


SUBSCRIBE TO NSK NEWSLETTER 

MOTION & CONTROL™

NSK

PRECISION MACHINE COMPONENTS





Preface

It is our pleasure to announce the publication of a new catalog which contains all NSK linear motion products. We believe this publication is one way to show our deep appreciation of your patronage.

Market demand for more sophisticated and diversified machines and equipment is rapidly escalating. NSK precision products are not only used widely in these machines, but also are crucial elements.

In response to this trend, ball screws, NSK linear guides, and Monocarriers, which are crucial mechanical components of these machines, are required to be highly reliable, maintenance-free, smaller in size and lightweight. They also are expected to heighten efficiency and satisfy uses in special environment.

Publishing a catalog to introduce our entire product line is especially meaningful under such circumstances. This is an improved version of the previous catalog; products are categorized, and each product category has two sections. The first section contains an explanation of products for selection and a technical explanation including results of the latest experiments and research to assist thorough technological discussion. The second half is dimension tables. Last, "Other," whose pages are in color, explains special environments and lubrications such as grease, which are general issues for NSK precision products.

We hope abundant NSK products in the new catalog will be your aide in selecting the most suitable products for your purpose. We solicit your continued patronage.

Contents

A. NSK Linear Rolling Guide

A-1 Characteristics of NSK Linear Rolling Guides

1. Comparison of Rolling Guides and Sliding Guides.....A1
2. Structure and Characteristics of NSK Linear GuidesA2

A-2 Types of NSK Linear Rolling Guides.....A5

A-3 Selection of NSK Linear Rolling Guides

1. Selection Flow Chart.....A13
2. Rating Life and Basic Load Rating.....A15
3. Preload.....A28
4. Accuracy.....A32
5. Maximum Rail Length.....A37
6. Lubrication.....A38
7. Dust Proof.....A52
8. Rust Prevention
(Stainless Steel and Surface Treatment).....A57
9. Special Environment.....A60
10. Arrangement and Mounting of Linear Guide.....A67
11. Drills to Select Linear Guide.....A79
12. Reference.....A90

A-4 NSK Linear Guides

1. Structure of NSK Linear Guides.....A91
2. Characteristics of NSK Linear Guides.....A91
3. Types and Characteristics of NSK Linear Guides.....A93
4. Guide to Technical Services.....A107
5. Linear Guides: Handling Precautions.....A108
6. Design Precautions.....A109

A-5 Technical Description and Dimension Table for NSK Linear Guides

1. General Industrial Use.....A111
2. Liquid Crystal Display and Semiconductor.....A189
3. Machine Tools.....A251
4. High-Precision Machine and High-Precision
Measuring Equipment.....A291
5. The Comparative Table of Old and New Series.....A321

A-6 Other Linear Rolling Guide Products

1. Linear Rolling Bushing.....A323
2. Roller Pack.....A334
3. Linear Roller Bearings.....A341

B. Ball Screws

B-1. Selection Guide to NSK Ball Screw

1. Features of NSK Ball Screws.....B1
2. Structure of a Ball Screw.....B3
3. Ball Screw Series.....B7
4. Procedures to Select Ball Screw.....B17
5. When Placing Orders.....B31

B-2 Technical Description of Ball Screws

1. Accuracy.....B37
2. Static Load Limitation.....B44
3. Permissible Rotational Speed.....B47
4. Supporting Conditions for Calculation of Buckling
Load and Critical Speed.....B51
5. Life (Dynamic Load Limitation).....B53
6. Preload and Rigidity.....B56
7. Friction Torque and Drive Torque.....B62
8. Even Load Distribution in Ball Nut (In Case of Ball
Screws for High-Load Drive).....B65
9. Lubrication of Ball Screw.....B67
10. Dust Prevention for Ball Screw.....B68
11. Rust Prevention and Surface Treatment of
Ball Screws.....B69
12. Ball Screw Specifications for Special Environment.....B70
13. Noise and Vibration.....B71
14. Installation of Ball Screw.....B73
15. Precautions for Designing Ball Screw.....B83
16. Shaft End Machining.....B86
17. Ball Screw Selection Exercise.....B87
18. Reference.....B101
19. Guide to Technical Services.....B102
20. Precautions When Handling Ball Screws.....B103

B-3 Ball Screw Dimension Table

1. Dimension Table and Reference Number of
Standard Ball Screws.....B105
2. Dimension Table and Reference Number of
Standard Nut Ball Screws.....B429
3. Dimension Table and Reference Number of
Application-Oriented Ball Screws.....B491

C. Monocarrier

C-1 Monocarrier

| | |
|-------------------------------------|-----|
| 1. Features | C5 |
| 2. Classifications and Series | C7 |
| 3. Accessories | C9 |
| 4. Selection of Monocarrier | C10 |
| 5. MCM Series | C23 |
| 6. MCH Series | C71 |

C-2 Toughcarrier

| | |
|--|------|
| 1. Features | C93 |
| 2. Classifications and Series | C93 |
| 3. Accessories | C95 |
| 4. Selection of Toughcarrier | C96 |
| 5. TCH Series Dimension Table for Standard Products .. | C109 |
| 6. Accessories | C115 |
| 7. Motor Bracket Compatibility Table | C128 |
| 8. Sensor Rail and Top Cover Unit Combination Table .. | C129 |
| 9. Toughcarrier High-Thrust Series | C132 |

C-3 Technical Guide

| | |
|--|------|
| 1. Sensor Specification | C135 |
| 2. Characteristics and Evaluation Method | C137 |
| 3. Special Specifications | C138 |
| 4. Maintenance | C139 |
| 5. NSK Clean Greace LG2 Specifications | C140 |

D. Other

| | |
|-------------------------------|-----|
| 1. Special Environments | D1 |
| 2. Lubrication | D13 |
| 3. RoHS Compliant | D24 |

E. Appendices: Tables

| | |
|---|----|
| 1. Conversion from International System of Units (SI) ... | E1 |
| 2. Conversion Table between N and kgf | E3 |
| 3. Conversion Table between kg and lb | E4 |
| 4. Conversion table of hardness | E5 |
| 5. Deviations of shafts used in common fits | E7 |
| 6. Deviations of holes used in common fits | E9 |

NSK Linear Rolling Guide Product

A-1 Characteristics of NSK Linear Rolling Guides

- 1. Comparison of Rolling Guides and Sliding Guides A1
- 2. Structure and Characteristics of NSK Linear Guides A2
 - 1. Structure of NSK Linear Guides A2
 - 2. Characteristics of NSK Linear Guides A2

A-2 Types of NSK Linear Rolling Guides A5

A-3 Selection of NSK Linear Rolling Guides

- 1. Selection Flow Chart A13
- 2. Rating Life and Basic Load Rating A15
 - 2.1 Life and Basic Load Rating A15
 - 1. Life A15
 - 2. Rating fatigue life A15
 - 3. Basic load ratings in compliance with ISO standard A15
 - 4. Basic dynamic load rating A15
 - 5. Calculation of rating fatigue life A15
 - 6. Dynamic equivalent load A16
 - 7. Basic static load rating A16
 - 8. Basic static moment load rating A16
 - 9. Basic load rating by load direction A16
 - 2.2 How to Calculate the Life A17
 - 1. Setting operating condition of linear guide A17
 - 2. Calculate load to a slide A17
 - 3. Calculation of dynamic equivalent load A21
 - 4. Calculation of mean effective load A23

- 5. Various coefficients A24
 - 6. Calculation of rating life A25
 - 7. Examination of the basic load rating A26
 - 8. Precautions for the design in examining the life A27
- 3. Preload A28
 - 1. Objective of preload A28
 - 2. Preload and rigidity A28
 - 3. Selection of preload classification A29
 - 4. Estimation of the elastic deformation A30
 - 5. Application examples of preload A30
 - 6. Load and rating life when the preload is taken into account A31
 - 7. Calculating friction force by preload A31
 - 4. Accuracy A32
 - 1. Accuracy standard A32
 - 2. Definition of accuracy A32
 - 3. Application example of accuracy grade and preload A34
 - 4. Combination of accuracy grade and preload A35
 - 5. Maximum Rail Length A37
 - 6. Lubrication A38
 - 1. NSK linear guides equipped with "NSK K1" lubrication unit A38
 - 2. Lubrication A42
 - 7. Dust Proof A52
 - 1. Standard specification parts A52
 - 2. Dust-proof parts A53
 - 8. Rust Prevention (Stainless Steel and Surface Treatment) A57
 - 1. Stainless steel A57
 - 2. Surface treatment A57

| | |
|--|-----|
| 9. Special Environment | A60 |
| 1. Heat-resistant specifications..... | A60 |
| 2. Vacuum and clean specifications..... | A60 |
| 3. "NSK linear guides for food processing equipment and medical devices" for sanitary environment..... | A61 |
| 4. Specifications for special environments | A63 |
| 5. Lubrication and materials..... | A64 |
| 6. Responsiveness of NSK linear guides for special environments | A66 |
| 7. Precautions for handling | A66 |
| 10. Arrangement and Mounting of Linear Guides..... | A67 |
| 1. Arrangement | A67 |
| 2. Mounting accuracy | A69 |
| 3. Installation | A72 |
| 4. Assembly random-matching type linear guide | A77 |
| 5. Butting rail specification | A77 |
| 6. Handling preloaded assembly..... | A78 |
| 11. Drills to Select Linear Guide..... | A79 |
| 1. Single axis material handling system..... | A79 |
| 2. Machining center..... | A84 |
| 12. Reference..... | A90 |

A-4 NSK Linear Guides

| | |
|---|------|
| 1. Structure of NSK Linear Guides | A91 |
| 2. Characteristics of NSK Linear Guides..... | A91 |
| 3. Types and Characteristics of NSK Linear Guides..... | A93 |
| 4. Guide to Technical Services..... | A107 |
| 5. Linear Guides: Handling Precautions..... | A108 |
| 6. Design Precautions..... | A109 |

A-5 Technical Description and Dimension Table for NSK Linear Guides

| | |
|--|------|
| 1. General Industrial Use | |
| 1.1 NH Series..... | A113 |
| 1.2 VH Series | A133 |
| 1.3 TS Series | A151 |
| 1.4 NS Series..... | A157 |
| 1.5 LW Series..... | A175 |
| 2. Liquid Crystal Display and Semiconductor | |
| 2.1 PU Series | A191 |
| 2.2 LU Series..... | A201 |
| 2.3 PE Series..... | A213 |
| 2.4 LE Series | A223 |
| 2.5 Miniature LH Series | A237 |
| 2.6 LL Series | A247 |
| 3. Machine Tools | |
| 3.1 RA Series | A253 |
| 3.2 LA Series..... | A273 |
| 4. High-Precision Machine and High- Precision Measuring Equipment | |
| 4.1 HA Series..... | A293 |
| 4.2 HS Series | A307 |
| 5. The Comparative Table of Old and New Series | A321 |

A-6 Other Linear Rolling Guide Products

| | |
|--------------------------------|------|
| 1. Linear Rolling Bushing..... | A323 |
| 2. Roller Pack | A334 |
| 3. Linear Roller Bearings..... | A341 |


A-1 Characteristics of NSK Linear Rolling Guides

Characteristics of the NSK linear rolling guides are:


- › Designs are simple and economic. This contributes to a highly accurate and low cost guide way system.
- › Low friction coefficient facilitates a compact and low cost driving mechanism.
- › Ultra-high purity of materials and superb processing technology ensure a long-term reliable operation.
- › Prompt delivery thanks to a variety of interchangeable components.
- › Users can select the most suitable guide from a wide variety of the ball guides and roller guides.

A-1-1 Comparison of Rolling Guides and Sliding Guides

The following describes a characteristic comparison between general rolling and sliding guide ways.



Example of rolling guide



Example of sliding guide



Comparative characteristics of rolling and sliding guide ways

| Function | Rolling guide | Sliding guide |
|--------------------------|--|--|
| Friction | <ul style="list-style-type: none"> › Friction coefficient: 0.01 or lower › Difference between static and dynamic friction is small. › The fluctuation of friction force due to varying speed is far less than sliding guides. | <ul style="list-style-type: none"> › Friction is high. › The difference between static and dynamic friction coefficient is significant. |
| Positioning accuracy | <ul style="list-style-type: none"> › Lost motion is minimal. › Stick-slip is minimal. › Easy to achieve sub-micron positioning | <ul style="list-style-type: none"> › Larger lost motion › Stick-slip at low speed › Difficult to achieve sub-micron positioning |
| Life | <ul style="list-style-type: none"> › Possible to estimate useful life | <ul style="list-style-type: none"> › Difficult to estimate useful life |
| Static rigidity | <ul style="list-style-type: none"> › Generally high › No play because of preload › Easy to estimate rigidity | <ul style="list-style-type: none"> › Rigidity is great against load from a particular direction. › There is mechanical play. › Difficult to estimate rigidity |
| Speed | <ul style="list-style-type: none"> › Wide range of use from low to high speed | <ul style="list-style-type: none"> › Unsuitable for extremely low or high speed |
| Maintenance, reliability | <ul style="list-style-type: none"> › Long life through a simple maintenance | <ul style="list-style-type: none"> › Precision is lost greatly by a worn out slide way surface. |

In response to the demand for a high-speed, high-precision, high-quality, and easy maintenance, rolling guides which have above features are becoming prevalent.

Utilizing the technology we have sharpened in anti-friction rotating bearings, NSK makes various types of rolling linear guides which are highly accurate and reliable.

A-1-2 Structure and Characteristics of NSK Linear Guides



1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (Fig. 1). This contributes to higher precision and lower prices.

NSK linear guides consist of a rail and a slide (Fig. 2). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the ball or roller slide. Then, the balls or rollers go through a passage made in the slide, and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (Fig. 3) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.

This unique ball groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the rails and ball slides for random matching. (Fig. 4)

On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.

Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

- › High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

- › Logical simplicity in shape, along with stable processing, maintains high precision and reliability.
- › Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

- › Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

- › The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (impact-resistance)


- › When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (Fig. 5).

(6) Lineup of extremely high-load capacity series

- › The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.

By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

A-1-2 Structure and Characteristics of NSK Linear Guides

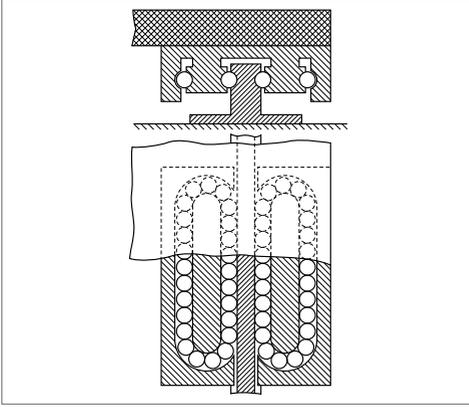

> Fig. 1 French Patent in 1932.
> Inventor: Gretsch (German)

NSK added its patented technology to the invention in **Fig. 1**, and improved the linear guide structure, thus realizing low cost design.

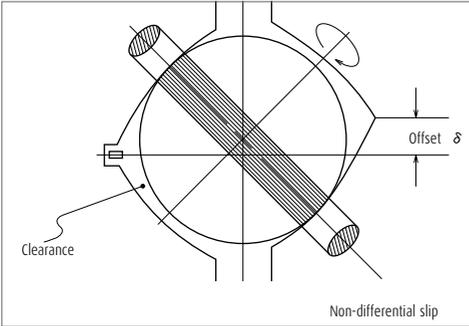


Fig. 3 Two contact point at offset Gothic arch groove

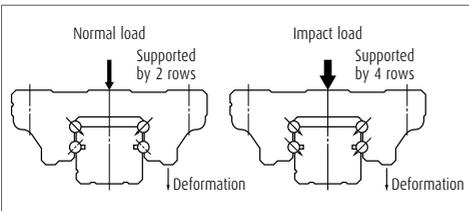


Fig. 5 Shock-resistance

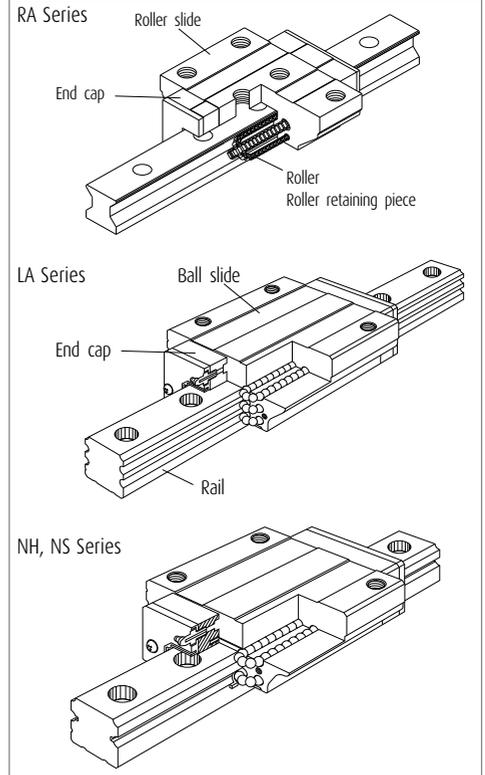


Fig. 2 Structure of NSK linear guides







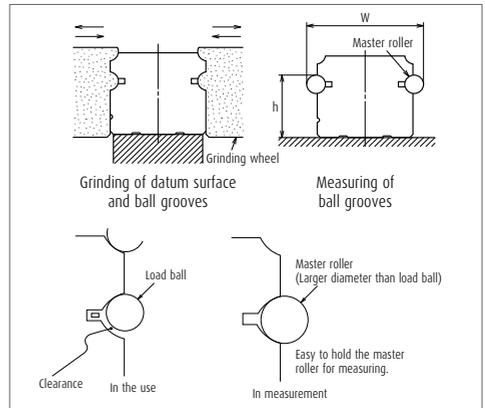


Fig. 4 Processing and measuring grooves

Measuring grooves is easy: you can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.



A-2 Types of NSK Linear Rolling Guides

| Product | Appearance | Shape | Rolling element | Load carrying characteristics |
|-------------------|--|--|-----------------|--|
| NSK Linear Guides |  |  | Ball | High vertical load carrying capacity  |
| |  |  | Ball | High vertical load carrying capacity  |
| |  |  | Ball | Four-way equal load carrying capacity  |

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A319.











| Rigidity | Friction characteristic | Assembly workability | Major applications | Page |
|----------|-------------------------|----------------------|---|------|
| ◎ | ◎ | ◎ | <ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Semiconductor manufacturing equipment > Laser cutting machines > Electric discharge machines > Packaging/packing machines | A113 |
| ◎ | ◎ | ◎ | <ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Woodworking machines > Laser cutting machines > Electric discharge machines > Packaging/packing machines | A133 |
| ◎ | ◎ | ◎ | <ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Woodworking machines > Laser cutting machines > Electric discharge machines > Packaging/packing machines | A151 |

Rigidity ☆ : Extremely high ◎ : High ○ : Medium ○ : Low

Friction characteristic ◎ : Low ○ : Normal

Assembly workability ◎ : Good ○ : Fair

A-2 Types of NSK Linear Rolling Guides

| Product | Appearance | Shape | Rolling element | Load carrying characteristics |
|-------------------|------------|---|-----------------|---|
| NSK Linear Guides | NS Series |  | Ball | High vertical load carrying capacity  |
| | LW Series |  | Ball | High vertical load carrying capacity  |
| | PU Series |  | Ball | Four-way equal load carrying capacity  |
| | LU Series |  | Ball | Four-way equal load carrying capacity  |
| | PE Series |  | Ball | Four-way equal load carrying capacity  |












Note For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A319.

| Rigidity | Friction characteristic | Assembly workability | Major applications | Page |
|----------|-------------------------|----------------------|--|-------------|
| | | | <ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Electric discharge machines > Woodworking machines > Semiconductor manufacturing equipment > Packaging/packing machines > Pneumatic equipment | A157 |
| | | | <ul style="list-style-type: none"> > Industrial robots > Materials handling equipment > Electric discharge machines > Woodworking machines > Semiconductor manufacturing equipment > Packaging/packing machines > Pneumatic equipment | A175 |
| | | | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Pneumatic equipment > Computer peripherals | A191 |
| | | | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > XY stage of microscope > Miniature robots > Pneumatic equipment > Computer peripherals | A201 |
| | | | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Pneumatic equipment > Computer peripherals | A213 |

Rigidity ☆ : Extremely high : High : Medium : Low

Friction characteristic : Low : Normal **Assembly workability** : Good : Fair

A-2 Types of NSK Linear Rolling Guides











| Product | Appearance | Shape | Rolling element | Load carrying characteristics |
|-------------------|--|---|-----------------|---|
| NSK Linear Guides | <p>LE Series</p>  |  | Ball | <p>Four-way equal load carrying capacity</p>  |
| | <p>Miniature LH Series</p>  |  | Ball | <p>High vertical load carrying capacity</p>  |
| | <p>LL Series</p>  |  | Ball | <p>Four-way equal load carrying capacity</p>  |
| | <p>RA Series</p>  |  | Roller | <p>Four-way equal load carrying capacity</p>  |
| | <p>LA Series</p>  |  | Ball | <p>Four-way equal load carrying capacity</p>  |

| Rigidity | Friction characteristic | Assembly workability | Major applications | Page |
|---|---|---|---|-------------|
|  |  |  | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > XY stages of microscope > Miniature robots > Pneumatic equipment > Computer peripherals | A223 |
|  |  |  | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Optical stages > Microscope XY stages > Miniature robots > Pneumatic equipment > Computer peripherals | A237 |
|  |  |  | <ul style="list-style-type: none"> > Knitting machines > Computer peripherals > Pneumatic equipment > Office equipment | A247 |
|  |  |  | <ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Various types of NC grinders > Gear-cutting machines > Press machines > Electric discharge machines | A253 |
|  |  |  | <ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Various types of NC grinders > Gear-cutting machines > Press machines > Electric discharge machines | A273 |

Rigidity ☆ : Extremely high ◎ : High ◉ : Medium ○ : Low

Friction characteristic ◎ : Low ○ : Normal **Assembly workability** ◎ : Good ○ : Fair

A-2 Types of NSK Linear Rolling Guides

| Product | Appearance | Shape | Rolling element | Load carrying characteristics |
|------------------------|--|---|-----------------|---|
| NSK Linear Guides | HA Series  |  | Ball | Four-way equal load carrying capacity  |
| | HS Series  |  | Ball | High vertical load carrying capacity  |
| Linear rolling bushing |  |  | Roller |  |
| Roller pack |  |  | Roller |  |
| Linear roller bearing |  |  | Roller |  |

| Rigidity | Friction characteristic | Assembly workability | Major applications | Page |
|----------|-------------------------|----------------------|---|-------------|
| | | | <ul style="list-style-type: none"> > Machining centers > Precision lathes > Various types of NC grinders > Electric discharge machines > Optical stages > LCD manufacturing equipment > Die molding machines > High-precision measuring equipment | A293 |
| | | | <ul style="list-style-type: none"> > Machining centers > Precision lathes > Various types of grinders > Electric discharge machines > Optical stages > LCD manufacturing equipment > High-precision measuring equipment | A307 |
| | | | <ul style="list-style-type: none"> > Materials handling equipment > Packaging/packing machines > Medical equipment > Pneumatic equipment > Office equipment > Assembling machines | A323 |
| | | | <ul style="list-style-type: none"> > Large machine tools > Conveyor system for heavy objects (guide ways for heavy loads) | A334 |
| | | | <ul style="list-style-type: none"> > Large machine tools > Conveyor system for heavy objects (guide ways for heavy loads) | A341 |


Rigidity ☆ : Extremely high : High : Medium : Low

Friction characteristic : Low : Normal **Assembly workability** : Good : Fair

A-3 Selection of NSK Linear Rolling Guides

A-3-1 Selection Flow Chart

The flow chart below shows the basic steps for the selection.

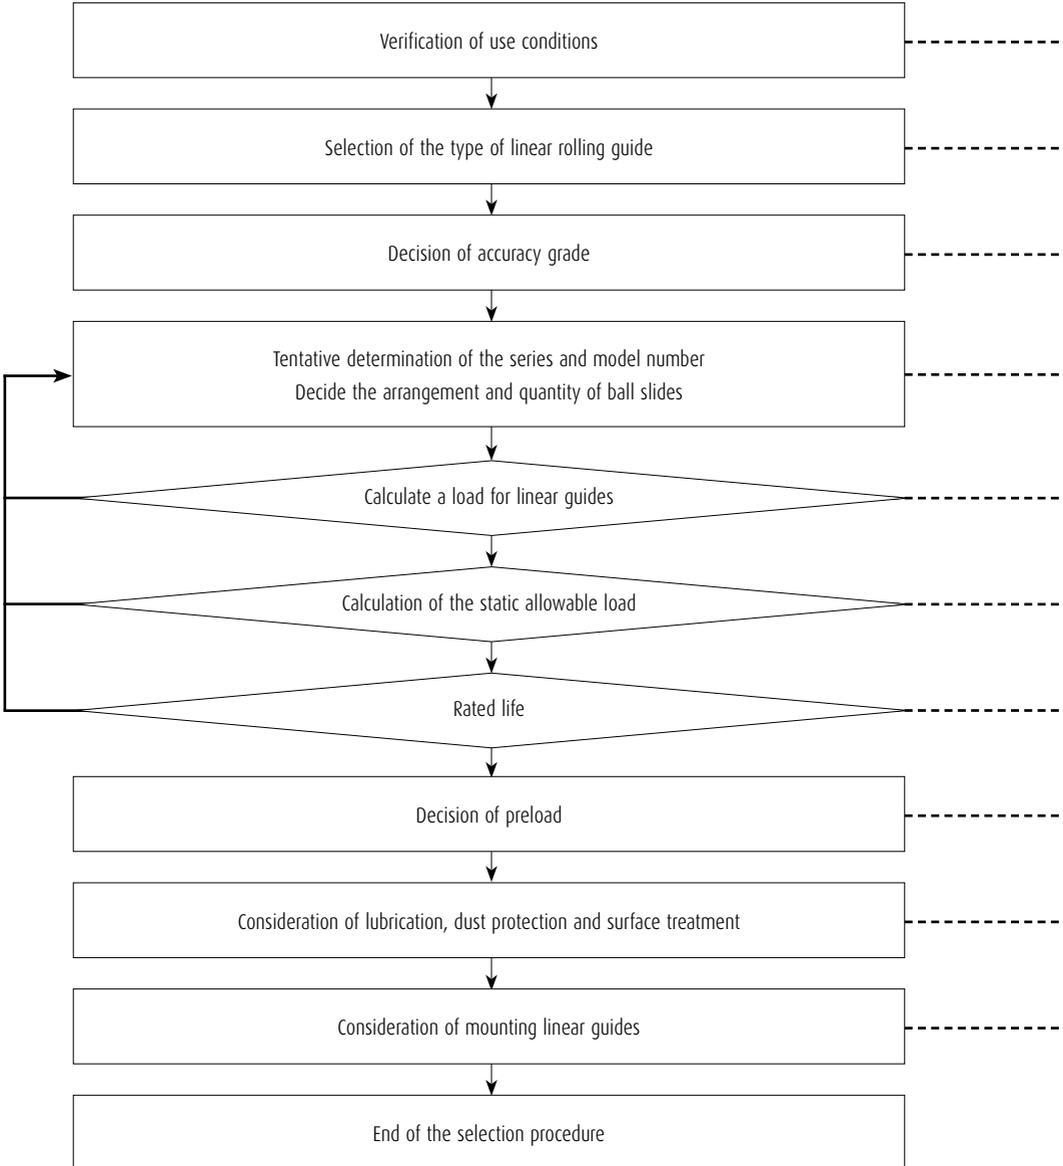

| | |
|---|---|
| <ul style="list-style-type: none"> › Machine structure, installation space and position of the linear guides › Functional requirements (required life, rigidity and accuracy) and use environment | <ul style="list-style-type: none"> A15 Description of the rated life A28 Description of the preload A32 Description of the accuracy A57 Description of rust prevention and surface treatment A67 Description of arrangement and mounting |
| <ul style="list-style-type: none"> › Consider the load, rigidity, friction and installation position, and select the model and size of linear guide most suitable to the condition requirements. | A111 Technical description and dimension table for NSK Linear Guides |
| <ul style="list-style-type: none"> › Decide by the required running accuracy of the machine. | A32 Description of the accuracy |
| <ul style="list-style-type: none"> › Select a model based on the installation space. › Select a model temporarily based on the mutual balance between the machine, its ancillaries and the size of ball screws, making use of your experience and actual results. | <ul style="list-style-type: none"> A15 Description of the rated life A111 Technical description and dimension table for NSK Linear Guides |
| <ul style="list-style-type: none"> › Calculate loads in the direction of up/down and right/left, and moment loads of the linear guide. › Consider loads caused by acceleration/deceleration and the fluctuation of load. | A15 Description of the rated life |
| <ul style="list-style-type: none"> › Calculate the static allowable load, and confirm that the total static load is within the permissible range. › Confirm the strength of fastening parts of linear guides such as bolts and their material. | A16 Description of the static load rating |
| <ul style="list-style-type: none"> › Estimate the life and confirm it is within the scope of the use conditions. | A15 Description of the rated life |
| <ul style="list-style-type: none"> › Select a preload and clearance most suitable to the requirements. | A28 Description of the preload |
| <ul style="list-style-type: none"> › Select lubricant, grease or oil, and the lubrication method according to the use conditions. › Select suitable dust protection means (seals, bellows or surface treatment) for the use environment. | <ul style="list-style-type: none"> A38 Description of lubrication A52 Description of dust protection |
| <ul style="list-style-type: none"> › Decision of an installation position, the shoulder height and corner radius R of mounting surface of a machine base. › Confirm installation procedures. | <ul style="list-style-type: none"> A67 Description of arrangement and mounting CAT.No.E9008 Description of the mounting of linear guides |

A-3-2 Rating Life and Basic Load Rating

A-3-2.1 Life and Basic Load Rating

1. Life

Although used in appropriate conditions, the linear guide deteriorates after a certain period of operation, and eventually becomes unusable. In broad definition, the period until the linear guide becomes unusable is called "life." There are "fatigue life" caused by flaking, and "accuracy life" which the result of wear components.

2. Rating fatigue life

When the linear guide runs under loads, the rolling elements and the rolling contact surface of the grooves are exposed to repetitive stress. This brings about fatigue to the material, and generates flaking. Flaking is scale-like damage to the surface of the rolling contact surface.

Total running distance until first appearance of flaking is called "fatigue life." This is "life" in the narrow sense. The fatigue life varies significantly even in linear guides produced in the same lot, and even when they are operated under the same conditions. This is attributable to the inherent variation of the fatigue of the material itself.

"Rating fatigue life" is the total running distance which allows 90% of the group of linear guides of the same reference number to run without causing flaking when they are independently run under the same conditions. The rating fatigue life is sometimes indicated by total operating hours when the linear guides run at a certain speed.

3. Basic load ratings in compliance with ISO standard

NSK defines the basic load rating in compliance with the ISO standard.

The basic load rating listed in "A-5 Technical Description and Dimension Table for NSK Linear Guides." comply with the ISO standard.

ISO: International Organization for Standardization

[Basic dynamic load rating]

ISO 14728-1; Rolling bearings — Linear motion rolling bearings

Part 1: Dynamic load ratings and rating life

[Basic static load rating]

ISO 14728-2; Rolling bearings — Linear motion rolling bearings

Part 2: Static load ratings

4. Basic dynamic load rating

- ISO international standard, the basic dynamic load rating, which indicates load carrying capacity of the linear guide, is a load whose direction and volume do not change, and which furnishes 100 km of rating fatigue life.
- In case of the linear guides, it is a constant load applied to downward direction to the center of the slide.
- For balls as rolling element, some linear guide manufacturers in Japan and Asian countries define the load for the basic fatigue life of 50 km as the basic dynamic load ratings.
- The following formula may be used to convert the basic dynamic load rating for 50 km (C_{50}) into the dynamic load rating for 100 km (C_{100}) rated fatigue life.
- For balls as rolling element $C_{100} = \frac{C_{50}}{1.26}$
- For rollers as rolling element $C_{100} = \frac{C_{50}}{1.23}$

5. Calculation of rating fatigue life

- In general, the rating fatigue life "L" can be calculated from the basic dynamic load rating "C" and the load "F" to a slide using the following formula.

[For balls as rolling element] The third power of the index.

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{C_{100}}{F} \right)^3$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{C_{50}}{F} \right)^3$$

[For rollers as rolling element] The ten third power of the index.

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{C_{100}}{F} \right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{C_{50}}{F} \right)^{\frac{10}{3}}$$

L ; Rating fatigue life (km)

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life (N)

F ; Load to a slide (dynamic equivalent load) (N)

6. Dynamic equivalent load

- › Loads applied to the linear guide (slide load) comes from various directions up/down and right/left directions and/or as moment loads. Sometimes more than one type of load is applied simultaneously. Sometimes the volume and direction of the load may change.
- › Various loads cannot be used as they are to calculate the life of the linear guide. Therefore, it is necessary to use a hypothetical load on the slide with a constant volume, which would generate a value equivalent to an actual fatigue life. This is called "dynamic equivalent load." For actual calculation, refer to "**A-3-2.2 3. Calculation of dynamic equivalent load**".

7. Basic static load rating

- › When an excessive load or a momentary large impact is applied to the linear guide, local permanent deformation takes place on the rolling elements and on the rolling contact surfaces. After exceeding a certain level, the deformation hampers smooth linear guide operation.
- › Basic static load rating is a static load when: [Permanent deformation of the rolling elements] + [permanent deformation of the rolling contact surfaces] becomes approximately 0.0001 times of the rolling element diameter.
- › In the case of the linear guides, it is a load which is applied in downward direction to the center of the slide.
- › Values of the basic static load rating C_0 are shown in "**A-5 Technical Description and Dimension Table for NSK Linear Guides**".

8. Basic static moment load rating

- › Generally, NSK linear guides use a set of two rails and four slides for the guide way of one axis. Under some operating condition, static moment load should be taken into account.
- › " M_0 ," which is the limit of static moment load, and calculated from permanent deformation in such use is shown in "**A-5 Technical Description and Dimension Table for NSK Linear Guides**".

9. Basic load rating by load direction

- › The basic load rating is considered to be a downward load to the slide and is indicated in the dimension tables as the dynamic load rating C and the static load rating C_0 respectively. However, the load may be applied to a slide in upward or lateral directions in actual use. In such a case the basic load rating shall be compensated as shown in **Table 2.1**. The basic dynamic load rating of the RA and LA Series is the same in C and C_0 for all load directions, up, down and lateral, while the NH Series, for an example, has different basic load ratings by the load direction as shown in the table.

Table 2.1 Basic load ratings by load direction

| Load rating Load direction Series | Basic dynamic load rating | | | Basic static load rating | | |
|--|---------------------------|--------|---------|--------------------------|------------|------------|
| | Downward | Upward | Lateral | Downward | Upward | Lateral |
| NH, VH, NS, LW, LH, HS | C | C | 0.84C | C_0 | 0.78 C_0 | 0.65 C_0 |
| TS, PU, LU, PE, LE, LL, RA, LA, HA | C | C | C | C_0 | C_0 | C_0 |

A-3-2 Rating Life and Basic Load Rating

A-3-2.2 How to Calculate the Life

1. Setting operating condition of linear guide

- > First, set operating conditions to determine whether the temporarily selected model satisfies the required life.
- > Major operating conditions are as follows. Set all values to calculate applied loads to each slide. (Refer to **Table 2.2**.)

| | |
|----------------------------------|--------------------------------|
| Axis set up | : Horizontal or vertical |
| Rail combination | : Single rail or multiple rail |
| Applying loads | : F_x , F_y and F_z (N) |
| Slide span | : l (mm) |
| Rail span | : L (mm) |
| Position of load action point | : X , Y , Z (mm) |
| Center of driving mechanism | : X_b , Y_b , Z_b (mm) |
| Operating speed | : V (mm/sec) |
| Time in acceleration | : t (sec) |
| Operating frequency (duty cycle) | |

2. Calculating load to a slide

- > **Table 2.2** shows a formula to calculate loads that are going to be applied to each assembled slide into a machine.

The Table shows six typical patterns of linear guide installing structure.

- > In the Tables, directions indicated by arrows denote "plus" for the applied loads (F_x , F_y , F_z) and the loads which are applied to the slides. (F_r , F_s , M_r , M_p , M_y)
- > Codes in the Tables are as follows:

F_r : Vertical loads to the slide (N)

F_s : Lateral loads to the slide (N)

M_r : Rolling moment to the slide (N · mm)

M_p : Pitching moment to the slide (N · mm)

M_y : Yawing moment to the slide (N · mm)

Suffixes (1, 2, ...) to the above $F_r - M_y$: Slide number

F_{xi} : Load applied in X direction ($i = 1$ to n ; n is the number of loads applied in X direction) (N)

F_{yj} : Load applied in Y direction ($j = 1$ to n ; n is the number of loads applied in Y direction) (N)

F_{zk} : Load applied in Z direction ($k = 1$ to n ; n is the number of loads applied in Z direction) (N)

Coordinates (X_{xi} , Y_{xi} , Z_{xi}): Point where load F_{xi} (mm) is applied.

Coordinates (X_{yj} , Y_{yj} , Z_{yj}): Point where load F_{yj} (mm) is applied.

Coordinates (X_{zk} , Y_{zk} , Z_{zk}): Point where load F_{zk} (mm) is applied.

l : Slide span (mm)

L : Rail span (mm)

Coordinates (X_b , Y_b , Z_b): Center of driving mechanism

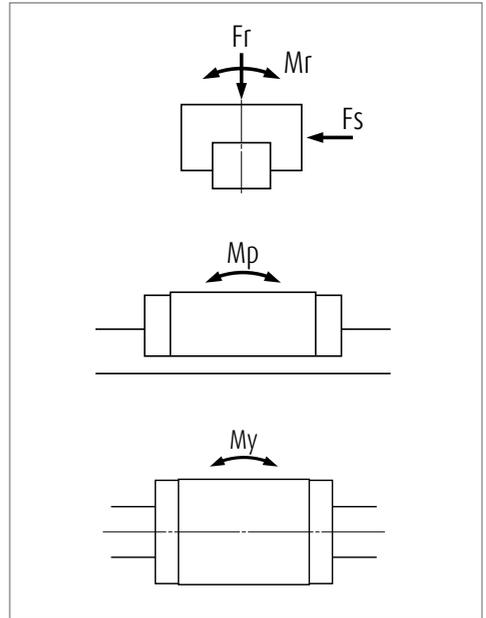




Fig. 2.1

Table 2.2 Loads applied to the slides

| Pattern | Arrangement of slides | Load to slide and deformation at Point A |
|---------|--|--|
| 1 | <p>Center of driving mechanism (X_b, Y_b, Z_b)</p> <p>Center line of driving mechanism</p> | $Fr_1 = \sum_{k=1}^n Fz_k, \quad Fs_1 = \sum_{j=1}^n Fy_j$ $Mr_1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $Mp_1 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $My_1 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$ |
| 2 | <p>Center of driving mechanism (X_b, Y_b, Z_b)</p> <p>Center line of driving mechanism</p> | $Fr_1 = \frac{\sum_{k=1}^n Fz_k}{2} + \frac{M2}{L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{2} - \frac{M2}{L}$ $Fs_1 = \frac{\sum_{j=1}^n Fy_j}{2} + \frac{M3}{L}, \quad Fs_2 = \frac{\sum_{j=1}^n Fy_j}{2} - \frac{M3}{L}$ $Mr_1 = \frac{M1}{2}, \quad Mr_2 = \frac{M1}{2}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$ |
| 3 | <p>Center of driving mechanism (X_b, Y_b, Z_b)</p> <p>Center line of driving mechanism</p> | $Fr_1 = \frac{\sum_{k=1}^n Fz_k}{2} + \frac{M1}{L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{2} - \frac{M1}{L}$ $Fs_1 = Fs_2 = \frac{\sum_{j=1}^n Fy_j}{2}$ $Mp_1 = Mp_2 = \frac{M2}{2}, \quad My_1 = My_2 = \frac{M3}{2}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{Fxi \cdot (Zxi - Zb)\} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = -\sum_{i=1}^n \{Fxi \cdot (Yxi - Yb)\} + \sum_{j=1}^n (Fyj \cdot Xyj)$ |

A-3-2 Rating Life and Basic Load Rating

| Pattern | Arrangement of slides | Load to slide and deformation at Point A |
|---------|-----------------------|--|
| 4 | | $Fr_1 = \frac{\sum_{k=1}^n Fz_k}{4} + \frac{M1}{2L} + \frac{M2}{2L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{4} + \frac{M1}{2L} - \frac{M2}{2L}$ $Fr_3 = \frac{\sum_{k=1}^n Fz_k}{4} - \frac{M1}{2L} + \frac{M2}{2L}, \quad Fr_4 = \frac{\sum_{k=1}^n Fz_k}{4} - \frac{M1}{2L} - \frac{M2}{2L}$ $Fs_1 = Fs_3 = \frac{\sum_{j=1}^n Fy_j}{4} + \frac{M3}{2L}, \quad Fs_2 = Fs_4 = \frac{\sum_{j=1}^n Fy_j}{4} - \frac{M3}{2L}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Z_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$ $\delta x = Y_d \cdot \frac{Fs_2 - Fs_1}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_2}{L \cdot Kr}$ $\delta y = \frac{\sum_{j=1}^n Fy_j}{4 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_2}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$ $\delta z = \frac{\sum_{k=1}^n Fz_k}{4 \cdot Kr} + X_d \cdot \frac{Fr_1 - Fr_2}{L \cdot Kr} + Y_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$ |
| 5 | | $Fr_1 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L} + \frac{M2}{2L}, \quad Fr_2 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L}$ $Fr_3 = \frac{\sum_{k=1}^n Fz_k}{6} + \frac{M1}{3L} - \frac{M2}{2L}, \quad Fr_4 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L} + \frac{M2}{2L}$ $Fr_5 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L}, \quad Fr_6 = \frac{\sum_{k=1}^n Fz_k}{6} - \frac{M1}{3L} - \frac{M2}{2L}$ $Fs_1 = Fs_4 = \frac{\sum_{j=1}^n Fy_j}{6} + \frac{M3}{2L}, \quad Fs_2 = Fs_5 = \frac{\sum_{j=1}^n Fy_j}{6}$ $Fs_3 = Fs_6 = \frac{\sum_{j=1}^n Fy_j}{6} - \frac{M3}{2L}$ $M1 = \sum_{j=1}^n (Fy_j \cdot Z_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$ $M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$ $M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$ $\delta x = Y_d \cdot \frac{Fs_3 - Fs_1}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr}$ $\delta y = \frac{\sum_{j=1}^n Fy_j}{6 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_3}{L \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_4}{L \cdot Kr}$ $\delta z = \frac{\sum_{k=1}^n Fz_k}{6 \cdot Kr} + X_d \cdot \frac{Fr_1 - Fr_3}{L \cdot Kr} + Y_d \cdot \frac{Fr_1 - Fr_4}{L \cdot Kr}$ |

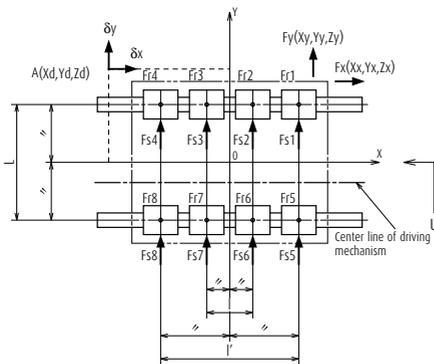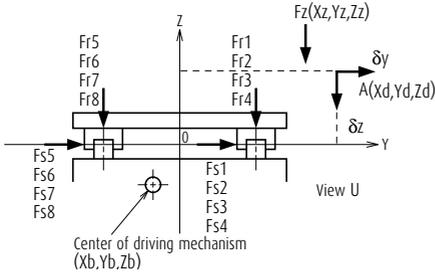

$$Fr_1 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} + \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_2 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} + \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_3 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} - \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_4 = \frac{\sum_{k=1}^n Fz_k}{8} + \frac{M1}{4L} - \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_5 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} + \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fr_6 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} + \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_7 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} - \frac{M2 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fr_8 = \frac{\sum_{k=1}^n Fz_k}{8} - \frac{M1}{4L} - \frac{M2 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fs_1 = Fs_5 = \frac{\sum_{j=1}^n Fy_j}{8} + \frac{M3 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$Fs_2 = Fs_6 = \frac{\sum_{j=1}^n Fy_j}{8} + \frac{M3 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fs_3 = Fs_7 = \frac{\sum_{j=1}^n Fy_j}{8} - \frac{M3 \cdot l}{2 \cdot (l^2 + l'^2)}$$

$$Fs_4 = Fs_8 = \frac{\sum_{j=1}^n Fy_j}{8} - \frac{M3 \cdot l'}{2 \cdot (l^2 + l'^2)}$$

$$M1 = \sum_{j=1}^n (Fy_j \cdot Zy_j) + \sum_{k=1}^n (Fz_k \cdot Yz_k)$$

$$M2 = \sum_{i=1}^n \{ Fx_i \cdot (Zx_i - Zb) \} + \sum_{k=1}^n (Fz_k \cdot Xz_k)$$

$$M3 = - \sum_{i=1}^n \{ Fx_i \cdot (Yx_i - Yb) \} + \sum_{j=1}^n (Fy_j \cdot Xy_j)$$

$$\delta X = Y_0 \cdot \frac{Fs_4 - Fs_5}{l_2 \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_4}{l_2 \cdot Kf}$$

$$\delta Y = \frac{\sum_{j=1}^n Fy_j}{8 \cdot Ks} + X_d \cdot \frac{Fs_1 - Fs_4}{l_2 \cdot Ks} + Z_d \cdot \frac{Fr_1 - Fr_5}{L \cdot Kf}$$

$$\delta Z = \frac{\sum_{k=1}^n Fz_k}{8 \cdot Kf} + X_d \cdot \frac{Fr_1 - Fr_4}{l_2 \cdot Kf} + Y_d \cdot \frac{Fr_1 - Fr_5}{L \cdot Kf}$$

A-3-2 Rating Life and Basic Load Rating

3. Calculation of dynamic equivalent load

➤ For the calculation of dynamic equivalent load, use the load in **Table 2.3** which matches the intended use of the linear guide.

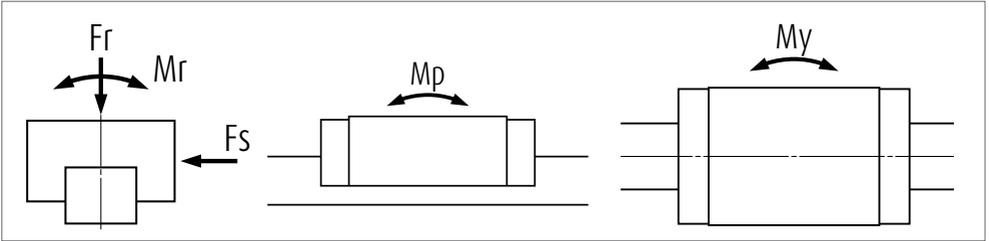


Fig. 2.2

Table 2.3 Loads in the arrangement of linear guides

| Pattern | Arrangement of linear guide | Loads necessary to calculate dynamic equivalent load | | | | | Dynamic equivalent load |
|---------|-----------------------------|--|----------------------|-------------|----------|--------|---|
| | | Load | | Moment load | | | |
| | | Up/down (vertical) | Right/left (lateral) | Rolling | Pitching | Yawing | |
| 1 | | F_r | F_s | M_r | M_p | M_y | $F_r = F_r$ $F_{se} = F_s \cdot \tan\alpha$ $F_{re} = \epsilon_r \cdot M_r$ $F_{pe} = \epsilon_p \cdot M_p$ $F_{ye} = \epsilon_y \cdot M_y$ α : Contact angle NH, VH, NS, LW, LH, HS Series $\alpha = 50^\circ$ TS, PU, LU, PE, LE, RA, LA, HA Series $\alpha = 45^\circ$ |
| 2 | | F_r | F_s | M_r | | | |
| 3 | | F_r | F_s | | M_p | M_y | |
| 4 | | F_r | F_s | | | | |

► Use the dynamic equivalent coefficient ε in the table below for an easy conversion of moment loads to the dynamic equivalent load.

► Coefficient of each moment direction is as follows.
 ε_r : Rolling direction
 ε_p : Pitching direction
 ε_y : Yawing direction

Table 2.4 Dynamic equivalent coefficients

Unit: 1/m

| Model No. | ε_r | ε_p | ε_y | Model No. | ε_r | ε_p | ε_y | Model No. | ε_r | ε_p | ε_y |
|-----------|-----------------|-----------------|-----------------|-----------|-----------------|-----------------|-----------------|-----------|-----------------|-----------------|-----------------|
| NH15 | 188 | 111 | 132 | NS35S | 76 | 87 | 104 | LE15L | 50 | 68 | 68 |
| NH15L | 188 | 72 | 86 | | | | | | | | |
| NH20 | 142 | 81 | 97 | LW17 | 66 | 125 | 149 | LH08 | 316 | 269 | 321 |
| NH20L | 142 | 57 | 68 | LW21 | 59 | 108 | 129 | LH10 | 253 | 203 | 242 |
| NH25 | 123 | 68 | 81 | LW27 | 53 | 76 | 91 | LH12 | 223 | 136 | 162 |
| NH25L | 123 | 51 | 61 | LW35 | 32 | 51 | 61 | | | | |
| NH30A | 98 | 70 | 83 | LW50 | 25 | 38 | 46 | RA15 | 105 | 95 | 95 |
| NH30EF | 98 | 58 | 69 | | | | | RA15L | 105 | 70 | 70 |
| NH30L | 98 | 44 | 52 | PU05 | 377 | 431 | 431 | RA20 | 79 | 74 | 74 |
| NH35 | 78 | 51 | 61 | PU07 | 267 | 349 | 349 | RA20L | 79 | 55 | 55 |
| NH35L | 78 | 36 | 43 | PU09 | 215 | 222 | 222 | RA25 | 71 | 64 | 64 |
| NH45 | 60 | 38 | 45 | PU09L | 215 | 136 | 136 | RA25L | 71 | 50 | 50 |
| NH45L | 60 | 30 | 36 | PU12 | 163 | 204 | 204 | RA30 | 56 | 58 | 58 |
| NH55 | 51 | 31 | 37 | PU12L | 163 | 125 | 125 | RA30L | 56 | 44 | 44 |
| NH55L | 51 | 25 | 30 | PU15 | 133 | 174 | 174 | RA35 | 46 | 52 | 52 |
| NH65 | 43 | 27 | 32 | PU15L | 133 | 102 | 102 | RA35L | 46 | 39 | 39 |
| NH65L | 43 | 20 | 24 | | | | | RA45 | 37 | 40 | 40 |
| | | | | LU05 | 385 | 359 | 359 | RA45L | 37 | 30 | 30 |
| VH15 | 188 | 111 | 132 | LU07 | 286 | 305 | 305 | RA55 | 32 | 33 | 33 |
| VH15L | 188 | 72 | 86 | LU09 | 217 | 242 | 242 | RA55L | 32 | 24 | 24 |
| VH20 | 142 | 81 | 97 | LU09L | 217 | 138 | 138 | RA65 | 26 | 28 | 28 |
| VH20L | 142 | 57 | 68 | LU09R | 217 | 203 | 203 | RA65L | 26 | 19 | 19 |
| VH25 | 123 | 68 | 81 | LU12 | 167 | 204 | 204 | | | | |
| VH25L | 123 | 51 | 61 | LU12L | 167 | 116 | 116 | LA25 | 122 | 76 | 76 |
| VH30A | 98 | 70 | 83 | LU15 | 133 | 174 | 174 | LA25L | 122 | 47 | 47 |
| VH30EF | 98 | 58 | 69 | LU15L | 133 | 94 | 94 | LA30 | 105 | 63 | 63 |
| VH30L | 98 | 44 | 52 | | | | | LA30L | 105 | 43 | 43 |
| VH35 | 78 | 51 | 61 | PE05 | 194 | 277 | 277 | LA35 | 84 | 54 | 54 |
| VH35L | 78 | 36 | 43 | PE07 | 141 | 203 | 203 | LA35L | 84 | 37 | 37 |
| VH45 | 60 | 38 | 45 | PE09 | 123 | 161 | 161 | LA45 | 60 | 41 | 41 |
| VH45L | 60 | 30 | 36 | PE09L | 123 | 108 | 108 | LA45L | 60 | 31 | 31 |
| VH55 | 51 | 31 | 37 | PE12 | 90 | 136 | 136 | LA55 | 51 | 33 | 33 |
| VH55L | 51 | 25 | 30 | PE12L | 90 | 90 | 90 | LA55L | 51 | 26 | 26 |
| | | | | PE15 | 50 | 111 | 111 | LA65 | 43 | 29 | 29 |
| TS15 | 128 | 122 | 122 | PE15L | 50 | 72 | 72 | LA65L | 43 | 20 | 20 |
| TS20 | 97 | 90 | 90 | | | | | | | | |
| TS25 | 81 | 77 | 77 | LE05 | 196 | 248 | 248 | HA25 | 122 | 33 | 33 |
| TS30 | 67 | 61 | 61 | LE05S | 196 | 323 | 323 | HA30 | 105 | 27 | 27 |
| TS35 | 55 | 54 | 54 | LE07 | 141 | 188 | 188 | HA35 | 84 | 23 | 23 |
| | | | | LE07S | 141 | 349 | 349 | HA45 | 60 | 20 | 20 |
| NS15 | 177 | 116 | 138 | LE07L | 141 | 122 | 122 | HA55 | 51 | 16 | 16 |
| NS15S | 177 | 174 | 208 | LE09 | 123 | 149 | 149 | | | | |
| NS20 | 127 | 94 | 112 | LE09S | 123 | 277 | 277 | HS15 | 177 | 45 | 54 |
| NS20S | 127 | 136 | 162 | LE09L | 123 | 102 | 102 | HS20 | 127 | 39 | 47 |
| NS25 | 111 | 70 | 83 | LE12 | 90 | 125 | 125 | HS25 | 111 | 33 | 39 |
| NS25S | 111 | 108 | 129 | LE12S | 90 | 233 | 233 | HS30 | 94 | 27 | 32 |
| NS30 | 94 | 63 | 75 | LE12L | 90 | 86 | 86 | HS35 | 76 | 23 | 28 |
| NS30S | 94 | 102 | 121 | LE15 | 50 | 102 | 102 | | | | |
| NS35 | 76 | 54 | 64 | LE15S | 50 | 174 | 174 | | | | |

Definitions of codes appearing at the end of the model number in **Table 2.4**:

| | | |
|---------|--|-------------------------------|
| L | : Super-high-load type | ; NH45L |
| S | : Medium load type | ; NS25S |
| No code | : High-load type | ; NH45_ |
| A | : Ball slide shape is square | ; NH30A (only LH30 and SH30) |
| EF | : Ball slide shape is flanged type (EL, FL type) | ; NH30EF (only LH30 and SH30) |
| R | : Miniature Series with ball retainer | ; LU09R (only LU and LE) |

A-3-2 Rating Life and Basic Load Rating

> The formula is determined by the relationship of loads in terms of volume. A full dynamic equivalent load can be easily obtained by using each coefficient.

After obtaining the dynamic equivalent load of the necessary load directions from Table 2.4, use the formulas below to calculate full dynamic equivalent loads.

> When **Fr** is the largest load : $F_e = Fr + 0.5F_{se} + 0.5F_{re} + 0.5F_{pe} + 0.5F_{ye}$

> When **Fse** is the largest load : $F_e = 0.5Fr + F_{se} + 0.5F_{re} + 0.5F_{pe} + 0.5F_{ye}$

> When **Fre** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + F_{re} + 0.5F_{pe} + 0.5F_{ye}$

> When **Fpe** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + 0.5F_{re} + F_{pe} + 0.5F_{ye}$

> When **Fye** is the largest load : $F_e = 0.5Fr + 0.5F_{se} + 0.5F_{re} + 0.5F_{pe} + F_{ye}$

For the values of each dynamic equivalent load in the formulas above, disregard load directions and take the absolute value.

> It is necessary to include the amount of preload for the calculation of rating life when selecting "Z3 medium preload" or "Z4 heavy preload" as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31.

4. Calculation of mean effective load

When the load to the slide deviates, obtain a mean effective load which becomes equal to the life of slide under variable load conditions. If the load does not vary, use the dynamic equivalent load as it is.

(1) When load and running distance vary stepwise (Fig. 2.3)

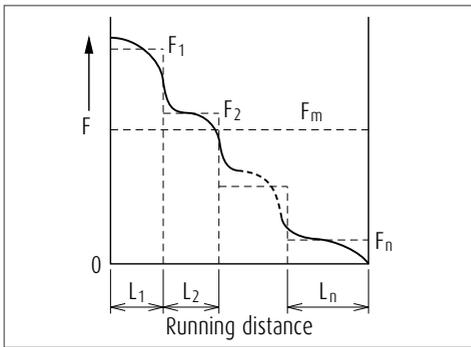


Fig. 2.3 Stepwise load change

Running distance while dynamic equivalent load F_1 is applied: L_1

Running distance while dynamic equivalent load F_2 is applied: L_2

Running distance while dynamic equivalent load F_3 is applied: L_3

.....

Running distance while dynamic equivalent load F_n is applied: L_n

From the above, mean effective load F_m can be obtained by the following formula.

In case of ball

$$F_m = \sqrt[3]{\frac{1}{L} (F_1^3 L_1 + F_2^3 L_2 + \dots + F_n^3 L_n)}$$

F_m : Mean effective load of the deviating load (N)

L : Running distance (ΣL_n)

In case of roller

$$F_m = \sqrt[10]{\frac{1}{L} (F_1^{10} L_1 + F_2^{10} L_2 + \dots + F_n^{10} L_n)}$$

(2) When load changes almost linearly (Fig. 2.4)

Approximate mean effective load F_m can be obtained by the following formula.

$$F_m \approx \frac{1}{3} (F_{min} + 2F_{max})$$

F_{min} : Minimum value of dynamic equivalent load (N))

F_{max} : Maximum value of dynamic equivalent load (N)

(3) When load changes in sinusoidal pattern (Fig. 2.5)

At time of (a): $F_m = 0.65 F_{max}$

At time of (b): $F_m = 0.75 F_{max}$

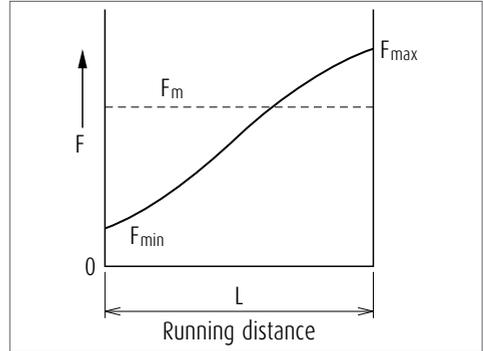


Fig. 2.4 Linear load change

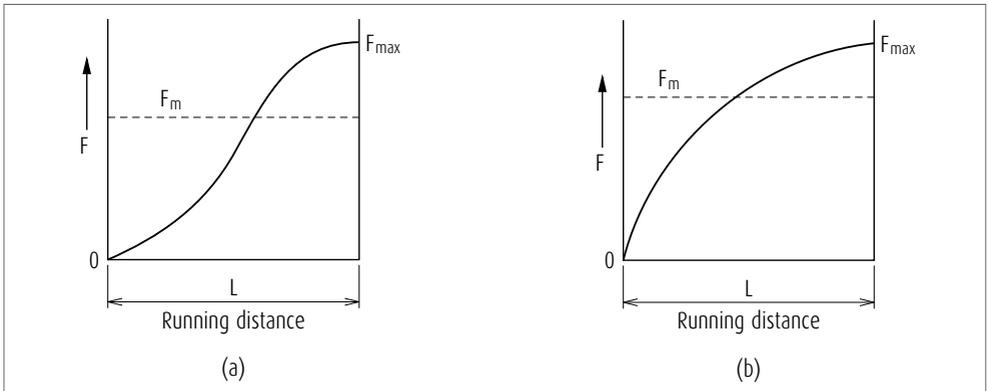


Fig. 2.5 Load that changes in sinusoidal pattern

5. Various coefficients

(1) Load factors

- > Although a load applied to the slide can be calculated, the actual load becomes larger than the calculated value due to the machine's vibration and impact.
- > Therefore, calculation of load on the slide should take into consideration the load factors in **Table 2.5**.

Table 2.5 Load factor f_w

| Impact/Vibration | Load factor |
|---|-------------|
| No external impact/vibration | 1.0 - 1.5 |
| There is impact/vibration from outside. | 1.5 - 2.0 |
| There is significant impact/vibration. | 2.0 - 3.0 |

A-3-2 Rating Life and Basic Load Rating

(2) Hardness coefficient

- For linear guides, in order to function optimally, both the rolling elements and the rolling contact surface must have a hardness of HRC58 to 62 to an appropriate depth.
- The hardness of NSK linear guide fully satisfies HRC58 to 62. Therefore, in most cases it is not necessary to consider hardness. If the linear guide is made of a special material by a customer's request, as the material hardness is lower than HRC58, use the following formula for adjustment.

$$C_H = f_H \cdot C$$

$$C_{0H} = f_H' \cdot C_0$$

C_H : Basic dynamic load rating adjusted by hardness coefficient

f_H : Hardness coefficient (Refer to Fig. 2.6)

C_{0H} : Basic static load rating adjusted by hardness coefficient

f_H' : Static hardness coefficient (Refer to Fig. 2.6)

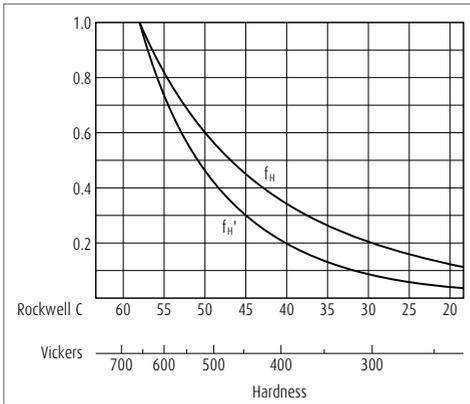


Fig. 2.6 Hardness coefficient

(3) Reliability coefficient

- In general, a reliability of 90% is customary. In this case, reliability coefficient is 1. Therefore, the reliability coefficient does not have to be included in calculation.

6. Calculation of rating life

(1) Life Calculating Formula

The life calculating formula in the stroke movement with normal lubrication, the following relationships exist between the slide mean effective load F_m (N), the basic dynamic load rating to load application direction C (N), and the rating fatigue life L (km).

[For balls as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^3$$

[For rollers as rolling element]

For the basic dynamic load rating for 100 km

$$L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

For the basic dynamic load rating for 50 km

$$L = 50 \times \left(\frac{f_H \cdot C_{50}}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

L : Rating fatigue life (km)

C_{100} : Basic dynamic load rating for 100 km rated fatigue life (N)

C_{50} : Basic dynamic load rating for 50 km rated fatigue life (N)

f_H : Hardness coefficient

f_w : Load factor

F_m : Mean effective load

Note: Do not use the basic static load rating C_0 and the basic static moment rating M_{R0} , M_{P0} or M_{Y0} for a calculation of the life.

(2) Life as an entire guide way system

In those cases when several slides comprise a single guide way system (such as a single-axis table), the life of the slide to which the most strenuous condition is applied is considered to be the life of the entire system.

For example, in Fig. 2.7, if "slide A" is the slide which receives the largest mean effective load, or if "slide A" is the one which has the shortest life, the life of the system is considered to be the life of "slide A."




Fig. 2.7 Life of a system

7. Examination of the basic static load rating

(1) Examine from the basic static load rating

- > Examine the static equivalent load P_0 , which is applied to the slide, from the basic static load rating C_0 and the static permissible load factor f_s .

$$f_s = \frac{C_0}{P_0}$$

When the static equivalent load P_0 is a combination of vertical loads F_r and lateral load F_s , calculate it using formulas below. When the static equivalent load P_0 is a combination of vertical loads F_r and lateral load F_s , calculate it using formulas below.

For NH, VH, NS, LW, LH and HS Series:

If compressed load and lateral load are combined

$$P_0 = Fr + 1.54Fs$$

If tensile load and lateral load are combined

$$P_0 = 1.28Fr + 1.54Fs$$

For TS, PU, LU, PE, LE, LL, RA, LA and HA Series:

$$P_0 = Fr + Fs$$

- > The table below shows guidelines of f_s for general industrial use.

Table 2.6

| Use conditions | f_s |
|-----------------------------------|---------|
| Under normal operating conditions | 1 - 2 |
| Operating under vibration/impact | 1.5 - 3 |

- > Basic static load rating is not a destructive force to the balls, rollers, rails, or slides. The balls can withstand a load more than seven times larger than the basic static load rating. It is sufficient as a safety factor to the destruction load designed for general machines.
- > However, when a heavy load applied to the rail and slide in tension direction, the strength of the bolts which secures the rail and the ball slide affects the strength of the entire system. Strength of the bolt and its material should be considered.

(2) Examining from static moment load rating

- > Also examine static permissible moment load M_0 from basic static moment load M_{p0} and static permissible load factor f_s .

$$f_s = \frac{M_{p0}}{M_0}$$

If more than one moment load in any direction is combined, please consult NSK.

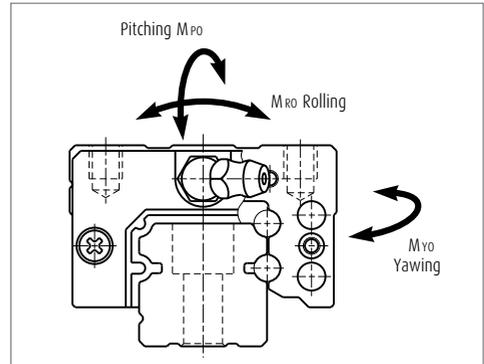


Fig. 2.8 Moment load directions

A-3-2 Rating Life and Basic Load Rating

8. Precautions for the design in examining the life

The following points must be heeded in examining the life.



In case of oscillating motion

- > If the rolling elements do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of rolling elements and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented, but it can be mitigated.
- > A grease which prevents fretting is recommended for oscillating stroke operations. When a standard grease is used, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.



When applying pitching or yawing moment

- > The load applied to the rolling element rows inside the slide is inconsistent if a pitching or yawing moment load is applied. Loads are heavy on the rolling elements on each end of the row.
- > In such case, a heavy load lubricant grease or oil are recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per rolling element.
- > The moment load to a ball slide is insignificant for 2-rail, 4-slide combination which is commonly used.



When an extraordinary high load is applied during stroke

- > If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- > When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.



When the calculated life is extraordinarily short (Less than 3 000 km in calculated life)

- > In such case, the contact pressure to the rolling elements and the rolling contact surface is extraordinarily high.
- > If the linear guides are operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- > It is necessary to reconsider the arrangement of linear guides, the number of slide, and the type of model in order to reduce the load to the slides.
- > It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31.



Application at high speed

- > The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external loading etc.
- > The end cap with high speed specification must be used when the operating speed exceeds the permissible speed. In such a case, please consult NSK.

A-3-3 Preload

1. Objective of preload

- > An elimination of clearance between the raceways and rolling elements vanishes the mechanical play of the linear guide system.
- > When a preload is applied, the deformation of linear guides by external vertical load is further improved thus increasing the system stiffness.
- > Preloading method
The preload is applied by inserting rolling elements slightly bigger than the space of two raceways as shown in **Fig. 3.1**.

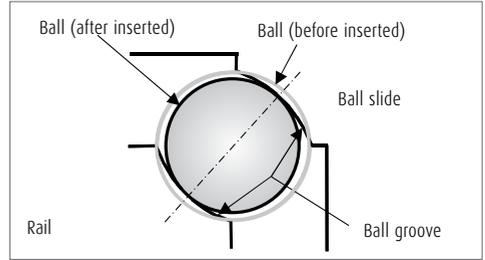


Fig. 3.1 Preloading method

2. Preload and rigidity

- > In NSK linear guides, slight size changes of rolling elements, which are going to be inserted in the slide, control the clearance and amount of preload.
- > In NSK linear guides, the rigidity is further increased and the elastic deformation is reduced by applying preload.
- > In general, the load range of ball guide system in which the preload is effective, is about 2.8 times of the preload (**Fig.3.2**). For roller guide system, it becomes about 2.2 times of the preload.
- > **Fig. 3.3** shows the relationship between the ball slide deformation and the external vertical load under a specified preload. NH35 is used as an example.
- > The following show the definition of linear guide rigidity.
 - 1) Radial rigidity: Rigidity of vertical and lateral directions, up/down and right/left (**Fig. 3.4**).
 - 2) Moment rigidity: Three moment directions, pitching, rolling, and yawing (**Fig. 3.5**).

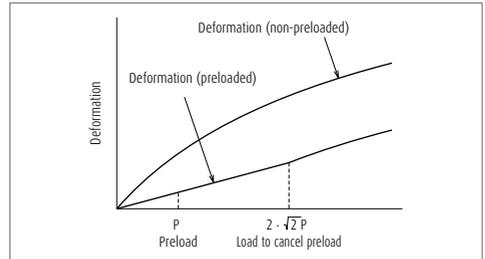


Fig. 3.2 Elastic deformation

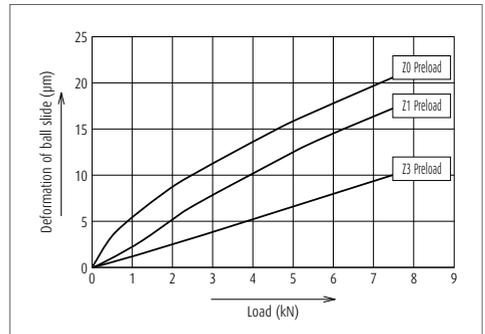


Fig. 3.3 Rigidity of NH35, downward direction load (example)

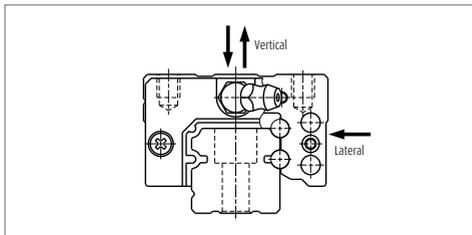


Fig. 3.4 Radial rigidity

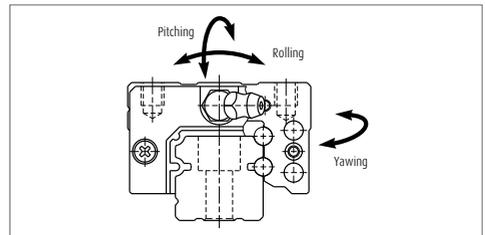


Fig. 3.5 Moment rigidity

A-3-3 Preload

- › Since two rails and four slides are used in general as a pair, consideration only for the radial rigidity is sufficient.
- › However, in cases as shown in **Fig. 3.6**, **Fig. 3.7** and **Fig. 3.8**, it is necessary to take into account the moment rigidity in addition to the radial rigidity.

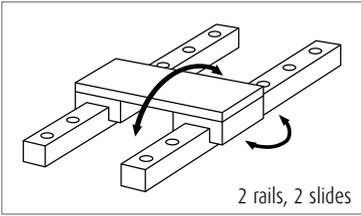


Fig. 3.6 Pitching and yawing direction




Fig. 3.7 Rolling direction




Fig. 3.8 All directions

3. Selection of preload types

- › Several types of preload that match the characteristic of each series are set for NSK linear guides.
- › Types of preload classification for each series are shown in **Table 3.1**. **Table 3.2** shows the selection criterion of the preload classification.

Table 3.1 Classification of preload in each series

| Preload Series | Preloaded assembly (not random matching) | | | | Random-matching assembly | | |
|----------------|--|----------------|----------------|----------------|--------------------------|----------------|----------------|
| | Heavy preload | Medium preload | Slight preload | Fine clearance | Medium preload | Slight preload | Fine clearance |
| | Z4 | Z3 | Z1 | Z0 | ZH | ZZ | ZT |
| Ball guide | NH, NS | ○ | ○ | ○ | ○ | ○ | ○ |
| | VH | ○ | ○ | ○ | ○ | ○ | ○ |
| | LW | (○) | ○ | ○ | ○ | ○ | ○ |
| | PU | | | ○ | ○ | | ○ |
| | LU | | | ○ | ○ | | ○ |
| | PE | | | ○ | ○ | | ○ |
| | LE | | | ○ | ○ | | ○ |
| | Miniature LH | | | ○ | ○ | | |
| | LL | | | | ○ | | |
| | LA | ○ | ○ | | | | |
| Roller guide | HA | ○ | ○ | | | | |
| | HS | | ○ | ○ | | | |
| | RA | | ○ | ○ | ○ | | |

Table 3.2 Selection criterion of the preload

| Classification of preload | Use condition | Applications |
|---|--|--|
| Z0 and ZT (Fine clearance) | <ul style="list-style-type: none"> › An application in which a set of two parallel linear guides (four ball slides/two rails) is used to sustain a unidirectional load with low vibration and impact. › An application in which the accuracy is not very necessary but a friction force must be minimized. | Welding machines, Glass processing machines, Packaging/packing machines, Materials handling equipment |
| Z1 and ZZ (Slight preload) | <ul style="list-style-type: none"> › Moment loads are applied. › Application for a highly accurate operation. | Industrial robots, Inspection/measuring equipment, Laser cutting machine, Electric discharge machines, PCB drillers, Chip mounters |
| Z3, ZH, and Z4 (Medium preload, Heavy preload) | <ul style="list-style-type: none"> › Application in which extremely high stiffness is essential. › Application in which vibration and impact load will be applied. | Machining centers, Lathes, Milling machines, Boring machines, Grinders |

4. Estimation of the elastic deformation

The followings are the relation between load and deformation.

- > Without the preload
 - When the rolling element is ball
The deformation is proportional to the 2/3 power of the load.
 - When the rolling element is roller
The deformation is proportional to the 9/10 power of the load.
- > With the preload
The deformation is directly proportional to the load.

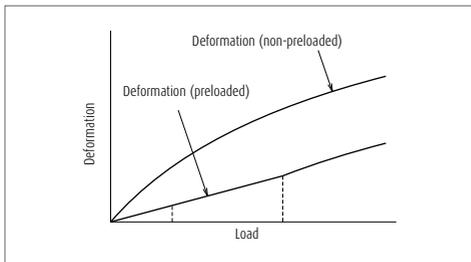


Fig. 3.9 Elastic deformation

A preloaded linear guide deforms proportionally to the load as shown in **Fig. 3.9**; the calculation of system deformation can be done using the deformation curve. The factors required for an estimation of the system deformation are listed below. The stiffness of slide is shown on the relevant explanation of each linear guide series.

< Required conditions to calculate deformation >

- > Volume of load
- > Direction of load
- > Point of load application
- > Position of deformation calculation
- > Arrangement of rails and ball slides
- > Position of a driving mechanism

Please refer to the calculation formula of deformation for typical table structures on the pages A18 to A20.

5. Application examples of preload

Table 3.3 shows typical application for each preload types of the NSK linear guides.

Refer to this table when selecting the preload type for your application.

Table 3.3 Examples of preload for specific purpose

| Type of machine | Application | Preload | | | |
|-----------------------------------|---|------------------|-------------------|-----------------------|-----------------------|
| | | Heavy preload Z4 | Medium preload Z3 | Slight preload Z1, Z2 | Fine clearance Z0, ZT |
| Machine tools | > Machining centers | ○ | ○ | | |
| | > Grinders | ○ | ○ | | |
| | > Lathes | ○ | ○ | | |
| | > Milling machines | ○ | ○ | | |
| | > Drilling machines | ○ | ○ | | |
| | > Boring machines | | ○ | | |
| | > Gear cutters | ○ | ○ | | |
| | > Diesinking machines | | ○ | ○ | |
| | > Laser cutting machines | | ○ | ○ | |
| | > Electric discharge machines | | ○ | | |
| Industrial machines and equipment | > Punch presses | | ○ | ○ | |
| | > Press machines | | | ○ | ○ |
| | > Welding machines | | ○ | ○ | ○ |
| | > Painting machines | | | ○ | ○ |
| | > Textile machines | | | ○ | ○ |
| | > Coil winders | | ○ | ○ | |
| | > Woodworking machines | | ○ | ○ | ○ |
| | > Glass processing machines | | | ○ | ○ |
| | > Stone cutting machines | | | ○ | ○ |
| | > Tire forming machines | | | ○ | ○ |
| | > ATC | | | ○ | ○ |
| | > Industrial robots | | ○ | ○ | ○ |
| | > Materials handling equipment | | | ○ | ○ |
| | > Packing machines | | | ○ | ○ |
| > Construction machines | | | | ○ | |
| Semiconductor facilities | > Probers | | ○ | | |
| | > Wire bonders | | ○ | ○ | |
| | > PCB drillers | | ○ | ○ | |
| | > Wafer slicers | | ○ | | |
| | > Wafer dicers | | ○ | | |
| | > Chip mounters | | ○ | ○ | |
| | > IC handlers | | | ○ | |
| | > Scanners | | | ○ | |
| > Lithographic machines | | ○ | ○ | | |
| Others | > Measuring/inspection equipment | | | ○ | |
| | > Three-dimensional measuring equipment | | ○ | ○ | |
| | > Medical equipment | | | ○ | ○ |
| | > OA equipment | | | ○ | ○ |
| | > Railway cars | | | ○ | ○ |
| | > Stage systems | | | | ○ |
| > Pneumatic equipment | | | ○ | ○ | |

A-3-3 Preload

6. Load and rating life when the preload is taken into account

- > It is necessary to include the amount of preload for the calculation of rating life when the Z3 (medium preload) or the Z4 (heavy preload) preload type is specified.
- > Full dynamic equivalent load when the preload is taken into account can be obtained by the following formulas.

For balls as rolling element

$$F_{eP} = P \left(1 + \frac{F_e}{2.83 \times P} \right)^{\frac{3}{2}}$$

P : Preload (N)

However, when the full dynamic equivalent load taking account of preload is larger than the load at which preload is removed, $F_{eP} = F_e$.

For this case, preload is lost at $F_{P0} = 2^{\frac{2}{3}}P$

For rollers as rolling element

$$F_{eP} = P \left(1 + \frac{F_e}{2.16 \times P} \right)^{\frac{10}{9}}$$

P : Preload (N)

However, when the full dynamic equivalent load taking preload into account is larger than the load at which preload is removed, $F_{eP} = F_e$.

For this case, preload is lost at $F_{P0} = 2^{\frac{9}{10}}P$

7. Calculating friction force by preload

- > Dynamic friction force per one slide of the ball guide can be calculated from a preload value.
- > The following is a simple calculation to obtain the criterion of dynamic friction force.

For the slight preload ZZ of a preloaded random-matching type linear guide, use the preload volume of slight preload Z1 type assembly.

$$F = iP$$

F : Dynamic friction force (N)

P : Preload (N)

i : Contact coefficient

Use the following contact coefficient values (i) for each series of linear guides.

NH, VH, NS, LW, LH and HS Series : 0.004

LA and HA Series : 0.010

PU, LU, PE and LE Series : 0.026

- > The starting friction force when the slide begins to move depends on lubrication condition. Roughly estimate it at 1.5 to 2 times of the dynamic friction obtained by the above method.

Calculation example

In case of NH35AN - Z3

$$i = 0.004$$

$$P = 2350 \text{ (N) (refer to LH series preload)}$$

$$F = iP$$

$$= 0.004 \times 2350 = 9.4 \text{ (N)}$$

Therefore, the criteria of the dynamic friction force of LH35AN - Z3 is 9.4 N.

For seal friction, refer to seal friction of each Series.

A-3-4 Accuracy

1. Accuracy standard

The accuracy characteristics of linear guide are specified to each series in the variations of assembled height, assembled width, and running parallelism. We also specify the mutual variation of a pair of linear guides in the assembled height and assembled width. The accuracy of the table equipped with a set of linear guides is depending on other accuracies and many factors besides the accuracy of linear guides. Those are the accuracy of the mounting surface of the machine, the mounting span between two linear guides, the span of ball slides, the number of ball slides, and the location of the point at where the accuracy is really required. The NSK linear guides can deal with these factors and provide the best suited model for your specific application.

2. Definition of Accuracy

> **Table 4.1, Figure 4.1** and **Figure 4.2** show accuracy characteristics.

Table 4.1 Definition of accuracy

| Characteristics | Definition (Figures 4.1 and 4.2) |
|--|---|
| Mounting height H | Distance from A (rail bottom datum surface) to C (slide top surface) |
| Variation of H | Variation of H in slides assembled to the rails of a set of linear guides |
| Mounting width W_2 or W_3 | Distance from B (rail side datum surface) to D (slide side datum surface). Applicable only to the reference linear guide. |
| Variation of W_2 or W_3 | Difference of the width (W_2 or W_3) between the assembled slides which are installed in the same rail. Applicable only to the reference linear guide. |
| Running parallelism of slide, surface C to surface A | Variation of C (slide top surface) to A (rail bottom datum surface) when slide is moving. |
| Running parallelism of slide, surface D to surface B | Variation of D (slide side datum surface) to B (rail side datum surface) when a slide is moving. |

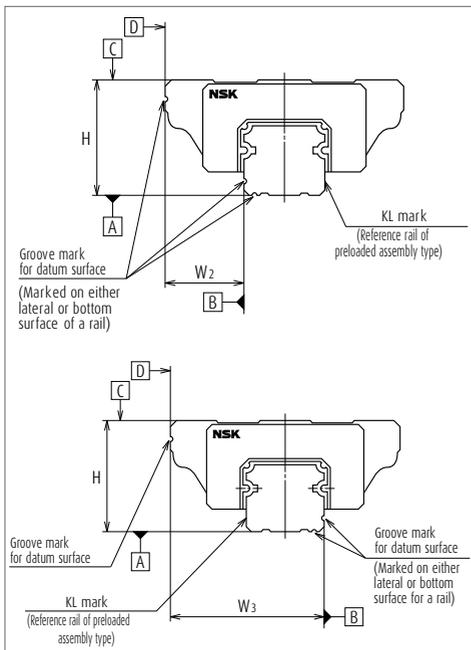


Fig. 4.1 Assembled dimensions

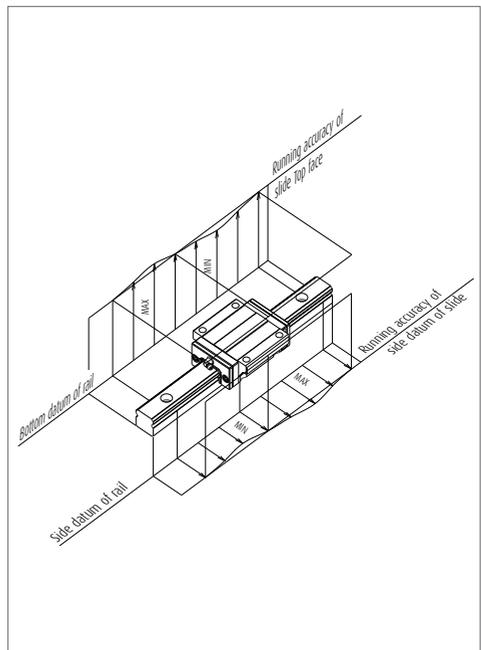


Fig. 4.2 Running parallelism of slide

A-3-4 Accuracy

Mounting width: W_2 and W_3

- Mounting width differs depending on the arrangement of the datum surfaces of the rail and slide on the reference linear guide (indicated as KL on the rail). (**Fig. 4.3** and **Fig. 4.4**)

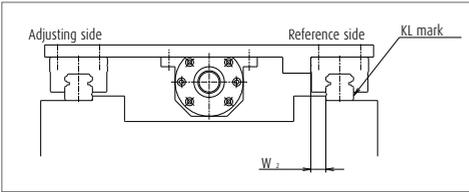


Fig. 4.3 Mounting width W_2

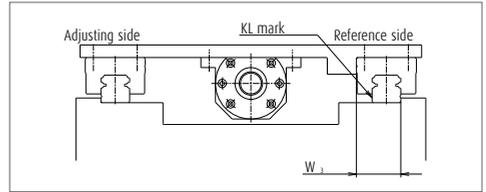


Fig. 4.4 Mounting width W_3

Running Parallelism of Ball Slide

- Running parallelism of slide is common in all series. Specifications of all accuracy grades are shown in Table 4.2. However, applicable accuracy grades differ by series. Please refer to "**Table 4.4 Accuracy grade and applicable series**" on page A35.

Table 4.2 Running parallelism of slide

Unit: μm

| Accuracy grade Rail length (mm) | | Preloaded assembly (not random matching) | | | | | Random- matching type | |
|---------------------------------------|---------|--|----------------------|---------------------|-----------------------|--------------------|--------------------------|--------------------|
| | | Ultraprecision P3 | Superprecision P4 | Highprecision P5 | Precision grade P6 | Normal grade PN | Normal grade PH | Normal grade PC |
| over | or less | | | | | | | |
| - | 50 | 2 | 2 | 2 | 4.5 | 6 | 2 | 6 |
| 50 | - 80 | 2 | 2 | 3 | 5 | 6 | 3 | 6 |
| 80 | - 125 | 2 | 2 | 3.5 | 5.5 | 6.5 | 3.5 | 6.5 |
| 125 | - 200 | 2 | 2 | 4 | 6 | 7 | 4 | 7 |
| 200 | - 250 | 2 | 2.5 | 5 | 7 | 8 | 5 | 8 |
| 250 | - 315 | 2 | 2.5 | 5 | 8 | 9 | 5 | 9 |
| 315 | - 400 | 2 | 3 | 6 | 9 | 11 | 6 | 11 |
| 400 | - 500 | 2 | 3 | 6 | 10 | 12 | 6 | 12 |
| 500 | - 630 | 2 | 3.5 | 7 | 12 | 14 | 7 | 14 |
| 630 | - 800 | 2 | 4.5 (4) | 8 | 14 | 16 | 8 | 16 |
| 800 | - 1000 | 2.5 | 5 (4.5) | 9 | 16 | 18 | 9 | 18 |
| 1 000 | - 1 250 | 3 | 6 (5) | 10 | 17 | 20 | 10 | 20 |
| 1 250 | - 1 600 | 4 | 7 (6) | 11 | 19 | 23 | 11 | 23 |
| 1 600 | - 2 000 | 4.5 | 8 (7) | 13 | 21 | 26 | 13 | 26 |
| 2 000 | - 2 500 | 5 | 10 (8) | 15 | 22 | 29 | 15 | 29 |
| 2 500 | - 3 150 | 6 | 11 (9.5) | 17 | 25 | 32 | 17 | 32 |
| 3 150 | - 4 000 | 9 | 16 | 23 | 30 | 34 | 23 | 34 |

Note Value of () is the running parallelism of RA Series.

3. Application examples of accuracy grade and preload

Table 4.3 shows examples of accuracy grade and preload of NSK linear guides for specific purposes.

Refer to this table when selecting accuracy grade and preload type for your application.

Table 4.3 Application examples of accuracy grade and preload

| Type of machine | Application | Accuracy grade | | | | | Preload | | | |
|-----------------------------------|---|--------------------|--------------------|-----------------------|--------------------|---------------------|------------------|-----------------------|-----------------------|-----------------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5, PH | Precision grade P6 | Normal grade PN, PC | Heavy preload Z4 | Medium preload Z3, ZH | Slight preload Z1, ZZ | Fine clearance Z0, ZT |
| Machine tools | > Machining centers | | ○ | ○ | ○ | | ○ | ○ | | |
| | > Grinders | ○ | ○ | ○ | | | ○ | ○ | | |
| | > Lathes | | ○ | ○ | ○ | | ○ | ○ | | |
| | > Milling machines | | ○ | ○ | ○ | | ○ | ○ | | |
| | > Drilling machines | | | ○ | ○ | | ○ | ○ | | |
| | > Boring machines | | ○ | ○ | ○ | | ○ | ○ | | |
| | > Gear cutters | | ○ | ○ | ○ | | ○ | | | |
| | > Diesinking machines | | ○ | ○ | ○ | | | ○ | ○ | |
| | > Laser cutting machines | | ○ | ○ | ○ | | | ○ | ○ | |
| | > Electric discharge machines | ○ | ○ | ○ | | | ○ | ○ | | |
| Industrial machines and equipment | > Punch presses | | | ○ | ○ | | | ○ | ○ | |
| | > Press machines | | | | ○ | ○ | | | ○ | ○ |
| | > Welding machines | | | | ○ | ○ | | ○ | ○ | ○ |
| | > Painting machines | | | | ○ | ○ | | | ○ | ○ |
| | > Textile machine | | | | ○ | ○ | | | ○ | ○ |
| | > Coil winders | | | | ○ | ○ | | ○ | ○ | |
| | > Woodworking machines | | | ○ | ○ | ○ | | ○ | ○ | ○ |
| | > Glass processing machines | | | | ○ | ○ | | | ○ | ○ |
| | > Stone cutting machines | | | | ○ | ○ | | | ○ | ○ |
| | > Tire forming machines | | | | ○ | ○ | | | ○ | ○ |
| | > ATC | | | | ○ | ○ | | | ○ | ○ |
| | > Industrial robots | | | ○ | ○ | ○ | | ○ | ○ | ○ |
| | > Materials handling equipment | | | | ○ | ○ | | | ○ | ○ |
| | > Packing machines | | | | ○ | ○ | | | ○ | ○ |
| > Construction machines | | | | | ○ | | | | ○ | |
| Semiconductor facilities | > Probers | ○ | | | | | | ○ | ○ | |
| | > Wire bonders | | ○ | ○ | | | | ○ | ○ | |
| | > PCB drillers | | | ○ | ○ | | | ○ | ○ | |
| | > Wafer slicers | ○ | ○ | | | | | ○ | | |
| | > Wafer dicers | ○ | ○ | | | | | ○ | | |
| | > Chip mounters | | | ○ | ○ | | | ○ | ○ | |
| | > IC handlers | | | ○ | ○ | | | | ○ | |
| | > Scanners | | | ○ | ○ | | | | ○ | |
| | > Lithographic machines | ○ | ○ | | | | ○ | ○ | | |
| Others | > Measuring/inspection equipment | ○ | ○ | ○ | ○ | | | ○ | ○ | |
| | > Three-dimensional measuring equipment | ○ | ○ | ○ | ○ | | ○ | ○ | | |
| | > Medical equipment | | ○ | ○ | | | | | ○ | ○ |
| | > OA equipment | | | | ○ | ○ | | | ○ | ○ |
| | > Railway cars | | | | | ○ | | | ○ | ○ |
| | > Stage systems | | | | | ○ | | | | ○ |
| | > Pneumatic equipment | | | | ○ | ○ | | ○ | ○ | |

Note Only Z1 and Z0 are available for PN grade.

For random-matching type, preload "ZH" and "ZZ" are available for PH grade. For PC grade, "ZH", "ZZ" and "ZT" are available.

A-3-4 Accuracy

4. Combination of accuracy grade and preload

(1) Accuracy grades

- > The accuracy grade which matches the characteristic of each series is set for the NSK linear guides.
- > **Table 4.4** shows the accuracy grades available for each series.
- > Refer to "**3. Application examples of accuracy grade**" which shows cases of appropriate accuracy grade for specific purpose.

Table 4.4 Accuracy grades and applicable series

| Series | Preloaded assembly (not random matching) | | | | | Random-matching type | |
|--------------|--|-----------------|----------------|-----------------|--------------|----------------------|--------------|
| | Ultra precision | Super precision | High precision | Precision grade | Normal grade | Precision grade | Normal grade |
| | P3 | P4 | P5 | P6 | PN | PH | PC |
| NH, NS | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| VH | ○ | ○ | ○ | ○ | ○ | | ○ |
| LA | ○ | ○ | ○ | ○ | | | |
| LW | | | ○ | ○ | ○ | | ○ |
| PE, LE | | ○ | ○ | ○ | ○ | | ○ |
| PU, LU | | ○ | ○ | ○ | ○ | | ○ |
| Miniature LH | | ○ | ○ | ○ | ○ | | |
| LL | | | | | ○ | | |
| HA | ○ | ○ | ○ | | | | |
| HS | ○ | ○ | ○ | | | | |
| RA | ○ | ○ | ○ | ○ | | ○ ^{*)} | |

^{*)} Only RA25 to RA65 are available in random matching.

(2) Preload

- › Several classifications of preload that match the characteristic of each series are set for the NSK linear guides.
- › The classification of preload for each series are shown in **Table 4.5**.
- › Refer to the specifications of each series for details of radial clearance, preload, and rigidity.
- › "**3. Application examples of accuracy grade**" shows the cases of appropriate preload classifications and accuracy grades for specific purposes.

Table 4.5 Classification of preload

| Series | Preloaded assembly (not random matching) | | | | Random-matching type | | |
|--------------|--|----------------|----------------|----------------|----------------------|----------------|----------------|
| | Heavy preload | Medium preload | Slight preload | Fine clearance | Medium preload | Slight preload | Fine clearance |
| | Z4 | Z3 | Z1 | Z0 | ZH | ZZ | ZT |
| NH, NS | | ○ | ○ | ○ | ○ | ○ | ○ |
| VH | | ○ | ○ | ○ | | ○ | ○ |
| LA | ○ | ○ | | | | | |
| LW | | (○) | ○ | ○ | | ○ | ○ |
| PE, LE | | | ○ | ○ | | | ○ |
| PU, LU | | | ○ | ○ | | | ○ |
| Miniature LH | | | ○ | ○ | | | |
| LL | | | | ○ | | | |
| HA | | ○ | ○ | | | | |
| HS | | ○ | ○ | | | | |
| RA | | ○ | ○ | | ○ | ○ | |

- Notes**
- 1) Z3 preload classification is only applicable to LW35 and LW50 for LW Series.
 - 2) Only RA25 to RA65 are available in random matching.
 - 3) The preload code of "Z" is omitted from the specification number. Only the number of preload classification code is specified on the last code of the reference number. (Refer to the reference number of each series.)

(3) Combinations of accuracy grade and preload

- › Combinations of accuracy grade and preload are shown in **Table 4.6**.

Table 4.6 Combinations of accuracy grade and preload type

| | Accuracy grade | Preload |
|----------------------|----------------|------------|
| Preloaded assembly | P3 – P6 | Z4 – Z0 |
| | PN | Z1, Z0 |
| Random-matching type | PC, PH*1), *2) | ZH, ZZ, ZT |

- Notes**
- *1) The random-matching type is available for the models of RA25 to RA65. PH grade is set for the accuracy.
 - *2) ZH and ZZ preload are available for the PH accuracy grade.

A-3-5 Maximum Rail Length

General Industrial Use

Unit: mm

| Series | Size | | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 |
|--------|---------------------------|--|-------|-------|-------|-------|-------|-------|-------|-------|
| | Material | | | | | | | | | |
| NH | Special high carbon steel | | 2 980 | 3 960 | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 | 3 900 |
| | Stainless steel | | 1 800 | 3 500 | 3 500 | 3 500 | | | | |
| VH | Special high carbon steel | | 2 000 | 3 960 | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 | |
| | Stainless steel | | 1 800 | 3 500 | 3 500 | 3 500 | | | | |
| TS | Special high carbon steel | | 1 960 | 2 920 | 4 000 | 4 040 | 4 040 | | | |
| NS | Special high carbon steel | | 2 920 | 3 960 | 3 960 | 4 000 | 4 000 | | | |
| | Stainless steel | | 1 700 | 3 500 | 3 500 | 3 500 | 3 500 | | | |

Unit: mm

| Series | Size | | 17 | 21 | 27 | 35 | 50 |
|--------|---------------------------|--|-------|-------|-------|-------|-------|
| | Material | | | | | | |
| LW | Special high carbon steel | | 1 000 | 1 600 | 2 000 | 2 000 | 2 000 |

Liquid Crystal Display and Semiconductor

Unit: mm

| Series | Size | | 05 | 07 | 08 | 09 | 10 | 12 | 15 |
|--------|---------------------------|--|-----|-----|-----|-------|-----|-------|-------|
| | Material | | | | | | | | |
| PU | Stainless steel | | 210 | 375 | | 600 | | 800 | 1 000 |
| LU | Special high carbon steel | | | | | 1 200 | | 1 800 | 2 000 |
| | Stainless steel | | 210 | 375 | | 600 | | 800 | 1 000 |
| PE | Stainless steel | | 150 | 600 | | 800 | | 1 000 | 1 200 |
| LE | Stainless steel | | 150 | 600 | | 800 | | 1 000 | 1 200 |
| LH | Stainless steel | | | | 375 | | 600 | 800 | |

Machine Tools

Unit: mm

| Series | Size | | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 |
|--------|---------------------------|--|-------|-------|-------|-------|-------|-------|-------|-------|
| | Material | | | | | | | | | |
| RA | Special high carbon steel | | 2 000 | 3 000 | 3 900 | 3 900 | 3 900 | 3 650 | 3 600 | 3 600 |
| LA | Special high carbon steel | | | | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 | 3 900 |

High-Precision Machine and High-Precision Measuring Equipment

Unit: mm

| Series | Size | | 15 | 20 | 25 | 30 | 35 | 45 | 55 |
|--------|---------------------------|--|-------|-------|-------|-------|-------|-------|-------|
| | Material | | | | | | | | |
| HA | Special high carbon steel | | | | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 |
| HS | Special high carbon steel | | 2 000 | 3 960 | 3 960 | 4 000 | 4 000 | | |
| | Stainless steel | | 1 700 | 3 500 | 3 500 | 3 500 | 3 500 | | |

A-3-6 Lubrication

1. NSK linear guides equipped with "NSK K1" lubrication unit




NSK K1 lowers machine operation cost, and reduces impact on the environment.

What is "long-term, maintenance-free" operation?

Ball screws and linear guides which are equipped with NSK K1 do not require maintenance for five years or up to 10 000 km operational distance.

What is NSK K1 lubrication unit?

NSK K1 is a lubrication device which combines oil and resin in a single unit. The porous resin contains a large amount of lubrication oil. Touching its surface to the raceway of a rail close to the ball contact point NSK K1 constantly supplies fresh oil which seeps from the resin.



Enlarged surface of "NSK K1" Lubrication Unit

100µm

Polyolefin

Unlike vinyl chloride products, polyolefin does not produce dioxin. Polyolefin is also being used increasingly at supermarkets for food wrapping.

Lubrication oil

It is mineral oil-based lubricant. The oil has a viscosity of 100 cSt.

Remarkable capacity with new material: NSK K1 lubrication unit information

- > NSK K1 lubrication unit (referred to as NSK K1 hereafter) equipped with an NSK linear guide is an outstanding new lubrication material.
- > A Newly developed porous synthetic resin contains large volume of lubricant oil that seeps out and enhances lubricating function.
- > Simply install NSK K1 inside a standard end seal (rubber).
- > We also provide NSK K1 lubrication unit for sanitary environments suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to "A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment".

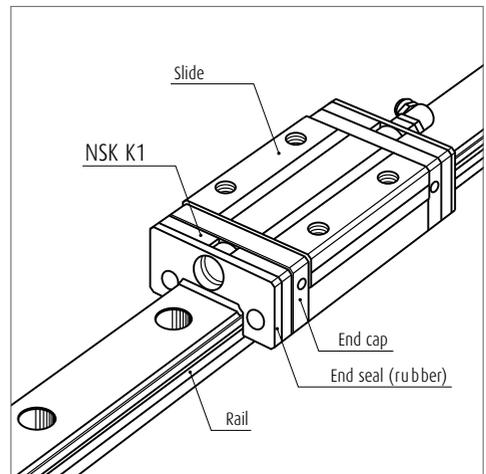


Fig. 6.1

A-3-6 Lubrication

(1) Features

NSK K1 comprises a part of the compact and efficient lubrication unit.

1) Maintenance is required only infrequently

Used with grease, the lubrication function lasts for a long time. Ideal for systems/environments in which replenishing is difficult.



For automotive component processing lines, etc.

2) Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.



Food processing/medical equipment, liquid crystal displays/semiconductor manufacturing equipment, etc.

We also provide NSK K1 lubrication unit for sanitary environment suited for food processing machinery, medical equipment and their ancillaries for the environment where hygiene control is essential. For details, refer to "A-3-9 3. NSK Linear Guides for Food Processing Equipment and Medical Devices for Sanitary Environment".

3) Good for applications where lubricant is washed away

Used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environments where the machine is exposed to rain or wind.



Food processing equipment, housing/construction machines, etc.

4) Maintains efficiency in dusty environments

In environments where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions is maintained by using NSK K1 in combination with grease.



Woodworking machines, etc.

(2) Functions

NSK K1 has various superb functions. NSK's ample test data and field performances confirm NSK K1 abilities.

1) Durability test at high speed, with no other lubrication

Fig. 6.2 shows test results under these conditions.

The linear guide operated with no lubricant is unable to travel after a short period because breakage occurs. Equipped with NSK K1, the linear guide easily travels 25 000 km.

Conditions: Sample ; LH30AN (preload Z1)
Travel speed ; 200 m/min
Stroke ; 1 800 mm

No lubricant: Completely degreased, no lubrication

NSK K1: Completely degreased, no lubrication + NSK K1

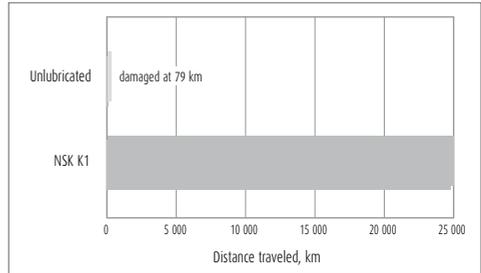


Fig. 6.2 Durability test at high speed, with no lubrication (lubricated by NSK K1 only)

* Stainless steel linear guides are available for use in corrosive environments or other environments where rusting is a potential problem.

2) Immersion test

Fig. 6.3 shows the test results after a linear guide is immersed in water once per week for 24 hours at a time, then traveled for 2 700 km. Without NSK K1, the ball groove surface wore out at an early stage and broke. With NSK K1, the wear was reduced to about 1/3 (Table 6.1). This test proves the effect of NSK K1.

Conditions: Sample ; LS30 Stainless steel (preload Z1)
 Travel speed ; 24 m/min
 Stroke ; 400 mm
 Load ; 4 700 N/Slide
 Lubricant ; Fully packed with grease
 (*) exclusive use for food processing machines

Immersion condition:

Immersed and traveled once per week for 24 hours at a time.

* Grease made in U.S.A.

Characteristic

Consistency: 280

Base oil viscosity: 580 (cSt)

Table 6.1 Comparison in wear of grooves and steel balls (2 700 km) Unit: μm

| Lubricating condition | Ball slide groove | Rail groove | Steel balls |
|-----------------------|-------------------|-------------|-------------|
| With NSK K1 | 16 – 18 | 2 – 3 | 6 – 8 |
| Without NSK K1 | 30 – 45 | 9 – 11 | 17 – 25 |

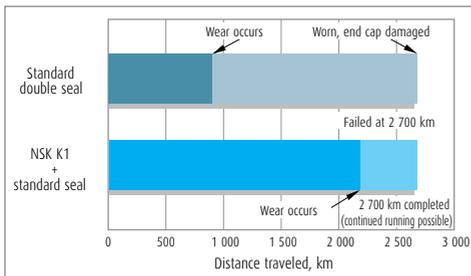


Fig. 6.3 Durability test immersed in water

3) Durability test with wood chips

Wood chips absorb lubricant. Maintaining lubrication in such environment is extremely difficult. Fig. 6.4 shows that the life when NSK K1 is added to a standard seal is two times longer than the life when two seals are combined (standard double seal).

Conditions: Sample ; LH30AN (preload Z1)
 Travel speed ; 24 m/min
 Stroke ; 400 mm
 Load ; 490 N/Slide

Seal specifications/lubricant:

Standard double Seal ; Standard double Seal + AS2 Grease

NSK K1 ; NSK K1 + Standard seal + AS2 Grease

Wood chip conditions: 1 Volume of wood chips: Large
 2 Volume of wood chips: Medium

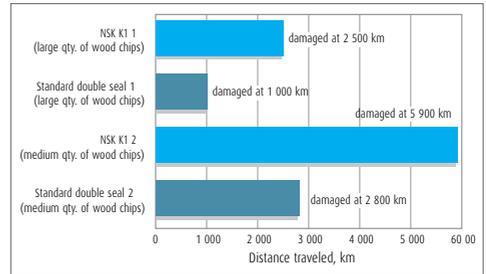


Fig. 6.4 Durability test with wood chips

4) Dust generation

Fig. 6.5 is a comparison of dust generation of NSK K1. The combination of NSK K1 and NSK Clean Grease LG2 (low dust generation grease) generates as little dust as fluorine grease (vacuum grease).

Conditions: Sample ; LS20
 Travel speed ; 36 m/min

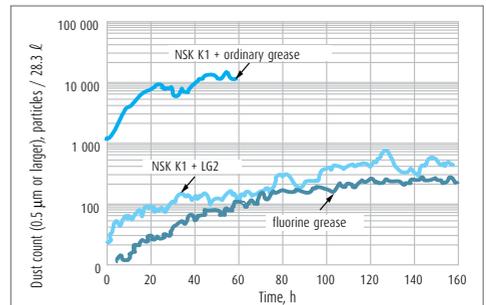


Fig. 6.5 Comparison of dust emission

A-3-6 Lubrication

(3) Specifications

1) Applicable series and sizes

- a) Can be installed in NH, NS, LW, PU, LU, PE, LE, LH, RA, LA, HA and HS series. It is standard equipment for the VH and TS Series.
- b) Can be used with stainless steel materials and surface-treated items.

2) Standard specifications

- a) NSK K1 is installed between the end seal and end cap.
For the TS series, it is installed in the end cap. (Double-seal specification, and specification with protector are also available upon request.)
- b) NSK standard grease is packed inside the slide.
(You may specify the type of grease and its volume if required.)
- c) Accuracy and preload classifications are the same as standard items. (Dynamic friction increases slightly due to NSK K1.)

3) Number of installed NSK K1

Normally, one NSK K1 should be installed on both ends of slides. (two K1s for one slide)

However, more NSK K1 may be required under more stringent operating conditions and environment. Please consult NSK for details in such a case.

Precautions for handling

To maintain high functionality of the NSK K1, observe the following precautions.

1. Temperature range for use:
Maximum temperature in use: 50°C
Momentary maximum temperature in use: 80°C
2. Chemicals that should not come into contact with NSK K1:
Do not leave the NSK K1 in an organic solvent, such as hexane and thinner that remove oil, or rust preventive oil that contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, mineral-oil type grease and ester-type grease do not damage NSK K1.

2. Lubrication

Mainly there are two ways of lubrication, grease and oil, for linear guides.

Use a lubricant agent and method most suitable to condition requirements and the purpose to optimize functions of linear guides.

In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.

Lubrication with high base oil kinematic viscosity is used for oscillating operations, operations in low speeds and in high temperatures.

The following are lubrication methods by grease and by oil.

(1) Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubrication accessories available from NSK are:

- › Various types of grease in bellows tube which can be instantly attached to the hand grease pump;
- › NSK Grease Unit that consists of a hand grease pump and various nozzles. These are compact and easy to use.

1) NSK grease lubricants

Table 6.2 shows the marketed general grease widely used for linear guides. In addition to these grease, NSK provides special grease for specific conditions and purposes.

Table 6.2 Grease lubricant for linear guides

| Type | Thickener | Base oil | Base oil kinematic viscosity mm ² /s (40°C) | Range of use temperature (°C) | Purpose |
|--------------------|---------------------|---|--|-------------------------------|--|
| AS2* ¹⁾ | Lithium type | Mineral oil | 130 | -10 - 110 | For general use at high load |
| PS2* ²⁾ | Lithium type | Synthetic oil + synthetic hydrocarbon oil | 15.9 | -50 - 110 | For low temperature and high frequency operation |
| LG2 | Lithium type | Mineral oil + synthetic hydrocarbon oil | 32 | -20 - 70 | For clean environment |
| LGU | Diurea | Synthetic hydrocarbon oil | 95.8 | -30 - 120 | For clean environment |
| NF2 | Urea composite type | Synthetic hydrocarbon oil | 26 | -40 - 100 | For fretting resistant |

Note *¹⁾ Standard grease of NH, VH, TS, NS, LW, LH, RA, LA, HA and HS Series.

*²⁾ Standard grease of PU, LU, PE and LE Series.

A-3-6 Lubrication

[1] NSK Grease AS2

> Features

It is environmentally friendly and widely used grease for high-load applications. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

> Application

It is a standard grease for general NSK linear guides. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

> Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Lithium soap base |
| Base oil | Mineral oil |
| Consistency | 275 |
| Dropping point | 181°C |
| Volume of evaporation | 0.24% (99°C, 22 hr) |
| Copper corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 2.8% (100°C, 24 hr) |
| Base oil kinematic viscosity | 130 mm ² /s (40°C) |

[2] NSK Grease PS2

> Features

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low-temperature operation. It is for a high-speed and light-load application.

> Application

It is standard grease for NSK miniature linear guides. It is especially superb for low-temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

> Nature

| | |
|------------------------------|---|
| Thickener | Lithium soap base |
| Base oil | Synthetic oil + Synthetic hydrocarbon oil |
| Consistency | 275 |
| Dropping point | 190°C |
| Volume of evaporation | 0.60% (99°C, 22 hr) |
| Copper corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 3.6% (100°C, 24 hr) |
| Base oil kinematic viscosity | 15.9 mm ² /s (40°C) |

[3] NSK Grease LG2

> Features

This grease was developed by NSK to be exclusively used for linear guides in clean room. Compared to the fluorine grease which is commonly used in clean room, LG2 has several advantages such as:

- > Higher in lubrication function
- > Longer lubrication life
- > More stable torque (resistant to wear)
- > Higher rust prevention.

In dust generation, LG2 is more than equal to the fluorine grease in keeping dust volume low. Since the base oil is not special oil but mineral oil, LG2 can be handled in the same manner as general grease.

> Application

LG2 is the lubrication grease for linear guides for semiconductor and liquid crystal display (LCD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page A60 for the detailed data on superb characteristics of NSK Grease LG2.

> Nature

| | |
|------------------------------|---|
| Thickener | Lithium soap base |
| Base oil | Mineral oil + Synthetic hydrocarbon oil |
| Consistency | 199 |
| Dropping point | 201°C |
| Volume of evaporation | 1.40% (99°C, 22 hr) |
| Copper corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.8% (100°C, 24 hr) |
| Base oil kinematic viscosity | 32 mm ² /s (40°C) |

[4] NSK Grease LGU

> Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for linear guides which are used in clean room.

In comparison with the fluorine base grease, which has been used commonly in clean room, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust generation. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

> Application

This is exclusive lubrication grease for linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of -30°C to 180°C.

This grease cannot be used in vacuum.

> Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Diurea |
| Base oil | Synthetic hydrocarbon oil |
| Consistency | 201 |
| Dropping point | 260°C |
| Volume of evaporation | 0.09% (99°C, 22 hr) |
| Copper corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.6% (100°C, 24 hr) |
| Base oil kinematic viscosity | 95.8 mm ² /s (40°C) |

[5] NSK Grease NF2

> Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

> Application

This grease suits for linear guides whose application includes oscillating operations. Allowable temperature range is -40°C to 100°C.

> Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Diurea |
| Base oil | Synthetic hydrocarbon oil |
| Consistency | 288 |
| Dropping point | 260°C |
| Volume of evaporation | 0.22% (99°C, 22 hr) |
| Copper corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.5% (100°C, 24 hr) |
| Base oil kinematic viscosity | 26 mm ² /s (40°C) |

> Precautions for handling

- > Wash the linear guides to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- > Clean grease is exclusively used for clean environments at normal pressure.

A-3-6 Lubrication

2) How to replenish grease

Use the grease fitting of a slide if an exclusive grease supply system is not used. Supply the required amount of grease by a grease pump.

Wipe off old grease and accumulated dust before supplying new grease. If the grease fitting is not used, apply grease directly to the rail. Remove the seal if possible, and move the slide few strokes so the grease permeates it. A hand grease pump, an exclusive and easy lubricating device for linear guides, is available at NSK.

3) Volume of grease to be replenished

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

- › When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is: All at once, replenish the amount that fills about 50% of the internal space of the slide. This method eliminates waste of grease, and is efficient.

Page A46 shows the internal spaces of slide of each series for your reference.

- › When replenishing grease using a grease pump:

Use a grease pump and fill the inside of slide with grease. Supply grease until it comes out from the slide area. Move the slide by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try to run-in the system a few times to spread the grease throughout the system and to remove excess grease from inside.

Running-in operation is necessary because the sliding force of the linear guide greatly increases immediately after the replenishment (full-pack state) and may cause problems. Grease's stirring resistance is accountable for this phenomenon. Wipe off excess grease that accumulates at the end of the rail after trial runs, so the grease does not scatter to other areas.

4) Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the slide is gradually removed by stroke movement. In some environments, the grease becomes dirty, and foreign objects may enter a slide. New grease should be replenished depending on the frequency of use. The following is a guide of intervals of grease replenishments to linear guides.

Table 6.3 Intervals of checks and replenishments for grease lubrication

| Intervals of checks | Items to be checked | Intervals of replenishments |
|---------------------|--|--|
| 3-6 months | Dirt, foreign matters such as cutting chip | Usually once per year is sufficient. Every 3 000 km for a system such as material handling equipment that travels more than 3 000 km per year. Replenish if checking results warrant it necessary. |

- Notes**
- 1) As a general rule, do not mix greases of different brands. Grease structure may be destroyed if greases of different thickeners are mixed. Even when greases have the same thickener, different additives in them may have an adverse effect on each other.
 - 2) Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperature. Pay attention to increase in linear guide's sliding resistance in such occasion.

Table 6.4 Inside space of the slide

NH Series

Unit: cm³

| Series Model No. | NH | |
|---------------------|----------------|----------------------|
| | High-load type | Ultra-high-load type |
| 15 | 3 | 4 |
| 20 | 6 | 8 |
| 25 | 9 | 13 |
| 30 | 13 | 20 |
| 35 | 22 | 30 |
| 45 | 47 | 59 |
| 55 | 80 | 100 |
| 65 | 139 | 186 |

LW Series

Unit: cm³

| Series Model No. | LW |
|---------------------|----|
| 17 | 3 |
| 21 | 3 |
| 27 | 7 |
| 35 | 24 |
| 50 | 52 |

VH Series

Unit: cm³

| Series Model No. | VH | |
|---------------------|----------------|----------------------|
| | High-load type | Ultra-high-load type |
| 15 | 3 | 4 |
| 20 | 6 | 8 |
| 25 | 9 | 13 |
| 30 | 13 | 20 |
| 35 | 22 | 30 |
| 45 | 47 | 59 |
| 55 | 80 | 100 |

PU, LU Series

Unit: cm³

| Series Model No. | PU | | LU | |
|---------------------|---------------|----------------|---------------|----------------|
| | Standard type | High-load type | Standard type | High-load type |
| 05 | 0.1 | - | 0.1 | - |
| 07 | 0.1 | - | 0.1 | - |
| 09 | 0.2 | 0.3 | 0.2 | 0.3 |
| 12 | 0.3 | 0.4 | 0.3 | 0.4 |
| 15 | 0.8 | 1.1 | 0.8 | 1.1 |

TS Series

Unit: cm³

| Series Model No. | TS |
|---------------------|----|
| 15 | 2 |
| 20 | 3 |
| 25 | 6 |
| 30 | 9 |
| 35 | 15 |

PE, LE Series

Unit: cm³

| Series Model No. | PE | | LE | | |
|---------------------|---------------|----------------|------------------|---------------|----------------|
| | Standard type | High-load type | Medium-load type | Standard type | High-load type |
| 05 | 0.1 | - | 0.1 | 0.1 | - |
| 07 | 0.2 | - | 0.1 | 0.2 | 0.3 |
| 09 | 0.4 | 0.5 | 0.2 | 0.4 | 0.5 |
| 12 | 0.5 | 0.7 | 0.3 | 0.5 | 0.7 |
| 15 | 1.2 | 1.6 | 0.8 | 1.2 | 1.6 |

NS Series

Unit: cm³

| Series Model No. | NS | |
|---------------------|------------------|----------------|
| | Medium-load type | High-load type |
| 1 | 5 | 3 |
| 2 | 0 | 3 |
| 2 | 5 | 8 |
| 30 | 8 | 12 |
| 35 | 12 | 19 |

Miniature LH Series

Unit: cm³

| Series Model No. | LH |
|---------------------|-----|
| 08 | 0.2 |
| 10 | 0.4 |
| 12 | 1.2 |

RA Series

Unit: cm³

| Series Model No. | RA | |
|---------------------|----------------|----------------------|
| | High-load type | Ultra-high-load type |
| 15 | 1 | 1.5 |
| 20 | 2 | 2.5 |
| 25 | 3 | 3.5 |
| 3 | 0 | 5 |
| 3 | 5 | 6 |
| 3 | 5 | 6 |
| 3 | 5 | 6 |
| 45 | 10 | 13 |
| 55 | 15 | 20 |
| 65 | 33 | 42 |

LA Series

Unit: cm³

| Series Model No. | LA | |
|---------------------|----------------|----------------------|
| | High-load type | Ultra-high-load type |
| 25 | 8 | 12 |
| 30 | 14 | 18 |
| 35 | 21 | 29 |
| 45 | 38 | 48 |
| 55 | 68 | 86 |
| 65 | 130 | 177 |

HA, HS Series

Unit: cm³

| Series Model No. | HA | HS |
|---------------------|-----|----|
| 15 | - | 5 |
| 20 | - | 9 |
| 25 | 16 | 16 |
| 30 | 27 | 25 |
| 35 | 42 | 40 |
| 45 | 67 | - |
| 55 | 122 | - |

A-3-6 Lubrication

5) NSK Grease Unit

A hand grease pump and lubrication grease contained in a bellows tube (80 g of grease) which can be loaded to the grease pump.



Grease in a bellows tube



[1] Composition of NSK grease unit

Components and grease types are shown below.

| | Name | (Tube color) | Reference number |
|---|-----------------------------|--------------|------------------|
| NSK Grease Unit | | | |
| NSK Grease (80 g in a bellows tube) | NSK Grease AS2 | (Ocher) | NSK GRS AS2 |
| | NSK Grease PS2 | (Orange) | NSK GRS PS2 |
| | NSK Grease LG2 | (Blue) | NSK GRS LG2 |
| | NSK Grease LGU | (Yellow) | NSK GRS LGU |
| | NSK Grease NF2 | (Gray) | NSK GRS NF2 |
| NSK Hand Grease Pump Unit | | | |
| NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with the hand pump.) | | | NSK HGP |
| Grease nozzle (used with a hand grease pump) | NSK straight nozzle | | NSK HGP NZ1 |
| | NSK chuck nozzle | | NSK HGP NZ2 |
| | NSK drive fitting nozzle | | NSK HGP NZ3 |
| | NSK point nozzle | | NSK HGP NZ4 |
| | NSK flexible nozzle | | NSK HGP NZ5 |
| | NSK flexible extension pipe | | NSK HGP NZ6 |
| | NSK straight extension pipe | | NSK HGP NZ7 |

[2] NSK greases (80 g in a bellows tube)

Refer to pages A43 and D14 for their natures and details.

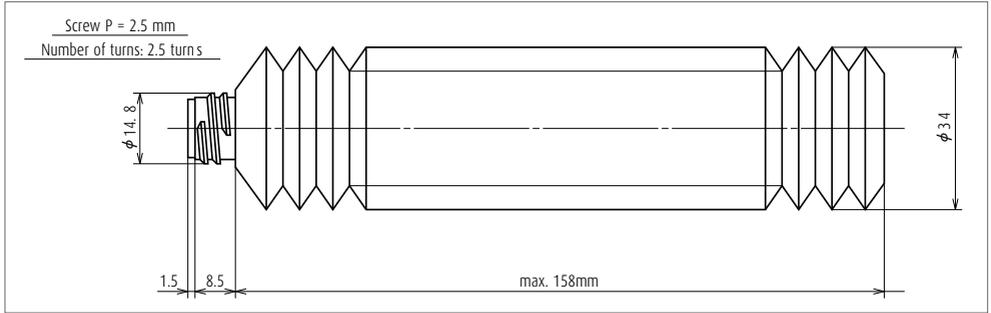


Fig. 6.6 Bellows tube

[3] NSK hand grease pump unit

a) NSK Hand Grease Pump (Reference number: NSK HGP)

> Features

- > Light-weight Can be operated by one hand, yet there is no worry to make a mistake.
- > Inserting by high pressure Insert at 15 Mpa.
- > No leaking Does not leak when held upside down.
- > Easy to change grease Simply attach grease in bellows tube.
- > Remaining grease Can be confirmed through slit on tube.
- > Several nozzles Five types of nozzles to choose from.

> Specifications

- > Discharge rate 15 MPa
- > Spout volume 0.35 cc/shot
- > Mass of main body Without nozzle 240 g
Provided nozzle 90 g
- > Outer diameter of bellows grease tube ϕ 38.1
- > Accessories Several nozzles for a unique application can be attached

* Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

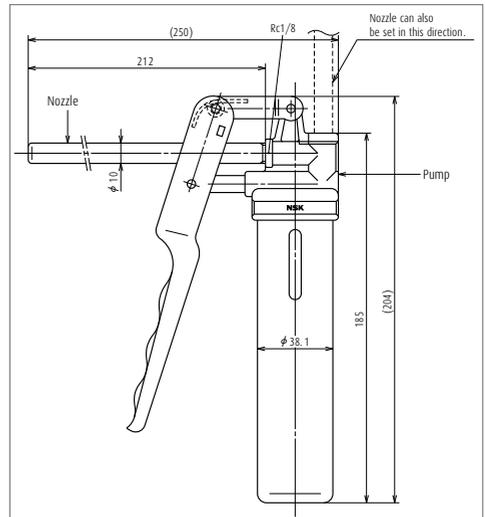


Fig. 6.7 NSK Hand Grease Pump with NSK straight nozzle

A-3-6 Lubrication

b) Nozzles

Table 6.5 Nozzles that can be attached to NSK Hand Grease Pump

| Name | Designation code | Use | Dimensions |
|-----------------------------|------------------|---|------------|
| NSK straight nozzle | NSK HGP NZ1 | Can be used with grease fitting A, B, and C under JIS B1575 standard. | |
| NSK chuck nozzle | NSK HGP NZ2 | Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come into contact due to the chucking mechanism at the tip. | |
| NSK fitting nozzle | NSK HGP NZ3 | Dedicated for the - ϕ 3 drive-in grease fitting. | |
| NSK point nozzle | NSK HGP NZ4 | Used for linear guides that do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of slide or slide to inside. | |
| NSK flexible nozzle | NSK HGP NZ5 | The tip of the flexible nozzle is a chuck nozzle. The straight nozzle is not available for use. | |
| NSK flexible extension pipe | NSK HGP NZ6 | Flexible extension pipe connects the grease pump and the nozzle | |
| NSK straight extension pipe | NSK HGP NZ7 | Straight extension pipe connects the grease pump and the nozzle. | |

Table 6.6 Grease fittings used for NSK linear guide

| Series | Model No. | Tap hole for grease fitting | Standard grease fitting | Straight nozzle NZ1 | Chuck nozzle NZ2 | Drive-in fitting nozzle NZ3 | Point nozzle NZ4 | Flexible nozzle NZ5 |
|---------------------|----------------------|-----------------------------|-------------------------|---------------------|------------------|-----------------------------|------------------|---------------------|
| NH Series | NH15 | $\phi 3$ | Drive-in type | | | ○ | | |
| | NH20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | NH45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| VH Series | VH15 | $\phi 3$ | Drive-in type | | | ○ | | |
| | VH20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | VH45, 55 | Rc1/8 | B type | ○ | ○ | | | ○ |
| TS Series | TS15 | $\phi 3$ | Drive-in type | | | ○ | | |
| | TS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| NS Series | NS15 | $\phi 3$ | Drive-in type | | | ○ | | |
| | NS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| LW Series | LW17 | $\phi 3$ | Drive-in type | | | ○ | | |
| | LW21, 27, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | LW50 | Rc1/8 | B type | ○ | ○ | | | ○ |
| PU Series | PU05, 07, 09, 12 | - | - | | | | ○ | |
| | PU15 | $\phi 3$ | Drive-in type | | | ○ | | |
| LU Series | LU05, 07, 09, 12, 15 | - | - | | | | ○ | |
| PE Series | PE05, 07, 09, 12 | - | - | | | | ○ | |
| | PE15 | $\phi 3$ | Drive-in type | | | ○ | | |
| LE Series | LE05, 07, 09, 12, 15 | - | - | | | | ○ | |
| Miniature LH Series | LH08, LH10 | - | - | | | | ○ | |
| | LH12 | $\phi 3$ | Drive-in type | | | ○ | | |
| RA Series | RA15, 20 | $\phi 3$ | Drive-in type | | | ○ | | |
| | RA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | RA45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| LA Series | LA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | LA45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| HA Series | HA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| | HA45, 55 | Rc1/8 | B type | ○ | ○ | | | ○ |
| HS Series | HS15 | $\phi 3$ | Drive-in type | | | ○ | | |
| | HS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |

*) When using a chuck nozzle, make sure that it does not interfere with the table on linear guides.

Note PU, PE, LU, and LE Series: Apply grease directly to ball groove, etc. using a point nozzle.

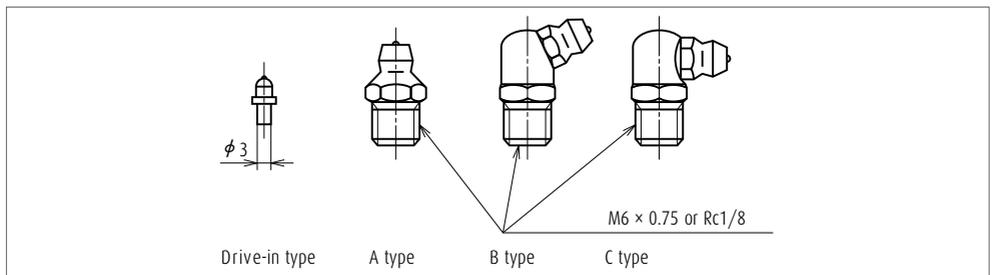


Fig. 6.8 Grease fittings

A long threaded grease fitting is required because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

A-3-6 Lubrication

(2) Oil lubrication

Required amount of new oil is regularly supplied by:

- > Manual or automatic intermittent supply system;
- > Oil mist lubricating system via piping.

Equipment for oil lubrication is more costly than one for grease lubrication. However, oil mist lubricating system supplies air as well as oil, thus raising the inner pressure of the slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32-68 for the oil mist lubrication system.

ISO VG 68-220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a slide of linear guide per hour can be obtained by the following formula.

In case of ball type linear guide except for LA series

$$Q \geq n/150 \text{ (cm}^3\text{/hr)}$$

In case of LA and RA series

$$Q \geq n/100 \text{ (cm}^3\text{/hr)}$$

n: Linear guide code

e.g. When NH45 is used,

$$n = 45,$$

Therefore,

$$Q = 45/150 = 0.3 \text{ cm}^3\text{/hr}$$

For the oil lubrication by gravity drip, the oil supply position and installation position of the slide are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has the internal design which allows oil lubricant to flow throughout the system.

Table 6.7 shows the criterion of intervals of oil checks and replenishments.

Table 6.7 Intervals of checks and replenishments

| Method | Intervals of checks | Items to check | Replenishment or intervals of changes |
|-------------------------------|------------------------|---------------------------|---|
| Automatic intermittent supply | Weekly | Volume of oil, dirt, etc. | Replenish at each check. Suitable volume for tank capacity. |
| Oil bath | Daily before operation | Oil surface | Make a suitable criterion based on consumption |

- Notes**
- 1) As with grease lubrication, do not mix oil lubricant with different types.
 - 2) Some components of the linear guide are made of plastic. Avoid using an oil that adversely affects synthetic resin.
 - 3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet port.

A-3-7 Dust Proof

1. Standard specification parts

- > To keep foreign matters from entering inside the slide, NSK linear guides have end seals on both ends, bottom seals at the bottom surfaces, and an inner seal in the inside of slide.
- > The seals for standard specification for each series are shown in **Table 7.1**.
- > Seal friction per a standard slide is shown in the technical description of the dust-proof parts of each series.

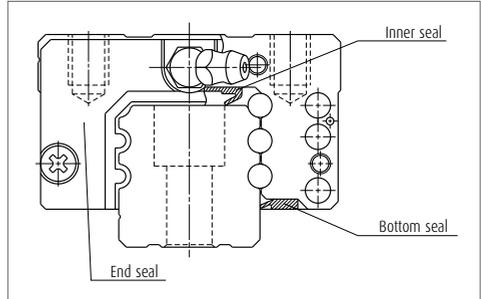


Fig. 7.1

Table 7.1 Standard seals

| | | End seal | Bottom seal | Inner seal |
|---------------------|--|----------|-------------|------------|
| NH Series | NH15 | ○ | ○ | - |
| | NH20, NH25, NH30, NH35, NH45, NH55, NH65 | ○ | ○ | △ |
| VH Series | VH15 | ○ | ○ | - |
| | VH20, VH25, VH30, VH35, VH45, VH55 | ○ | ○ | △ |
| TS Series | TS15, TS20, TS25, TS30, TS35 | ○ | ○ | ○ |
| NS Series | NS15 | ○ | ○ | - |
| | NS20, NS25, NS30, NS35 | ○ | ○ | △ |
| LW Series | LW17, LW21, LW27, LW35, LW50 | ○ | ○ | - |
| PU Series | PU05, PU07, PU09, PU12, PU15 | ○ | - | - |
| LU Series | LU05, LU07, LU09 | △ | - | - |
| | LU12, LU15 | ○ | - | - |
| PE Series | PE05, PE07, PE09, PE12, PE15 | ○ | - | - |
| LE Series | LE05, LE07, LE09, LE12, LE15 | ○ | - | - |
| Miniature LH Series | LH08, LH10 | ○ | - | - |
| | LH12 | ○ | ○ | - |
| RA Series | RA15, RA20 | ○ | ○ | △ |
| | RA25, RA30, RA35, RA45, RA55, RA65 | ○ | ○ | ○ |
| LA Series | LA25, LA30, LA35, LA45, LA55, LA65 | ○ | ○ | △ |
| HA Series | HA25, HA30, HA35, HA45, HA55 | ○ | ○ | ○ |
| HS Series | HS15, HS20, HS25, HS30, HS35 | ○ | △ | - |

○ : Equipped as a standard feature

△ : Available upon request

A-3-7 Dust Proof

2. Dust-proof parts

› NSK has the following items for the dust-proof parts. Select a suitable type for the operating environment.

Table 7.2 Optional dust-proof parts

| Name | Purpose | Reference page |
|-------------------------|--|----------------|
| NSK K1 lubrication unit | Made of oil impregnated resin. Enhances lubricating functions. | A38 – A41 |
| Double seal | It combines two end seals for enhancing sealing function. | A53 |
| Protector | Protect the end seal from hot and hard contaminants. | A54 |
| Rail cap | Prevents foreign matters, such as swarf generated in cutting operation from clogging the rail-mounting holes. | A54 |
| Inner seal | Installed inside a slide, and prevents foreign matters from entering the rolling contact surface. | A55 |
| Bellows | Covers the linear guide. | A55 |
| Rail cover *) | Covers the rail top surface, and prevents foreign matters, such as cutting dust, from collecting in the rail mounting holes. | A310 |

*) Rail cover is applicable to RA25 to 65 of RA series.

(1) Double seal

- › It is a combination of two end seals to enhance seal function.
- › When the double seal is installed, the end seal section becomes thicker than the standard item. Please pay attention to the increase in a slide length when designing the mounting dimension of slide and the table stroke. Please refer to the section of dust-proof components for the dimensional increase in the length direction of each series due to fitting of double seal.
- › Double-seal set: Can be installed to a completed standard ball slide assembly later upon request. It comprises two end seals, two collars, and two machine screws for installation (**Fig. 7.2**). The product reference numbers of each series are described on the section of dust-proof parts.
- › When attaching a grease fitting to the end cap after the double seal is equipped, you require a connector shown in **Fig. 7.2**. Please specify the connector set when ordering the linear guides.
- › For VH, RA, LA, HA and HS Series, the double-seal set can be only installed before shipping from the factory.

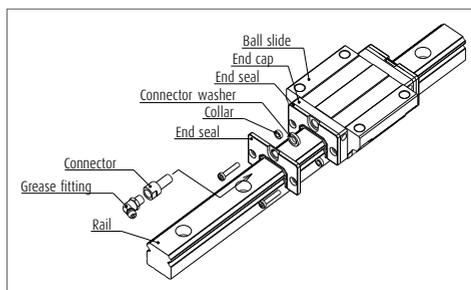


Fig. 7.2 Double seal

(2) Protector

- > A protector is usually installed outside the end seal to prevent high-temperature fine particles such as welding spatter and other hard foreign matters from entering the slide.
- > Same as the case with the double seal, when the protector is installed, the slide becomes longer. Take this thickness of slide into consideration for determining the relevant dimensions such as the system stroke and the ball slide installation envelope. An increase in the length of the ball slide due to the installation of protector is shown in the technical description of the dust-proof parts of each series.
- > The protectors are available from the stock and we can install them to a completed standard slide assembly upon request. The model numbers of the protectors for ordering are shown in the technical explanation of the dust-proof parts of each series.
- > When attaching a grease fitting to the end cap after the protector is equipped, you require the connector shown in **Fig. 7.3**. Please specify the connector set when ordering the linear guides.
- > For VH, RA, LA, HA and HS Series, the protector can only be installed only before shipping from the factory.

(3) Bolt-hole cap to plug the bolt holes for rail mounting

- > After the rail is mounted to the machine base, a bolt-hole cap is used to plug the bolt hole to prevent foreign matters from clogging up the hole and from entering into the slide (**Fig. 7.4**).
- > The bolt-hole cap is made of synthetic resin which has superb in its resistance to oil and abrasion.
- > Sizes of the bolt for the each linear guide model as well as the reference number of the bolt-hole cap are shown in the technical description of the dust-proof parts of each series.
- > To insert the cap into the rail bolt hole, use a flat dolly block (**Fig. 7.5**). Pound the cap gradually until its height becomes flush with the rail top surface.
- > You can reorder extra bolt hole caps. Sizes of the bolts and each model number of bolt-hole caps are shown in the technical description of the dust-proof parts of each series.
- > Caps which are made of metal is also available upon request.

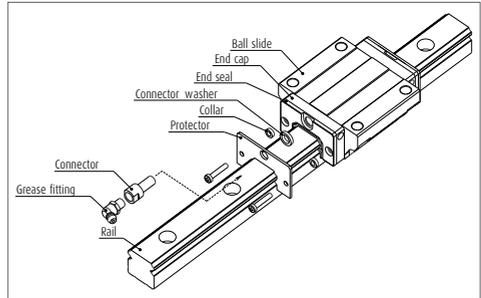


Fig. 7.3 Protector

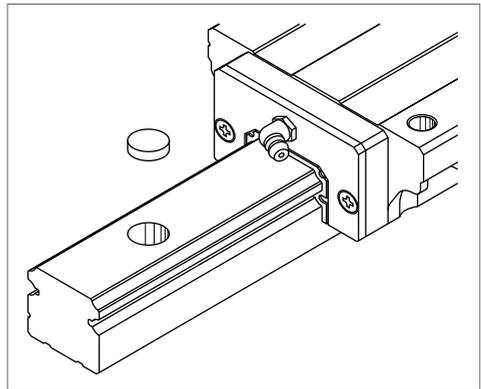


Fig. 7.4

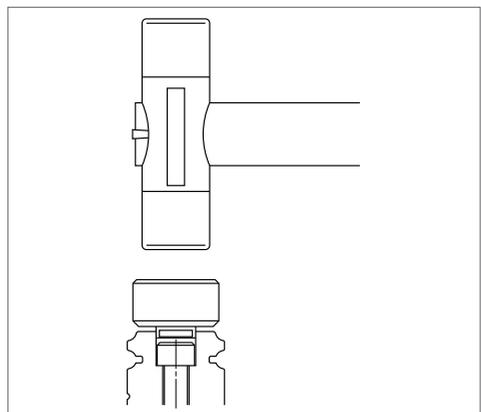


Fig. 7.5

(4) Inner seal

- ▶ The end seal installed on both ends of a slide cannot arrest entire contaminant, though the missed amount is negligible. An inner seal protects the rolling contact surface from such contaminant which entered inside the slide (**Fig. 7.6**).
- ▶ The inner seal is installed inside the slide. Therefore, the appearance in size and the shape are the same as the standard slide. (The inner seal is already installed before shipping.)
- ▶ It is strongly recommended to use the bellows and the double seal along with the inner seal to maintain the precision of the linear guide.
- ▶ Refer to **Table 7.1** for availability of inner seal.

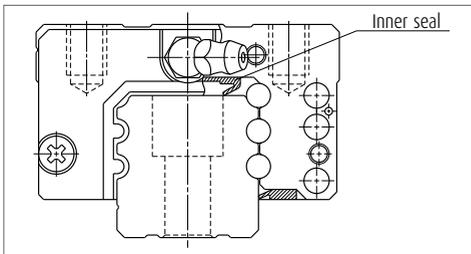


Fig. 7.6 Inner seal when installed

[1] Installation of bellows NH and NS Series

* Fixing to the ball slide (Fig. 7.7)

- ▶ Remove two machine screws (M_2) which secure the end seals to the end of the slide (**Fig. 7.7**). For NS15, hold the end cap by hand. Otherwise, the end cap is detached from the ball slide, and the balls inside may spill out.
- ▶ Then insert a spacer to the hole for securing the end seal. Fasten the mounting plate at the end of the bellows to the slide with a slightly longer machine screw (provided with the bellows).

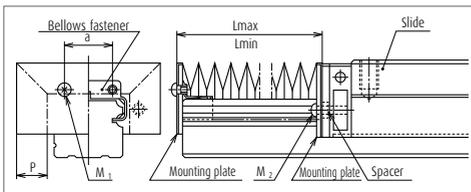


Fig. 7.7

(5) Bellows

- ▶ A bellows covers entire linear guide. It has been used widely as a way of protection in an environment where foreign matters are prevalent.
- ▶ NSK has bellows exclusively for NH, NS, LW and LA Series. They have a middle bellows and a bellows at both ends. For NH Series, there are low and high type bellows which are in compliance with their slide types.
- ▶ The high type is used for AN and BN types. The low type is used for EM, GM, AL and BL types. The top of the high type bellows is slightly lower than the top surface of the slide.
- ▶ When a high type bellows is installed to the slide with the height code L (such as AL), the top of the bellows becomes higher than the slide. However, it is advantageous for stroke because the pitch of the bellows becomes larger than the low type.
- ▶ Special bellows are required when installing the linear guide vertically, or hanging it from a ceiling. Please consult NSK in such a case.
- ▶ When a bellows is used, please be advised that we cannot put a grease fitting on the end of slide to which the bellows is attached. If you require the grease fitting, it shall be put on the side of end cap or slide body. Consult NSK for details.
- ▶ For the dimension of bellows, please refer to the section of dust proof parts of each series.

* Fixing to the rail

- ▶ To install bellows for NH and NS Series, lightly knock a fastener exclusively for bellows to the end of the rail (**Fig. 7.7**). Then secure the mounting plate to the end of the bellows through the tap hole of the fastener.
 - ▶ As described above, a bellows can be easily fixed to the end of the rail without adding a tap hole on the end of the rail.
 - ▶ Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56.)
- For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

[2] LW and LA Series

* Fixing to the ball slide (Fig. 7.8 and Fig. 7.9)

- > Remove two machine screws which secure the end seal. (For LW17 and LW21, hold the end cap by hand while removing the machine screw. Otherwise, the end cap is detached from the slide, and the balls inside may spill over and fall.)
- > Insert a spacer to the securing hole of the end seal, fasten the mounting plate on the end of the bellows using a slightly longer machine screw (provided with the bellows).

* Fixing to the rail

- > Make two tap holes to the rail end surface. Fix the bellows mounting plate with machine screws to the rail end surface through these tap holes. NSK processes the tap holes to the rail end surface when ordered with a linear guide.

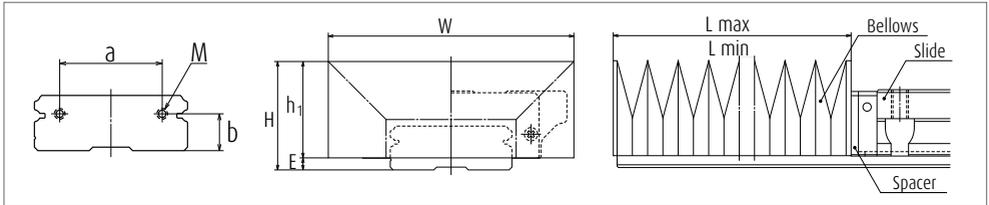


Fig. 7.8

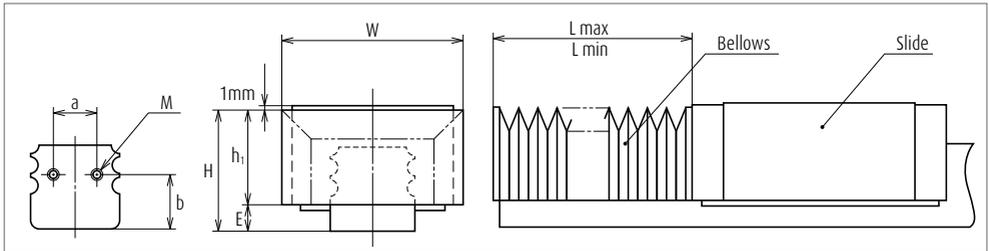


Fig. 7.9

Calculating length of bellows

- > The formula is as follows.
- > A bellows forms one block (BL) with six folds as shown in Fig. 7.10. The stroke is determined by multiplying by an integer of this BL.
- > Length when stretched to the maximum length:

$$L_{max} = 7 \times P \times \text{Number of BL}$$

- > Length when contracted to the minimum length:

$$L_{min} = 17 \times \text{Number of BL}$$
- > Stroke:

$$St = L_{max} - L_{min}$$
- > The dimension of P and the number of BL are shown in the bellows dimension table of each series.

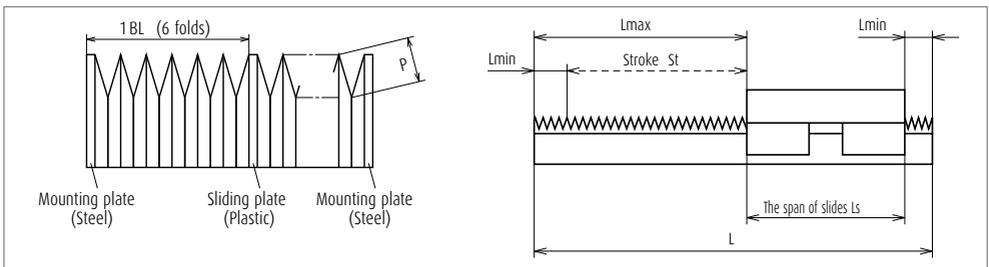


Fig. 7.10

A-3-8 Rust Prevention (Stainless Steel and Surface Treatment)

1. Stainless steel

NSK linear guide is available in stainless steel.

› Stainless steel standard series

PU Series **PE Series**

LE Series **Miniature LH Series** **LL Series**

› Available in stainless steel

NH Series

NS Series

LU Series

Select from the above when using in the environments which invite rust.

2. Surface treatment

(1) Recommended surface treatment

We recommend "low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of the humidity chamber test for antirust characteristics and their cost-effectiveness.

However, never apply any organic solvent to those treatments for degreasing because it has adverse effect on antirust characteristics.

Refer to the next page for the results of humidity chamber test. Please consult NSK for other surface treatment.

Low temperature chrome plating (Electrolytic rust prevention black treatment)

› Used to prevent corrosion, light reflection, and for cosmetic purpose.

Fluoride low temperature chrome plating

- › Fluoroplastic coating is provided following the low temperature chrome plating.
- › Resistance to corrosion is higher than electrolytic rust prevention film treatment.

(2) Rust prevention of fluoride low temperature chrome plating

The use environment of NSK linear guides is expanding from general industrial machines, semiconductor and liquid crystal manufacturing systems to aerospace equipment.

Among all measures to cope with environment, rust prevention is the most challenging. Such environment includes:

- › Moisture for washing machines and other equipment
- › Chemicals used in the wet processing of semiconductor and liquid crystal display manufacturing equipment

NSK has developed electrolytic rust prevention black film treatment (black chrome plating) which is added by fluororesin impregnating treatment. (Hereinafter referred as "Fluoride low temperature chrome plating") This surface treatment methods has proved its superiority as the rust prevention of linear guides which are used in the above equipment.

› What is "Fluoride low temperature chrome plating?"


This is a type of black chrome plating which forms a black film (1 to 2µm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- › Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- › Product accuracy is less affected due to the thin film which has high-corrosion resistance.
- › This method is superior to other surface treatments in durability on the rolling surface.
- › Inexpensive compared with products with other surface treatment and stainless steel products.

However, do not use organic solvent because it adversely affects antirust property of the plating.

> Humidity chamber test

Table 8.1 Results of the humidity test

| Test sample | | Fluoride low temperature chrome plating (Recommended) | Hard chrome plating (Reference) | Electroless nickel plating (Reference) | Equivalent to SUS440C material | Standard steel |
|------------------------------|---|---|--|---|--|--|
| Rusting | Top | (Ground) B | (Ground) B | (Ground) A | (Ground) C | (Ground) D |
| | Side | (Ground) A | (Ground) A | (Ground) A | (Ground) C | (Ground) E |
| | Bottom | (Ground) A | (Ground) A | (Ground) A | (Ground) C | (Ground) E |
| | End | (Machined) A | (Machined) C | (Machined) A | (Machined) C | (Machined) E |
| | Chamfer/grinding recess | (Drawn) A | (Drawn) D | (Drawn) A | (Drawn) C | (Drawn) E |
| Corrosion-resistant property | <Test conditions> > Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) > Temperature: 70°C > Relative humidity: 95% > Testing time: 96 h Time to "ramp-up" and "ramp-down" conditions of the temperature and the humidity Ramp-up: 5 h Ramp-down: 2 h |  |  |  |  |  |
| |  |  |  |  |  | |
| Film thickness | 5 μm | 0.5 - 7 μm | 10 μm | — | — | |

- Rusting
- A: No rust
 - B: Not rusted, but slightly discolored
 - C: Spotty rust
 - D: Slightly rusted
 - E: Completely rusted

A-3-8 Rust Prevention (Stainless Steel and Surface Treatment)

> Chemical corrosion resistance test

Table 8.2 Results of the corrosion resistance test

| Test conditions | Rail base material: Equivalent to SUS440C Chemical density: 1 mol/ℓ | | | |
|-----------------|--|--|---|--|
| | Fluoride low temperature chrome plating | | Hard chrome plating (reference) | None surface treatment |
| |  | Immersed in solution for 24 hrs Nitric acid |  |  |
| |  | Immersed in solution for 24 hrs Fluoride |  |  |
| |  | Immersed in solution for 72 hrs Hydrochloric acid type washing solution HCl : H ₂ O ₂ : H ₂ O = 1 : 1 : 8 |  | |
| | ○ | Hydrochloric acid (immersed) | ○ | ▲ |
| | ○ | Sulfuric acid (immersed) | ○ | × |
| | ○ | Ammonia or sodium hydroxide | ○ | △ |

○: Normal △: Partial surface damage ▲: Overall surface damage ×: Corroded

> Surface treatment durability test

Peeling resistance of surface treatment

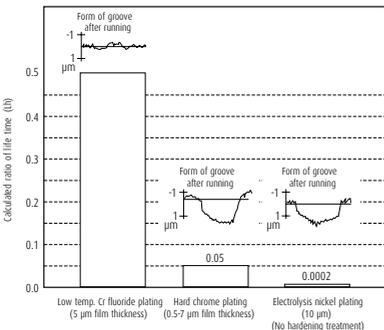


Fig. 8.1 Result of durability test

> Total evaluation

Table 8.3 Evaluation

| | Rust prevention ability | Quality stability | Durability | Cost |
|---|-------------------------|-------------------|------------|------|
| Fluoride low temperature chrome plating (recommended) | ◎ | ○ | ◎ | ◎ |
| Hard chrome plating (reference) | ○ | × | △ | △ |
| Electroless nickel plating (reference) | ◎ | △ | × | △ |
| Material equivalent to SUS440C | ○ | ◎ | ◎ | △ |

◎: Excellent ○: Suitable in use △: Not so good for use ×: Problem in use

A-3-9 Special Environment

1. Heat-resistant specifications

- › Standard linear guides use plastic for rolling element recirculation component. The maximum temperature in use for standard linear guides is 80°C.
- › Use the linear guide with heat-resistant specifications under temperatures that exceed this limit.

Table 9.1 Comparison of materials: Standard and heat-resistant specifications

| Component | Standard specification | Heat-resistant specification |
|------------------|--|---|
| Rail | Special high carbon steel (equivalent to SUS440C/JIS) | Special high carbon steel (equivalent to SUS440C/JIS) |
| Slide | Special high carbon steel (equivalent to SUS440C/JIS) | Special high carbon steel (equivalent to SUS440C/JIS) |
| Rolling elements | SUJ2, SUS440C | SUJ2, SUS440C |
| Retainer | Polyacetals | SUS304 |
| Retaining wire | SUS304 | SUS304 |
| End cap | Polyacetals | SUS316L |
| Return guide | Polyacetals | SUS316L |
| End seal | Acrylonitril-butadiene rubber, SPC/JIS and stainless steel | Fluoro rubber, SPC/JIS and stainless steel |
| Bottom seal | Acrylonitril-butadiene rubber, SPC/JIS and stainless steel | Fluoro rubber, SPC/JIS and stainless steel |

Heat resistant linear guides

NH Series NS Series
 LW Series LU Series
 LE Series

See page A66 for the availability.

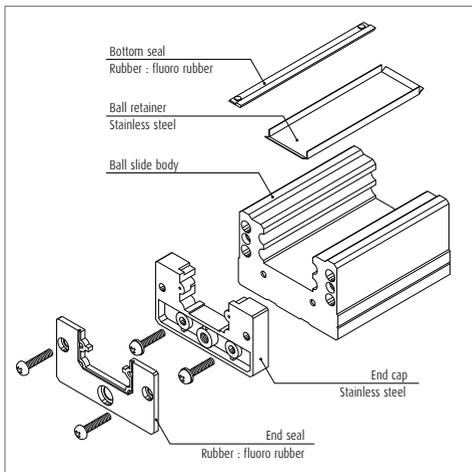


Fig. 9.1

2. Vacuum and clean specifications

- › Based on its abundant experience and technology, NSK manufactures linear guides that can be used in a vacuum or in clean environment. Please consult NSK for more details.
- › Linear guide specifications vary for environmental conditions.

For example, "all stainless steel plus special grease, or solid film lubricant is suitable" for vacuum environment.


- › NSK has low-dust generating grease "LG2" which is ideal for clean environment.

Refer to page A43 for details.

A-3-9 Special Environment

3. NSK linear guides for food processing equipment and medical devices for sanitary environment

Used with NSK K1 for food processing equipment and medical devices and grease for food processing equipment.

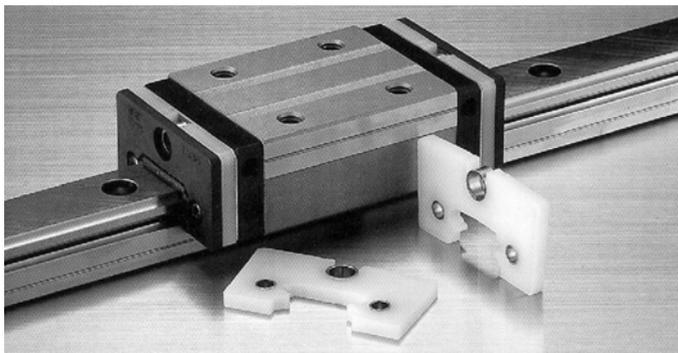

What is "NSK K1" for food processing equipment and medical devices?

With an amazing innovation lubrication unit, the NSK K1 for food processing equipment and medical devices utilizing the US Food and Drug Administration (FDA) compliant material, provides reliability when used in food processing equipment and medical devices. The newly developed porous synthetic resin contains abundant lubricant.

With the basic function of highly praised NSK K1 lubrication unit for general industry, more sophisticated materials make it applicable in food and medical equipment.

It also offers easy installation: it is installed inside the standard end seal.

(1) Features

1) The highest grade of category H1* grease of USDA** standard is used for NSK K1 lubrication unit.

*category H1: Lubricants permitted for use where there is possibility of incidental food contact

**USDA: USDA (The United States Department of Agriculture)

Features of grease for food processing machines

- > This grease is approved by USDA H1. (National Science Foundation [NSF] carries out certification for USDA.)
- > Superb water resistance and antirust capability
- > Superb wear resistance
- > Applicable for a centralized oiling system

2) Appropriate volume of grease


A supply of appropriate volume of grease reduces grease draining and scattering, and maintains a clean environment.

(2) Available models

Table 9.2 shows available models.

Table 9.2

| | |
|---------------------|---------------------------------|
| NH Series | NH15, NH20, NH25, NH30 and NH35 |
| NS Series | NS15, NS20, NS25, NS30 and NS35 |
| LW Series | LW17, LW21, LW27 and LW35 |
| PU Series | PU09, PU12 and PU15 |
| LU Series | LU09, LU12 and LU15 |
| PE Series | PE09, PE12 and PE15 |
| LE Series | LE09, LE12 and LE15 |
| Miniature LH Series | LH12 |

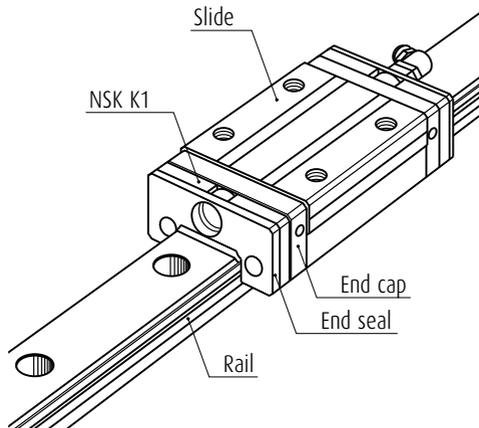

Precautions for use

To maintain optimal performance of NSK K1 lubrication unit over a long time, please follow the instructions below:

1. Temperatures range for use: Maximum temperature in use: 50°C
Momentary maximum temperature in use: 80°C
2. Chemicals that should not come to contact: Do not leave NSK K1 lubrication unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust prevention oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil and grease such as mineral-type and ester-type do not damage NSK K1 lubrication unit.

A-3-9 Special Environment

4. Specifications for special environments

Table 9.3 Linear guide specifications

| Environment | Condition | NSK linear guide specifications | | | | Technical Explanation Page No. |
|----------------------|---|---------------------------------|--------------------------------|------------------------------------|---|-----------------------------------|
| | | Rail, slide | Steel balls/ rollers | Ball Recirculation component | Lubrication/surface treatment | |
| Clean | Atmosphere, normal temperature | Standard material | Standard material | Standard material | LG2 Grease, LGU Grease NSK K1 lubrication unit | D8 D10 |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | LG2 Grease, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating | D8 D10 D5 |
| | Fluoride grease | | | | | |
| | Atmosphere- Vacuum up to 200°C | | | | | |
| Vacuum | Atmosphere- Vacuum, normal temperature | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Fluoride grease | |
| | Atmosphere- Vacuum up to 200°C | | | | | |
| | Atmosphere- Vacuum up to 300°C | | | | Molybdenum disulfide | |
| | High vacuum up to 500°C | | | | Special silver film | D7 |
| Corrosion resistance | Vapor, steam | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | |
| | Acid, alkali | Standard material | Standard material | Standard material | Fluoride low temperature chrome plating | D5 D5 D5 |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Fluoride low temperature chrome plating | D5 |
| | LG2 Grease, LGU Grease Fluoride low temperature chrome plating Fluoride grease | | | | D8 D5 | |
| | Strong acid, strong alkali | | | | Fluoride grease | |
| | Organic solvent | | | | | |
| High temperature | Atmosphere up to 150°C | Standard material | Standard material | Austenitic stainless steel | ET-100K Grease | |
| | Atmosphere Up to 200°C | Martensitic stainless steel | Martensitic stainless steel | | Fluoride grease | |
| | Atmosphere Up to 200°C, Corrosion resistant | | | | Fluoride grease | |
| Low temperature | -273°C and higher | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Solid lubricant | |
| Radiation resistance | Atmosphere | Standard material | Standard material | Standard material | Radiation resistant grease | |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | |
| Foreign matters | Fine particles, wooden chips | Standard material | Standard material | Standard material | NSK K1 lubrication unit | D10 |
| | | Martensitic stainless steel | Standard material | Martensitic stainless steel | | D10 |
| | Water, under water | | | Martensitic stainless steel | | Standard material |
| | | Martensitic stainless steel | Austenitic stainless steel | | | D10 |

5. Lubrication and materials

(1) Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature. Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

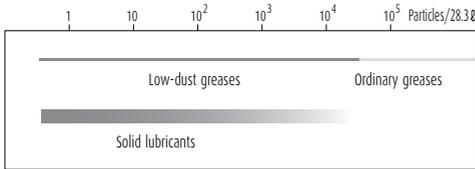


Fig. 9.2 Lubrication in clean environment

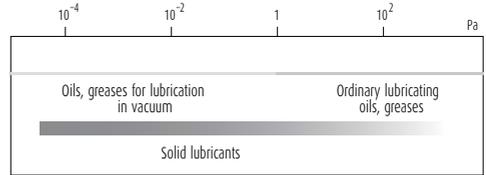


Fig. 9.3 Lubrication in vacuum

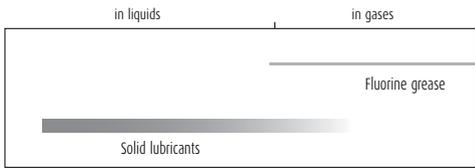


Fig. 9.4 Lubrication in corrosive environment

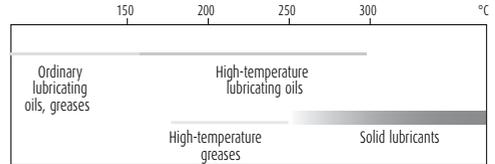


Fig. 9.5 Lubrication in high temperature

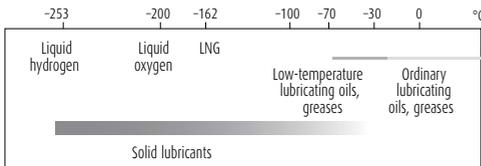


Fig. 9.6 Lubrication in low temperature

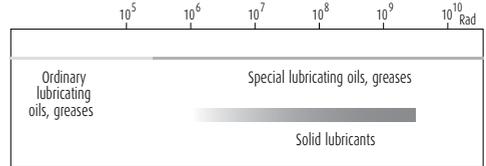


Fig. 9.7 Lubrication in radioactive environment

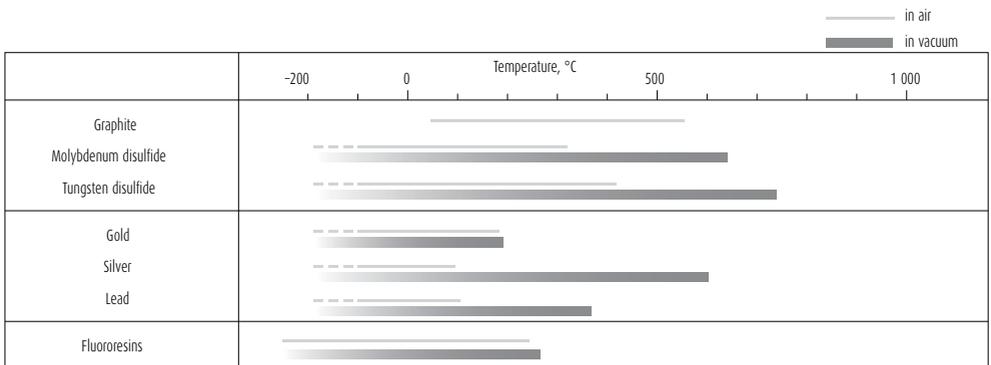


Fig. 9.8 Temperature range for using solid lubricants

A-3-9 Special Environment

(2) Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 9.4 Characteristics of metal materials

| Application | Type of steel | Linear expansivity $\times 10^{-6}/^{\circ}\text{C}$ | Young's modulus GPa | Hardness *) HB |
|---|--|---|------------------------|-------------------|
| For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance | Martensitic stainless steel SUS440C | 10.1 | 200 | 580 |
| | Austenitic stainless steel SUS304 | 16.3 | 193 | 150 |
| | Precipitation hardening stainless steel SUS630 | 10.8 | 200 | 277 - 363 |
| Nonmagnetic | Nonmagnetic stainless steel | 17.0 | 195 | 420 |

*) Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

6. Responsiveness of NSK linear guides for special environments

| Series | Model No. | Special environment which linear guide can tolerate | | | | | |
|--------|-----------|---|--------|-----------|------------|----------|--------------------|
| | | Clean | Vacuum | Corrosion | High temp. | Hygienic | High dust proofing |
| NH | NH15 | ○ | | ○ | | ○ | |
| | NH20 | ○ | ○ | ○ | ○ | ○ | |
| | NH25 | ○ | ○ | ○ | ○ | ○ | |
| | NH30 | ○ | ○ | ○ | ○ | ○ | |
| | NH35 | ○ | | ○ | ○ | ○ | |
| | NH45 | ○ | | ○ | ○ | | |
| | NH55 | ○ | | ○ | | | |
| | NH65 | ○ | | ○ | | | |
| VH | VH15 | ○ | | ○ | | | ○ |
| | VH20 | ○ | | ○ | | | ○ |
| | VH25 | ○ | | ○ | | | ○ |
| | VH30 | ○ | | ○ | | | ○ |
| | VH35 | ○ | | ○ | | | ○ |
| | VH45 | ○ | | ○ | | | ○ |
| | VH55 | ○ | | ○ | | | ○ |
| TS | TS15 | ○ | | ○ | | | |
| | TS20 | ○ | | ○ | | | |
| | TS25 | ○ | | ○ | | | |
| | TS30 | ○ | | ○ | | | |
| | TS35 | ○ | | ○ | | | |
| NS | NS15 | ○ | ○ | ○ | ○ | ○ | |
| | NS20 | ○ | ○ | ○ | ○ | ○ | |
| | NS25 | ○ | ○ | ○ | ○ | ○ | |
| | NS30 | ○ | ○ | ○ | ○ | *○ | |
| | NS35 | ○ | ○ | ○ | ○ | ○ | |
| LW | LW17 | ○ | | ○ | ○ | *○ | |
| | LW21 | ○ | | ○ | ○ | *○ | |
| | LW27 | ○ | | ○ | ○ | ○ | |
| | LW35 | ○ | | ○ | | ○ | |
| | LW50 | ○ | | ○ | | | |
| PU | PU05 | ○ | | ○ | | | |
| | PU07 | ○ | | ○ | | | |
| | PU09 | ○ | | ○ | | ○ | |
| | PU12 | ○ | | ○ | | ○ | |
| | PU15 | ○ | | ○ | | ○ | |
| LU | LU05 | ○ | | ○ | | | |
| | LU07 | ○ | | ○ | | | |
| | LU09_L | ○ | ○ | ○ | ○ | ○ | |
| | LU09_R | ○ | | ○ | | ○ | |
| | LU12_L | ○ | ○ | ○ | ○ | ○ | |
| | LU12_R | ○ | | ○ | | ○ | |
| | LU15 | ○ | ○ | ○ | ○ | *○ | |

| Series | Model No. | Special environment which linear guide can tolerate | | | | | |
|--------------|-----------|---|--------|-----------|------------|----------|--------------------|
| | | Clean | Vacuum | Corrosion | High temp. | Hygienic | High dust proofing |
| PE | PE05 | ○ | | ○ | | | |
| | PE07 | ○ | | ○ | | | |
| | PE09 | ○ | | ○ | | ○ | |
| | PE12 | ○ | | ○ | | ○ | |
| | PE15 | ○ | | ○ | | ○ | |
| | | LE05 | ○ | | ○ | | |
| LE | LE07 | ○ | ○ | ○ | ○ | * | |
| | LE09_L | ○ | ○ | ○ | ○ | *○ | |
| | LE09_R | ○ | | ○ | | ○ | |
| | LE12_L | ○ | ○ | ○ | ○ | ○ | |
| | LE12_R | ○ | | ○ | | ○ | |
| | LE15_L | ○ | ○ | ○ | ○ | ○ | |
| | LE15AR | ○ | | ○ | | ○ | |
| Miniature LH | LH08 | ○ | | ○ | | | |
| | LH10 | ○ | | ○ | | | |
| | LH12 | ○ | ○ | ○ | ○ | *○ | |
| RA | RA15 | ○ | | ○ | | | |
| | RA20 | ○ | | ○ | | | |
| | RA25 | ○ | | ○ | | | |
| | RA30 | ○ | | ○ | | | |
| | RA35 | ○ | | ○ | | | |
| | RA45 | ○ | | ○ | | | |
| | RA55 | ○ | | ○ | | | |
| RA65 | ○ | | ○ | | | | |
| LA | LA25 | ○ | | ○ | | | |
| | LA30 | ○ | | ○ | | | |
| | LA35 | ○ | | ○ | | | |
| | LA45 | ○ | | ○ | | | |
| | LA55 | ○ | | ○ | | | |
| | LA65 | ○ | | ○ | | | |
| HA | HA25 | ○ | | ○ | | | |
| | HA30 | ○ | | ○ | | | |
| | HA35 | ○ | | ○ | | | |
| | HA45 | ○ | | ○ | | | |
| | HA55 | ○ | | ○ | | | |
| HS | HS15 | ○ | | ○ | | | |
| | HS20 | ○ | | ○ | | | |
| | HS25 | ○ | | ○ | | | |
| | HS30 | ○ | | ○ | | | |
| | HS35 | ○ | | ○ | | | |

*) Applicable except for the dust-proofing parts.

7. Precautions for handling

Please observe the following precautions to maintain high functions of NSK linear guide.

- Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- After opening, store the products in a clean, air-tight container such as desiccator with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or an antirust paper that vaporizes rust preventive agent.
- Wear plastic gloves and handle product in a clean place.

Note: Please refer to the catalog "CAT. No. E1258 SPACEA" for the details of special environmental use.

A-3-10 Arrangement and Mounting of Linear Guide

1. Arrangement

- For NSK linear guides, the datum surfaces of the rail and of the slide are either marked with a "datum surface groove" or with an "arrow."
- In case that two or more linear guides are used together, one linear guide is designated as a reference side guide, and the rest is adjusting side guide(s). The reference side linear guide has its reference number, serial number, and "KL" mark on the opposite side of the datum surface (Fig. 10.1).
- When the datum surfaces of the reference side rail and slides are pressed to their mounting datum surfaces respectively, the variation of distance (mounting width W_2 or W_3) between the datum surfaces of the rails and that of the slides must be a minimum and therefore, it is specified as the standard. (Figs. 10.2 and 10.3)
- The ways to indicate the datum surfaces of each series are shown in Table 10.1.

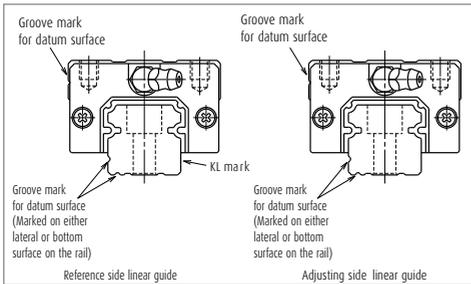


Fig. 10.1 Datum surface

Example of arrangement

- The arrangement of the linear guides must be determined taking into account the table mounting position (horizontal, vertical, inclined, or upside-down), strokes and the size of the machine base to which the table is mounted. Table 10.2 shows common arrangement examples and their properties (features/precautions).

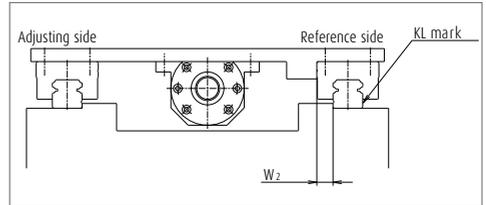


Fig. 10.2 Most common setting of the reference side rail

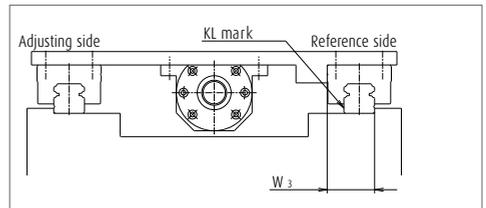








Fig. 10.3 Setting of the reference side rail in certain occasions

Table 10.1 Marks on the rail datum surfaces in each series

| Model No. | Standard | LU05, 07, 09 PU05, 09, 12, 15 LE07, 09, 12 | LU12, 15, NH15, NS15 | PU07 LE05, 15 LE09, 12 (with a ball retainer) PE series LH08, 10, 12 LW17, 21 RA15 |
|---------------------------|----------|--|-------------------------|---|
| Material | | | | |
| Special high carbon steel | | | | |
| Stainless steel | | | | |

Table 10.2 Arrangement example

| Arrangement | Features/Precautions |
|---|--|
|  | <ul style="list-style-type: none"> › Easy for a highly-accurate installation (recommended arrangement) |
|  | <ul style="list-style-type: none"> › Easy in highly-accurate installation › <u>The lubricant oil may not be supplied to slides. When oil lubricant is used, special care is required to design the oil supply routing.</u> |
|  | <ul style="list-style-type: none"> › Slightly difficult for a highly-accurate installation › The life of the linear guides is affected by the mounting accuracy. › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u> |
|  | <ul style="list-style-type: none"> › Difficult for a highly-accurate installation › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u> |
|  | <ul style="list-style-type: none"> › Rather easy for a highly-accurate installation › <u>When oil lubricant is used, special care is required to design the oil supply routing.</u> |
|  | <ul style="list-style-type: none"> › Easy in highly-accurate installation if the linear guides are installed to the machine base first, and then hung them upside down along with the machine base. › The slide may detach from the rail and fall down if the linear guide is damaged and rolling elements in the slide fall out. It is necessary to take preventive measures against the falling of the ball slide. |

A-3-10 Arrangement and Mounting of Linear Guide

2. Mounting accuracy

(1) Accuracy of the mounting base of machine

- > The mounting accuracy of linear guide usually copies the accuracy of the machine base.
- > However, when two or more slides are assembled to each rail, the table stroke becomes shorter than the mounting surface. This, along with the fact that the mounting error is evenly spread, contributes to a higher table accuracy than the mounting surface accuracy, reducing the error to about 1/3 in average (Fig. 10.4).

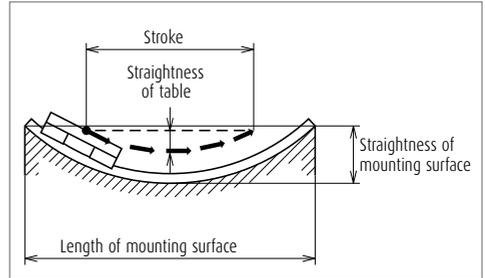

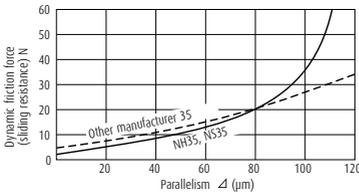



Fig. 10.4

(2) Installation error

- > Mounting error affects mainly three factors: life, friction and accuracy (Table 10.3).

Table 10.3 Influence of mounting error

| Factor | Influence |
|----------|--|
| Life |  <ul style="list-style-type: none"> > Large mounting error generates a force which twists the slide and reduces its life. > It also distorts the contact point of the ball and the groove, and changes contact angle, thus lowering the table rigidity. |
| Friction |  <ul style="list-style-type: none"> > NH and NS Series are affected very little by mounting error thanks to their small friction. (self aligning capability) > However, because of off-set Gothic arch grooves, their friction suddenly soars once the mounting error exceeds a certain level. > The mounting error severely affects friction of LA Series with heavy preload. |
| Accuracy |  <ul style="list-style-type: none"> > When the rigidity of four slides is equal, the theoretical straightness becomes 1/2 of the installation error "e1". > However, this value becomes slightly larger due to the deformation of the rail and the machine base. |

(3) Permissible values of mounting error

- > Among the three factors of life, friction, and accuracy, which are affected by the mounting error, NSK focuses on the life factor to determine the permissible mounting accuracy. The specifications are based on the following conditions.

For ball linear guides

- > The permissible load per ball slide due to the mounting error is 10% of the basic dynamic load rating C_{50} .
- > The rated life is 5 000 km.
- > The rigidity of the machine base is infinite.

For roller linear guide

- > The permissible load per roller slide due to the mounting error is 10% of the basic dynamic load rating C_{100} .
- > The rated life is 10 000 km.
- > The rigidity of the machine base is infinite.

C_{50} ; Basic dynamic load rating for 50 km rated fatigue life

C_{100} ; Basic dynamic load rating for 100 km rated fatigue life

- > **Figs. 10.5** and **10.6** are representing the mounting errors of e_1 and e_2 . Their permissible values are shown in the description of "**5. Installation**" of the each series.

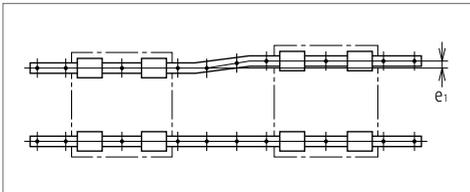


Fig. 10.5

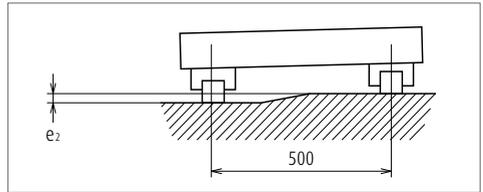


Fig. 10.6

A-3-10 Arrangement and Mounting of Linear Guide

(4) Running accuracy and the influence of even-off effect

When mounting on a machine base, the linear guide is affected by the flatness of the mounting surface. However, in the case of two-rail/four-slide specification, which is most widely used, the straightness as a table unit is generally less than the straightness as a single component.

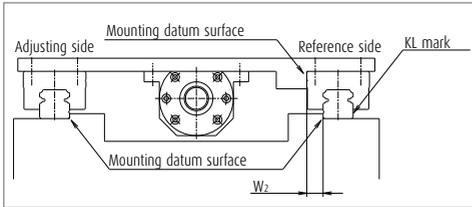


Fig. 10.7

This is due to the even-off effect generated by the shorter table stroke, compared to the rail length, as well as by interaction between the rails and slides.

Fig. 10.9 shows an actually measured straightness of the table which uses NSK linear guides. In this case, the final straightness of the table is about 1/5 of the straightness of the mounting surface.

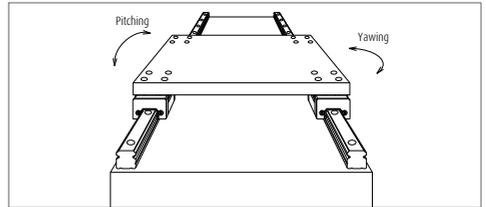


Fig. 10.8

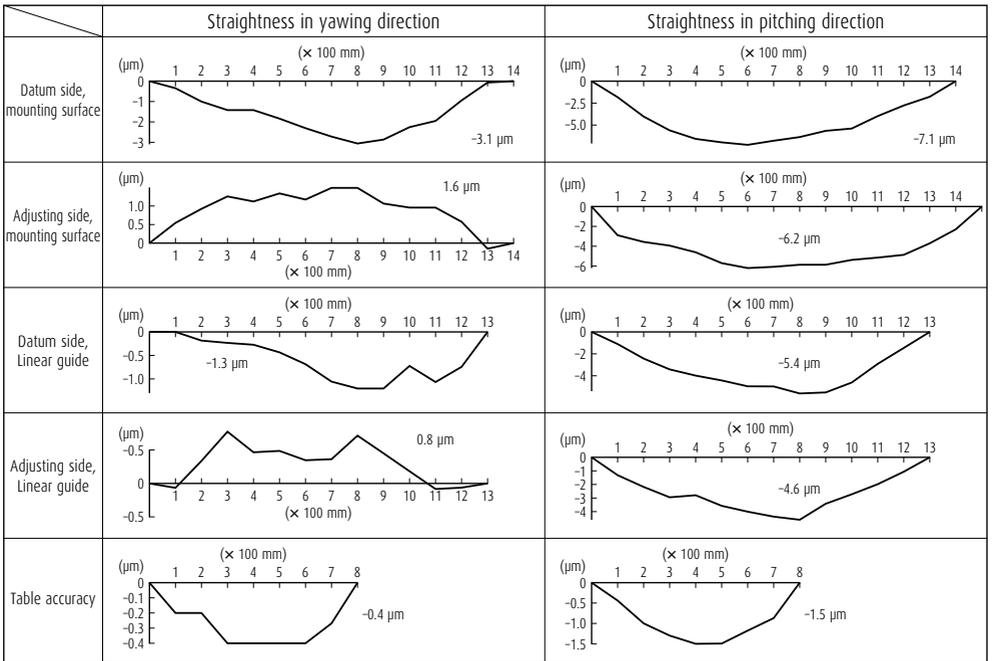


Fig. 10.9 Straightness of the table equipped with linear guide

3. Installation

(1) Shoulder height of the mounting surface of the machine base and corner radius

- › Figs. 10.10 and 10.11, show shoulder height of the mounting surface of the machine base and the size of corner radius. These figures are relevant when the linear guide is pressed to the shoulder of the machine base or table (the raised section from where the mounting surface begins), and horizontally secured to it. Recommended sizes are shown in the clause of "Shoulder height and corner radius r " of each series introduction.
- › The shoulder should be thick (wide) enough, so it is not deformed by the pressing force.

(2) Tightening torque of the bolt

- › Table 10.4 shows tightening torque of the bolt when the rail is secured to the fixture of race way grinding machine.
- › Apply same torque in this table when securing the rail to the machine base. Equal accuracy at the time of grinding can be obtained.

Table 10.4 Bolt tightening torque (Bolt material: High carbon chromium steel) Unit: N·m

| Bolt size | Tightening torque | Bolt size | Tightening torque |
|-----------|-------------------|-----------|-------------------|
| M2.3 | 0.38 | M10 | 43 |
| M2.5 | 0.58 | M12 | 76 |
| M3 | 1.06 | M14 | 122 |
| M4 | 2.5 | M16 | 196 |
| M5 | 5.1 | M18 | 265 |
| M6 | 8.6 | M22 | 520 |
| M8 | 22 | — | — |

(3) Installation procedures

- › There are two installation ways depending on the accuracy requirement.
 - a. Installation with high accuracy
 - b. Accuracy is not high, but easy to install
- › For both methods, wipe off the rust preventive oil applied to the linear guide. Remove burrs and small bumps on the machine base and table mounting surface with an oilstone (Fig. 10.12).
- › Apply machine oil or similar oil with low viscosity to the mounting surface to increase the rust preventive effect.
- › Linear guides are precision products. Handle them with care.




Fig. 10.10 Shoulder for the rail datum face




Fig. 10.11 Shoulder for the slide datum face

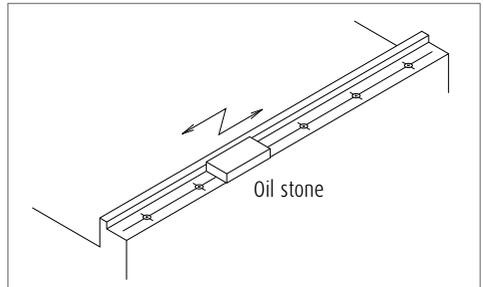


Fig. 10.12

A-3-10 Arrangement and Mounting of Linear Guide

1) Highly accurate installation

A) Rail installation procedures

a) When the machine base has a shoulder for the reference side rail.

- [1] Confirm that the rail is reference side rail, and the datum surface of the rail comes to face to face with the shoulder of the machine base. Keep the slides on the rail, and carefully place the rail on the machine base on its mounting surface. Loosely tighten the bolts.

At this time, press the rail from sideways to make the rail tightly contact to the shoulder of the machine base.

When using a shoulder plate, refer to **Table 10.4** for the bolt tightening torque (**Fig. 10.13**).

Refer to "**4. Various methods to press linear guide sideways.**"

- [2] For final tightening of the bolts to secure the rail, tighten the bolt on either end of the rail, then proceed to other end.

If the datum surface is on the left side as shown in **Fig. 10.14**, tighten the bolt at the farthest end first, then proceed to the near end.

This way, creates a bolt rotating force that presses the rail against the shoulder. (Therefore, the rail is pressed sufficiently tight against the shoulder by merely pressing the rail by hand. However, if there is a possibility applying a lateral impact load, it is necessary to use a shoulder plate to prevent the rail from slipping.)

- [3] If the mounting surface of the machine base where the adjusting side rail is installed also has a shoulder, repeat the steps [1] - [2].
- [4] If there is no shoulder on the mounting surface of the machine base for the adjusting side rail: Secure a measuring table to the slides of the reference side rail (**Fig. 10.15**). Use this to adjust the parallelism of the adjusting side rail. Check parallelism of the adjusting side rail with a dial indicator from one end of the rail, tightening the bolts one by one.

The measuring table is more stable if secured to two slides, but one slides is sufficient.

Parallelism between two rails can also be checked by the same method in **Fig. 10.15** when there is a shoulder on the surface where the adjusting side rail is installed.

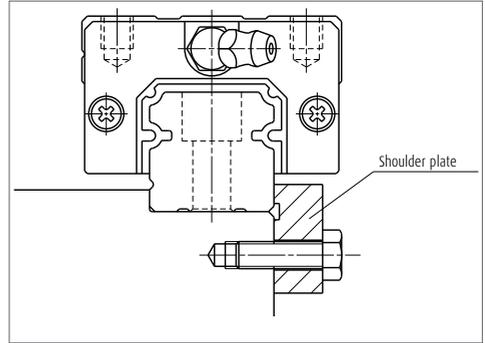


Fig. 10.13 Pressing the rail from sideways

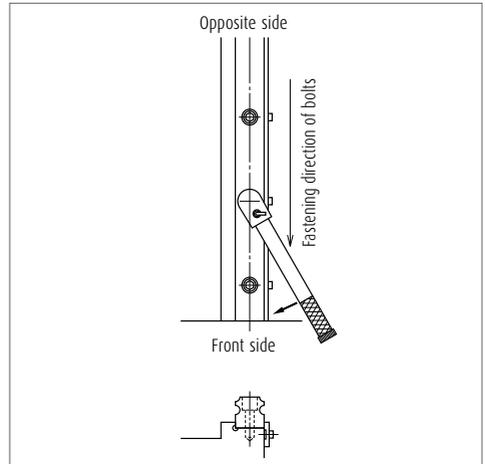


Fig. 10.14 Rail installation

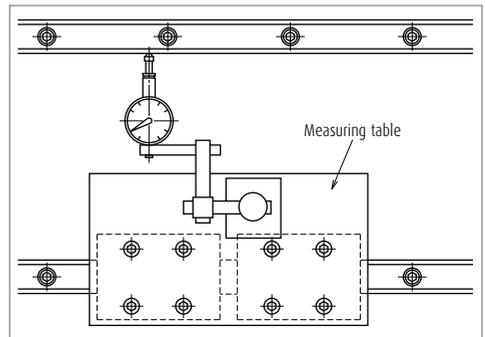


Fig. 10.15 Measuring parallelism

b) When the machine base does not have a shoulder on the side where the reference side rail is installed

- [1] Carefully place the reference side rail on its mounting surface of the machine base. Loosely tighten the bolts. Do not tighten the bolts all the way, but stop tightening when the bolt enters halfway into the bolt hole. This makes the proceeding steps easier.
- [2] Place the straight edge almost parallel to the reference side rail which is temporarily secured by the bolts. (At both ends of the rail and straight edge, the distance between them shall be almost same.)
- [3] Once the position of the straight edge is determined, use it as the reference. With a dial indicator, check parallelism with the rail, and adjust the rail if necessary. Then tighten the bolts.

Ensure that the straight edge does not move while the bolts are being tightened.

This procedure should be carried out starting from one end of the rail to the other end (**Fig. 10.16**).

- [4] Finally tighten all bolts with specified torque.
- [5] There are two ways for installation of adjusting side rail:
 1. Based on the straight edge which is used for reference side rail installation
 2. Based on the reference side rail which is installed prior to the adjusting side rail.

In both cases, use a dial indicator to measure parallelism.

Other procedures are the same as [1] - [4] above, and the [4] for the case where there is a shoulder on the machine base.

B) Procedures for slide installation

a) When the table has a shoulder

- [1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten all bolts.
- [2] While pressing the table from sideways, further tighten the bolts which secure the slides on the reference side, so the table shoulder and the slide's mounting datum surface are sufficiently tightly pressed.

If a shoulder plate is provided, first tighten the bolts of the plate, then further tighten the bolts to the slides (**Fig. 10.17**).

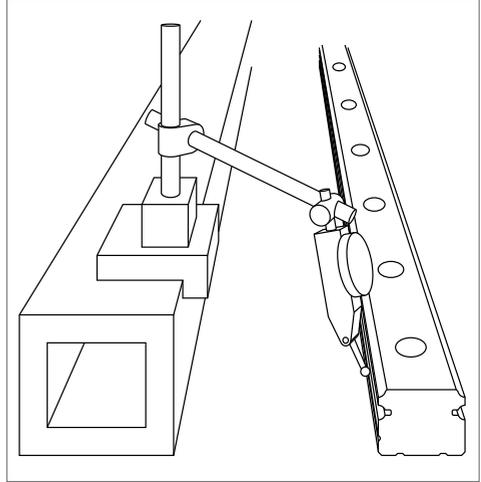


Fig. 10.16

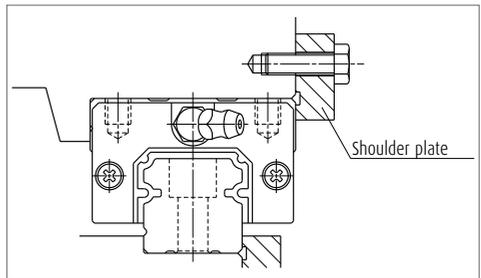


Fig. 10.17 Pressing slide from sideways

A-3-10 Arrangement and Mounting of Linear Guide

[3] Then, further tighten the bolts for slides on the adjusting side rail.

Move the table by hand to confirm that there is no abnormality such as excessive friction force during stroking. (This confirms that the correct installation steps were taken.)

[4] Finally, tighten all bolts with standard torque.

b) When table does not have a shoulder

[1] Arrange the slides so that locations match to their mounting section of the table. Carefully place the table on the slides. Loosely tighten bolts to secure the slides.

[2] Since the table does not have a shoulder, immediately tighten the bolts further to secure slides.

[3] Move the table by hand to confirm that there is no abnormality. Finally, tighten all bolts with the specified torque.

2) Easy installation

[1] Carefully place the reference side rail on the machine base. Then tighten the bolts to the specified torque.

[2] Loosely tighten the bolts on the adjusting side rail.

[3] Tighten the slides on the reference side rail and one slide on the adjustment side rail with the specified torque. Leave the rest of the slide on the adjusting side rail loosely tightened (**Fig. 10.18**).

[4] While moving the table with each pitch of the bolt for rail: With the specified torque, tighten the rail mounting bolt which is located immediately adjacent to the slide on the adjusting side rail that had been firmly tightened. Take this procedure from one end to the other.

[5] Return the table to the original position once. Then, tighten the rest of the slides on the adjusting side to the specified torque. By the same procedure as in [4], tighten the rest of the rail mounting bolts to the specified torque. Move the table to check any abnormality such as large friction force.

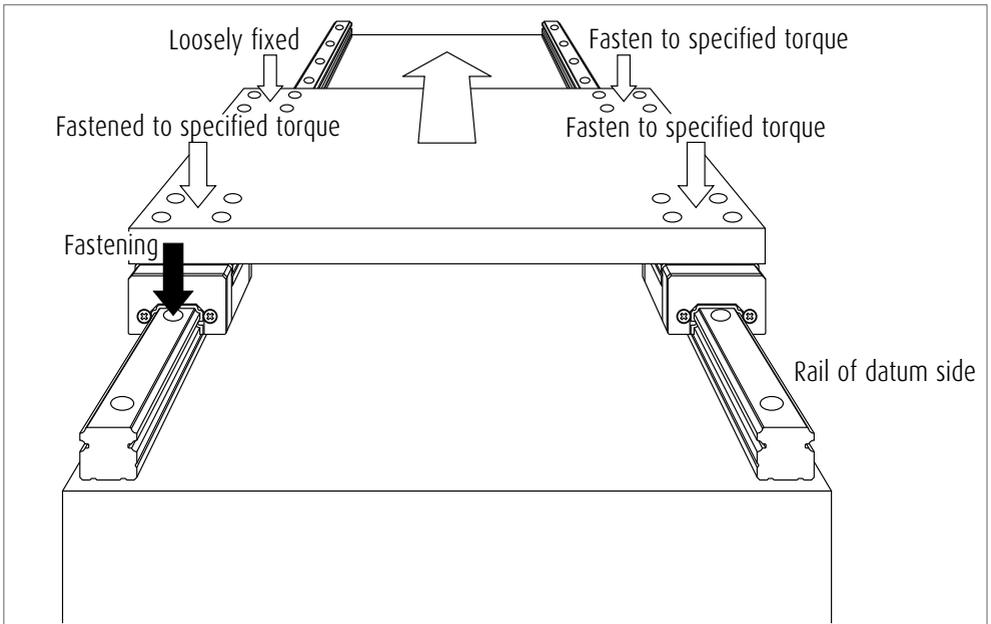


Fig. 10.18 Easy installation

(4) Various methods to press linear guide sideways

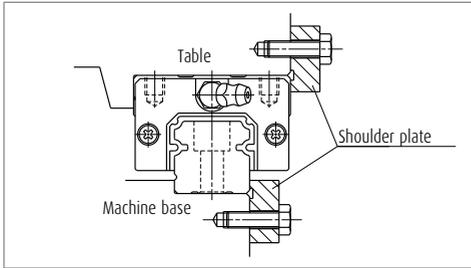


Fig. 10.19 Recommended method

- › This method is most widely used, and generally recommended. The slides and the rail should protrude slightly from the sides of the table and the machine base. The shoulder plate should have a recess, so that the corners of the rail and slide do not touch the shoulder plate.

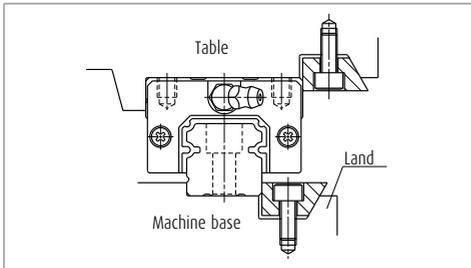


Fig. 10.20 Installation that requires caution

- › A tapered block is squeezed in. However, the slightest tightening of the bolt generates a large pressing force to the side. Too much tightening may cause the rail to deform, or the land (shown in the figure left) to warp to the right. This method requires caution.

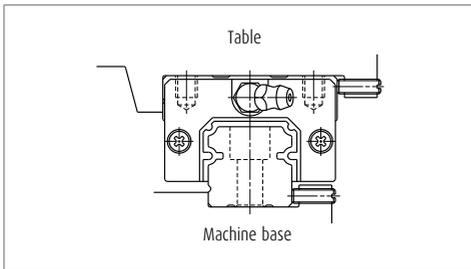


Fig. 10.21

- › The bolt that presses rail must be thin due to limited space.

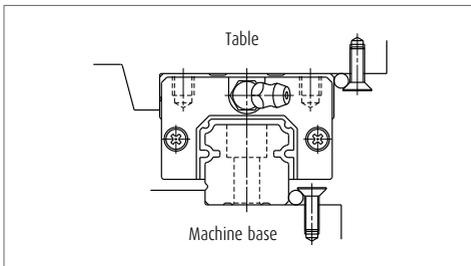


Fig. 10.22

- › Press a needle roller with a taper section of the head of a slotted pan head screw. Watch out for the position of the screw.

A-3-10 Arrangement and Mounting of Linear Guide

4. Assembly random-matching type linear guide

- › Slides of random-matching type are assembled on a provisional rail (an inserting tool) when it is delivered (Fig. 10.23).
- › NSK standard grease is packed into the slide, allowing immediate use.

Assembly procedures of a random-matching type linear guide

Follow steps as described below.

- (1) Wipe off the rust preventive oil from the rail and slide.
- (2) Please match a groove mark for the datum surface of slide and rail to set a desired assembling state W_2 or W_3 .
- (3) Align the provisional rail to the rail in the bottom and side surfaces. Press the provisional rail lightly against the rail, and move the slide over the rail (Fig. 10.23).

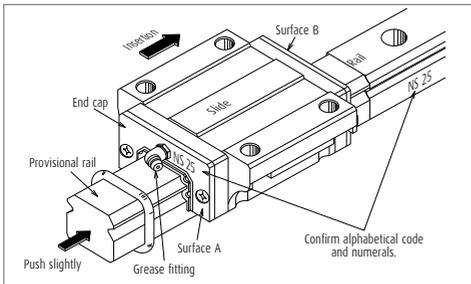


Fig. 10.23 Inserting slide into the rail

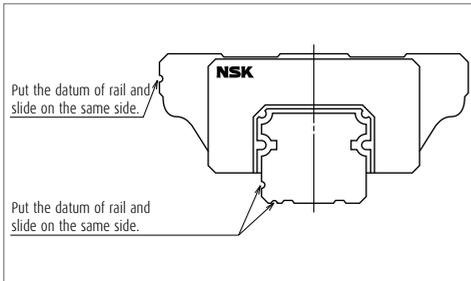


Fig. 10.24

5. Butting rail specification

- › A rail which requires the length that exceeds the machine capacity manufactured maximum length comes in butting specification.
- › The rails with butting specification are marked with alphabet (A, B, C ...) and an arrow on the opposite side of the mounting datum surface. Use the alphabets and arrows for assembly order and direction of the rail (Fig. 10.25). The random-matching rails for butting specification are only marked with the arrows.
- › The pitch of the rail mounting hole on the butting section should be as F in Fig. 10.26. When two rails are used in parallel, the butted sections should not align. This is to avoid change in the running accuracy of the table at the butted sections.
- › We recommend shifting the butting sections more than the length of a slide. If the higher running accuracy is required, consider installing the slides into the table so that they do not simultaneously pass the butting sections.

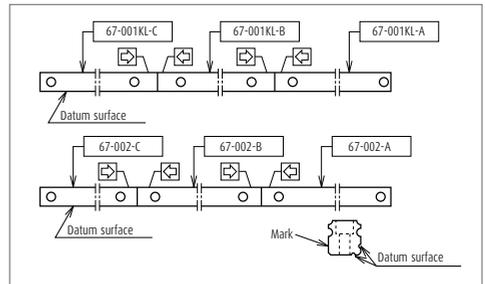


Fig. 10.25

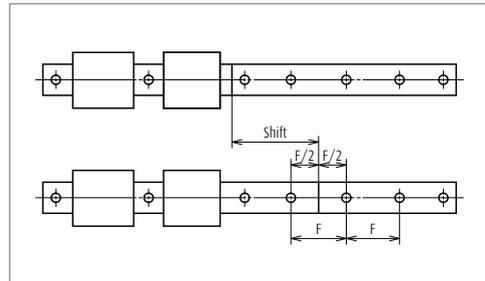


Fig. 10.26

6. Handling preloaded assembly

- > In case of the preloaded assembly (not random-matching type), do not remove slides from the rail as a general rule.
- > If it is unavoidable to remove slides from the rail, make certain to use a provisional rail (a jig used to insert a slide to the rail) as shown in **Fig. 10.27**.
- > The provisional rails for each series and sizes are available.
- > Pay due attention to the assembly mark when returning the slide back to the rail. Follow the cautions described below.

Mark for assembling ball slide and rail

- > Rails of preloaded assembly (not random-matching type) are marked with a reference number and a serial number on the opposite of the datum surface.
- > Slides to be combined are also marked with the same serial number (the reference number is not marked).
- > Furthermore, slides are marked with an arrow. Slides should be positioned with their arrows facing each other.
- > In case that the slides had to be removed from the rail, confirm their serial numbers and the directions of arrows for re-assembly (**Fig. 10.28**).
- > When two or more rails are used in a single set, serial numbers are in sequence if their reference numbers are the same. The linear guide with smallest serial number has the "KL" mark (**Fig. 10.29**).
- > When two or more rails of different reference number are used in a single set, the rails and slides have the same serial number. In this case, when slides are removed from the rail, it is unclear which rail each slide was previously installed on. When removing ball slides from the rail for an unavoidable reason (**Fig. 10.30**), sufficient precaution is required.

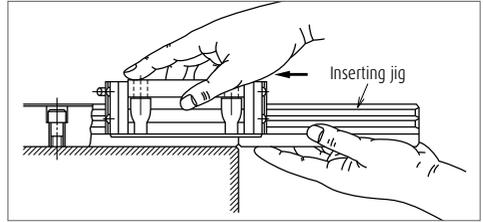


Fig. 10.27

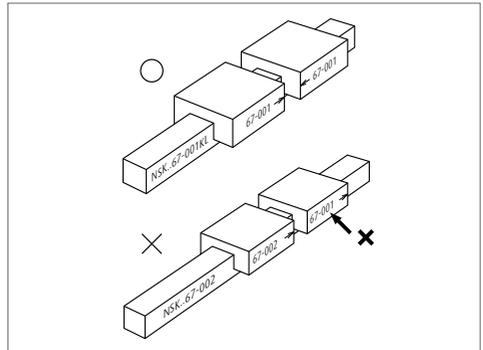


Fig. 10.28

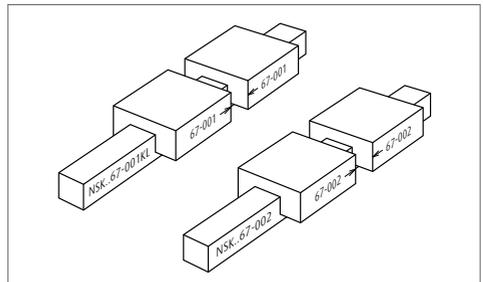


Fig. 10.29 When two rails have the same reference number

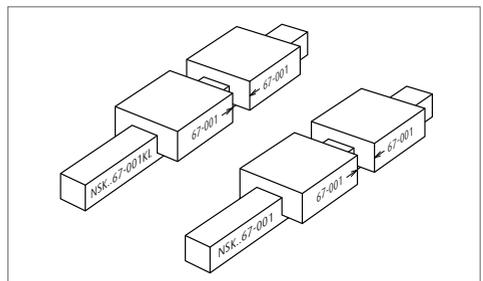


Fig. 10.30 When two rails have different reference number

A-3-11 Drills to Select Linear Guide

1. Single axis material handling system

This section explains the selection of linear guide, life calculation, and deformation at load acting point for a single axis material handling system equipped with linear guides.

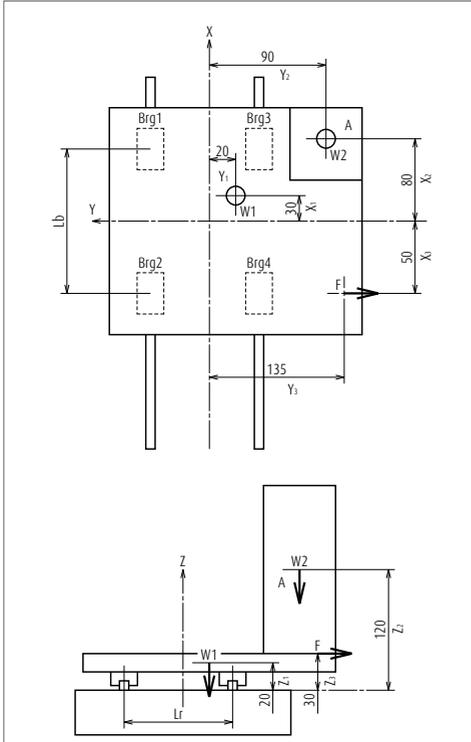


Fig. 11.1 Single axis material handling system

The work load is applied only to one way of stroke. Assume that the load is acting in full stroke as the condition of acting load is unknown.

Specification of the single axis material handling system

Table weight $W1 : 150 \text{ (N)}$

Weight of the work $W2 : 200 \text{ (N)}$

Acting load $F : 200 \text{ (N)}$

Ball slide span $L_b : 100 \text{ (mm)}$

Rail span $L_r : 90 \text{ (mm)}$

Load point coordinates from the table center (mm)

| Load | X axis | Y axis | Z axis |
|------|--------|--------|--------|
| W1 | 30 | -20 | 20 |
| W2 | 80 | -90 | 120 |
| F | -50 | -135 | 30 |

Stroke: 1 000 mm
(1 cycle: 2 000 mm)

Environment : 10 - 30 (°C)

Travel speed : 12 (m/min)

Time to reach travel speed : 0.25 (sec)

Operating hour : 16 (hr/day)

(1) Selection of linear guide model

Select a type of linear guide from "A-1-2 Structure and Characteristics of Linear Guide." Since this material handling system has two rails and four ball slides, **NH**, **NS**, and **PU Series** are suitable.

Here, we temporarily select **PU15** because of the dimensions of mounting space.

(2) Calculating life

Calculate life of the selected PU15AL based on "A-3-2 Rating Life and Basic Load Rating."

Linear guide PU15AL

Basic dynamic load rating $C_{100} : 4\,400 \text{ (N)}$

Basic static load rating $C_0 : 6\,600 \text{ (N)}$

Load conditions of the linear guide

Table weight $W1 : 150 \text{ (N)}$

Weight of the work $W2 : 200 \text{ (N)}$

Applied load $F : 200 \text{ (N)}$

Rail span $L_r : 90 \text{ (mm)}$

Ball slide span $L_b : 100 \text{ (mm)}$

From the time to reach travel speed and the travel speed, the table acceleration is 0.8 m/sec^2 . Therefore, it is not necessary to take into account inertial force brought about by the table mass.

Calculation of the load applied to ball slide

Calculate two occasions:

1. There is the work mounted on the table.
2. No work mounted on the table.

From **Pattern 4** on page A19 in **Table 2.2**

When a work is mounted on the table

Vertical loads

$$\begin{aligned} M1 &= \sum_{j=1}^n (F_{yj} \cdot Z_{yj}) + \sum_{k=1}^n (F_{zk} \cdot Y_{zk}) \\ &= F \cdot Z_3 + W1 \cdot Y_1 + W2 \cdot Y_2 \\ &= -200 \times 30 + 150 \times (-20) + 200 \times (-90) \\ &= -27\,000 \text{ (N} \cdot \text{mm)} \end{aligned}$$

$$\begin{aligned} M2 &= \sum_{i=1}^n \{F_{xi} \cdot (Z_{xi} - Z_b)\} + \sum_{k=1}^n (F_{zk} \cdot X_{zk}) \\ &= W1 \cdot X_1 + W2 \cdot X_2 \\ &= 150 \times 30 + 200 \times 80 \\ &= 20\,500 \text{ (N} \cdot \text{mm)} \end{aligned}$$

$$\begin{aligned} F_{r1} &= \frac{\sum_{k=1}^n F_{zk}}{4} + \frac{M1}{2 \cdot L} + \frac{M2}{2 \cdot l_b} \\ &= \frac{W1 + W2}{4} + \frac{M1}{2 \cdot L_r} + \frac{M2}{2 \cdot L_b} \\ &= \frac{150 + 200}{4} + \frac{-27\,000}{2 \times 90} + \frac{20\,500}{2 \times 100} \\ &= 40 \text{ (N)} \end{aligned}$$

Similarly

$$F_{r2} = -165 \text{ (N)}$$

$$F_{r3} = 340 \text{ (N)}$$

$$F_{r4} = 135 \text{ (N)}$$

Lateral loads

$$\begin{aligned} M3 &= -\sum_{i=1}^n \{F_{xi} \cdot (Y_{xi} - Y_b)\} + \sum_{j=1}^n (F_{yj} \cdot X_{yj}) \\ &= F \cdot X_3 \\ &= -200 \times (-50) \\ &= 10\,000 \text{ (N} \cdot \text{mm)} \end{aligned}$$

A-3-11 Drills to Select Linear Guide

$$\begin{aligned}
 F_{s1} = F_{s3} &= \frac{\sum_{j=1}^n F_{yj}}{4} + \frac{M3}{2 \cdot l} \\
 &= \frac{F}{4} + \frac{M3}{2L_b} \\
 &= \frac{-200}{4} + \frac{10\,000}{2 \times 100} \\
 &= 0 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{s2} = F_{s4} = -100 \text{ (N)}$$

No work mounted on the table

Vertical direction load

$$\begin{aligned}
 M1 &= \sum_{j=1}^n (F_{yj} \cdot Z_{yj}) + \sum_{k=1}^n (F_{zk} \cdot Y_{zk}) \\
 &= F \cdot Z_3 + W1 \cdot Y_1 \\
 &= -200 \times 30 + 150 \times (-20) \\
 &= -9\,000 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 M2 &= \sum_{i=1}^n \{F_{xi} (Z_{xi} - Z_b)\} + \sum_{k=1}^n (F_{zk} \cdot X_{zk}) \\
 &= W1 \cdot X_1 \\
 &= 150 \times 30 \\
 &= 4\,500 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 F_{r1} &= \frac{\sum_{k=1}^n F_{zk}}{4} + \frac{M1}{2 \cdot L} + \frac{M2}{2 \cdot l} \\
 &= \frac{W1}{4} + \frac{M1}{2 \cdot L_r} + \frac{M2}{2 \cdot L_b} \\
 &= \frac{150}{4} + \frac{-9\,000}{2 \times 90} + \frac{4\,500}{2 \times 100} \\
 &= 10 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{r2} = -35 \text{ (N)}$$

$$F_{r3} = 110 \text{ (N)}$$

$$F_{r4} = 65 \text{ (N)}$$

Lateral loads

$$\begin{aligned}
 M3 &= -\sum_{i=1}^n \{F_{xi} \cdot (Y_{xi} - Y_b)\} + \sum_{j=1}^n (F_{yj} \cdot X_{yj}) \\
 &= F \cdot X_3 \\
 &= -200 \times (-50) \\
 &= 10\,000 \text{ (N} \cdot \text{mm)}
 \end{aligned}$$

$$\begin{aligned}
 F_{s1} = F_{s3} &= \frac{\sum_{j=1}^n F_{yj}}{4} + \frac{M3}{2 \cdot l} \\
 &= \frac{F}{4} + \frac{M3}{2 \cdot L_b} \\
 &= \frac{-200}{4} + \frac{10\,000}{2 \times 100} \\
 &= 0 \text{ (N)}
 \end{aligned}$$

Similarly

$$F_{s2} = F_{s4} = -100 \text{ (N)}$$

For calculation, take into consideration the positive or negative signs (+ or -) for load point coordinates.

Calculation of dynamic equivalent load

Use "A-3-2.2 3. Calculation of dynamic equivalent load."

It matches Position 4 in "Table 2.3 Loads in the arrangement of linear guides." Ball slide loads that must be considered are vertical and lateral direction loads.

In case of PU15AL,

Vertical direction dynamic equivalent load

$$F_r = F_r$$

Lateral direction dynamic equivalent load

$$F_{se} = F_s \cdot \tan \alpha = F_s$$

Use the formula for full dynamic equivalent load (page A23) to calculate F_e .

Results are shown in the table below.

Unit: N

| Work mounted | Slide1 | Slide2 | Slide3 | Slide4 |
|----------------------------|--------|--------|--------|--------|
| $F_r (F_{r1} - F_{r4})$ | 40 | - 165 | 340 | 135 |
| $F_{se} (F_{s1} - F_{s4})$ | 0 | - 100 | 0 | - 100 |
| F_e | 40 | 215 | 340 | 185 |
| No work mounted | Slide1 | Slide2 | Slide3 | Slide4 |
| $F_r (F_{r1} - F_{r4})$ | 10 | - 35 | 110 | 65 |
| $F_{se} (F_{s1} - F_{s4})$ | 0 | - 100 | 0 | - 100 |
| F_e | 10 | 118 | 110 | 133 |

Based on the results of calculations, a ball slide that bears the maximum dynamic equivalent load shall be taken as the representative of the linear guides for further life calculation. For this case, we take the Slide3.


Therefore;

Work mounted $F_{e1} = 340 \text{ (N)}$

No work mounted $F_{e2} = 110 \text{ (N)}$

Calculation of mean effective load

Based on "A-3-2.2 4. Calculation of mean effective load", calculate from the largest full dynamic equivalent loads.

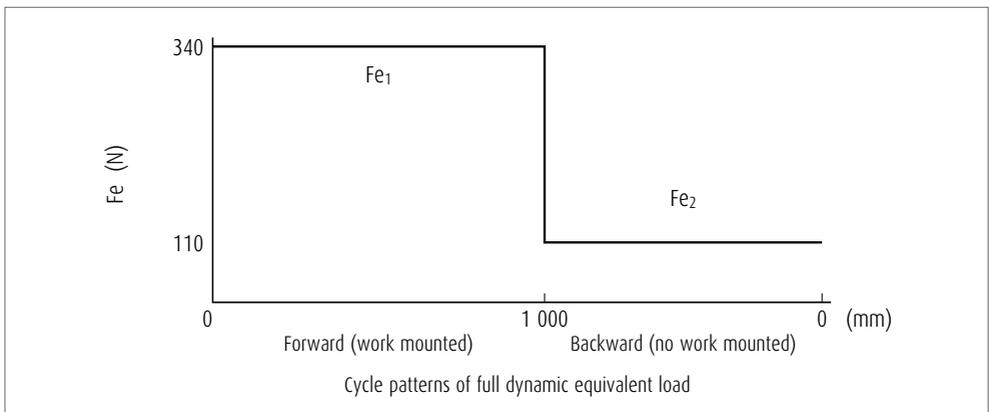

A-3-11 Drills to Select Linear Guide

From the cycle pattern, the mean effective load matches the case "1 When load and running distance vary stepwise."
Therefore, use the following formula.

Assuming that L is: $L = L_1 + L_2$.

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 L_1 + F_{e2}^3 L_2)}$$

$$= \sqrt[3]{\frac{1}{2\,000} (340^3 \times 1\,000 + 110^3 \times 1\,000)}$$

$$= 273 \text{ (N)}$$

Determine various coefficients

Determine applicable coefficients from "A-3-2.2.5. Various coefficients."

Load factors

Use conditions are: Travel speed, 12 m/min; Acceleration, 0.8 m/sec² (0.082 G). As the load factor f_w is in the range of 1.0 to 1.5, use common value $f_w = 1.2$.

Hardness coefficient

The hardness of NSK linear guides is HRC58 to 62. Use a hardness coefficient $f_H = 1$ and take the value of basic dynamic load rating as it is.

Calculate rating life

Use "A-3-2.2.6 Calculation of rating life."

The basic dynamic load rating (C_{100}) of linear guide PU15AL : 4 400 (N)

Mean effective load F_m : 273 (N)

Load factor f_w : 1.2

Hardness coefficient f_H : 1

$$\text{Rating fatigue life } L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_w \cdot F_m} \right)^3$$

$$= 100 \times \left(\frac{1 \times 4400}{1.2 \times 273} \right)^3$$

$$= \text{approximately } 242\,280 \text{ (km)}$$

Travel speed, 12 m/min; Operating hours, 16 hr/day.

Convert the above rating fatigue life into hours:

$$\frac{242\,280 \times 1\,000}{12 \times 60 \times 16} = \text{approximately } 21\,030 \text{ (days)}$$

Examine static load

Based on "A-3-2.2.7 Examination of static load", find out on which ball slide the static equivalent load P_0 becomes largest.

The basic static load rating (C_0) of linear guide PU15AL: 6 600 (N)

Ball slide No. 3 bears the largest load.

P_0 at this time:

$$P_0 = F_r + F_s = 340$$

Therefore, static permissible load coefficient fs is:

$$f_s = \frac{C_0}{P_0} = \frac{6\,600}{340} = 19.4$$

There is no problem at this value.

(3) Selection of accuracy grade and preload

Based on "A-3-4.3 Application examples of accuracy", select accuracy grade PN and preload Z1 for material handling system.

(4) Calculation of deformation

Calculate deformation by the weight of the mounted work W_2 . From "Rigidity of PU series", the rigidity of linear guide PU15AL with Z1 preload is:

$$K_s = K_r = 45 \text{ (N/}\mu\text{m)} = 45\,000 \text{ (N/mm)}$$

Deformation by the weight of the mounted work W_2 can be obtained as the difference in deformation when W_2 applies or does not apply.

From Pattern 4 in Table 2.2 (Page A19)

Work mounted:

$$\delta_{x1} = Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{t1} - F_{t2}}{L_b \cdot K_r}$$

$$= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{40 - (-165)}{100 \times 45\,000}$$

$$= 0.0075 \text{ (mm)} = 7.5 \text{ (}\mu\text{m)}$$

Similarly, $\delta_{y1} = -0.0082 \text{ (mm)} = -8.2 \text{ (}\mu\text{m)}$

$$\delta_{z1} = 0.0123 \text{ (mm)} = 12.3 \text{ (}\mu\text{m)}$$

No work mounted:

$$\begin{aligned}\delta_{x2} &= Y_d \cdot \frac{F_{s2} - F_{s1}}{L_b \cdot K_s} + Z_d \cdot \frac{F_{r1} - F_{r2}}{L_b \cdot K_r} \\ &= -90 \times \frac{-100 - 0}{100 \times 45\,000} + 120 \times \frac{10 - (-35)}{100 \times 45\,000} \\ &= 0.0032 \text{ (mm)} = 3.2 \text{ (}\mu\text{m)}\end{aligned}$$

$$\begin{aligned}\text{Similarly, } \delta_{y2} &= -0.0023 \text{ (mm)} = -2.3 \text{ (}\mu\text{m)} \\ \delta_{z2} &= 0.0039 \text{ (mm)} = 3.9 \text{ (}\mu\text{m)}\end{aligned}$$

Therefore, the difference in deformation by whether there is a mounted work or not is as follows:

$$\begin{aligned}\delta_x &= \delta_{x1} - \delta_{x2} = 7.5 - 3.2 = 4.3 \text{ (}\mu\text{m)} \\ \delta_y &= \delta_{y1} - \delta_{y2} = -8.2 - (-2.3) = -5.9 \text{ (}\mu\text{m)} \\ \delta_z &= \delta_{z1} - \delta_{z2} = 12.3 - 3.9 = 8.4 \text{ (}\mu\text{m)}\end{aligned}$$

2. Machining center

The following is a calculation example of a horizontal type machining center. Arrangements of each axis are shown in **Fig. 11.2** (front view) and **Fig. 11.3** (side view).

Operating conditions

Dimensions and load conditions are:

| | |
|------------------------------|-------------------|
| X axis column's weight | W_x : 7 500 (N) |
| Y axis spindle head's weight | W_y : 2 500 (N) |
| Z axis table's weight | W_z : 5 500 (N) |
| X axis rail span | XL_r : 450 (mm) |
| X axis ball slide span | XL_b : 310 (mm) |
| Y axis rail span | YL_r : 410 (mm) |
| Y axis ball slide span | YL_b : 308 (mm) |
| Z axis rail span | ZL_r : 660 (mm) |
| Z axis ball slide span | ZL_b : 420 (mm) |
| X axis stroke | : 400 (mm) |
| Y axis stroke | : 350 (mm) |
| Z axis stroke | : 500 (mm) |

| | |
|------------------------------|--------------------------|
| Average rapid traverse speed | : 15 (m/min) |
| | [Max. 30 (m/min)] |
| Starting accelerating speed | : 1 (G) |
| Milling speed | : 2.5 (m/min) |
| Drilling speed | : 0.8 (m/min) |
| Cutting load | |
| Milling process | $F_x = F_y = 1\,000$ (N) |
| Drilling process | $F_z = 3\,000$ (N) |

A-3-11 Drills to Select Linear Guide

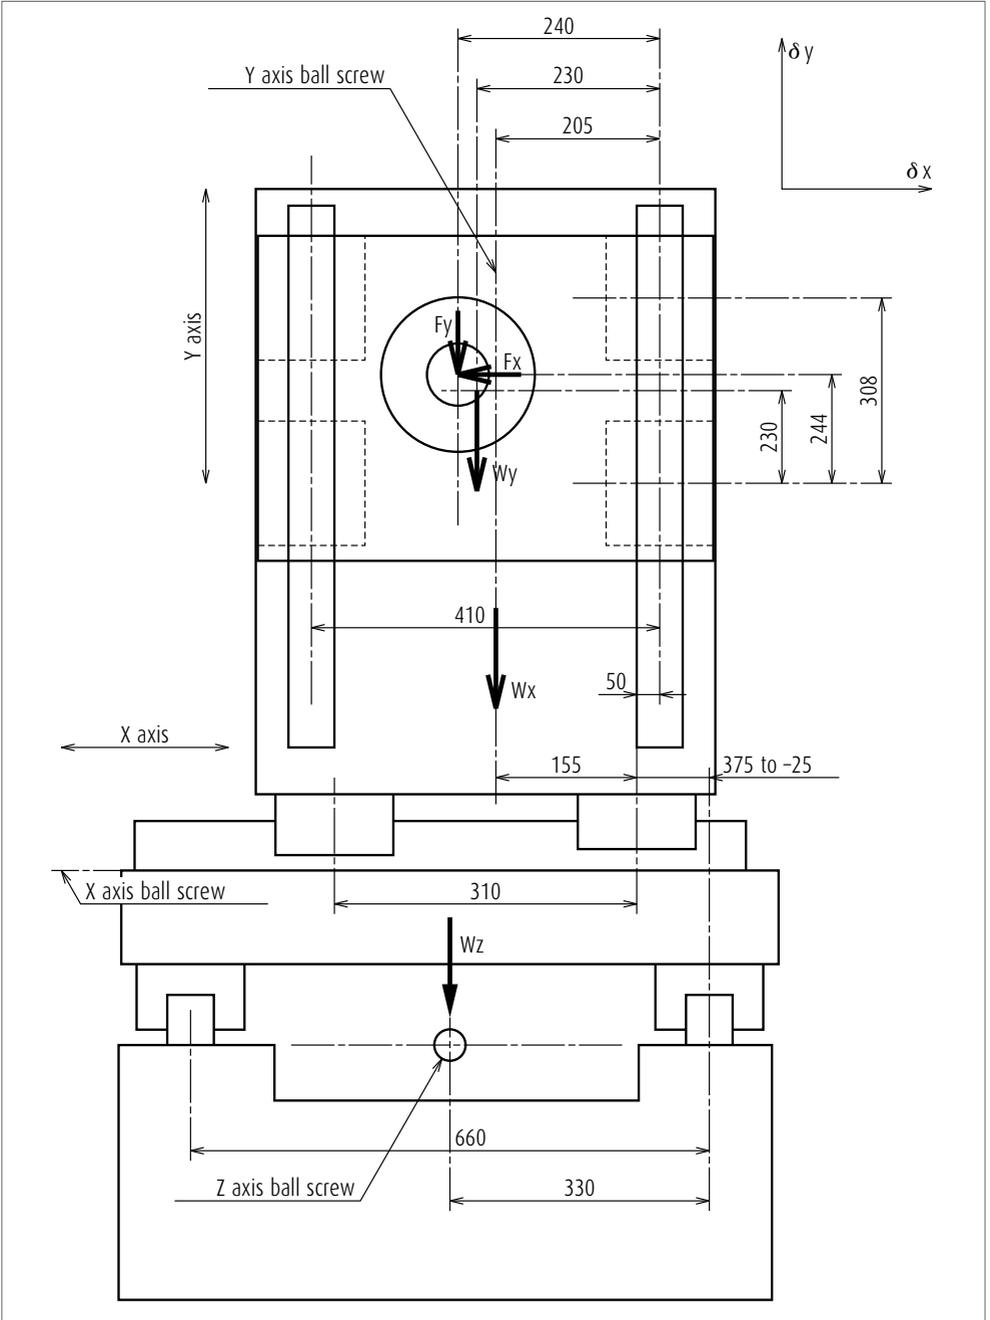


Fig. 11.2 Machining center (front view)

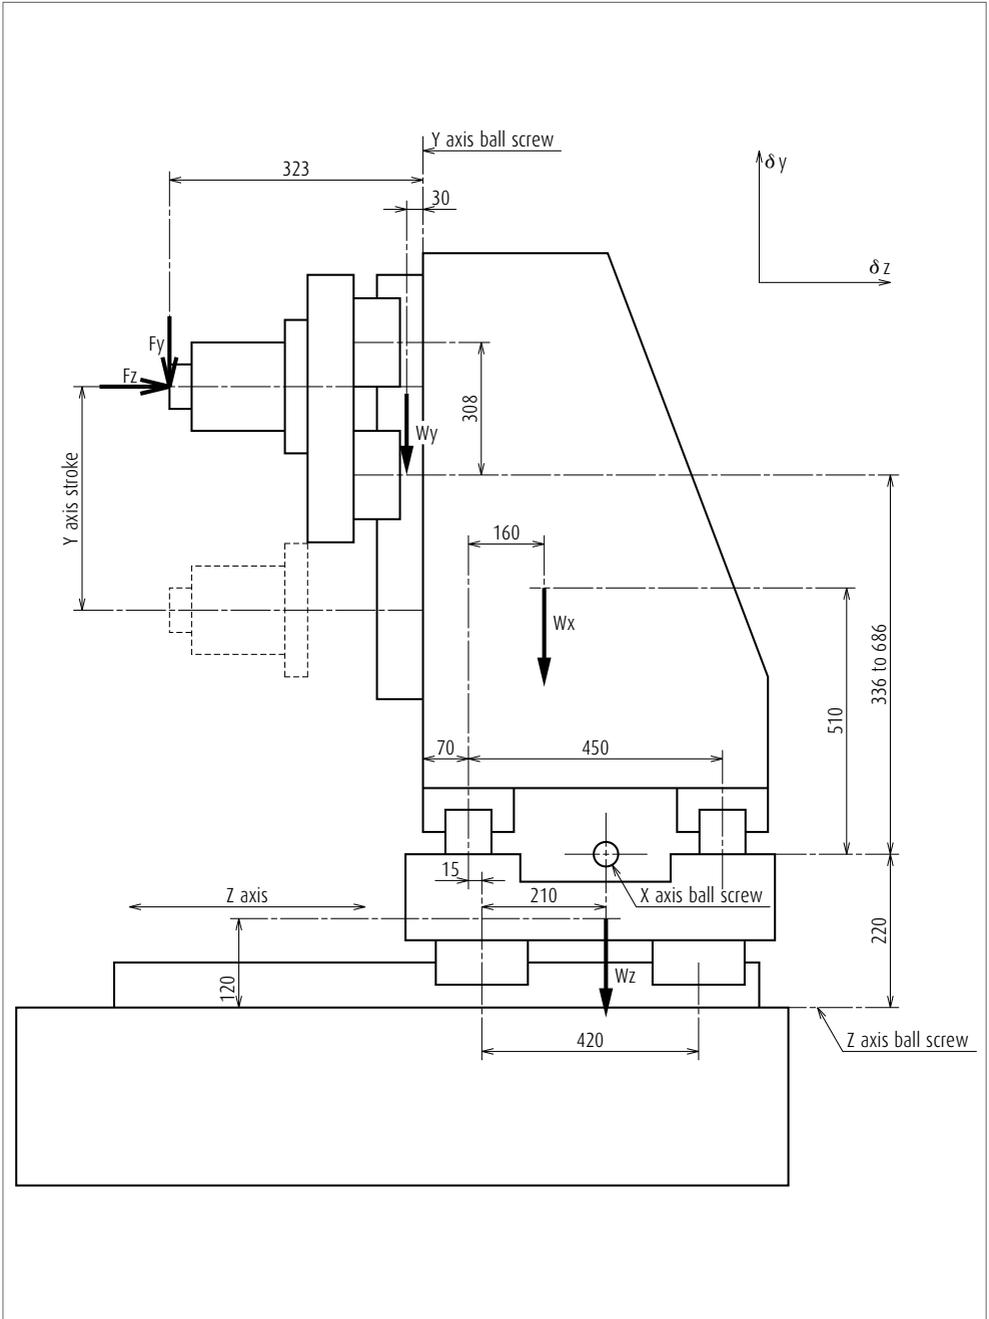


Fig. 11.3 Machining center (side view)

A-3-11 Drills to Select Linear Guide

(1) Selection of linear guide model

From the operating conditions, the linear guide should be LA Series which is suitable for the machining center.

Select below temporarily from shaft diameter of ball screw:

X axis LA55

Y axis LA35

Z axis LA65

(2) Selection of accuracy grade and preload

For machining center, select accuracy grade P5 and preload Z3.

(3) Calculation of life expectancy

Examination shall be done in three cases, no cutting load, milling process, and drilling process.

Inertial force associated with the starting acceleration is not considered in this case. However, it must be calculated for more accurate figures.

Calculation of the loads that apply to the ball slide

In case of no cutting load: $F_x = F_y = F_z = 0$

Calculate load on X, Y, Z axes using "Table 2.2" in "A-3-2.2 2 Calculating load to a ball slide".

X axis: Loads to consider W_x and W_y

Y axis: Loads to consider W_y

Z axis: Loads to consider W_x , W_y , and W_z

Unit: N

| Axis | Load direction | Slide 1 | Slide 2 | Slide 3 | Slide 4 |
|--------|--------------------------|---------|---------|---------|---------|
| X axis | Vertical direction F_r | 1 156 | 955 | 4 045 | 3 844 |
| | Lateral direction F_s | 0 | 0 | 0 | 0 |
| Y axis | Vertical direction F_r | 122 | -122 | 122 | -122 |
| | Lateral direction F_s | 102 | -102 | 102 | -102 |
| Z axis | Vertical direction F_r | 765 | 3 860 | 3 890 | 6 985 |
| | Lateral direction F_s | 0 | 0 | 0 | 0 |

In case of milling process: $F_x = F_y = 1\ 000\ (N)$

Similarly,

X axis: Loads to consider W_x , W_y , F_x , and F_y

Y axis: Loads to consider W_y , F_x , and F_y

Z axis: Loads to consider W_x , W_y , W_z , F_x , and F_y

The table below shows the calculation of each load coordinates at stroke end which imposes most strict condition.

Unit: N

| Axis | Load direction | Slide 1 | Slide 2 | Slide 3 | Slide 4 |
|--------|--------------------------|---------|---------|---------|---------|
| X axis | Vertical direction F_r | 2 277 | -1 039 | 6 539 | 3 224 |
| | Lateral direction F_s | 997 | -997 | 997 | -997 |
| Y axis | Vertical direction F_r | 252 | -1 040 | 1 040 | -252 |
| | Lateral direction F_s | 54 | -554 | 54 | -554 |
| Z axis | Vertical direction F_r | -771 | 3 796 | 4 453 | 9 020 |
| | Lateral direction F_s | 486 | -986 | 486 | -986 |

In case of drilling process: $F_z = 3\ 000\ (N)$

X axis: Loads to consider $W_x, W_y,$ and F_z

Y axis: Loads to consider W_y and F_z

Z axis: Loads to consider $W_x, W_y, W_z,$ and F_z

The table below shows calculation of each load coordinates at a stroke end which imposes most strict condition.

Unit: N

| Axis | Load direction | Slide 1 | Slide 2 | Slide 3 | Slide 4 |
|--------|--------------------------|---------|---------|---------|---------|
| X axis | Vertical direction F_r | 4 256 | 4 055 | 945 | 744 |
| | Lateral direction F_s | 919 | 581 | 919 | 581 |
| Y axis | Vertical direction F_r | 305 | 938 | 561 | 1 195 |
| | Lateral direction F_s | 102 | -102 | 102 | -102 |
| Z axis | Vertical direction F_r | 4 872 | -247 | 7 997 | 2 878 |
| | Lateral direction F_s | 839 | -839 | 839 | -839 |

Calculation of dynamic equivalent load

Next, find dynamic equivalent load under each cutting condition. From "Table 2.3" in "A-3-2.2 3. Calculation of dynamic equivalent load", the necessary loads, F_r and F_{se} are, as the linear guide model is LA Series, obtained as follows.

Vertical dynamic equivalent load

$$F_r = F_r$$

Lateral dynamic equivalent load

$$F_{se} = F_s \cdot \tan \alpha = F_s$$

From the above, calculate F_e using formulas for full dynamic equivalent loads shown in page A23.

From calculation, the largest full dynamic equivalent loads are as follows.

| Axis | Largest full dynamic equivalent load F_e (N) | | |
|--------|--|---------------------|----------------------|
| | No cutting load | For milling process | For drilling process |
| X axis | 4 045 | 7 038 | 4 716 |
| Y axis | 173 | 1 317 | 1 246 |
| Z axis | 6 985 | 9 513 | 8 417 |

Calculation of full dynamic equivalent load taking account of preload

It is necessary to include the amount of preload for the calculation of rating life when Z3 preload is specified. Consider each preload and calculate full dynamic equivalent load. Calculate F_{ep} using formulas in "A-3-3 6 Load and rating life when the preload is taken into account".

Preload P (X axis linear guide LA55): 8 100 (N)

Preload P (Y axis linear guide LA35): 3 450 (N)

Preload P (Z axis linear guide LA65): 13 800 (N)

From the above, the full dynamic equivalent loads taking preload into account are smaller than the load at which preload is relieved.

| Axis | Largest full dynamic equivalent load F_e (N) | | |
|--------|--|---------------------|----------------------|
| | No cutting load | For milling process | For drilling process |
| X axis | 10 336 | 12 104 | 10 724 |
| Y axis | 3 542 | 4 171 | 4 131 |
| Z axis | 17 663 | 19 138 | 18 494 |

Calculation of mean effective load

Calculate the mean effective loads from full dynamic equivalent loads. If duty cycle in the cutting process is not clear, set the mean effective load to 70% of the largest full dynamic equivalent load in all processes.

Therefore,

$$X \text{ axis: } 12\ 104 \times 0.7 = 8\ 473\ (N)$$

$$Y \text{ axis: } 4\ 171 \times 0.7 = 2\ 920\ (N)$$

$$Z \text{ axis: } 19\ 138 \times 0.7 = 13\ 397\ (N)$$

A-3-11 Drills to Select Linear Guide

Determine various coefficients

Determine them based on "A-3-2.2 5. Various coefficients".

In this occasion,

$$\begin{aligned} \text{Load coefficient } f_W &: 1.5 \\ \text{Hardness coefficient } f_H &: 1 \end{aligned}$$

Calculation of rating life

Based on the calculated loads and various coefficients, calculate the rating life from "A-3-2.2 6. Calculation of rating life".

Basic dynamic load rating C_{100}

$$\text{(X axis linear guide LA55)} : 111\,000 \text{ (N)}$$

Basic dynamic load rating C_{100}

$$\text{(Y axis linear guide LA35)} : 49\,000 \text{ (N)}$$

Basic dynamic load rating C_{100}

$$\text{(Z axis linear guide LA65)} : 206\,000 \text{ (N)}$$

$$\text{Load coefficient } f_W : 1.5$$

$$\text{Hardness coefficient } f_H : 1$$

$$\text{Rating fatigue life } L = 100 \times \left(\frac{f_H \cdot C_{100}}{f_W \cdot F_m} \right)^3$$

From this,

$$\text{In case of X axis } L_x = 66\,617 \text{ (km)}$$

$$\text{In case of Y axis } L_y = 140\,012 \text{ (km)}$$

$$\text{In case of Z axis } L_z = 107\,722 \text{ (km)}$$

In case of roller linear guides, refer to "A-3-2.2 6. Calculation of rating life" (page A25).

Calculate using Pattern 4 in Table 2.2.

| Load conditions | Deformation direction | Deformation of each axis (μm) | | | Total deformation (μm) |
|--------------------|-----------------------|--|--------|--------|-------------------------------------|
| | | X axis | Y axis | Z axis | |
| Table weight alone | δx | -0.2 | -0.1 | -3.1 | -3.4 |
| | δy | -4.6 | -0.3 | -4.2 | -9.1 |
| | δz | -4.3 | -0.1 | -4.9 | -9.3 |
| Milling process | δx | -9.9 | -1.3 | -6.7 | -17.9 |
| | δy | -6.4 | -1.7 | -5.2 | -13.3 |
| | δz | -6.1 | -0.4 | -7.7 | -14.2 |
| Drilling process | δx | -0.9 | -0.3 | -4.6 | -5.8 |
| | δy | 1.4 | 0.8 | 2.8 | 5.0 |
| | δz | 5.5 | 1.2 | 7.6 | 14.3 |

Therefore, deformation at processing points at time of milling is:

$$\delta x = -17.9 - (-3.4) = -14.5 \text{ (}\mu\text{m)}$$

$$\delta y = -13.3 - (-9.1) = -4.2 \text{ (}\mu\text{m)}$$

$$\delta z = -14.2 - (-9.3) = -4.9 \text{ (}\mu\text{m)}$$

Examination of static loads based on "A-3-2.2 7"

Basic static load rating C_0

$$\text{(X axis linear guide LA55)} : 215\,000 \text{ (N)}$$

Basic static load rating C_0

$$\text{(Y axis linear guide LA35)} : 98\,000 \text{ (N)}$$

Basic static load rating C_0

$$\text{(Z axis linear guide LA65)} : 420\,000 \text{ (N)}$$

Examine a case of high-load milling process with large load.

$$\text{X axis } f_s = \frac{C_0}{P_0} = \frac{C_0}{(F_r + F_s)} = \frac{215\,000}{(6\,539 + 997)} = 28.5$$

Similarly,

$$\text{Y axis } f_s = 61.5$$

$$\text{Z axis } f_s = 42.0$$

Therefore, there is no problem.

(3) Calculation of deformation

Calculate deformation at the processing points. (The stroke position is the stroke end positions on Y axis and X axis.)

$$\text{Rigidity of X axis linear guide LA55Z3} : 1\,400 \text{ (N}/\mu\text{m)}$$

$$\text{Rigidity of Y axis linear guide LA35Z3} : 825 \text{ (N}/\mu\text{m)}$$

$$\text{Rigidity of Z axis linear guide LA65Z3} : 1\,730 \text{ (N}/\mu\text{m)}$$

Deformation at processing points at time of milling:

$$\delta x = -5.8 - (-3.4) = -2.4 \text{ (}\mu\text{m)}$$

$$\delta y = 5.0 - (-9.1) = 14.1 \text{ (}\mu\text{m)}$$

$$\delta z = 14.3 - (-9.3) = 23.6 \text{ (}\mu\text{m)}$$

If a rating life of this long period is not required, select a smaller linear guide model, and calculate the life again.

To reduce deformation at the processing point, select a linear guide model with higher rigidity, and then calculate the life again.

A-3-12 Reference

The articles in "Motion & Control (NSK Technical Journals)" which refer to NSK linear guides are listed in the table below for user convenience.

"Motion & Control" is compiled to introduce NSK products and its technologies.

For inquiries and orders of "Motion & Controls," please contact your local NSK sales offices, or Representatives.

Table 12.1 Motion & Control (NSK Technical Journal): Articles relating to linear guides (1997 -)

| Issue No. | Date of Publication | Articles related to linear guides |
|-----------|---------------------|--|
| No. 5 | Dec. 1998 | Development of the NSK K1 Seal for Linear Guides |
| No. 8 | May 2000 | NSK Linear Guides for High-Temperature Environments |
| No. 9 | Oct. 2000 | Recent Developments in Highly Precise NSK Linear Guides |
| No. 9 | Oct. 2000 | High-Performance Seals for NSK Linear Guides |
| No. 11 | Oct. 2001 | Development of the NSK S1 Series Ball Screws and Linear Guides High Load Capacity Mini LH Series of NSK Linear Guides |
| No. 12 | Apr. 2002 | NSK Linear Guides & Ball Screws Equipped with NSK K1 Lubrication Unit |
| No. 12 | Apr. 2002 | NSK S1 Series NSK Linear Guides and Ball Screws |
| No. 13 | Oct. 2002 | Translide -New Rolling Element Linear Motion Bearing- |
| No. 14 | May 2003 | New Generation of NSK Linear Guides Miniature PU Series |
| No. 15 | Dec. 2003 | Ultra-Precision NSK Linear Guides for Machine Tools-the HA Series |
| No. 16 | Aug. 2004 | Numerical analysis Technology & NSK Linear Guides for Machine Tools |
| No. 16 | Aug. 2004 | NSK RA Series Roller Guide |
| No. 18 | Aug. 2005 | New Generation of NSK linear Guides Miniature PU Series/PE Series |
| No. 20 | Aug. 2007 | V1 Series of Highly Dust-Resistant NSK Linear Guides |
| No. 21 | Dec.2009 | Technological Trends of NSK Linear Guides for Industrial Machines Highly Accurate HS Series of Ultra-Precision NSK Linear Guides Linear Guides for Food Machine and Medical Devices |
| No. 22 | Mar. 2011 | Technological Trends of NSK Linear Guides for Industrial Machines High-Accuracy HS Series of Ultra-Precision NSK Linear Guides NSK Linear Guides for Food Processing Equipment and Medical Devices |
| No. 23 | Jun. 2013 | Technological Trends in Linear Motion Rolling Guides for Machine Tools |
| No. 24 | Dec. 2014 | Slight-Preload Type RA Series Roller Guides of NSK Linear Guides |

A-4 NSK Linear Guides

1. Structure of NSK Linear Guides

By avoiding structural complexity, and by reducing the number of components, we not only enhanced the precision of linear guides, but also are able to keep costs low. We have added NSK's patented unique structural feature to the original invention (**Fig. 1**). This contributes to higher precision and lower prices.

NSK linear guides consist of a rail and a slide (**Fig. 2**). The balls or rollers roll on the race way surface, and are scooped up by the end caps attached to both ends of the slide. Then, the balls or rollers go through a passage made in the slide and circulate back to the other end.

2. Characteristics of NSK Linear Guides

The use of a unique offset Gothic arch groove (**Fig. 3**) allows the ball type of NSK linear guides to satisfy groove designs required for specific purposes.

This unique groove design facilitates precise measurement of the ball groove, thus enabling the stable and highly accurate production of the slides and the rails for random matching. (**Fig. 4**)

On top of that, we have developed and marketed the NSK Roller Guides, representing the culmination of NSK's analysis technology and tribology.

Such technologies ensure the features of NSK linear guides outlined below.

(1) High precision and quality

› High precision and quality come from our superb production and measuring technologies, strengthened by extensive experience in antifriction rotary bearings and ball screw production. Our quality assurance extends to the smallest components.

(2) High reliability and durability

› Logical simplicity in shape, along with stable processing, maintains high precision and reliability.

› Super-clean materials, our advanced heat treatment and processing technologies increase product durability.

(3) Abundant in type for any purpose

› Various series are available, and their slide models and size categories are standardized to satisfy any requirement. Our technology, polished by abundant experience in the use of special materials and surface treatments, meets the customer's most demanding expectations.

(4) Development of random-matching parts for short delivery time

› The adoption of the Gothic arch groove which makes measuring easy, and a new reliable quality control method has made random-matching of the rails and the ball or roller slides possible. The parts are stocked as standard products, thereby reducing delivery time.

(5) Patented static load carrying capacity (shock-resistance)

› When a super-high load (impact) is applied, our Gothic arch groove spreads the load to surfaces which usually do not come into contact in the ball type NSK linear guides. This increases impact load resistance (**Fig. 5**).

(6) Lineup of extremely high-load capacity series

› The LA series provides a top class high-load capacity for the ball linear guides through a unique load carrying configuration with three ball recirculation circuits on the one side.

By installing rollers that are the largest possible diameter and length, the NSK roller linear guides have realized the world's highest load capacity, far superior to the roller linear guides of other companies.

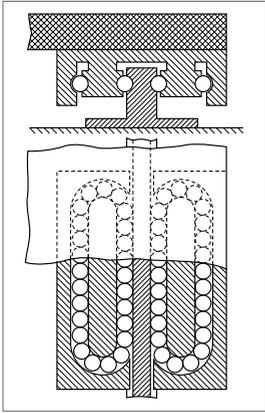


Fig. 1 > French Patent in 1932.
> Inventor: Gretsch (German)

NSK added its patented technology to the invention in Fig. 1, and improved the linear guide structure and realized low cost design.

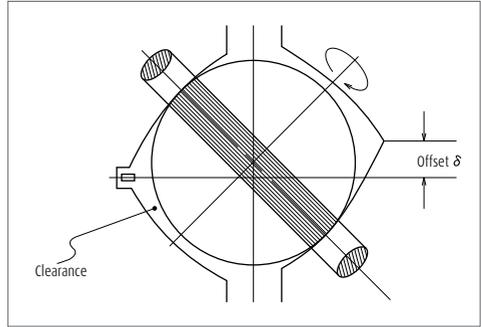


Fig. 3 Two contact point at offset Gothic arch groove

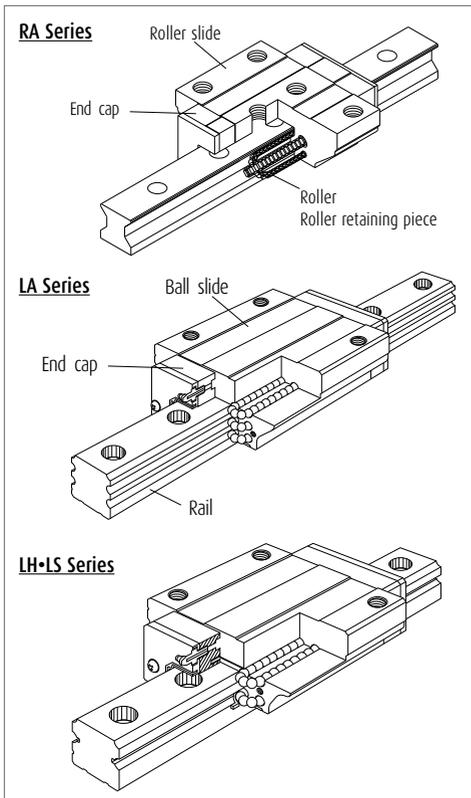


Fig. 2 Structure of NSK linear guides

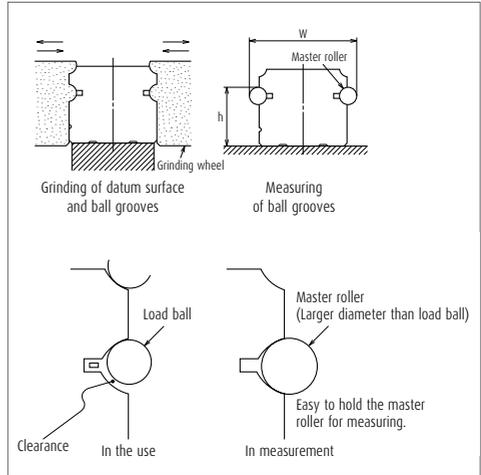


Fig. 4 Processing and measuring grooves

Measuring grooves accuracy is easy. You can obtain highly accurate results for all types of NSK series. This is why you can purchase rails and slides separately for random matching.

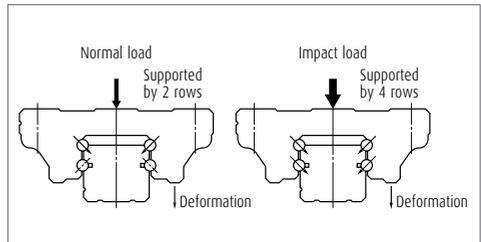


Fig. 5 Shock-resistance

A-4 NSK Linear Guides


3. Types and Characteristics of NSK Linear Guides

| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure | |
|---|--------------------|-------------|---------------------------|-------------------------|-----------------------------------|--|
| High vertical load carrying capacity type | Self-aligning type | NH | AN BN | | | |
| | | | AL BL | | | |
| | | | EM GM | | | |
| | | | High-load type AN, AL | | EM | |

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A321.


| Characteristics | Applications | Page |
|--|--|------|
| <p>The NH series is applicable to a wide range of uses from general industrial use to high-accuracy application.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> ➤ The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. ➤ The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. ➤ Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. ➤ High resistance against shock load due to the unique load-carrying structure. ➤ Gothic arch groove renders measuring of ball grooves accurate and easy. ➤ Standardized random-matching type allows separate purchase of rails and ball slides. ➤ Stainless steel standard type is also available for small sizes (NH15 to NH30). | <ul style="list-style-type: none"> ➤ Cartesian type robots ➤ Robots that remove plastic molds from injection machine ➤ Material handling equipment ➤ Food processing machines ➤ Packaging/packing machines ➤ Printing machines ➤ Woodworking machines ➤ Paper manufacturing machines ➤ Measuring equipment ➤ Inspecting equipment ➤ Semiconductor manufacturing equipment ➤ LCD manufacturing equipment ➤ Medical equipment ➤ Electric discharge machines ➤ Laser cutting machines ➤ Press machines ➤ Tool grinders ➤ Flat surface grinders ➤ NC lathes ➤ Machining centers ➤ Automatic tool changers | A113 |

Super-high-load type








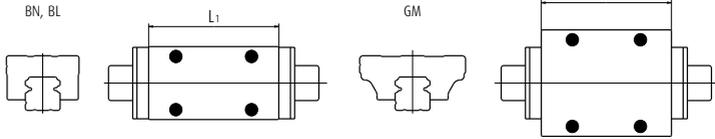


A-4 NSK Linear Guides


| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure |
|--|--------------------|--------------------------|--------------------------------------|-------------------------|-----------------------------------|
| High vertical load carrying capacity type | Self-aligning type | AN BN | | | |
| | | AL BL | | | |
| High vertical load carrying capacity type | Self-aligning type | VH | EM GM | | |
| | | High-load type AN, AL | L_1 EM L_1 | | |
| Four-way equal load carrying capacity type | Standard type | TS | AN | | |
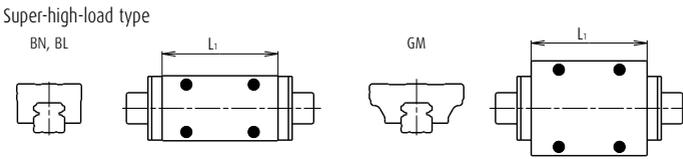
| Characteristics | Applications | Page |
|---|--|------|
| <p>The VH series delivers outstanding dust-proof functionality and thus ensures long operating life under contaminated environments.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > The contact angle between the ball and the raceway is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load acting direction in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. > Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. > High resistance against shock load due to the unique load carrying structure. > Gothic arch groove renders measuring groove accurate and easy. > Standardized random-matching type allows separate purchase of rails and ball slides. > Penetration of fine contaminants is less than 1/10 of the existing products. > Operating life under contaminated environments is more than 5 times longer. | <ul style="list-style-type: none"> > Automotive manufacturing equipment > Press machines > Machine tools loader/un-loader > Tire molding machines > Woodworking machines > Automatic doors | A133 |
| <p>Super-high-load type</p>  | | |
| <p>The TS series is suitable for transfer equipment.</p> <ul style="list-style-type: none"> > The newly developed manufacturing processes contribute to low cost. > Standardized random-matching type allows separate purchase of rails and ball slides. | <ul style="list-style-type: none"> > Automotive manufacturing equipment > Press machines > Loader/unloader of machine tools > Tire molding machines > Woodworking machines > Automatic doors | A151 |

A-4 NSK Linear Guides

| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure |
|---|--------------------|----------------|---|--|--|
| High vertical load carrying capacity type | Self-aligning type | NS | CL AL |  |  |
| | | | JM EM | | |
| | | High-load type | | AL   EM   | |
| High moment capacity type | LW | EL |  |  | |


Note For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A321.
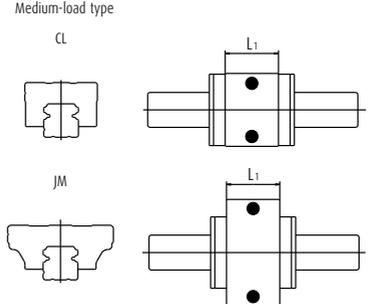
| Characteristics | Applications | Page |
|---|---|------|
| <p>The NS series is low in height, and is applicable to a wide range of uses from general industrial use to high-accuracy application.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > Compact and low profile. > The contact angle between the ball and the groove is set at 50 degrees. This design increases the load carrying capacity against vertical directions, which is the main load direction prevalent in most operations. > The DF contact structure greatly absorbs the installation error in the perpendicular direction of the rail. > Thanks to the offset Gothic arch groove, balls make contacts at two points. This keeps friction to a minimum. > High resistance against shock load due to the unique load carrying structure. > Gothic arch groove renders measuring groove accurate and easy. > Standardized random-matching type allows separate purchase of rails and ball slides. > Stainless steel type is also available. | <ul style="list-style-type: none"> > Cartesian type robots > Robots that remove plastic molds from injection machine > Material handling equipment > Food processing machines > Packaging/packing machines > Printing machines > Woodworking machines > Paper manufacturing machines > Measuring equipment > Inspection equipment > Semiconductor manufacturing equipment > LCD manufacturing equipment > Medical equipment > Electric discharge machines > Laser cutting machines > Press machines | A157 |
| <p>Medium-load type</p>  | | |
| <p>High-moment rigidity and low profile products are most suited for a single rail linear guideway system.</p> <p>Random-matching of rails and ball slides is available as a standard.</p> <ul style="list-style-type: none"> > The wide rail contributes to a high rolling moment carrying capacity and to great moment rigidity of a single rail linear guideway system. > Balls contact at two points in the Gothic arch groove, thus keeping friction to a minimum. > High resistance against shock load > Standardized random-matching type allows separate purchase of rails and ball slides. | <ul style="list-style-type: none"> > Semiconductor manufacturing equipment > LCD manufacturing equipment > Conveyor systems > Medical equipment > Microscope XY stages | A175 |





A-4 NSK Linear Guides

| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure |
|----------------|--|----------------------------------|---------------------------|-------------------------|-----------------------------------|
| Miniature type | Standard type | | | | |
| | PU | AL AR TR UR BL | | | |
| | LU | AL TL AR TR BL UL | | | |
| | High moment capacity type | | | | |
| PE | AR TR UR BR | | | | |
| LE | AL TL AR TR BL UL CL SL | | | | |
| | | | Standard type | High-load type | |
| | | | PU, LU | AL, TL, AR, TR | BL, UL, UR |
| | | | | | |

| Characteristics | Applications | Page |
|---|--|------|
| <p>Low inertia and low dust generation miniature series.</p> <ul style="list-style-type: none"> › Low dust generation and highly smooth operation › Super-compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. | <ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Conveying system of optical fibers › Miniature robots › Computer peripherals › Pneumatic equipment | A191 |
| <p>Miniature series</p> <ul style="list-style-type: none"> › Extremely compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. | | A201 |
| <p>Wide rail miniature with low inertia and low dust generation.</p> <ul style="list-style-type: none"> › Low dust generation and highly smooth operation › Super-compact size › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. | <ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Conveying optical fibers › Miniature robots › Computer peripherals › Pneumatic equipment | A213 |
| <p>Miniature wide series</p> <ul style="list-style-type: none"> › Super-small size in wide rail type › Stainless steel is the standard material. › A ball retainer is a standard equipment. › Standardized random-matching type allows separate purchase of rails and ball slides. | | A223 |











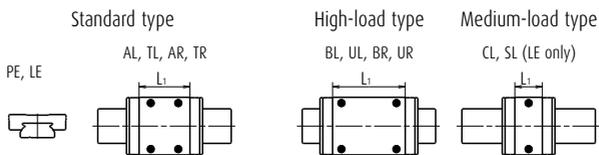










A-4 NSK Linear Guides
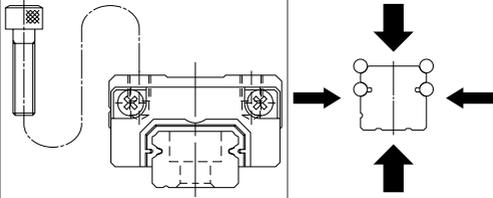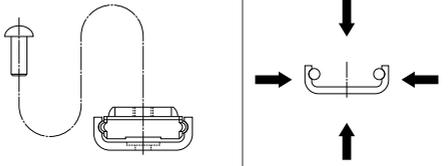
| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure |
|----------------|--------------------|-------------|---------------------------|--|---|
| Miniature type | Self-aligning type | LH | AN |  |  |
| | Lightweight type | LL | PL |  |  |

| Characteristics | Applications | Page |
|---|--|------|
| <p>High vertical load carrying capacity and self-aligning type miniature series</p> <ul style="list-style-type: none"> › The contact angle between the ball and ball groove is set at 50 degrees. This design increases the load carrying capacity against the vertical directions, which is the main load acting direction in most operations. › The DF contact structure greatly absorbs the installation error in the perpendicular direction to the rail. › Balls make contact at two points thanks to the offset Gothic arch groove. This keeps friction to a minimum. › High resistance against shock load due to the unique load-carrying structure. › Gothic arch groove renders measuring of ball grooves accurate and easy. › A ball retainer is a standard equipment. (LH10~12) › Stainless steel type is standard. | <ul style="list-style-type: none"> › Semiconductor manufacturing equipment › LCD manufacturing equipment › Medical equipment › Optical stages › Microscope XY stages › Miniature robots › Computer peripherals › Pneumatic equipment | A237 |
| <p>The LL series is a compact and lightweight miniature linear guide for press molding.</p> <ul style="list-style-type: none"> › Rails and ball slides are made of thin steel plate, and thus making them very light. › Stainless steel is the standard material. | <ul style="list-style-type: none"> › Platter pen heads › Robot hands › Pneumatic equipment | A247 |



A-4 NSK Linear Guides

| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure |
|--|------------------|-------------|--|---|--|
| Four-way equal load carrying capacity type | Super-rigid type | RA | AN BN  |  |  |
| | | AL BL |  | | |
| | | EM GM |  | | |
| Four-way equal load carrying capacity type | Super-rigid type | LA | AN BN  |  |  |
| | | AL BL |  | | |
| | | EL GL |  | | |
| | | FL HL |  | | |

| Characteristics | Applications | Page |
|--|--|------|
| <p>The RA series roller guides have realized the world highest load capacity. Super-high rigidity and smooth motion contribute to higher performance of machine tools.</p> <ul style="list-style-type: none"> > Unique and optimum design of rollers and other component facilitate the high-load capacity and high rigidity. > High-performance seals, a standard feature in the roller guides, maintain the initial performance for a prolonged time. > The installation of retaining piece achieves smooth motion. > Standardized random-matching type allows separate purchase of rails and roller slides. | <ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Gear cutters > Electric discharge machines > Press machines > Various types of grinders | |
| <p>High-load type AN, AL</p>  <p>Super-high-load type BN, BL</p>  | <p>EM</p>  <p>GM</p>  | A253 |
| <p>As well as providing a low friction operation, the LA series provides a top class high-load capacity for the ball linear guides. The series is most suited for machine tools.</p> <ul style="list-style-type: none"> > The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. > Six-row ball grooves support the load from vertical and lateral directions, enhancing rigidity and increasing load carrying capacity. > Appropriate friction > Best suited for machine tools. | <ul style="list-style-type: none"> > Machining centers > NC lathes > Heavy cutting machine tools > Gear cutters > Electric discharge machines > Press machines > Various types of grinders | |
| <p>High-load type AN, AL</p>  <p>Super-high-load type BN, BL</p>  | <p>EL, FL</p>  <p>GL, HL</p>  | A273 |

A-4 NSK Linear Guides

| Category | Series | Slide shape | Shape/installation method | Load direction/capacity | Rolling element contact structure | |
|--|-------------------------------------|-------------|---------------------------|-------------------------|-----------------------------------|--|
| Four-way equal load carrying capacity type | Super rigidity, high-precision type | AN | | | | |
| | | AL | | | | |
| | | EM | | | | |
| | | AN, AL | | | | |
| High vertical load carrying capacity type | Self-aligning, super-precision type | AL | | | | |
| | | EM | | | | |
| | | AL | | | | |

| Characteristics | Applications | Page |
|---|--|------|
| <p>The HA Series ball guide with high-precision and high-load carrying capacity, featuring high-motion accuracy equivalent to hydrostatic linear bearings.</p> <ul style="list-style-type: none"> ➤ Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design. ➤ The contact angle between the ball and the raceway is set at 45 degrees. This makes load carrying capacity and rigidity equal in vertical and lateral directions. ➤ High motion accuracy is realized by the feature of super-finished ball groove (optional). ➤ End seals, bottom seals, and inner seals of high dust-proof specification are the standard equipment. ➤ Best suited for high-grade machine tools. | <ul style="list-style-type: none"> ➤ Die molding machines ➤ High precision processing machine ➤ Heavy cutting machine tools ➤ Gear cutters ➤ Press machines ➤ Various types of NC grinders | A293 |
|  | | |
| <p>The HS Series ball guide with high-precision featuring high-motion accuracy equivalent to hydrostatic linear bearings.</p> <p>A Ball passage vibration has been reduced to one-third of conventional models by ultra-long ball slides and specification of new design.</p> <ul style="list-style-type: none"> ➤ The contact angle between the ball and the raceway is set at 50 degrees. The load carrying capacity against vertical directions, which is the main load acting direction in most operations, increases by this design. ➤ The DF contact structure greatly absorbs the installation error in the perpendicular direction of rail. ➤ Thanks to the offset Gothic arch groove, balls make contacts at two points, thus keeping friction low. | <ul style="list-style-type: none"> ➤ High precision processing machines ➤ Electric discharge machines ➤ Various types of NC grinders ➤ LCD manufacturing equipment | A307 |
|  | | |

A-4 NSK Linear Guides

4. Guide to Technical Services

(1) CAD drawing data

NSK offers CAD data for linear guides. Please visit the NSK website to download.

NSK website

<http://www.nsk.com>

- > Data in drawings are filed in the actual size (some parts are simplified). You can use these data without processing.
- > Drawings are three dimensional projection.
- > Dimension lines are omitted to render the data as standard drawing for database.

Data offered by CAD

NSK linear guides

NH Series

VH Series

TS Series

NS Series

LW Series

PU Series

LU Series

PE Series

LE Series

Miniature LH Series

RA Series

LA Series

HA Series

HS Series

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or Representative in your area.

5. Linear Guides: Handling Precautions

NSK linear guides are high quality and are easy to use. NSK places importance on safety in design. For maximum safety, please follow precautions as outlined below.

(1) Lubrication



Confirm lubrication.

- If your linear guide is rust prevention specification, thoroughly wipe the rust prevention oil and put lubricant inside of slide before using. For seal lubrication products, put lubricant on the rail.
- Do not mix greases of different brands.
- If your linear guide is rust prevention specifications, put lubricant inside of slide before using.

(2) Handling



Handle with care.



Do not disassemble.



Do not drop.



Do not give impact.

- Slides for random-matching are mounted on a provisional rail when they leave the factory. Handle the slide with care during installation on the rail.
- Do not disassemble the linear guide unless absolutely necessary. Not only does it allow dust to enter, but it lessens precision.
- The slide may move by simply tilting the rail. Make sure that the slide does not disengage from the rail.
- Standard end cap is made of plastic. Striking it or hitting it against an object may cause damage.

(3) Precautions in use



Do not contaminate.



Temperature limitation.



Do not hang upside down.

- Make every effort not to allow dust and foreign objects to enter.
- Please apply splash guard or bellows to the linear guide to prevent sticking solvent or coolant when it contains corrosive material.
- The temperature of the place where linear guides are used should not exceed 80°C (excluding heat-resistant type linear guides). A higher temperature may damage the plastic end cap.
- If the user cuts the rail, thoroughly remove burrs and sharp edges on the cut surface.
- When hanging upside-down (e.g. the rail is installed upside-down on the ceiling in which the slide faces downward), should the end cap be damaged, causing the balls or rollers to fall out, the slide may be detached from the rail and fall. For such use, take measures including installing a safety device.

(4) Storage



Store in the correct position.

- Linear guide may bend if the rail is stored in inappropriate position. Place it on a suitable surface, and store it in a flat position.

A-4 NSK Linear Guides

6. Design Precautions

The following points must be heeded in examining the life.



In case of oscillating stroke

- › If the balls or rollers do not rotate all the way, but only halfway, and if this minute stroke is repeated, lubricant disappears from the contact surface of balls or rollers and raceways. This generates "fretting," a premature wear. Fretting cannot be entirely prevented in such a case but it can be mitigated.
- › We recommend anti-fretting grease for oscillating stroke operations. Even in a case using a standard grease, the life can be markedly prolonged by adding a normal stroke travel (about the slide length) once every several thousand cycles.



When applying pitching or yawing moment

- › Load applied to the ball or roller rows inside the slide is inconsistent if pitching or yawing moment load is applied. Loads are heavy on the balls or rollers on each end of the row.
- › In such a case, a heavy load lubricant grease or oil is recommended. Another countermeasure is using one size larger model of linear guide to reduce the load per ball or roller.
- › Moment load is insignificant for 2-rail, 4-slide combination which is commonly used.



When an extraordinary large load is applied during stroke

- › If an extraordinary large load is applied at certain position of the stroke, calculate not only the life based on the mean effective load, but also the life based on the load in this range.
- › When an extraordinary heavy load is applied and thus the application of high tensile stress to fixing bolts of the rails and slides is foreseen, the strength of the bolts should be considered.



When calculated life is extraordinarily short (Less than 3000 km in calculated life.)

- › In such a case, the contact pressure to the balls or rollers and the rolling contact surface is extraordinarily high.
- › When a linear guide is operated under such state continually, the life is significantly affected by the loss of lubrication and the presence of dust, and thus the actual life becomes shorter than calculated.
- › It is necessary to reconsider the number of slides, the arrangement of slides, and the type of model in order to reduce the load to the slide.
- › It is necessary to consider preload for calculation of rating life when selecting Z3 (medium preload) or Z4 (heavy preload) as a preload. For the calculation of full dynamic equivalent loads that consider preload, see "A-3-3 6" on page A31. Please consult NSK for details.




Application at high speed

- › The standard maximum allowable speed of a linear guide under normal conditions is 100 m/min. However, the maximum allowable speed can be affected by accuracy of installation, temperature, external loading etc.
- › The end cap with high speed specification must be used when operating speed exceeds the permissible speed. In such a case, please consult NSK.




A-5-1 General Industrial Use



| | Page |
|---------------------------|------|
| 1. NH Series | A113 |
| 2. VH Series | A133 |
| 3. TS Series | A151 |
| 4. NS Series | A157 |
| 5. LW Series | A175 |

A-5-1.1 NH Series

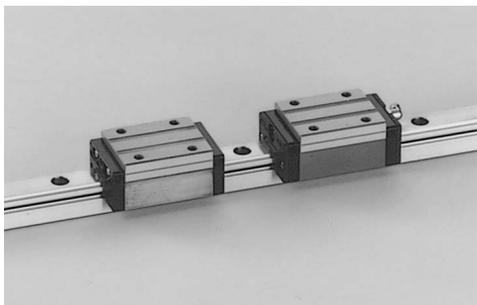

1. Features

(1) Improve rating life dramatically

Based on the LH series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LH Series, the load rating capacity of the NH series has increased by 1.3 times, while the life span has increased doubled^{*1}. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

^{*1}: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NH series is suited for high-speed applications compared with the LH Series.

(3) All mounting dimensions are the same as those for the LH and SH Series

Regarding the mounting dimensions, such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NH Series remain the same as those of the conventional LH series and SH series. So, the new NH Series linear guides can be used without making any design changes.

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity.

This increases the capacity to absorb errors in installation.

Note For customers who have used the former LH or SH series, NH series is recommended as a substitute. Please confirm the correlation between NH series and former ones on the comparative table at A321.

(5) High load carrying capacity in vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As shown in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer, therefore they do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes

Each size of NH Series has various models of ball slides, rendering the linear guide available for numerous uses.

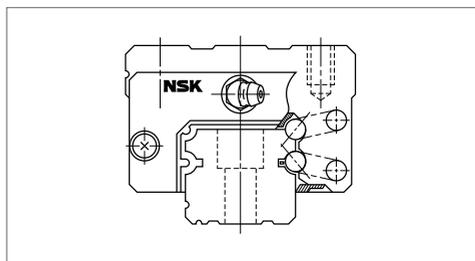


Fig. 1 NH Series

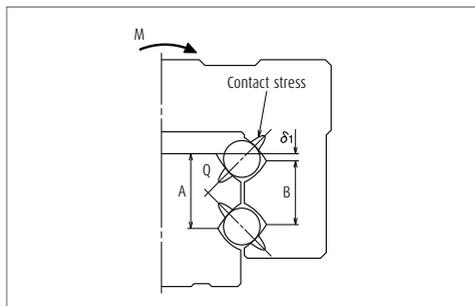


Fig. 2 Enlarged illustration of the offset Gothic arch groove

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

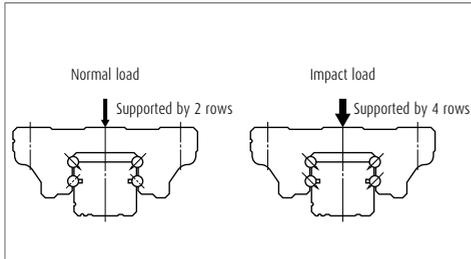


Fig. 3 When load is applied

High precision grade and medium preload types are also available in random matching. (Special high-carbon steel products)

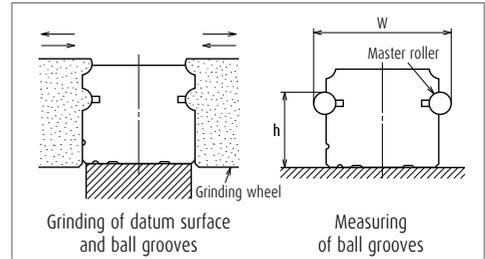


Fig. 4 Rail grinding and measuring

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type | |
|------------------|---------------------------|----------------|----------------------|
| | | High-load type | Super-high-load type |
| | | Standard | Long |
| AN BN | | AN | BN |
| AL BL | | AL | BL |
| EM GM | | EM | GM |

A-5-1.1 NH Series

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail over all length (mm) over or less | | Preloaded assembly (not random matching) | | | | | Random-matching type | |
|---|--|--|--------------------|-------------------|--------------------|-----------------|----------------------|-----------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN | High precision PH | Normal grade PC |
| - 50 | | 2 | 2 | 2 | 4.5 | 6 | 2 | 6 |
| 50 - 80 | | 2 | 2 | 3 | 5 | 6 | 3 | 6 |
| 80 - 125 | | 2 | 2 | 3.5 | 5.5 | 6.5 | 3.5 | 6.5 |
| 125 - 200 | | 2 | 2 | 4 | 6 | 7 | 4 | 7 |
| 200 - 250 | | 2 | 2.5 | 5 | 7 | 8 | 5 | 8 |
| 250 - 315 | | 2 | 2.5 | 5 | 8 | 9 | 5 | 9 |
| 315 - 400 | | 2 | 3 | 6 | 9 | 11 | 6 | 11 |
| 400 - 500 | | 2 | 3 | 6 | 10 | 12 | 6 | 12 |
| 500 - 630 | | 2 | 3.5 | 7 | 12 | 14 | 7 | 14 |
| 630 - 800 | | 2 | 4.5 | 8 | 14 | 16 | 8 | 16 |
| 800 - 1000 | | 2.5 | 5 | 9 | 16 | 18 | 9 | 18 |
| 1 000 - 1 250 | | 3 | 6 | 10 | 17 | 20 | 10 | 20 |
| 1 250 - 1 600 | | 4 | 7 | 11 | 19 | 23 | 11 | 23 |
| 1 600 - 2 000 | | 4.5 | 8 | 13 | 21 | 26 | 13 | 26 |
| 2 000 - 2 500 | | 5 | 10 | 15 | 22 | 29 | 15 | 29 |
| 2 500 - 3 150 | | 6 | 11 | 17 | 25 | 32 | 17 | 32 |
| 3 150 - 4 000 | | 9 | 16 | 23 | 30 | 34 | 23 | 34 |

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High precision PH and Normal PC grade.

› Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|-------------------------------------|--------------------|-------------------|--------------------|-----------------|
| Mounting height H | | ± 10 | ± 10 | ± 20 | ± 40 | ± 80 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 15 | ± 25 | ± 50 | ± 100 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 3 | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1, Fig. 5 and Fig. 6 | | | | |

› Tolerance of random-matching type

Table 3

Unit: μm

| Accuracy grade | Model No. | High precision grade PH | | Normal grade PC | |
|--|-----------|--|--|--|--|
| | | NH15, 20, 25, 30, 35 | NH45, 55, 65 | NH15, 20, 25, 30, 35 | NH45, 55, 65 |
| Characteristics | | | | | |
| Mounting height H | | ± 20 | ± 30 | ± 20 | ± 30 |
| Variation of mounting height H | | 15 ⁽¹⁾ 30 ⁽²⁾ | 20 ⁽¹⁾ 35 ⁽²⁾ | 15 ⁽¹⁾ 30 ⁽²⁾ | 20 ⁽¹⁾ 35 ⁽²⁾ |
| Mounting width W_2 or W_3 | | ± 30 | ± 35 | ± 30 | ± 35 |
| Variation of mounting width W_2 or W_3 | | 25 | 30 | 25 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | See Table 1, Fig. 5 and Fig. 6 | | | |

Notes ① Variation on the same rail ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

| | | Accuracy grade | | | | | | |
|--|---|-----------------|-----------------|----------------|-----------------|--------------|----------------|--------------|
| | | Ultra precision | Super precision | High precision | Precision grade | Normal grade | High precision | Normal grade |
| Without NSK K1 lubrication unit | | P3 | P4 | P5 | P6 | PN | PH | PC |
| With NSK K1 lubrication unit | | K3 | K4 | K5 | K6 | KN | KH | KC |
| With NSK K1 for food and medical equipment | | F3 | F4 | F5 | F6 | FN | FH | FC |
| Preload | Fine clearance Z0 | ○ | ○ | ○ | ○ | ○ | — | — |
| | Slight preload Z1 | ○ | ○ | ○ | ○ | ○ | — | — |
| | Medium preload Z3 | ○ | ○ | ○ | ○ | — | — | — |
| | Random-matching type with fine clearance ZT | — | — | — | — | — | — | ○ |
| | Random-matching type with slight preload ZZ | — | — | — | — | — | ○ | ○ |
| | Random-matching type with medium preload ZH | — | — | — | — | — | ○ | ○ |

(4) Assembled accuracy

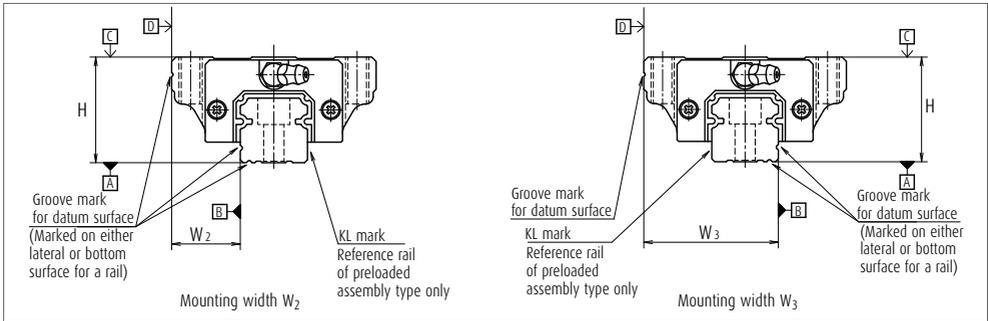


Fig. 5 Special high carbon steel

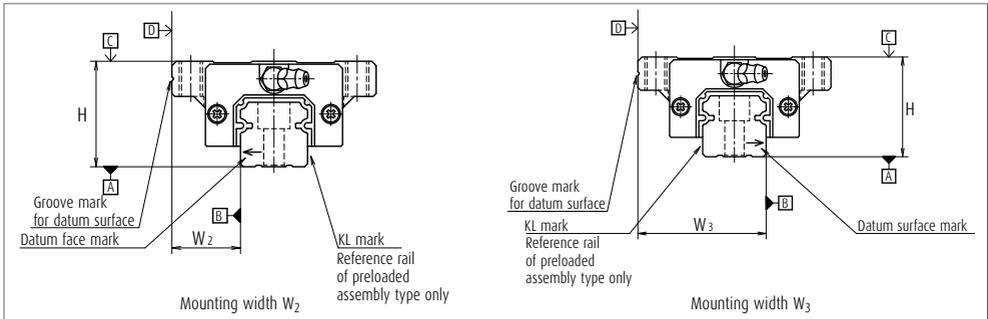


Fig. 6 Stainless steel

A-5-1.1 NH Series

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Slight preload ZZ and Fine clearance ZT.

› Preload and rigidity of preloaded assembly

Table 5

| Model No. | | Preload (N) | | Rigidity (N/ μ m) | | | |
|----------------------|-----------------|---------------------|---------------------|-----------------------|---------------------|---------------------|---------------------|
| | | | | Vertical direction | | Lateral direction | |
| | | Slight preload (Z1) | Medium preload (Z3) | Slight preload (Z1) | Medium preload (Z3) | Slight preload (Z1) | Medium preload (Z3) |
| High-load type | NH15 AN, EM | 78 | 490 | 137 | 226 | 98 | 186 |
| | NH20 AN, EM | 147 | 835 | 186 | 335 | 137 | 245 |
| | NH25 AL, AN, EM | 196 | 1 270 | 206 | 380 | 147 | 284 |
| | NH30 AL, AN | 245 | 1 570 | 216 | 400 | 157 | 294 |
| | NH30 EM | 294 | 1 770 | 265 | 480 | 186 | 355 |
| | NH35 AL, AN, EM | 390 | 2 350 | 305 | 560 | 216 | 390 |
| | NH45 AL, AN, EM | 635 | 3 900 | 400 | 745 | 284 | 540 |
| | NH55 AL, AN, EM | 980 | 5 900 | 490 | 910 | 345 | 645 |
| Super-high-load type | NH65 AN, EM | 1 470 | 8 900 | 580 | 1 070 | 400 | 755 |
| | NH15 BN, GM | 98 | 685 | 196 | 345 | 137 | 284 |
| | NH20 BN, GM | 196 | 1 080 | 265 | 480 | 196 | 355 |
| | NH25 BL, BN, GM | 245 | 1 570 | 294 | 560 | 216 | 400 |
| | NH30 BL, BN, GM | 390 | 2 260 | 360 | 665 | 265 | 480 |
| | NH35 BL, BN, GM | 490 | 2 940 | 430 | 795 | 305 | 570 |
| | NH45 BL, BN, GM | 785 | 4 800 | 520 | 960 | 370 | 695 |
| | NH55 BL, BN, GM | 1 180 | 7 050 | 635 | 1 170 | 440 | 835 |
| | NH65 BN, GM | 1 860 | 11 300 | 805 | 1 480 | 550 | 1 040 |

Note Clearance for Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero.
However, Z0 of PN grade is 0 to 15 μ m.

› Clearance and preload of random-matching type

Table 6

| Model No. | Fine clearance ZT | Slight preload ZZ | Medium preload ZH |
|-----------|-------------------|-------------------|-------------------|
| NH15 | -4 - 15 | -4 - 0 | -7 - -3 |
| NH20 | | -5 - 0 | -8 - -3 |
| NH25 | | -5 - 0 | -9 - -4 |
| NH30 | | -7 - 0 | -12 - -5 |
| NH35 | -5 - 15 | -7 - 0 | -12 - -5 |
| NH45 | | -7 - 0 | -14 - -7 |
| NH55 | | -9 - 0 | -18 - -9 |
| NH65 | | -9 - 0 | -19 - -10 |

Unit : μ m

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 7 Length limitations of rails

| Series | Material | Size | Unit : mm | | | | | | | |
|--------|---------------------------|-------|-----------|-------|-------|-------|-------|-------|-------|--|
| | | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 | |
| NH | Special high carbon steel | 2 980 | 3 960 | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 | 3 900 | |
| | Stainless steel | 1 800 | 3 500 | 3 500 | 3 500 | | | | | |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

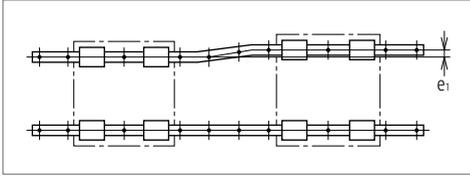


Fig. 7

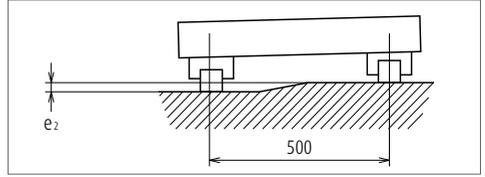


Fig. 8

Table 8

Unit : μm

| Value | Preload | Model No. | | | | | | | |
|---|----------------|---------------------------------|------|------|------|------|------|------|------|
| | | NH15 | NH20 | NH25 | NH30 | NH35 | NH45 | NH55 | NH65 |
| Permissible values of parallelism in two rails e_1 | Z0, ZI | 22 | 30 | 40 | 45 | 55 | 65 | 80 | 110 |
| | Z1, ZZ | 18 | 20 | 25 | 30 | 35 | 45 | 55 | 70 |
| | Z3, ZH | 13 | 15 | 20 | 25 | 30 | 40 | 45 | 60 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZI | 375 $\mu\text{m}/500\text{ mm}$ | | | | | | | |
| | Z1, ZZ, Z3, ZH | 330 $\mu\text{m}/500\text{ mm}$ | | | | | | | |

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum face




Fig. 10 Shoulder for the ball slide datum face

Table 9

Unit : mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| NH15 | 0.5 | 0.5 | 4 | 4 |
| NH20 | 0.5 | 0.5 | 4.5 | 5 |
| NH25 | 0.5 | 0.5 | 5 | 5 |
| NH30 | 0.5 | 0.5 | 6 | 6 |
| NH35 | 0.5 | 0.5 | 6 | 6 |
| NH45 | 0.7 | 0.7 | 8 | 8 |
| NH55 | 0.7 | 0.7 | 10 | 10 |
| NH65 | 1 | 1 | 11 | 11 |

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NH series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed

Unit : m/min

| Series | 15 | 20 | 25 | 30 | 30 | 35 | 45 | 55 |
|--------|-----|----|----|-----|----|----|-----|----|
| NH | 300 | | | 200 | | | 150 | |

A-5-1.1 NH Series

7. Lubrication components

Refer to page A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and Table 11 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

Table 11 Grease fitting and tube fitting Unit : mm

| Model No. | Dust proof specification | Dimension L | | |
|-----------|--------------------------|--------------------------------|--------------|---------|
| | | Grease fitting / Drive-in type | Tube fitting | |
| | | | SF Type | LF Type |
| NH15 | Standard | 5 | - | - |
| | With NSK K1 | 10 | - | - |
| | Double seal | * | - | - |
| | Protector | * | - | - |
| NH20 | Standard | 5 | - | - |
| | With NSK K1 | 12 | - | - |
| | Double seal | 10 | - | - |
| | Protector | 10 | - | - |
| NH25 | Standard | 5 | 5 | 5 |
| | With NSK K1 | 12 | 12 | 12 |
| | Double seal | 10 | 9 | 9 |
| | Protector | 10 | 9 | 9 |
| NH30 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 14 | 12 | 13 |
| | Double seal | 12 | 10 | 11 |
| | Protector | 12 | 10 | 11 |
| NH35 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 14 | 12 | 13 |
| | Double seal | 12 | 10 | 11 |
| | Protector | 12 | 10 | 11 |
| NH45 | Standard | 8 | 13.5 | 17 |
| | With NSK K1 | 18 | 20 | 21.5 |
| | Double seal | 14 | 16 | 17 |
| | Protector | 14 | 13.5 | 17 |
| NH55 | Standard | 8 | 13.5 | 17 |
| | With NSK K1 | 18 | 20 | 21.5 |
| | Double seal | 14 | 16 | 17 |
| | Protector | 14 | 13.5 | 17 |
| NH65 | Standard | 8 | 13.5 | 17 |
| | With NSK K1 | 20 | 22 | 25.5 |
| | Double seal | 16 | 18 | 19 |
| | Protector | 16 | 13.5 | 17 |

*) A connector is required for this model. Please contact NSK for grease fittings..

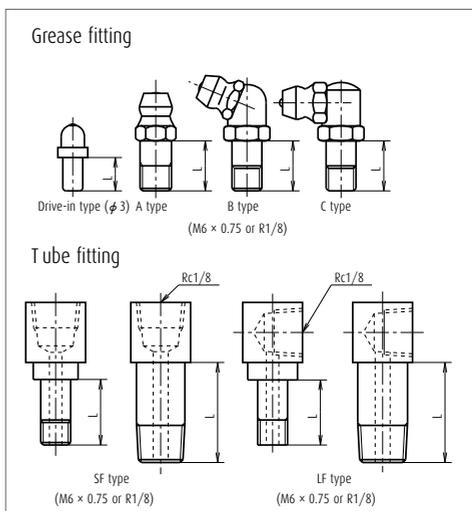


Fig. 11 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. They can be optionally mounted on the side of the end cap. (Fig. 12)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

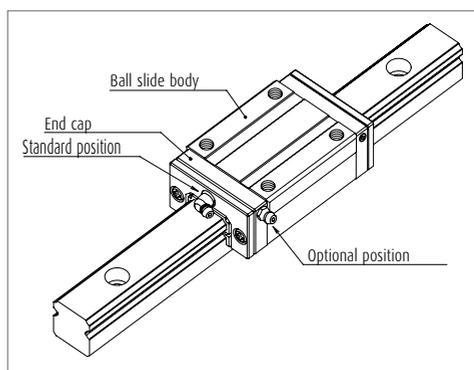


Fig. 12 Mounting position of lubrication accessories

8. Dust proof components

(1) Standard specification

The NH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

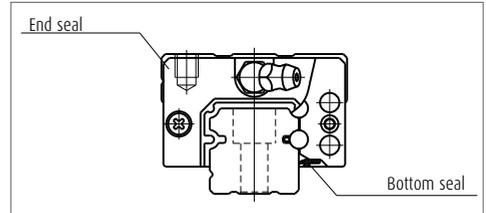


Fig. 13

Table 12 Seal friction per ball slide (maximum value)

Unit : N

| Size \ Series | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 |
|---------------|----|----|----|----|----|----|----|----|
| NH | 8 | 9 | 10 | 10 | 12 | 17 | 22 | 29 |

(2) NSK K1 lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

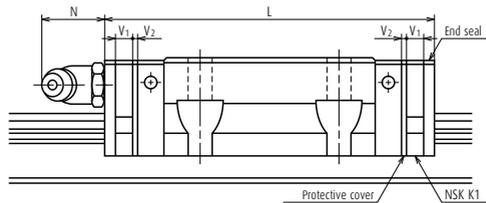


Table 13

Unit : mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V ₁ | Protective cover thickness V ₂ | Protruding area of the grease fitting N |
|-----------|-------------------|------------------|----------------------------|---|-------------------------------------|---|---|
| NH15 | Standard | AN, EM | 55 | 65.6 | 4.5 | 0.8 | (5) |
| | Long | BN, GM | 74 | 84.6 | 4.5 | 0.8 | (5) |
| NH20 | Standard | AN, EM | 69.8 | 80.4 | 4.5 | 0.8 | (14) |
| | Long | BN, GM | 91.8 | 102.4 | 4.5 | 0.8 | (14) |
| NH25 | Standard | AL, AN, EM | 79.0 | 90.6 | 5.0 | 0.8 | (14) |
| | Long | BL, BN, GM | 107 | 118.6 | 5.0 | 0.8 | (14) |
| NH30 | Standard | AL, AN | 85.6 | 97.6 | 5.0 | 1.0 | (14) |
| | Standard | EM | 98.6 | 110.6 | 5.0 | 1.0 | (14) |
| | Long | BL, BN, GM | 124.6 | 136.6 | 5.0 | 1.0 | (14) |
| NH35 | Standard | AL, AN, EM | 109 | 122 | 5.5 | 1.0 | (14) |
| | Long | BL, BN, GM | 143 | 156 | 5.5 | 1.0 | (14) |
| NH45 | Standard | AL, AN, EM | 139 | 154 | 6.5 | 1.0 | (15) |
| | Long | BL, BN, GM | 171 | 186 | 6.5 | 1.0 | (15) |
| NH55 | Standard | AL, AN, EM | 163 | 178 | 6.5 | 1.0 | (15) |
| | Long | BL, BN, GM | 201 | 216 | 6.5 | 1.0 | (15) |
| NH65 | Standard | AN, EM | 193 | 211 | 8.0 | 1.0 | (16) |
| | Long | BN, GM | 253 | 271 | 8.0 | 1.0 | (16) |

Notes 1) NSK K1 for food and medical equipments are available for NH15 to NH35.

2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

A-5-1.1 NH Series

(3) Double seal

Use a double seal set as showing in **Table 14**, when installing an extra seal to completed standard products. (**Fig. 14**)

When installing a grease fitting after the installation of double seals, a connector as showing in **Fig.14** is required.

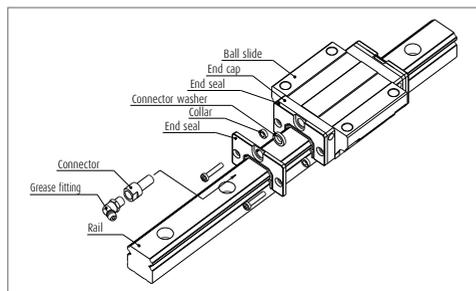


Fig. 14 Double seal

(4) Protector

Use a protector set as showing **Table 14**, when installing a protector to completed standard products. (**Fig.15**)

When installing a grease fitting after the installation of protectors, a connector as showing in **Fig.15** is required.

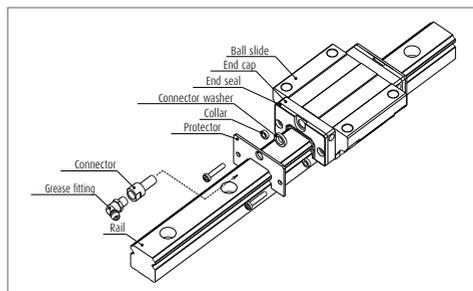


Fig. 15 Protector

Table 14 Double-seal set

| Model No. | Reference No. | | Increased thickness V_3 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| NH15 | LH15WS-01 | * | 2.5 |
| NH20 | LH20WS-01 | LH20WSC-01 | 2.5 |
| NH25 | LH25WS-01 | LH25WSC-01 | 2.8 |
| NH30 | LH30WS-01 | LH30WSC-01 | 3.6 |
| NH35 | LH35WS-01 | LH35WSC-01 | 3.6 |
| NH45 | LH45WS-01 | LH45WSC-01 | 4.3 |
| NH55 | LH55WS-01 | LH55WSC-01 | 4.3 |
| NH65 | LH65WS-01 | LH65WSC-01 | 4.9 |

Table 15 Protector set

| Model No. | Reference No. | | Increased thickness V_4 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| NH15 | LH15PT-01 | * | 2.7 |
| NH20 | LH20PT-01 | LH20PTC-01 | 2.9 |
| NH25 | LH25PT-01 | LH25PTC-01 | 3.2 |
| NH30 | LH30PT-01 | LH30PTC-01 | 4.2 |
| NH35 | LH35PT-01 | LH35PTC-01 | 4.2 |
| NH45 | LH45PT-01 | LH45PTC-01 | 4.9 |
| NH55 | LH55PT-01 | LH55PTC-01 | 4.9 |
| NH65 | LH65PT-01 | LH65PTC-01 | 5.5 |

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

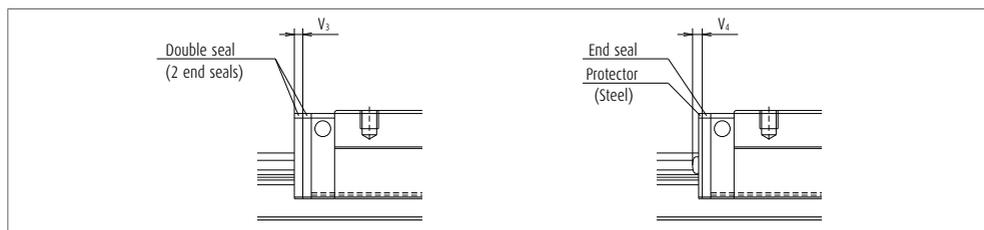


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

| Modell No. | Bolt to secure rail | Cap reference No. | Quantity/case |
|------------|---------------------|-------------------|---------------|
| NH15 | M4 | LG-CAP/M4 | 20 |
| NH20 | M5 | LG-CAP/M5 | 20 |
| NH25 | M6 | LG-CAP/M6 | 20 |
| NH30, NH35 | M8 | LG-CAP/M8 | 20 |
| NH45 | M12 | LG-CAP/M12 | 20 |
| NH55 | M14 | LG-CAP/M14 | 20 |
| NH65 | M16 | LG-CAP/M16 | 20 |

(6) Inner seal

Inner seal is only available for models shown in the table below.

Table 17

| Series | Model No. |
|--------|--|
| NH | NH20, NH25, NH30, NH35, NH45, NH55, NH65 |

(7) Bellows

- › A bellows fastener kit, which includes one of bellows faster, two of M₁ set screws, two of M₂ set screws, and two collars for M₂ set screws as showing **Fig. 7.7** on page A55, is supplied with ellows for the ends.
- › Middle bellows are supplied with four set screws and four collars.
- › Use a bellows fastener kit as showing **Table 18**, when installing bellows to completed standard products.
- › When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use.
- › Please contact NSK for details.
- › Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).
- › For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 18 Bellows fastner kit reference No.

| Modell No. | Kit reference No. |
|------------|-------------------|
| NH20 | LH20FS-01 |
| NH25 | LH25FS-01 |
| NH30 | LH30FS-01 |
| NH35 | LH35FS-01 |
| NH45 | LH45FS-01 |
| NH55 | LH55FS-01 |
| NH65 | LH65FS-01 |

A-5-1.1 NH Series

Dimension tables of bellows NH Series

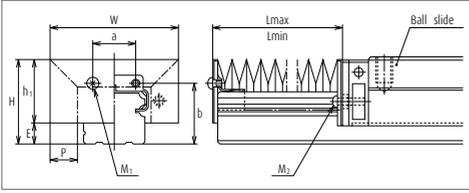


Fig. 17 Dimensions of bellows

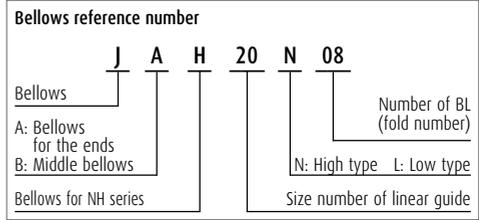


Table 19 Dimensions of bellows

Unit : mm


| Model No. | H | h ₁ | E | W | P | a | b | BL minimum length | M ₁ Tap × depth | M ₂ Tap × depth |
|-----------|------|----------------|-----|-----|----|----|------|-------------------|----------------------------|----------------------------|
| JAH20N | 29.5 | 24.5 | 5 | 48 | 10 | 13 | 22 | 17 | M3 × 5 | M2.5 × 16 |
| JAH25L | 35 | 28 | 7 | 51 | 10 | 16 | 26 | 17 | M3 × 5 | M3 × 18 |
| JAH25N | 39 | 32 | 7 | 61 | 15 | 16 | 26 | 17 | M3 × 5 | M3 × 18 |
| JAH30L | 41 | 32 | 9 | 60 | 12 | 18 | 31 | 17 | M4 × 6 | M4 × 22 |
| JAH30N | 44 | 35 | 9 | 66 | 15 | 18 | 31 | 17 | M4 × 6 | M4 × 22 |
| JAH35L | 47 | 37.5 | 9.5 | 72 | 15 | 24 | 34 | 17 | M4 × 6 | M4 × 23 |
| JAH35N | 54 | 44.5 | 9.5 | 82 | 20 | 24 | 34 | 17 | M4 × 6 | M4 × 23 |
| JAH45L | 59 | 45 | 14 | 83 | 15 | 32 | 44.5 | 17 | M5 × 8 | M5 × 28 |
| JAH45N | 69 | 55 | 14 | 103 | 25 | 32 | 44.5 | 17 | M5 × 8 | M5 × 28 |
| JAH55L | 69 | 54 | 15 | 101 | 20 | 40 | 50.5 | 17 | M5 × 8 | M5 × 30 |
| JAH55N | 79 | 64 | 15 | 121 | 30 | 40 | 50.5 | 17 | M5 × 8 | M5 × 30 |
| JAH65N | 89 | 73 | 16 | 131 | 30 | 48 | 61 | 17 | M6 × 8 | M6 × 35 |

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

| Model No. | Number of BL | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
|-----------|------------------|------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| | | L _{min} | 34 | 68 | 102 | 136 | 170 | 204 | 238 | 272 | 306 |
| JAH20N | Stroke | 106 | 212 | 318 | 424 | 530 | 636 | 742 | 848 | 954 | 1 060 |
| | L _{max} | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1 120 | 1 260 | 1 400 |
| | L _{min} | 106 | 212 | 318 | 424 | 530 | 636 | 742 | 848 | 954 | 1 060 |
| JAH25L | Stroke | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1 120 | 1 260 | 1 400 |
| | L _{max} | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{min} | 134 | 268 | 402 | 536 | 670 | 804 | 938 | 1 072 | 1 206 | 1 340 |
| JAH30L | Stroke | 168 | 336 | 504 | 672 | 840 | 1 008 | 1 176 | 1 344 | 1 512 | 1 680 |
| | L _{max} | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{min} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| JAH35L | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{max} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| | L _{min} | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| JAH45L | Stroke | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| | L _{max} | 176 | 352 | 528 | 704 | 880 | 1 058 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{min} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| JAH45N | Stroke | 316 | 632 | 948 | 1 264 | 1 580 | 1 896 | 2 212 | 2 528 | 2 844 | 3 160 |
| | L _{max} | 350 | 700 | 1 050 | 1 400 | 1 750 | 2 100 | 2 450 | 2 800 | 3 150 | 3 500 |
| | L _{min} | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| JAH55L | Stroke | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| | L _{max} | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| | L _{min} | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |
| JAH65N | Stroke | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| | L _{max} | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.



A-5-1.1 NH Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|--------------------------------|--|
| | NH | 30 | 1200 | AN | C | 2 | -** | P5 | 3 | |
| Series name | | | | | | | | | Preload code (See page A116) | |
| Size | | | | | | | | | 0: Z0, 1: Z1, 3: Z3 | |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 22) | |
| Ball slide shape code (See page A114) | | | | | | | | | Design serial number | |
| Material/surface treatment code (See Table 21) | | | | | | | | | Added to the reference number. | |
| C: Special high carbon steel (NSK standard), K: Stainless steel | | | | | | | | | Number of ball slides per rail | |

(2) Reference number for random-matching type

| | | | | | | | |
|---|------------|-----------|-----------|----------|----------|-----------|---|
| Ball slide | NAH | 30 | AN | S | Z | -K | |
| Random-matching ball slide series code | | | | | | | Option code |
| NAH: NH Series random-matching ball slide | | | | | | | -K: Equipped with NSK K1 |
| Size | | | | | | | -F: Fluoride low temperature chrome plating+AS2 grease |
| Ball slide shape code (See page A114.) | | | | | | | -F50: Fluoride low temperature chrome plating+LG2 grease |
| | | | | | | | Preload code |
| | | | | | | | No code: Fine clearance, Z: Slight preload, H: Medium preload |
| | | | | | | | Material code |
| | | | | | | | No code: Special high carbon steel (NSK standard), S: Stainless steel |

| | | | | | | | | | |
|---|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|
| Rail | N1H | 30 | 1200 | L | C | N | -** | PC | Z |
| Random-matching rail series code | | | | | | | | | Preload code (See page A116.) |
| N1H: NH Series random-matching rail | | | | | | | | | 1: Fine clearance |
| Size | | | | | | | | | Z: Slight preload (common rail for slight or medium preload) |
| Rail length (mm) | | | | | | | | | Accuracy code |
| Rail shape code: L | | | | | | | | | PH: High precision grade random-matching type |
| L: Standard | | | | | | | | | PC: Normal grade random-matching type |
| Material/surface treatment code (See Table 21.) | | | | | | | | | Design serial number |
| | | | | | | | | | Added to the reference number. |
| | | | | | | | | | *Butting rail specification |
| | | | | | | | | | N: Non-butting, L: Butting specification |
| | | | | | | | | | *Please consult with NSK for butting rail specification. |

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T", "slight preload Z" and "medium preload H" are available (refer to page A116).

Table 21 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| K | Stainless steel (NH15 to NH30 only) |
| D | Special high carbon steel with surface treatment |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Note High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 22 Accuracy code


| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|---|------------------------------|-------------|---|
| Ultra precision grade | P3 | K3 | F3 |
| Super precision grade | P4 | K4 | F4 |
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |
| High precision grade (random-matching type) | PH | KH | FH |
| Normal grade (random-matching type) | PC | KC | FC |

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.


A-5-1.1 NH Series

10. Dimensions


NH-AN (High-load type / Standard)
NH-BN (Super-high-load type / Long)

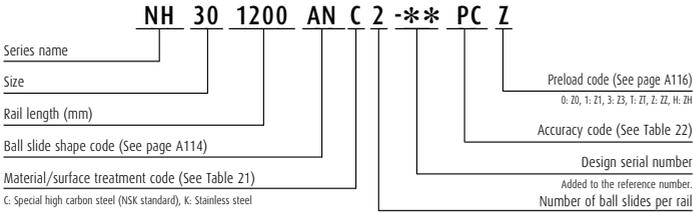


Front view of AN and BN types



Side view of AN type

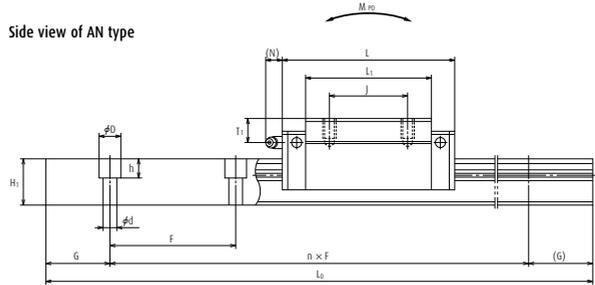

Side view of BN type



| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|---------------|----------------|------|----|----------------|----------------|-----|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | | | |
| NH15AN | 28 | 4.6 | 9.5 | 34 | 55 | 26 | 26 | M4×0.7×6 | 39 | 23.4 | 8 | φ 3 | 8.5 | 3.3 | 15 | 15 | | |
| NH15BN | 28 | 4.6 | 9.5 | 34 | 74 | 26 | 26 | M4×0.7×6 | 58 | 23.4 | 8 | φ 3 | 8.5 | 3.3 | 15 | 15 | | |
| NH20AN | 30 | 5 | 12 | 44 | 69.8 | 32 | 36 | M5×0.8×6 | 50 | 25 | 12 | M6×0.75 | 5 | 11 | 20 | 18 | | |
| NH20BN | 30 | 5 | 12 | 44 | 91.8 | 32 | 50 | M5×0.8×6 | 72 | 25 | 12 | M6×0.75 | 5 | 11 | 20 | 18 | | |
| NH25AN | 40 | 7 | 12.5 | 48 | 79 | 35 | 35 | M6×1×9 | 58 | 33 | 12 | M6×0.75 | 10 | 11 | 23 | 22 | | |
| NH25BN | 40 | 7 | 12.5 | 48 | 107 | 35 | 50 | M6×1×9 | 86 | 33 | 12 | M6×0.75 | 10 | 11 | 23 | 22 | | |
| NH30AN | 45 | 9 | 16 | 60 | 85.6 | 40 | 40 | M8×1.25×10 | 59 | 36 | 14 | M6×0.75 | 10 | 11 | 28 | 26 | | |
| NH30BN | 45 | 9 | 16 | 60 | 124.6 | 40 | 60 | M8×1.25×10 | 98 | 36 | 14 | M6×0.75 | 10 | 11 | 28 | 26 | | |
| NH35AN | 55 | 9.5 | 18 | 70 | 109 | 50 | 50 | M8×1.25×12 | 80 | 45.5 | 15 | M6×0.75 | 15 | 11 | 34 | 29 | | |
| NH35BN | 55 | 9.5 | 18 | 70 | 143 | 50 | 72 | M8×1.25×12 | 114 | 45.5 | 15 | M6×0.75 | 15 | 11 | 34 | 29 | | |
| NH45AN | 70 | 14 | 20.5 | 86 | 139 | 60 | 60 | M10×1.5×17 | 105 | 56 | 17 | Rc1/8 | 20 | 13 | 45 | 38 | | |
| NH45BN | 70 | 14 | 20.5 | 86 | 171 | 60 | 80 | M10×1.5×17 | 137 | 56 | 17 | Rc1/8 | 20 | 13 | 45 | 38 | | |
| NH55AN | 80 | 15 | 23.5 | 100 | 163 | 75 | 75 | M12×1.75×18 | 126 | 65 | 18 | Rc1/8 | 21 | 13 | 53 | 44 | | |
| NH55BN | 80 | 15 | 23.5 | 100 | 201 | 75 | 95 | M12×1.75×18 | 164 | 65 | 18 | Rc1/8 | 21 | 13 | 53 | 44 | | |
| NH65AN | 90 | 16 | 31.5 | 126 | 193 | 76 | 70 | M16×2×20 | 147 | 74 | 23 | Rc1/8 | 19 | 13 | 63 | 53 | | |
| NH65BN | 90 | 16 | 31.5 | 126 | 253 | 76 | 120 | M16×2×20 | 207 | 74 | 23 | Rc1/8 | 19 | 13 | 63 | 53 | | |

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 AN S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114.)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating+AS2 grease

-F5D: Fluoride low temperature chrome plating+LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AN and BN types



AN type



BN type



Reference number for rail of random-matching type

Rail

N1H 30 1200 L C N - PC Z**

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21.)

Preload code (See page A116.)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade, PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

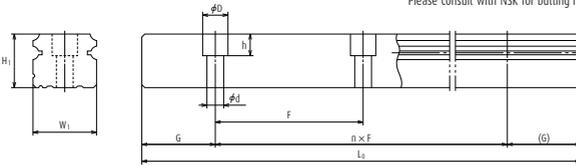

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|---|---------------------|----------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} () for stainless | 2) Dynamic | | Static | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | C ₅₀ (N) | C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 4.5×7.5×5.3 | 20 | 2 980 | 14 200 | 11 300 | 20 700 | 108 | 94.5 | 575 | 79.5 | 480 | 0.18 | 1.6 |
| 60 | 4.5×7.5×5.3 | 20 | (1 800) | 18 100 | 14 400 | 32 000 | 166 | 216 | 1 150 | 181 | 965 | 0.26 | 1.6 |
| 60 | 6×9.5×8.5 | 20 | 3 960 | 23 700 | 18 800 | 32 500 | 219 | 185 | 1 140 | 155 | 955 | 0.33 | 2.6 |
| 60 | 6×9.5×8.5 | 20 | (3 500) | 30 000 | 24 000 | 50 500 | 340 | 420 | 2 230 | 355 | 1 870 | 0.48 | 2.6 |
| 60 | 7×11×9 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320 | 1 840 | 267 | 1 540 | 0.55 | 3.6 |
| 60 | 7×11×9 | 20 | (3 500) | 45 500 | 36 500 | 71 000 | 555 | 725 | 3 700 | 610 | 3 100 | 0.82 | 3.6 |
| 80 | 9×14×12 | 20 | 4 000 | 41 000 | 32 500 | 51 500 | 490 | 350 | 2 290 | 292 | 1 920 | 0.77 | 5.2 |
| 80 | 9×14×12 | 20 | (3 500) | 61 000 | 48 500 | 91 500 | 870 | 1 030 | 5 600 | 865 | 4 700 | 1.3 | 5.2 |
| 80 | 9×14×12 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755 | 4 500 | 630 | 3 800 | 1.5 | 7.2 |
| 80 | 9×14×12 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530 | 8 350 | 1 280 | 7 000 | 2.1 | 7.2 |
| 105 | 14×20×17 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740 | 9 750 | 1 460 | 8 150 | 3.0 | 12.3 |
| 105 | 14×20×17 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000 | 15 600 | 2 520 | 13 100 | 3.9 | 12.3 |
| 120 | 16×23×20 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000 | 16 300 | 2 510 | 13 700 | 4.7 | 16.9 |
| 120 | 16×23×20 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150 | 26 300 | 4 350 | 22 100 | 6.1 | 16.9 |
| 150 | 18×26×22 | 35 | 3 900 | 239 000 | 190 000 | 281 000 | 6 150 | 4 950 | 27 900 | 4 150 | 23 400 | 7.7 | 24.3 |
| 150 | 18×26×22 | 35 | 3 900 | 310 000 | 246 000 | 410 000 | 8 950 | 10 100 | 51 500 | 8 450 | 43 500 | 10.8 | 24.3 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.1 NH Series


NH-AL (High-load type / Standard)
NH-BL (Super-high-load type / Long)

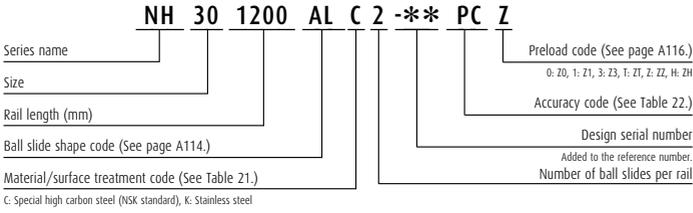


Front view of AL and BL types

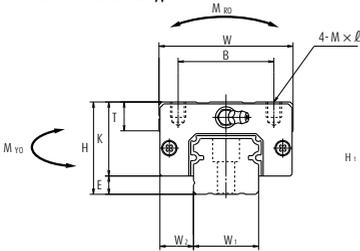

Side view of AL type

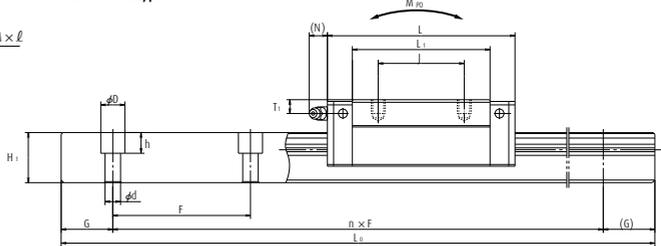

Side view of BL type



| Model No. | Assembly | | | Ball slide | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|----------------|------|----|----------------|----------------|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × l | | | | Hole size | T ₁ | | | | |
| NH25AL | 36 | 7 | 12.5 | 48 | 79 | 35 | 35 | M6×1×6 | 58 | 29 | 12 | M6×0.75 | 6 | 11 | 23 | 22 | |
| NH25BL | 36 | 7 | 12.5 | 48 | 107 | 35 | 50 | M6×1×6 | 86 | 29 | 12 | M6×0.75 | 6 | 11 | 23 | 22 | |
| NH30AL | 42 | 9 | 16 | 60 | 85.6 | 40 | 40 | M8×1.25×8 | 59 | 33 | 14 | M6×0.75 | 7 | 11 | 28 | 26 | |
| NH30BL | 42 | 9 | 16 | 60 | 124.6 | 40 | 60 | M8×1.25×8 | 98 | 33 | 14 | M6×0.75 | 7 | 11 | 28 | 26 | |
| NH35AL | 48 | 9.5 | 18 | 70 | 109 | 50 | 50 | M8×1.25×8 | 80 | 38.5 | 15 | M6×0.75 | 8 | 11 | 34 | 29 | |
| NH35BL | 48 | 9.5 | 18 | 70 | 143 | 50 | 72 | M8×1.25×8 | 114 | 38.5 | 15 | M6×0.75 | 8 | 11 | 34 | 29 | |
| NH45AL | 60 | 14 | 20.5 | 86 | 139 | 60 | 60 | M10×1.5×10 | 105 | 46 | 17 | Rc1/8 | 10 | 13 | 45 | 38 | |
| NH45BL | 60 | 14 | 20.5 | 86 | 171 | 60 | 80 | M10×1.5×10 | 137 | 46 | 17 | Rc1/8 | 10 | 13 | 45 | 38 | |
| NH55AL | 70 | 15 | 23.5 | 100 | 163 | 75 | 75 | M12×1.75×13 | 126 | 55 | 15 | Rc1/8 | 11 | 13 | 53 | 44 | |
| NH55BL | 70 | 15 | 23.5 | 100 | 201 | 75 | 95 | M12×1.75×13 | 164 | 55 | 15 | Rc1/8 | 11 | 13 | 53 | 44 | |

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 AL S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114.)

Option code

-K: Equipped with NSK K1
-F: Fluoride low temperature chrome plating+AG2 grease
-F50: Fluoride low temperature chrome plating+LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AL and BL types



AL type



BL type



Reference number for rail of random-matching type

Rail

N1H 30 1200 L C N - PC Z**

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21.)

Preload code (See page A116.)

I: Fine clearance,
Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade

PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-Butting, L: Butting specification

*Please consult with NSK for butting rail specification.

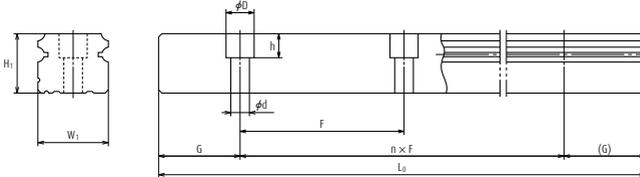

Unit: mm

| Rail | | | Basic load rating | | | | | | | Weight | | | |
|------------|------------------------------------|------------------|---|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} () for stainless | 2) Dynamic | | Static | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320 | 1 840 | 267 | 1 540 | 0.46 | 3.6 |
| 60 | 7×11×9 | 20 | (3 500) | 45 500 | 36 500 | 71 000 | 555 | 725 | 3 700 | 610 | 3 100 | 0.69 | 3.6 |
| 80 | 9×14×12 | 20 | 4 000 | 41 000 | 32 500 | 51 500 | 490 | 350 | 2 290 | 292 | 1 920 | 0.69 | 5.2 |
| 80 | 9×14×12 | 20 | (3 500) | 61 000 | 48 500 | 91 500 | 870 | 1 030 | 5 600 | 865 | 4 700 | 1.16 | 5.2 |
| 80 | 9×14×12 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755 | 4 500 | 630 | 3 800 | 1.2 | 7.2 |
| 80 | 9×14×12 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530 | 8 350 | 1 280 | 7 000 | 1.7 | 7.2 |
| 105 | 14×20×17 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740 | 9 750 | 1 460 | 8 150 | 2.2 | 12.3 |
| 105 | 14×20×17 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000 | 15 600 | 2 520 | 13 100 | 2.9 | 12.3 |
| 120 | 16×23×20 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000 | 16 300 | 2 510 | 13 700 | 3.7 | 16.9 |
| 120 | 16×23×20 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150 | 26 300 | 4 350 | 22 100 | 4.7 | 16.9 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.1 NH Series


NH-EM (High-load type / Standard)
 NH-GM (Super-high-load type / Long)

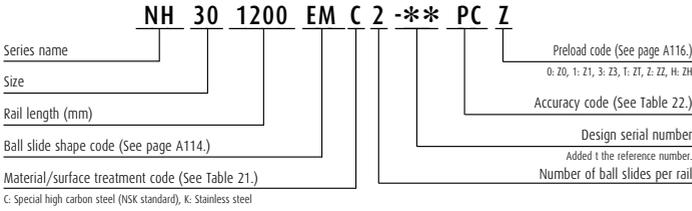


Front view of EM and GM types

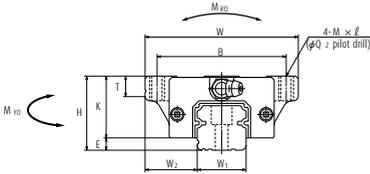

Side view of EM type

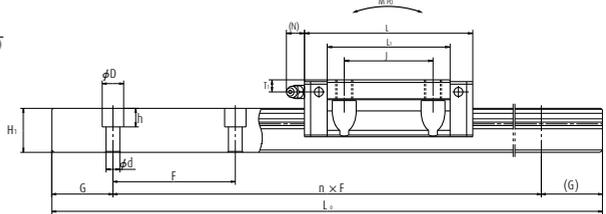

Side view of GM type



| Model No. | Assembly | | | Ball slide | | | | | | | | | | | | | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|----------------|-----------|----------------|----------------|------|---------|----------------|-----|----------------|-------|--------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | Q ₂ | L ₁ | K | T | Grease fitting | | | Width | Height |
| | | | | | | B | J | M × pitch × ℓ | Hole size | | | | | T ₁ | N | W ₁ | | |
| NH15EM | 24 | 4.6 | 16 | 47 | 55 | 38 | 30 | M5×0.8×7 | 4.4 | 39 | 19.4 | 8 | φ 3 | 4.5 | 3.3 | 15 | 15 | |
| NH15GM | 24 | 4.6 | 16 | 47 | 74 | 38 | 30 | M5×0.8×7 | 4.4 | 58 | 19.4 | 8 | φ 3 | 4.5 | 3.3 | 15 | 15 | |
| NH20EM | 30 | 5 | 21.5 | 63 | 69.8 | 53 | 40 | M6×1×9.5 | 5.3 | 50 | 25 | 10 | M6×0.75 | 5 | 11 | 20 | 18 | |
| NH20GM | 30 | 5 | 21.5 | 63 | 91.8 | 53 | 40 | M6×1×9.5 | 5.3 | 72 | 25 | 10 | M6×0.75 | 5 | 11 | 20 | 18 | |
| NH25EM | 36 | 7 | 23.5 | 70 | 79 | 57 | 45 | M8×1.25×10 | 6.8 | 58 | 29 | 11 | M6×0.75 | 6 | 11 | 23 | 22 | |
| NH25GM | 36 | 7 | 23.5 | 70 | 107 | 57 | 45 | (M8×1.25×11.5) | 6.8 | 86 | 29 | (12) | M6×0.75 | 6 | 11 | 23 | 22 | |
| NH30EM | 42 | 9 | 31 | 90 | 98.6 | 72 | 52 | M10×1.5×12 | 8.6 | 72 | 33 | 11 | M6×0.75 | 7 | 11 | 28 | 26 | |
| NH30GM | 42 | 9 | 31 | 90 | 124.6 | 72 | 52 | (M10×1.5×14.5) | 8.6 | 98 | 33 | (15) | M6×0.75 | 7 | 11 | 28 | 26 | |
| NH35EM | 48 | 9.5 | 33 | 100 | 109 | 82 | 62 | M10×1.5×13 | 8.6 | 80 | 38.5 | 12 | M6×0.75 | 8 | 11 | 34 | 29 | |
| NH35GM | 48 | 9.5 | 33 | 100 | 143 | 82 | 62 | M10×1.5×13 | 8.6 | 114 | 38.5 | 12 | M6×0.75 | 8 | 11 | 34 | 29 | |
| NH45EM | 60 | 14 | 37.5 | 120 | 139 | 100 | 80 | M12×1.75×15 | 10.5 | 105 | 46 | 13 | Rc1/8 | 10 | 13 | 45 | 38 | |
| NH45GM | 60 | 14 | 37.5 | 120 | 171 | 100 | 80 | M12×1.75×15 | 10.5 | 137 | 46 | 13 | Rc1/8 | 10 | 13 | 45 | 38 | |
| NH55EM | 70 | 15 | 43.5 | 140 | 163 | 116 | 95 | M14×2×18 | 12.5 | 126 | 55 | 15 | Rc1/8 | 11 | 13 | 53 | 44 | |
| NH55GM | 70 | 15 | 43.5 | 140 | 201 | 116 | 95 | M14×2×18 | 12.5 | 164 | 55 | 15 | Rc1/8 | 11 | 13 | 53 | 44 | |
| NH65EM | 90 | 16 | 53.5 | 170 | 193 | 142 | 110 | M16×2×24 | 14.6 | 147 | 74 | 23 | Rc1/8 | 19 | 13 | 63 | 53 | |
| NH65GM | 90 | 16 | 53.5 | 170 | 253 | 142 | 110 | M16×2×24 | 14.6 | 207 | 74 | 23 | Rc1/8 | 19 | 13 | 63 | 53 | |

Notes

- 1) Parenthesized dimensions are for items made of stainless steel.
- 2) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAH 30 EM S Z -K

Random-matching ball slide series code

NAH: NH Series random-matching ball slide

Size

Ball slide shape code (See page A114.)

Option code

-K: Equipped with NSK K1
-F: Fluoride low temperature chrome plating+AS2 grease
-F50: Fluoride low temperature chrome plating+G2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


EM and GM types



EM type



GM type



Reference number for rail of random-matching type

Rail

Random-matching rail series code

N1H: NH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 21.)

N1H 30 1200 L C N - PC Z**

Preload code (See page A116.)

T: Fine clearance
Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade
PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

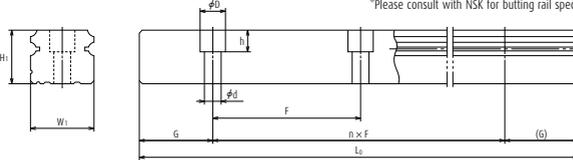

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------|---|-------------------------------|---------------------------------|--------------------------|-----------------|---------------------|------------|-----------------|--------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G | Maximum length L _{0max} () for stainless | 3) Dynamic | | Static C ₀ | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{PO} | | M _{VO} | | | |
| | | | | | | One slide | Two slides | One slide | Two slides | | | | |
| 60 | 4.5×7.5×5.3 | 20 | 2 980 | 14 200 | 11 300 | 20 700 | 108 | 94.5 | 575 | 79.5 | 480 | 0.17 | 1.6 |
| 60 | 4.5×7.5×5.3 | 20 | (1 800) | 18 100 | 14 400 | 32 000 | 166 | 216.0 | 1 150 | 181.0 | 965 | 0.25 | 1.6 |
| 60 | 6×9.5×8.5 | 20 | 3 960 | 23 700 | 18 800 | 32 500 | 219 | 185.0 | 1 140 | 155.0 | 955 | 0.45 | 2.6 |
| 60 | 6×9.5×8.5 | 20 | (3 500) | 30 000 | 24 000 | 50 500 | 340 | 420.0 | 2 230 | 355.0 | 1 870 | 0.65 | 2.6 |
| 60 | 7×11×9 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320.0 | 1 840 | 267.0 | 1 540 | 0.63 | 3.6 |
| 60 | 7×11×9 | 20 | (3 500) | 45 500 | 36 500 | 71 000 | 555 | 725.0 | 3 700 | 610.0 | 3 100 | 0.93 | 3.6 |
| 80 | 9×14×12 | 20 | 4 000 | 47 000 | 37 500 | 63 000 | 600 | 505.0 | 3 150 | 425.0 | 2 650 | 1.2 | 5.2 |
| 80 | 9×14×12 | 20 | (3 500) | 61 000 | 48 500 | 91 500 | 870 | 1 030.0 | 5 600 | 865.0 | 4 700 | 1.6 | 5.2 |
| 80 | 9×14×12 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755.0 | 4 500 | 630.0 | 3 800 | 1.7 | 7.2 |
| 80 | 9×14×12 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530.0 | 8 350 | 1 280.0 | 7 000 | 2.4 | 7.2 |
| 105 | 14×20×17 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740.0 | 9 750 | 1 460.0 | 8 150 | 3 | 12.3 |
| 105 | 14×20×17 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000.0 | 15 600 | 2 520.0 | 13 100 | 3.9 | 12.3 |
| 120 | 16×23×20 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000.0 | 16 300 | 2 510.0 | 13 700 | 5 | 16.9 |
| 120 | 16×23×20 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150.0 | 26 300 | 4 350.0 | 22 100 | 6.5 | 16.9 |
| 150 | 18×26×22 | 35 | 3 900 | 239 000 | 190 000 | 281 000 | 6 150 | 4 950.0 | 27 900 | 4 150.0 | 23 400 | 10 | 24.3 |
| 150 | 18×26×22 | 35 | 3 900 | 310 000 | 246 000 | 410 000 | 8 950 | 10 100.0 | 51 500 | 8 450.0 | 43 500 | 14.1 | 24.3 |


3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

4) High-precision grade and medium preload of random-matching type are available for high-carbon steel products.

A-5-1.2 VH Series

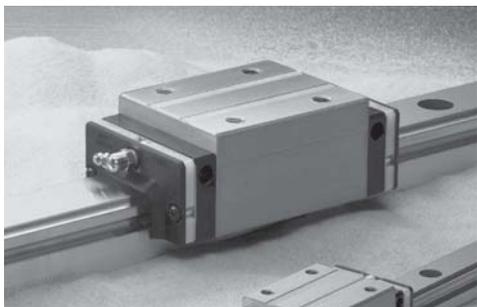

1. Features

(1) High-performance end seals

High-performance end seals with a multi-lip structure prevent the entry of various foreign matters.

(2) NSK K1 lubrication unit (standard)

Outstanding lubrication support of NSK K1 further improves sealing capability and durability. Additional NSK K1 units can be mounted for specific usage conditions and environments.

(3) Tapped holes on a rail bottom surface (optional)

In addition to standard mounting bolt holes (counterbores on a rail top surface), a specification for tapped holes on the rail bottom surface for enhanced sealing capability is available for the VH Series. (Refer to the dimension table.)

(4) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, reducing moment rigidity.

This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, thus increasing load carrying capacity as well as rigidity in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in **Fig. 2**. The vertical load is generally carried by the top rows, at where balls are contacting at two points. Because of this design, the bottom rows will carry load when a large impact load is applied vertically as shown in **Fig. 3**. This assures high resistance to the impact load.

(7) High accuracy

As showing in **Fig. 4**, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Random matching type

Random-matching of rails and ball slides are available.

(9) Improve rating life dramatically

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased. As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice^{*1)}.

*1) Representative values of series.

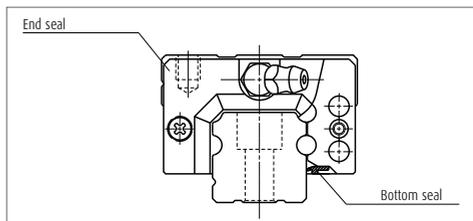


Fig. 1 VH Series

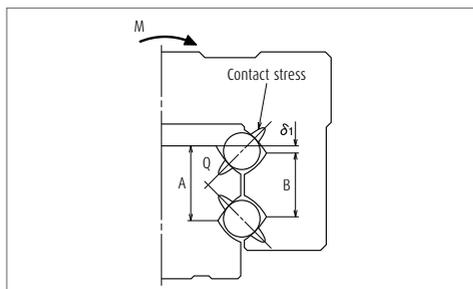


Fig. 2 Enlarged illustration of the offset Gothic arch groove

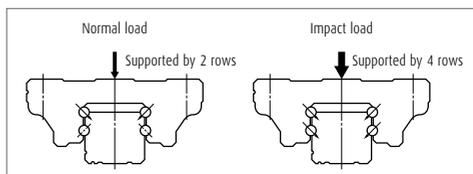


Fig. 3 When load is applied

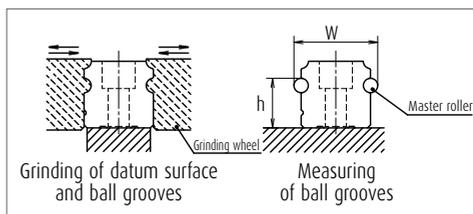


Fig. 4 Rail grinding and measuring

> Comparison with NSK standard products

Less than 1/10 the level of fine contaminants

Results of dust-proof tests reveal that the entry of fine contaminants is reduced to less than one-tenth of existing standard series due to improvements in sealing capability.

Test sample : VH30AN
 Speed : 16.7 mm/sec
 Contaminant : Graphite powder
 (average grain size: 0.037 mm) + Grease

Operating life under contaminated environments is more than 5 times longer

Durability test with rubber fragments

Extreme durability tests under contaminated environments using rubber fragments show that durability of the VH Series extended more than five times longer than the existing standard series, as shown in the graph.





Test sample : VH30AN, preload code Z1
 (preload of 245 N)
 Rail orientation : Horizontal (wall mount)
 Speed : 500 mm/sec
 Lubrication : AS2 grease
 (prepacked AS2 only)
 Contaminant : Rubber fragments

Durability test with fine wood particles


Extreme durability tests in a contaminated environment with fine wood particles show that durability of the VH Series is more than doubled compared to the standard series, as shown in the graph.

Test sample : VH30AN
 (preload of 3 200 N)
 Rail orientation : Horizontal (wall mount)
 Speed : 400 mm/sec

Lubrication : AS2 grease
 (prepacked AS2 only)
 Contaminant : Fine wood particles

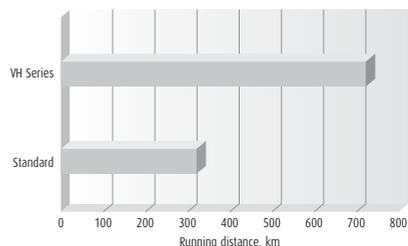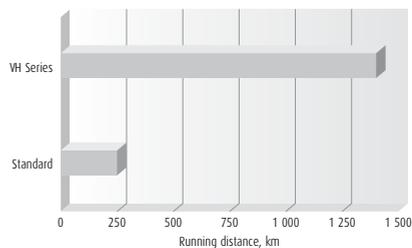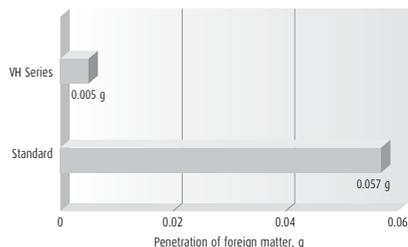

Before the passage of ball slide
 (Heavily contaminated with wood particle)



After the passage of ball slide
 (All contaminant particles are swept away)

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

A-5-1.2 VH Series

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | |
|------------------|---------------------------|--|----------------------|
| | | High-load type | Super-high-load type |
| | | Standard | Long |
| AN BN | | AN | BN |
| AL BL | | AL | BL |
| EM GM | | EM | GM |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly (not random matching) | | | | | Random-matching type |
|------------------|---------------|--|--------------------|-------------------|--------------------|-----------------|----------------------|
| | | Ultra precision K3 | Super precision K4 | High precision K5 | Precision grade K6 | Normal grade KN | Normal grade KC |
| over | or less | | | | | | |
| | – 50 | 2 | 2 | 2 | 4.5 | 6 | 6 |
| | 50 – 80 | 2 | 2 | 3 | 5 | 6 | 6 |
| | 80 – 125 | 2 | 2 | 3.5 | 5.5 | 6.5 | 6.5 |
| | 125 – 200 | 2 | 2 | 4 | 6 | 7 | 7 |
| | 200 – 250 | 2 | 2.5 | 5 | 7 | 8 | 8 |
| | 250 – 315 | 2 | 2.5 | 5 | 8 | 9 | 9 |
| | 315 – 400 | 2 | 3 | 6 | 9 | 11 | 11 |
| | 400 – 500 | 2 | 3 | 6 | 10 | 12 | 12 |
| | 500 – 630 | 2 | 3.5 | 7 | 12 | 14 | 14 |
| | 630 – 800 | 2 | 4.5 | 8 | 14 | 16 | 16 |
| | 800 – 1000 | 2.5 | 5 | 9 | 16 | 18 | 18 |
| | 1 000 – 1 250 | 3 | 6 | 10 | 17 | 20 | 20 |
| | 1 250 – 1 600 | 4 | 7 | 11 | 19 | 23 | 23 |
| | 1 600 – 2 000 | 4.5 | 8 | 13 | 21 | 26 | 26 |
| | 2 000 – 2 500 | 5 | 10 | 15 | 22 | 29 | 29 |
| | 2 500 – 3 150 | 6 | 11 | 17 | 25 | 32 | 32 |
| | 3 150 – 4 000 | 9 | 16 | 23 | 30 | 34 | 34 |

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision K3, Super precision K4, High precision K5, Precision K6, and Normal KN grades, while the random-matching type has Normal KC grade only.

> Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Ultra precision K3 | Super precision K4 | High precision K5 | Precision grade K6 | Normal grade KN |
|--|----------------|-------------------------------------|--------------------|-------------------|--------------------|-----------------|
| Mounting height H | | ± 10 | ± 10 | ± 20 | ± 40 | ± 80 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 15 | ± 25 | ± 50 | ± 100 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 3 | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1, Fig. 5 and Fig. 6 | | | | |

> Tolerance of random-matching type; Normal grade, KC

Table 3

Unit: μm

| Characteristics | Model No. | VH15, 20, 25, 30, 35 | VH45, 55 |
|--|-----------|--------------------------------|--|
| Mounting height H | | ± 20 | ± 30 |
| Variation of mounting height H | | 15 ① 30 ② | 20 ⁽¹⁾ 30 ⁽²⁾ |
| Mounting width W_2 or W_3 | | ± 30 | ± 35 |
| Variation of mounting width W_2 or W_3 | | 25 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | See Table 1, Fig. 5 and Fig. 6 | |

Notes ① Variation on the same rail ② Variation on multiple rails

A-5-1.2 VH Series

(3) Combinations of accuracy and preload

Table 4

| | | Accuracy grade | | | | | |
|------------------------------|---|-----------------|-----------------|----------------|-----------------|--------------|--------------|
| | | Ultra precision | Super precision | High precision | Precision grade | Normal grade | Normal grade |
| With NSK K1 lubrication unit | | K3 | K4 | K5 | K6 | KN | KC |
| Preload | Fine clearance Z0 | ○ | ○ | ○ | ○ | ○ | — |
| | Slight preload Z1 | ○ | ○ | ○ | ○ | ○ | — |
| | Medium preload Z3 | ○ | ○ | ○ | ○ | — | — |
| | Random-matching type with fine clearance ZT | — | — | — | — | — | ○ |
| | Random-matching type with slight preload ZZ | — | — | — | — | — | ○ |

(4) Assembled accuracy

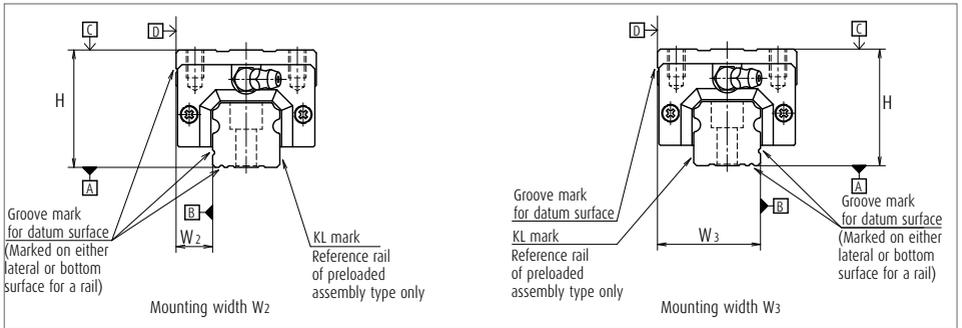


Fig. 5 Special high carbon steel

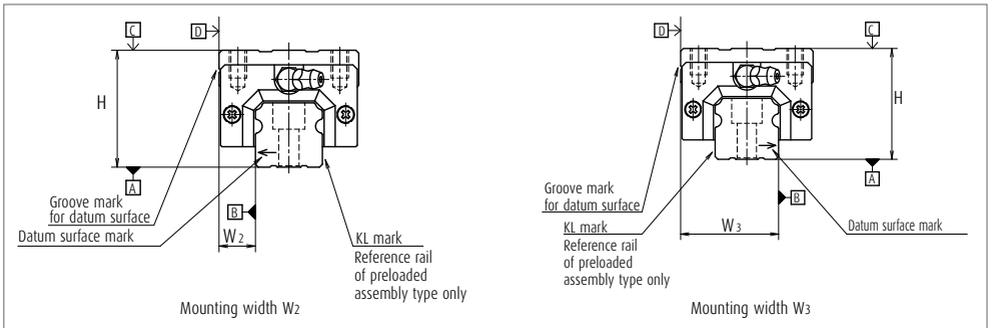


Fig. 6 Stainless steel

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Fine clearance Z1 and Slight preload ZZ.

› Preload and rigidity of preloaded assembly

Table 5

| Model No. | | Preload (N) | | Rigidity (N/μm) | | | |
|------------------|-----------------|-------------------|-------------------|--------------------|-------------------|-------------------|-------------------|
| | | | | Vertical direction | | Lateral direction | |
| | | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 |
| High-load type | VH15 AN, EM | 78 | 490 | 137 | 226 | 98 | 186 |
| | VH20 AN, EM | 147 | 835 | 186 | 335 | 137 | 245 |
| | VH25 AN, AL, EM | 196 | 1 270 | 206 | 380 | 147 | 284 |
| | VH30 AN, AL | 245 | 1 570 | 216 | 400 | 157 | 294 |
| | VH30 EM | 294 | 1 770 | 265 | 480 | 186 | 355 |
| | VH35 AN, AL, EM | 390 | 2 350 | 305 | 560 | 216 | 390 |
| | VH45 AN, AL, EM | 635 | 3 900 | 400 | 745 | 284 | 540 |
| | VH55 AN, AL, EM | 980 | 5 900 | 490 | 910 | 345 | 645 |
| Medium-load type | VH15 BN, GM | 98 | 685 | 196 | 345 | 137 | 284 |
| | VH20 BN, GM | 196 | 1 080 | 265 | 480 | 196 | 355 |
| | VH25 BN, BL, GM | 245 | 1 570 | 294 | 560 | 216 | 400 |
| | VH30 BN, BL, GM | 390 | 2 260 | 360 | 665 | 265 | 480 |
| | VH35 BN, BL, GM | 490 | 2 940 | 430 | 795 | 305 | 570 |
| | VH45 BN, BL, GM | 785 | 4 800 | 520 | 960 | 370 | 695 |
| | VH55 BN, BL, GM | 1 180 | 7 050 | 635 | 1 170 | 440 | 835 |

Note Clearance for Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15 μm.

› Preload of random-matching type

Table 6

Unit: μm

| Model No. | Fine clearance Z1 | Slight preload ZZ |
|-----------|-------------------|-------------------|
| VH15 | -4 - 15 | -4 - 0 |
| VH20 | | -5 - 0 |
| VH25 | | -5 - 0 |
| VH30 | | -7 - 0 |
| VH35 | | -7 - 0 |
| VH45 | | -7 - 0 |
| VH55 | | -9 - 0 |

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit: mm

| Series | Size | 15 | 20 | 25 | 30 | 35 | 45 | 55 |
|--------|---------------------------|-------|-------|-------|-------|-------|-------|-------|
| | Material | | | | | | | |
| VH | Special high carbon steel | 2 000 | 3 960 | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 |
| | Stainless steel | 1 800 | 3 500 | 3 500 | 3 500 | | | |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-1.2 VH Series

5. Installation

(1) Permissible values of mounting error

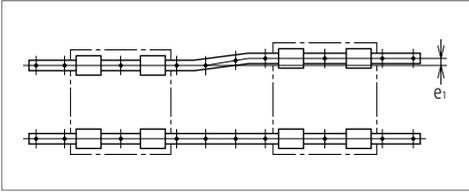


Fig. 7

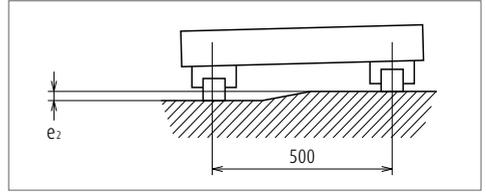


Fig. 8

Table 8

Unit: μm

| Value | Preload | Model No. | | | | | | |
|---|------------|---------------------------------|------|------|------|------|------|------|
| | | VH15 | VH20 | VH25 | VH30 | VH35 | VH45 | VH55 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 22 | 30 | 40 | 45 | 55 | 65 | 80 |
| | Z1, ZZ | 18 | 20 | 25 | 30 | 35 | 45 | 55 |
| | Z3 | 13 | 15 | 20 | 25 | 30 | 40 | 45 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 375 $\mu\text{m}/500\text{ mm}$ | | | | | | |
| | Z1, ZZ, Z3 | 330 $\mu\text{m}/500\text{ mm}$ | | | | | | |

(2) Shoulder height of the mounting surface and corner radius r




Fig. 9 Shoulder for the rail datum surface




Fig. 10 Shoulder for the ball slide datum surface

Table 9

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| VH15 | 0.5 | 0.5 | 4 | 4 |
| VH20 | 0.5 | 0.5 | 4.5 | 5 |
| VH25 | 0.5 | 0.5 | 5 | 5 |
| VH30 | 0.5 | 0.5 | 6 | 6 |
| VH35 | 0.5 | 0.5 | 6 | 6 |
| VH45 | 0.7 | 0.7 | 8 | 8 |
| VH55 | 0.7 | 0.7 | 10 | 10 |

(3) Specification for tapped holes on a rail bottom surface

- > Special high carbon steel is available for this specification.
- > Applicable accuracy grades are precision grade (K6) and normal grades (KN and KC) only.
- > The minimum rail length for production is 400 mm.
- > The tapping pitch is the same as the pitch for regular mounting bolt holes. Please refer to the dimension table.

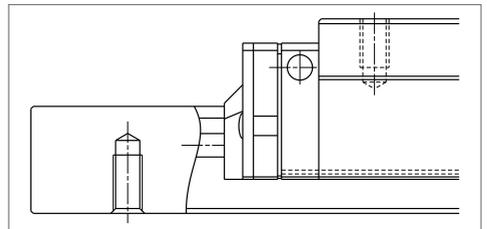


Fig. 11

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Table 10 and **Fig. 12** show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

Table 10

Unit : mm

| Model No. | Dust proof specification | Dimension L | | |
|-----------|--------------------------|--------------------------------|--------------|---------|
| | | Grease fitting / Drive-in type | Tube fitting | |
| | | | SF Type | LF Type |
| VH15 | Standard* | 10 | - | - |
| | Double seal | ** | - | - |
| | Protector | ** | - | - |
| VH20 | Standard* | 12 | - | - |
| | Double seal | 18 | - | - |
| | Protector | 18 | - | - |
| VH25 | Standard* | 12 | 15 | 16 |
| | Double seal | 18 | 23 | 24.5*** |
| | Protector | 18 | 17 | 18 |
| VH30 | Standard* | 14 | 18 | 17.5 |
| | Double seal | 22 | 25 | 24.5 |
| | Protector | 22 | 19.5 | 19 |
| VH35 | Standard* | 14 | 15 | 15 |
| | Double seal | 22 | 25 | 24.5 |
| | Protector | 22 | 21.5 | 22 |
| VH45 | Standard* | 18 | 22 | 21.5 |
| | Double seal | 22 | 32 | 32 |
| | Protector | 28 | 28 | 30 |
| VH55 | Standard* | 18 | 20 | 20 |
| | Double seal | 22 | 32 | 32 |
| | Protector | 28 | 28 | 30 |

*) NSK K1 units are mounted as a standard specification for VH series.

**) A connector is required for grease fitting. Please contact NSK.

***) Only available for AN and BN type ball slides.

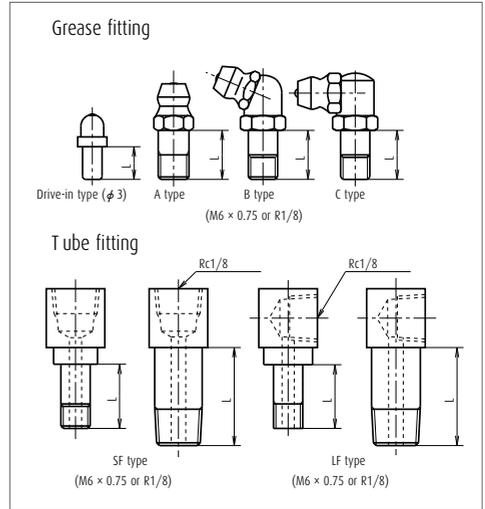


Fig. 12 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap as an option.

(**Fig. 13**)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

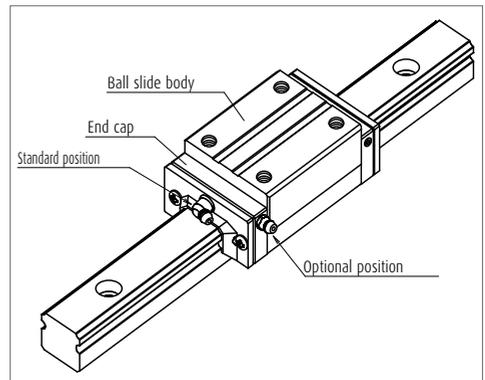


Fig. 13 Mounting position of lubrication accessories

A-5-1.2 VH Series

7. Dust proof components

(1) Standard specification

To keep foreign matters from entering inside the ball slide, VH Series has an end seal on both ends, and bottom seals at the bottom.

Two NSK K1, one at each end, are installed as the standard equipment.

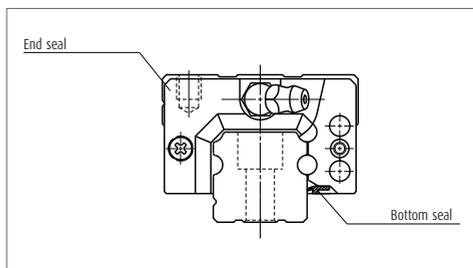


Fig. 14

Table 11 Seal friction per ball slide (maximum value)

Unit: N

| Size \ Series | 15 | 20 | 25 | 30 | 35 | 45 | 55 |
|---------------|----|----|----|----|----|----|----|
| VH | 11 | 13 | 14 | 17 | 23 | 33 | 44 |

(2) Double seal and protector

For VH Series, double-seal and protector can be installed only before shipping from the factory. Please consult NSK when you require them.

Table 12 shows the ball slide length when a double seal set and a protector are installed.

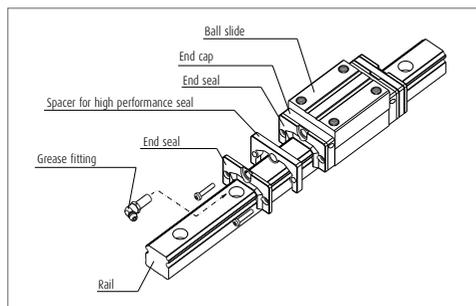


Fig. 15 Double seal

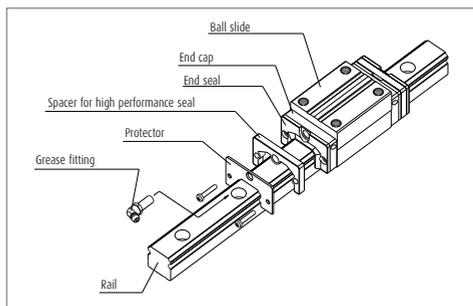


Fig. 16 Protector

Table 12

Unit: mm

| Model No. | Ball slide length | Ball slide model | Ball slide length L | | |
|-----------|-------------------|------------------|---------------------|--------------------------|------------------------|
| | | | Standard | Double seal installation | Protector installation |
| VH15 | Standard type | AN, EM | 70.6 | 81.6 | 77 |
| | Long type | BN, GM | 89.6 | 100.6 | 96 |
| VH20 | Standard type | AN, EM | 87.4 | 100.4 | 94.2 |
| | Long type | BN, GM | 109.4 | 122.4 | 116.2 |
| VH25 | Standard type | AN, AL, EM | 97 | 110 | 104.4 |
| | Long type | BN, BL, GM | 125 | 138 | 132.4 |
| VH30 | Standard type | AN, AL | 104.4 | 120.4 | 114.8 |
| | | EM | 117.4 | 133.4 | 127.8 |
| | Long type | BN, BL, GM | 143.4 | 159.4 | 153.8 |
| VH35 | Standard type | AN, AL, EM | 128.8 | 144.8 | 139.2 |
| | Long type | BN, BL, GM | 162.8 | 178.8 | 173.2 |
| VH45 | Standard type | AN, AL, EM | 161.4 | 180.4 | 174.2 |
| | Long type | BN, BL, GM | 193.4 | 212.4 | 206.2 |
| VH55 | Standard type | AN, AL, EM | 185.4 | 204.4 | 198.2 |
| | Long type | BN, BL, GM | 223.4 | 242.4 | 236.2 |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover, $V_2 \times 2$)

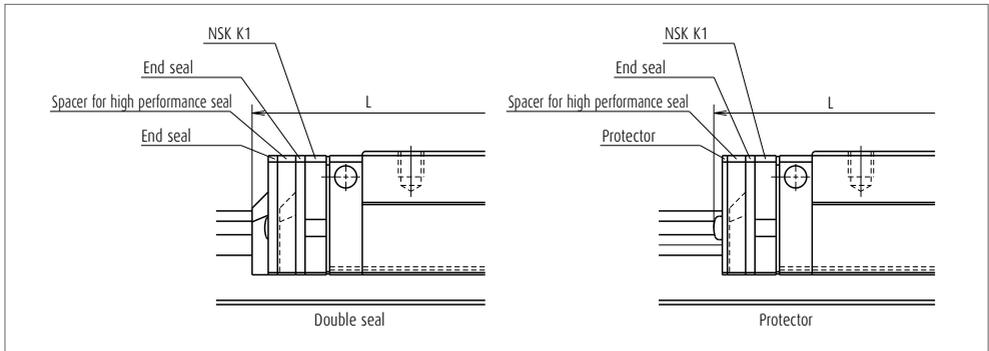


Fig. 17

(3) Cap to plug the rail mounting bolt hole

Table 13 Cap to plug the rail bolt hole

| Model No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| VH15 | M4 | LG-CAP/M4 | 20 |
| VH20 | M5 | LG-CAP/M5 | 20 |
| VH25 | M6 | LG-CAP/M6 | 20 |
| VH30, VH35 | M8 | LG-CAP/M8 | 20 |
| VH45 | M12 | LG-CAP/M12 | 20 |
| VH55 | M14 | LG-CAP/M14 | 20 |

(4) Inner seal

The availability of inner seal is limited to the models shown below.

Table 14

| Series | Model No. |
|--------|------------------------------|
| VH | VH20, VH25, VH30, VH45, VH55 |


A-5-1.2 VH Series

8. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

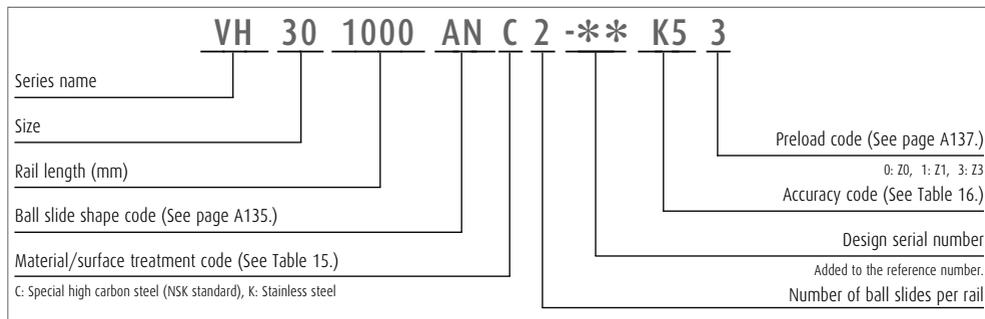

(2) Reference number for random-matching type

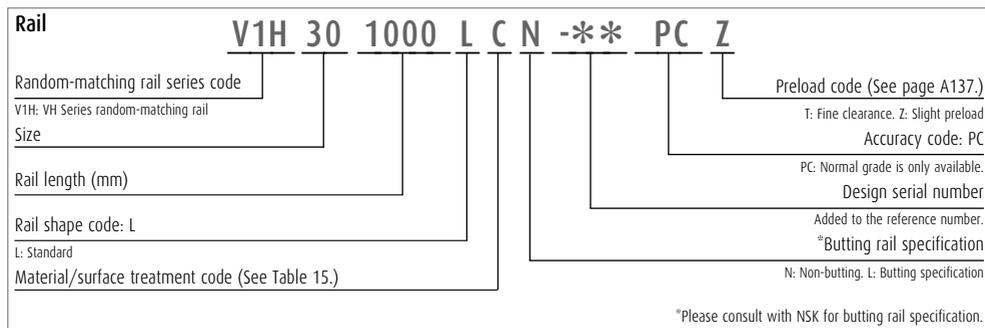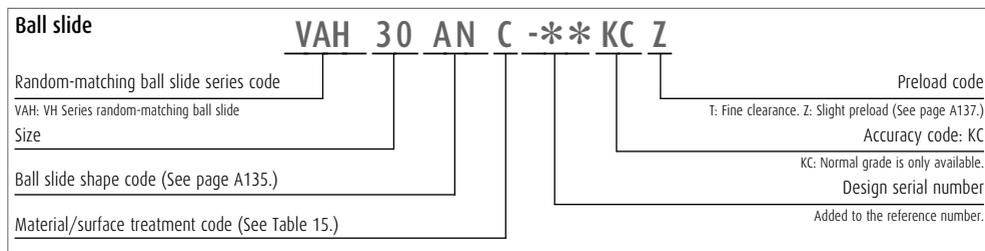

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, the preload code of "fine clearance T" and "slight preload Z" is only applicable (refer to page A137).

Table 15 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) + counterbores on a rail top surface |
| K | Stainless steel + counterbores on a rail top surface |
| D | Special high carbon steel with surface treatment + counterbores on a rail top surface |
| H | Stainless steel with surface treatment + counterbores on a rail top surface |
| V | Special high carbon steel (NSK standard) + tapped holes on a rail bottom surface |
| W | Special high carbon steel with surface treatment + tapped holes on a rail bottom surface |
| Z | Other, special |

Table 16 Accuracy code


| Accuracy | Standard (with NSK K1) |
|-------------------------------------|------------------------|
| Ultra precision grade | K3 |
| Super precision grade | K4 |
| High precision grade | K5 |
| Precision grade | K6 |
| Normal grade | KN |
| Normal grade (random-matching type) | KC |

Note Refer to page A38 for NSK K1 lubrication unit.


A-5-1.2 VH Series

9. Dimensions


VH-AN (High-load type / Standard)
 VH-BN (Super-high-load type / Long)

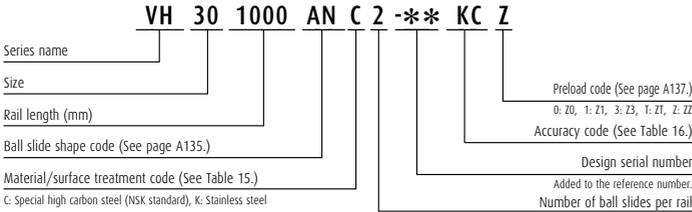


Front view of AN and BN type




Specification for tapped holes on a rail bottom face



Side view of AN type

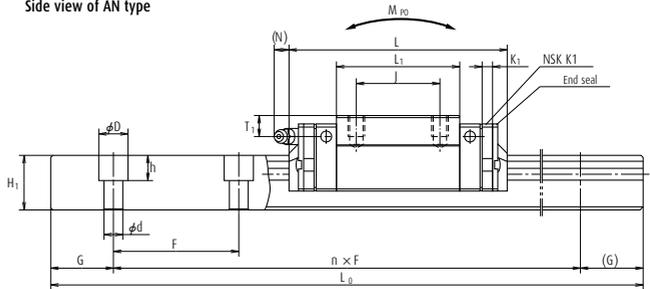

Side view of BN type

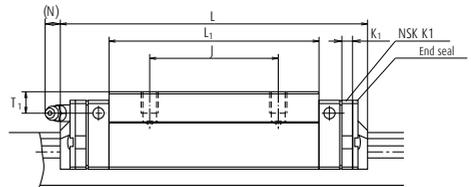

| Model No. | Assembly | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|-------|-------------------|---------------|----|---------------|----------------|------|----|----------------|----------------|-------|-----------------|----------------|----|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | K ₁ | Grease fitting | | | | |
| | | | | | | B | J | M × pitch × ℓ | | | | | Hole size | | | T ₁ | N |
| VH15AN | 28 | 4.6 | 9.5 | 34 | 70.6 (< 77) | 26 | 26 | M4×0.7×6 | 39 | 23.4 | 8 | 4.5 | φ 3 | 8.5 | 1 (< 8.2) | 15 | 15 |
| VH15BN | 28 | 4.6 | 9.5 | 34 | 89.6 (< 96) | 26 | 26 | M4×0.7×6 | 58 | 23.4 | 8 | 4.5 | φ 3 | 8.5 | 1 (< 8.2) | 15 | 15 |
| VH20AN | 30 | 5 | 12 | 44 | 87.4 (< 94.2) | 32 | 36 | M5×0.8×6 | 50 | 25 | 12 | 4.5 | M6×0.75 | 5 | 11.1 (< 12.3) | 20 | 18 |
| VH20BN | 30 | 5 | 12 | 44 | 109.4 (< 116.2) | 32 | 50 | M5×0.8×6 | 72 | 25 | 12 | 4.5 | M6×0.75 | 5 | 11.1 (< 12.3) | 20 | 18 |
| VH25AN | 40 | 7 | 12.5 | 48 | 97 (< 104.4) | 35 | 35 | M6×1×9 | 58 | 33 | 12 | 5 | M6×0.75 | 10 | 9.6 (< 12.9) | 23 | 22 |
| VH25BN | 40 | 7 | 12.5 | 48 | 125 (< 132.4) | 35 | 50 | M6×1×9 | 86 | 33 | 12 | 5 | M6×0.75 | 10 | 9.6 (< 12.9) | 23 | 22 |
| VH30AN | 45 | 9 | 16 | 60 | 104.4 (< 114.8) | 40 | 40 | M8×1.25×10 | 59 | 36 | 14 | 5 | M6×0.75 | 10 | 11.4 (< 14.2) | 28 | 26 |
| VH30BN | 45 | 9 | 16 | 60 | 143.4 (< 153.8) | 40 | 60 | M8×1.25×10 | 98 | 36 | 14 | 5 | M6×0.75 | 10 | 11.4 (< 14.2) | 28 | 26 |
| VH35AN | 55 | 9.5 | 18 | 70 | 128.8 (< 139.2) | 50 | 50 | M8×1.25×12 | 80 | 45.5 | 15 | 5.5 | M6×0.75 | 15 | 10.9 (< 13.7) | 34 | 29 |
| VH35BN | 55 | 9.5 | 18 | 70 | 162.8 (< 173.2) | 50 | 72 | M8×1.25×12 | 114 | 45.5 | 15 | 5.5 | M6×0.75 | 15 | 10.9 (< 13.7) | 34 | 29 |
| VH45AN | 70 | 14 | 20.5 | 86 | 161.4 (< 174.2) | 60 | 60 | M10×1.5×17 | 105 | 56 | 17 | 6.5 | Rc1/8 | 20 | 12.5 (< 14.1) | 45 | 38 |
| VH45BN | 70 | 14 | 20.5 | 86 | 193.4 (< 206.2) | 60 | 80 | M10×1.5×17 | 137 | 56 | 17 | 6.5 | Rc1/8 | 20 | 12.5 (< 14.1) | 45 | 38 |
| VH55AN | 80 | 15 | 23.5 | 100 | 185.4 (< 198.2) | 75 | 75 | M12×1.75×18 | 126 | 65 | 18 | 6.5 | Rc1/8 | 21 | 12.5 (< 14.1) | 53 | 44 |
| VH55BN | 80 | 15 | 23.5 | 100 | 223.4 (< 236.2) | 75 | 95 | M12×1.75×18 | 164 | 65 | 18 | 6.5 | Rc1/8 | 21 | 12.5 (< 14.1) | 53 | 44 |

- Notes**
- Figure inside (<) is the dimension when equipped with the protector.
 - VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 AN C -** KC Z

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135.)

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


AN and BN types



AN type



BN type

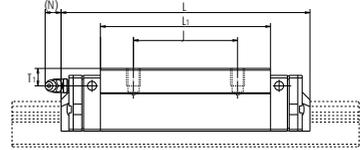

Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N -** PC Z

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

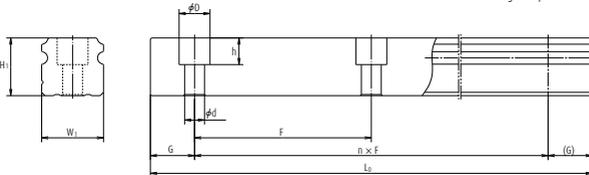

Unit: mm

| Rail | | | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|--|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|-----------------|------------|--------|-----------------------|----------------|--|
| Pitch F | Mounting bolt hole d × D × h | Tapped hole M ₂ × pitch × ℓ ₂ | G (reference) | Maximum length L _{omax} for stainless () | 4) Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) | |
| | | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | One slide | | Two slides | | | | |
| | | | | | | | M _{P0} | M _{P0} | M _{Y0} | M _{Y0} | | | | | |
| 60 | 4.5×7.5×5.3 | M5×0.8×8 | 20 | 2 000 | 14 200 | 11 300 | 20 700 | 108 | 94.5 | 575 | 79.5 | 480 | 0.18 | 1.6 | |
| 60 | 4.5×7.5×5.3 | M5×0.8×8 | 20 | [1 800] | 18 100 | 14 400 | 32 000 | 166 | 216 | 1 150 | 181 | 965 | 0.26 | 1.6 | |
| 60 | 6×9.5×8.5 | M6×1×10 | 20 | 3 960 | 23 700 | 18 800 | 32 500 | 219 | 185 | 1 140 | 155 | 955 | 0.33 | 2.6 | |
| 60 | 6×9.5×8.5 | M6×1×10 | 20 | [3 500] | 30 000 | 24 000 | 50 500 | 340 | 420 | 2 230 | 355 | 1 870 | 0.48 | 2.6 | |
| 60 | 7×11×9 | M6×1×12 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320 | 1 840 | 267 | 1 540 | 0.55 | 3.6 | |
| 60 | 7×11×9 | M6×1×12 | 20 | [3 500] | 45 500 | 36 500 | 71 000 | 555 | 725 | 3 700 | 610 | 3 100 | 0.82 | 3.6 | |
| 80 | 9×14×12 | M8×1.25×15 | 20 | 4 000 | 41 000 | 32 500 | 51 500 | 490 | 350 | 2 290 | 292 | 1 920 | 0.77 | 5.2 | |
| 80 | 9×14×12 | M8×1.25×15 | 20 | [3 500] | 61 000 | 48 500 | 91 500 | 870 | 1 030 | 5 600 | 865 | 4 700 | 1.3 | 5.2 | |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755 | 4 500 | 630 | 3 800 | 1.5 | 7.2 | |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530 | 8 350 | 1 280 | 7 000 | 2.1 | 7.2 | |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740 | 9 750 | 1 460 | 8 150 | 3.0 | 12.3 | |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000 | 15 600 | 2 520 | 13 100 | 3.9 | 12.3 | |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000 | 16 300 | 2 510 | 13 700 | 4.7 | 16.9 | |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150 | 26 300 | 4 350 | 22 100 | 6.1 | 16.9 | |


4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


The basic static load rating shows static permissible load.

A-5-1.2 VH Series


VH-AL (High-load type / Standard)
 VH-BL (Super-high-load type / Long)

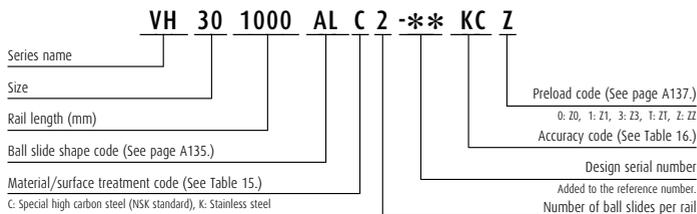


Front view of AL and BL type




Side view of AL type

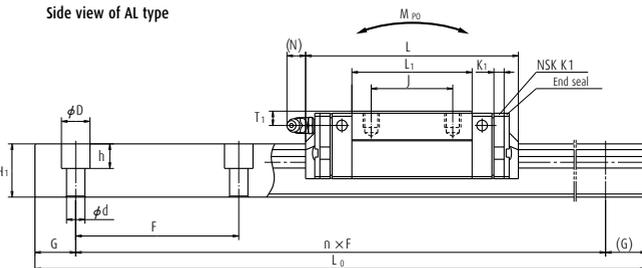

Specification for tapped holes on a rail bottom face



Side view of BL type

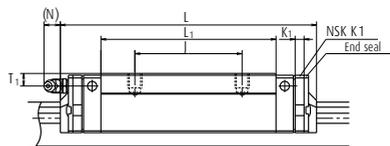

| Model No. | Assembly | | Ball slide | | | | | | | | | | | Width | Height | | | |
|-----------|----------|-----|------------|--------|---------------|----------------|----|----------------|-----|------|----------------|----------------|---------|-------|-------------|----------------|----------------|---|
| | Height | E | Width | Length | Mounting hole | | | L ₁ | K | T | K ₁ | Grease fitting | | | | W ₁ | H ₁ | |
| | | | | | H | W ₂ | W | | | | | L | B | | | | | J |
| VH25AL | 36 | 7 | 12.5 | 48 | 97 (104.4) | 35 | 35 | M6×1×6 | 58 | 29 | 12 | 5 | M6×0.75 | 6 | 9.6 (12.9) | 23 | 22 | |
| VH25BL | 36 | 7 | 12.5 | 48 | 125 (132.4) | 35 | 50 | M6×1×6 | 86 | 29 | 12 | 5 | M6×0.75 | 6 | 9.6 (12.9) | 23 | 22 | |
| VH30AL | 42 | 9 | 16 | 60 | 104.4 (114.8) | 40 | 40 | M8×1.25×8 | 59 | 33 | 14 | 5 | M6×0.75 | 7 | 11.4 (14.2) | 28 | 26 | |
| VH30BL | 42 | 9 | 16 | 60 | 143.4 (153.8) | 40 | 60 | M8×1.25×8 | 98 | 33 | 14 | 5 | M6×0.75 | 7 | 11.4 (14.2) | 28 | 26 | |
| VH35AL | 48 | 9.5 | 18 | 70 | 128.8 (139.2) | 50 | 50 | M8×1.25×8 | 80 | 38.5 | 15 | 5.5 | M6×0.75 | 8 | 10.9 (13.7) | 34 | 29 | |
| VH35BL | 48 | 9.5 | 18 | 70 | 162.8 (173.2) | 50 | 72 | M8×1.25×8 | 114 | 38.5 | 15 | 5.5 | M6×0.75 | 8 | 10.9 (13.7) | 34 | 29 | |
| VH45AL | 60 | 14 | 20.5 | 86 | 161.4 (174.2) | 60 | 60 | M10×1.5×10 | 105 | 46 | 17 | 6.5 | Rc1/8 | 10 | 12.5 (14.1) | 45 | 38 | |
| VH45BL | 60 | 14 | 20.5 | 86 | 193.4 (206.2) | 60 | 80 | M10×1.5×10 | 137 | 46 | 17 | 6.5 | Rc1/8 | 10 | 12.5 (14.1) | 45 | 38 | |
| VH55AL | 70 | 15 | 23.5 | 100 | 185.4 (198.2) | 75 | 75 | M12×1.75×13 | 126 | 55 | 18 | 6.5 | Rc1/8 | 11 | 12.5 (14.1) | 53 | 44 | |
| VH55BL | 70 | 15 | 23.5 | 100 | 223.4 (236.2) | 75 | 95 | M12×1.75×13 | 164 | 55 | 18 | 6.5 | Rc1/8 | 11 | 12.5 (14.1) | 53 | 44 | |

- Notes**
- 1) Figure inside () is the dimension when equipped with the protector.
 - 2) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 3) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 AL C - KC Z**

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135.)

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


AL and BL types



AL type



BL type

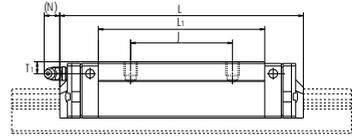

Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N - PC Z**

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

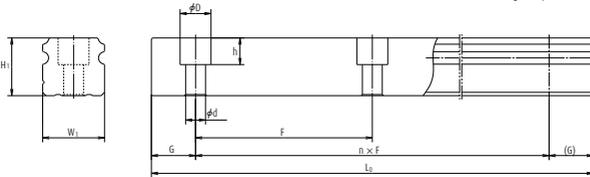

Unit: mm

| Rail | | | Basic load rating | | | | | | | | Weight | | | |
|------------|---------------------------------|--|-------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|--------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | Tapped hole M ₂ × pitch × L ₂ | G (reference) | Maximum length L _{0max} () for stainless | 4) Dynamic | | Static C ₀ (N) | M _{ro} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | M6×1×12 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320 | 1 840 | 267 | 1 540 | 0.46 | 3.6 |
| 60 | 7×11×9 | M6×1×12 | 20 | [3 500] | 45 500 | 36 500 | 71 000 | 555 | 725 | 3 700 | 610 | 3 100 | 0.69 | 3.6 |
| 80 | 9×14×12 | M8×1.25×15 | 20 | 4 000 | 41 000 | 32 500 | 51 500 | 490 | 350 | 2 290 | 292 | 1 920 | 0.69 | 5.2 |
| 80 | 9×14×12 | M8×1.25×15 | 20 | [3 500] | 61 000 | 48 500 | 91 500 | 870 | 1 030 | 5 600 | 865 | 4 700 | 1.16 | 5.2 |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755 | 4 500 | 630 | 3 800 | 1.2 | 7.2 |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530 | 8 350 | 1 280 | 7 000 | 1.7 | 7.2 |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740 | 9 750 | 1 460 | 8 150 | 2.2 | 12.3 |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000 | 15 600 | 2 520 | 13 100 | 2.9 | 12.3 |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000 | 16 300 | 2 510 | 13 700 | 3.7 | 16.9 |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150 | 26 300 | 4 350 | 22 100 | 4.7 | 16.9 |


4) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


The basic static load rating shows static permissible load.

A-5-1.2 VH Series


VH-EM (High-load type / Standard)
 VH-GM (Super-high-load type / Long)

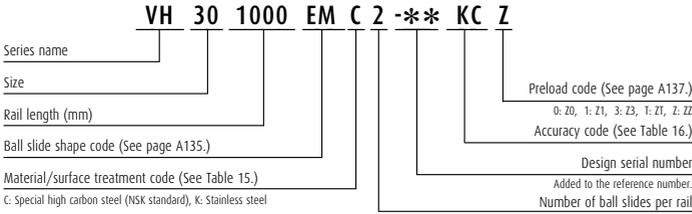


Front view of EM and GM type




Side view of EM type

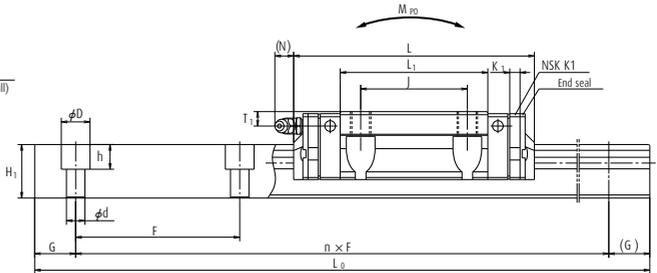

Specification for tapped holes on a rail bottom face



Side view of GM type

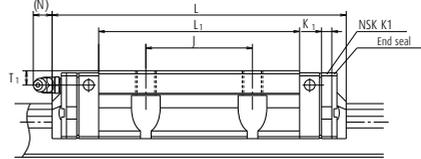

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | | | | Width | Height |
|-----------|----------|-----|----------------|------------|-------------------|---------------|----|----------------|----------------|----------------|------|------|----------------|-----------|----------------|-----------------|----------------|-------|--------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | Grease fitting | | | | | | W ₁ | H ₁ | | |
| | | | | | | B | J | M × pitch × l | Q ₂ | L ₁ | K | T | K ₁ | Hole size | T ₁ | | | | |
| VH15EM | 24 | 4.6 | 16 | 47 | 70.6 (< 77) | 38 | 30 | M5×0.8×7 | 4.4 | 39 | 19.4 | 8 | 4.5 | φ 3 | 4.5 | 1 (< 8.2) | 15 | 15 | |
| VH15GM | 24 | 4.6 | 16 | 47 | 89.6 (< 96) | 38 | 30 | M5×0.8×7 | 4.4 | 58 | 19.4 | 8 | 4.5 | φ 3 | 4.5 | 1 (< 8.2) | 15 | 15 | |
| VH20EM | 30 | 5 | 21.5 | 63 | 87.4 (< 94.2) | 53 | 40 | M6×1×9.5 | 5.3 | 50 | 25 | 10 | 4.5 | M6×0.75 | 5 | 11.1 (< 12.3) | 20 | 18 | |
| VH20GM | 30 | 5 | 21.5 | 63 | 109.4 (< 116.2) | 53 | 40 | M6×1×9.5 | 5.3 | 72 | 25 | 10 | 4.5 | M6×0.75 | 5 | 11.1 (< 12.3) | 20 | 18 | |
| VH25AN | 36 | 7 | 23.5 | 70 | 97 (< 104.4) | 57 | 45 | M8×1.25×10 | 6.8 | 58 | 29 | 11 | 5 | M6×0.75 | 6 | 9.6 (< 12.9) | 23 | 22 | |
| VH25GM | 36 | 7 | 23.5 | 70 | 125 (< 132.4) | 57 | 45 | [M8×1.25×11.5] | 6.8 | 86 | 29 | [12] | 5 | M6×0.75 | 6 | 9.6 (< 12.9) | 23 | 22 | |
| VH30EM | 42 | 9 | 31 | 90 | 117.4 (< 127.8) | 72 | 52 | M10×1.5×12 | 8.6 | 72 | 33 | 11 | 5 | M6×0.75 | 7 | 11.4 (< 14.2) | 28 | 26 | |
| VH30GM | 42 | 9 | 31 | 90 | 143.4 (< 153.8) | 72 | 52 | [M10×1.5×14.5] | 8.6 | 98 | 33 | [15] | 5 | M6×0.75 | 7 | 11.4 (< 14.2) | 28 | 26 | |
| VH35EM | 48 | 9.5 | 33 | 100 | 128.8 (< 139.2) | 82 | 62 | M10×1.5×13 | 8.6 | 80 | 38.5 | 12 | 5.5 | M6×0.75 | 8 | 10.9 (< 13.7) | 34 | 29 | |
| VH35GM | 48 | 9.5 | 33 | 100 | 162.8 (< 173.2) | 82 | 62 | M10×1.5×13 | 8.6 | 114 | 38.5 | 12 | 5.5 | M6×0.75 | 8 | 10.9 (< 13.7) | 34 | 29 | |
| VH45EM | 60 | 14 | 37.5 | 120 | 161.4 (< 174.2) | 100 | 80 | M12×1.75×15 | 10.5 | 105 | 46 | 13 | 6.5 | M6×0.75 | 10 | 12.5 (< 14.1) | 45 | 38 | |
| VH45GM | 60 | 14 | 37.5 | 120 | 193.4 (< 206.2) | 100 | 80 | M12×1.75×15 | 10.5 | 137 | 46 | 13 | 6.5 | Rc1/8 | 10 | 12.5 (< 14.1) | 45 | 38 | |
| VH55EM | 70 | 15 | 43.5 | 140 | 185.4 (< 198.2) | 116 | 95 | M14×2×18 | 12.5 | 126 | 55 | 15 | 6.5 | Rc1/8 | 11 | 12.5 (< 14.1) | 53 | 44 | |
| VH55GM | 70 | 15 | 43.5 | 140 | 223.4 (< 236.2) | 116 | 95 | M14×2×18 | 12.5 | 164 | 55 | 15 | 6.5 | Rc1/8 | 11 | 12.5 (< 14.1) | 53 | 44 | |

Notes

- 1) Figure inside (<) is the dimension when equipped with the protector.
- 2) Figure inside [] is applied to stainless products.
- 3) VH Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
- 4) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

VAH 30 EM C - KC Z**

Random-matching ball slide series code

VAH: VH Series random-matching ball slide

Size

Ball slide shape code (See page A135.)

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload


Accuracy code: KC

KC: Normal grade is only available.


Design serial number

Added to the reference number.


EM and GM types



EM type



GM type



Reference number for rail of random-matching type

Rail

V1H 30 1000 L C N - PC Z**

Random-matching rail series code

V1H: VH Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 15.)

Preload code (See page A137.)

T: Fine clearance. Z: Slight preload

Accuracy code: PC

PC: Normal grade is only available.


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

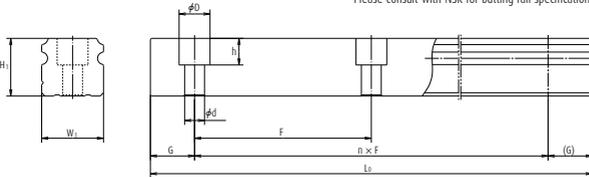

Unit: mm

| Rail | | | Basic load rating | | | | | | | | Weight | | | |
|------------|------------------------------------|--|-------------------|---|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | Tapped hole M ₂ × pitch × l ₂ | G | Maximum length L _{0max} () for stainless | ⁵⁾ Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 4.5×7.5×5.3 | M5×0.8×8 | 20 | 2 000 | 14 200 | 11 300 | 20 700 | 108 | 94.5 | 575 | 79.5 | 480 | 0.17 | 1.6 |
| 60 | 4.5×7.5×5.3 | M5×0.8×8 | 20 | [1 800] | 18 100 | 14 400 | 32 000 | 166 | 216 | 1 150 | 181 | 965 | 0.25 | 1.6 |
| 60 | 6×9.5×8.5 | M6×1×10 | 20 | 3 960 | 23 700 | 18 800 | 32 500 | 219 | 185 | 1 140 | 155 | 955 | 0.45 | 2.6 |
| 60 | 6×9.5×8.5 | M6×1×10 | 20 | [3 500] | 30 000 | 24 000 | 50 500 | 340 | 420 | 2 230 | 355 | 1 870 | 0.65 | 2.6 |
| 60 | 7×11×9 | M6×1×12 | 20 | 3 960 | 33 500 | 26 800 | 46 000 | 360 | 320 | 1 840 | 267 | 1 540 | 0.63 | 3.6 |
| 60 | 7×11×9 | M6×1×12 | 20 | [3 500] | 45 500 | 36 500 | 71 000 | 555 | 725 | 3 700 | 610 | 3 100 | 0.93 | 3.6 |
| 80 | 9×14×12 | M8×1.25×15 | 20 | 4 000 | 47 000 | 37 500 | 63 000 | 600 | 505 | 3 150 | 425 | 2 650 | 1.2 | 5.2 |
| 80 | 9×14×12 | M8×1.25×15 | 20 | [3 500] | 61 000 | 48 500 | 91 500 | 870 | 1 030 | 5 600 | 865 | 4 700 | 1.6 | 5.2 |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 62 500 | 49 500 | 80 500 | 950 | 755 | 4 500 | 630 | 3 800 | 1.7 | 7.2 |
| 80 | 9×14×12 | M8×1.25×17 | 20 | 4 000 | 81 000 | 64 500 | 117 000 | 1 380 | 1 530 | 8 350 | 1 280 | 7 000 | 2.4 | 7.2 |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 107 000 | 84 500 | 140 000 | 2 140 | 1 740 | 9 750 | 1 460 | 8 150 | 3.0 | 12.3 |
| 105 | 14×20×17 | M12×1.75×24 | 22.5 | 3 990 | 131 000 | 104 000 | 187 000 | 2 860 | 3 000 | 15 600 | 2 520 | 13 100 | 3.9 | 12.3 |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 158 000 | 125 000 | 198 000 | 3 600 | 3 000 | 16 300 | 2 510 | 13 700 | 5.0 | 16.9 |
| 120 | 16×23×20 | M14×2×24 | 30 | 3 960 | 193 000 | 153 000 | 264 000 | 4 850 | 5 150 | 26 300 | 4 350 | 22 100 | 6.5 | 16.9 |

5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

A-5-1.3 TS Series





1. Features

(1) Inexpensive

Newly developed manufacturing process of rail and design of ball slide contribute to substantial cost reductions.

2. Ball slide shape
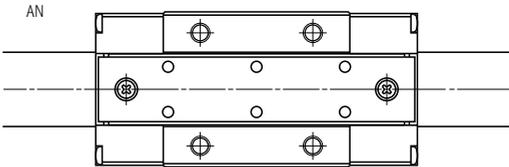
| Ball slide Model | Shape / installation method | Type |
|------------------|---|---|
| AN |  | AN  |

3. Accuracy and preload

- > Accuracy grade: Normal grade for transportation
- > Tolerance of mounting height H: ± 0.1 mm
- > Running parallelism: 100 μ m or less
- > Running parallelism (height): 500 μ m/500 mm
- > Permissible values of mounting error parallelism in two rails: 100 μ m, parallelism (height) in two rails: 500 μ m/500 mm
- > Clearance: 60 μ m or less

4. Maximum rail length

Table 1 shows the limitations of rail length.

Table 1

| Series | Size | | 15 | 20 | 25 | 30* | 35* |
|--------|---------------------------|------|------|------|------|------|------|
| | Size | Size | | | | | |
| TS | Special high carbon steel | | 1960 | 2920 | 4000 | 4040 | 4040 |

Unit : mm

Note Rails can be butted if user requirement exceeds the rail length shown in the table. In such a case, please consult NSK.

* The maximum length of a rail coated with fluoride low temperature chrome plate is 4 000 mm (G = 80).

(2) High capacity

Optimum ball diameter for higher capacity design.

(3) High dust proof capability

Dust-tight high performance end seals, bottom seals, and inner seals are built-in as a standard feature. (Optional protector is available for protection against hot debris such as welding spatters or hard contaminants.)

(4) Maintenance free

NSK K1 lubrication unit is equipped as a standard specification for long-term maintenance-free operation.

(5) Rust prevention

NSK provides a lineup of products with antirust surface treatment for corrosive environments.

(6) Fast delivery

Lineup of random-matching rails and ball slide supports and facilitates fast delivery.

5. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 1 and Table 2 show grease fittings and tube fittings.

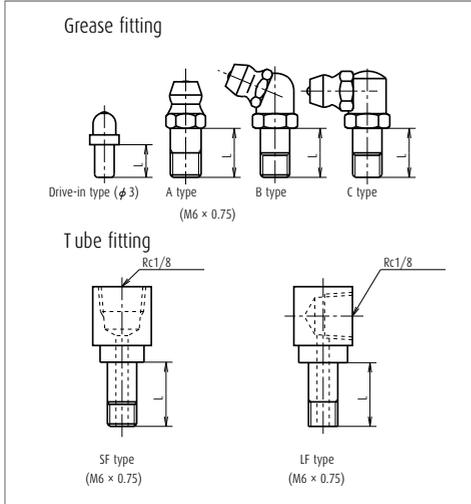


Fig. 1 Grease fitting and tube fitting

Table 2

Unit : mm

| Model No. | Dust -proof specification | Dimension L | | |
|-----------|---------------------------|--------------------------------|---------|---------|
| | | Grease fitting / Drive-in type | SF Type | LF Type |
| TS15 | Standard* | 5 | - | - |
| | Protector | 5 | - | - |
| TS20 | Standard* | 5 | - | - |
| | Protector | 5 | - | - |
| TS25 | Standard* | 5 | 6 | 6 |
| | Protector | 5 | 6 | 6 |
| TS30 | Standard* | 5 | 6 | 6 |
| | Protector | 5 | 6 | 6 |
| TS35 | Standard* | 5 | 6 | 6 |
| | Protector | 5 | 6 | 6 |

*) NSK K1 units are mounted as a standard specification for TS Series.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. You may mount them on the side of end cap as an option. (Fig. 2)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector for the connection to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

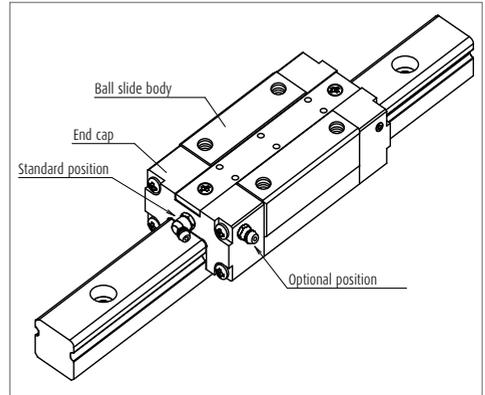


Fig. 2

6. Dust-proof components

(1) Standard specification

To keep contaminants from entering inside the ball slide, the TS Series has an end seal and NSK K1 on both ends, and bottom seals at the bottom. Also, the inner seal is a standard equipment. The series can be readily used in a normal environment.

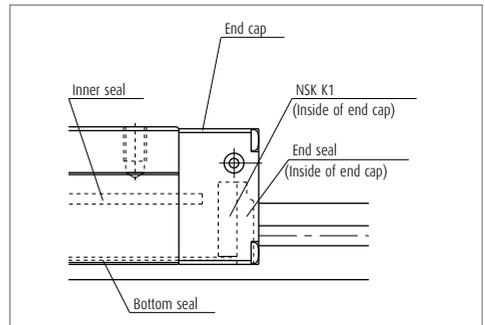


Fig. 3

A-5-1.3 TS Series

(2) Protector

Please consult NSK as the protector for TS Series can be installed only before shipping from the factory.

Fig. 4 and Table 3 show the ball slide length when protector is installed.

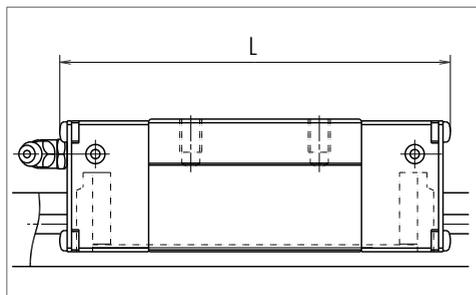


Fig. 4

Table 3 Dimension when equipped with the protector

| Model No. | Ball Slight length L | |
|-----------|----------------------|-------------------------|
| | Standard length | Protector installation* |
| TS15 | 72.2 | 77.6 |
| TS20 | 87 | 92.8 |
| TS25 | 100 | 106.4 |
| TS30 | 115 | 123.4 |
| TS35 | 135.8 | 144.2 |

*) The table shows the ball slide length when one protector is installed in both ends.

(3) Cap to plug the rail mounting bolt hole

Table 4 Caps to plug rail bolt hole

| Model No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| TS15 | M4 | LG-CAP/M4 | 20 |
| TS20 | M5 | LG-CAP/M5 | 20 |
| TS25 | M6 | LG-CAP/M6 | 20 |
| TS30, TS35 | M8 | LG-CAP/M8 | 20 |

Note Cap to plug the bolt hole for rail mounting is exclusive for rail design of type 1.

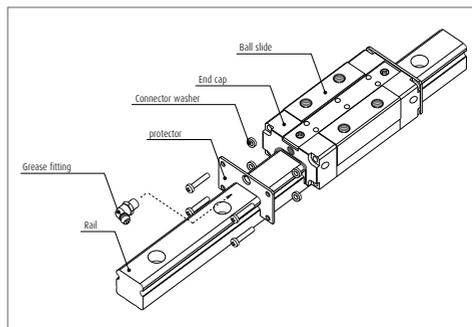


Fig. 5 Protector

7. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for assembly of random-matching ball slide and rail

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|-------------------------------------|--|
| | TS | 30 | 2400 | AN | P | 2 | -** | KL | S | |
| Series name | | | | | | | | | Preload code: S | |
| Size | | | | | | | | | S: Clearance of 60 µm or less | |
| Rail length (mm) | | | | | | | | | Accuracy code: KL | |
| Ball slide shape code (See page A151.) | | | | | | | | | KL: Normal grade is only available. | |
| Surface treatment/Rail design code | | | | | | | | | Design serial number | |
| | | | | | | | | | Added to the reference number. | |
| | | | | | | | | | Number of ball slides per rail | |
| <p>P: No surface treatment/Counterbores on a rail top surface (Type I) V: No surface treatment/Tapped holes on a rail bottom surface (Type II) R: With surface treatment/Counterbores on a rail top surface (Type I) W: With surface treatment/Tapped holes on a rail bottom surface (Type II)</p> | | | | | | | | | | |


(2) Reference number for random-matching type

| | | | | | |
|---|------------|-----------|-----------|-----------|--|
| Ball slide | TAS | 30 | AN | -F | |
| Random-matching ball slide series code | | | | | Option code |
| TAS: TS Series random-matching ball slide | | | | | No code: No surface treatment + AS2 grease |
| Size | | | | | -F: Fluoride low temperature chrome plating + AS2 grease |
| Ball slide shape code (See page A151.) | | | | | -F50: Fluoride low temperature chrome plating + LG2 grease |


| | | | | | | | | | | |
|--|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|--|
| Rail | T1S | 30 | 2400 | L | P | N | -** | PL | S | |
| Random-matching rail series code | | | | | | | | | Preload code: S | |
| T1S: TS Series random-matching rail | | | | | | | | | S: Clearance of 60 µm or less | |
| Size | | | | | | | | | Accuracy code: PL | |
| Rail length (mm) | | | | | | | | | PL: Normal grade is only available. | |
| Rail shape code: L | | | | | | | | | Design serial number | |
| L: Standard | | | | | | | | | Added to the reference number. | |
| Surface treatment/rail design code (See above.) | | | | | | | | | *Butting rail specification | |
| | | | | | | | | | N: Non-butting, L: Butting specification | |
| *Please consult with NSK for butting rail specification. | | | | | | | | | | |

A-5-1.3 TS Series


8. Dimensions

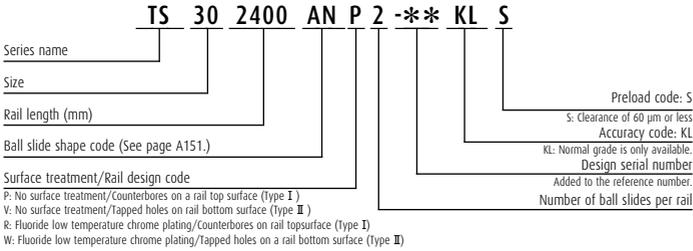

Front view



Side view

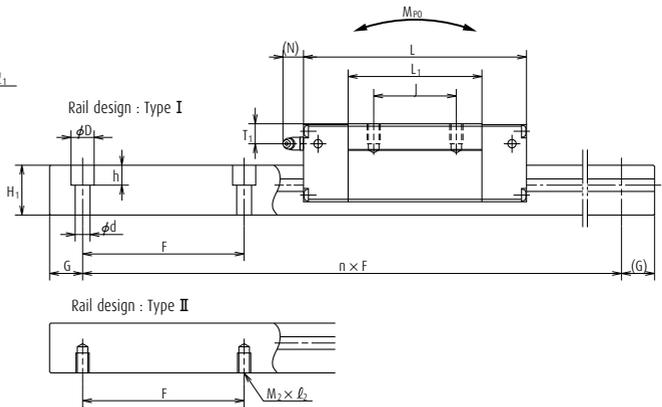

| Model No. | Assembly | | Ball slide | | | | | | | | | | | width | height | Pitch |
|-----------|----------|-----|------------|--------|---------------|----|----------------------------|----------------|------|----------------|----------------|----|----------------|-------|--------|-------|
| | Height | | Width | Length | Mounting hole | | | | | Grease fitting | | | | | | |
| | H_{R0.1} | E | | | B | J | M × pitch × ℓ ₁ | L ₁ | K | Hole size | T ₁ | N | W ₁ | | | |
| TS15AN | 28 | 3 | 34 | 72.2 | 26 | 26 | M4×0.7×6 | 39 | 25 | φ 3 | 6.5 | 5 | 15 | 14 | 120 | |
| TS20AN | 30 | 3 | 44 | 87 | 32 | 36 | M5×0.8×8 | 50 | 27 | M6×0.75 | 6.5 | 14 | 20 | 15 | 120 | |
| TS25AN | 40 | 4 | 48 | 100 | 35 | 35 | M6×1×9 | 58 | 36 | M6×0.75 | 9.5 | 14 | 23 | 20 | 120 | |
| TS30AN | 45 | 6.5 | 60 | 115 | 40 | 40 | M8×1.25×10 | 70 | 38.5 | M6×0.75 | 9.5 | 14 | 28 | 25 | 160 | |
| TS35AN | 55 | 8 | 70 | 135.8 | 50 | 50 | M8×1.25×12 | 81.8 | 47 | M6×0.75 | 12 | 14 | 34 | 30 | 160 | |

Notes 1) TS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Reference number for ball slide of random-matching type

Ball slide

Random-matching ball slide series code **TAS 30 AN -F**


TAS: TS Series random-matching ball slide

Size

Ball slide shape code (See page A151.)

Option code

No code: No surface treatment + AS2 grease
 -F: Fluoride low temperature chrome plating + AS2 grease
 -F50: Fluoride low temperature chrome plating + LG2 grease

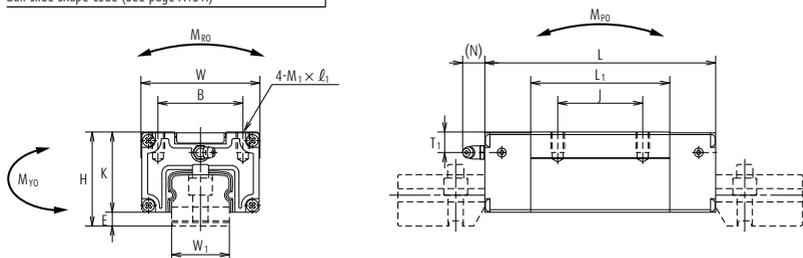

Reference number for rail of random-matching type

Rail

Random-matching rail series code **T1S 30 1200 L P N -*** PL S**

T1S: TS Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Surface treatment/rail design code (See page A155.)

Preload code: S

S: Clearance of 60 μm or less

Accuracy code: PL

PL: Normal grade is only available.

Design serial number


Added to the reference number.

*Butting rail specification


N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

Rail design : Type I

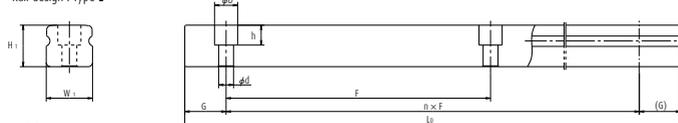

Rail design : Type II

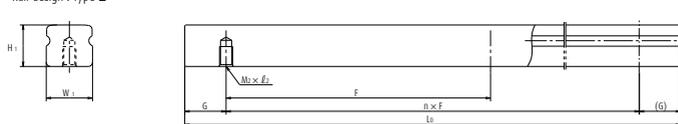

Unit: mm


| Rail | | Basic load rating | | | | | | | | Weight | | | |
|---------------------|--|-------------------|--|-------------------------------|---------------------------------|------------------------------|-----------------|---------------------|------------|-----------|------------|--------------------|----------------|
| Mounting hole | | G | Maximum length L _{0max} () for stainless | Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| Type I d × D × h | Type II M ₂ × pitch × l ₂ | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | One slide | Two slides | One slide | Two slides | | |
| 4.5×7.5×5.3 | M4×0.7×6 | 20 | 1 960 | 9 800 | 7 800 | 11 800 | 92 | 63.5 | 585 | 63.5 | 585 | 0.21 | 1.5 |
| 6×9.5×8.5 | M5×0.8×8 | 20 | 2 920 | 15 700 | 12 500 | 19 100 | 196 | 137 | 1 110 | 137 | 1 110 | 0.37 | 2.1 |
| 7×11×9 | M6×1×9 | 20 | 4 000 | 21 800 | 17 300 | 26 000 | 320 | 217 | 1 730 | 217 | 1 730 | 0.47 | 3.4 |
| 9×14×12 | M8×1.25×12 | 20 | 4 040* | 31 000 | 24 800 | 37 500 | 565 | 395 | 2 810 | 395 | 2 810 | 0.77 | 5.3 |
| 9×14×12 | M8×1.25×12 | 20 | 4 040* | 46 500 | 37 000 | 53 000 | 970 | 635 | 4 750 | 635 | 4 750 | 1.3 | 7.7 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

3) Consult with NSK when using a TS Series in a single rail configuration.

* Maximum length of fluoride low-temperature chrome plated products is 4 000 (G = 80).

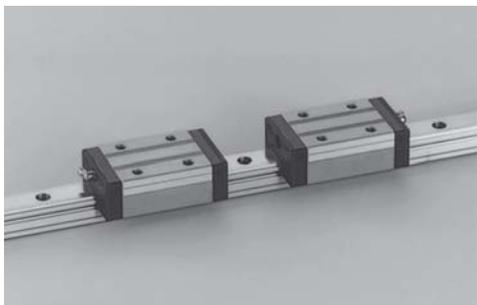

1. Features

(1) Improve rating life dramatically

Based on the LS series characterized by reliability and performance, a significant increase in durability has been attained. New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the LS Series, the load rating capacity of the NS series has increased to 1.3 times, while the life span has increased to twice^{*1)}. These features enable you to design a machine with a longer life and downsize the machine. Thus, your design capability is greatly enhanced.

^{*1)}: Representative values of series.

(2) Ball circulation path with excellent high-speed property

By reexamining the design practice for the ball circulation path, we have attained smooth ball circulation and reduced noise level. So, NS series is suited for high-speed applications compared with the LS Series.

(3) All mounting dimensions are the same as those for the LS and SS Series

Regarding the mounting dimensions (mounting parts' dimensions), such as the mounting height, mounting width, mounting hole diameter/pitch of the linear guide, etc., the mounting dimensions of the NS Series remain the same as those of the conventional LS series and SS series. So, the new NS Series linear guides can be used without making any design changes.

(4) High self aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity. This increases the capacity to absorb errors in installation.

(5) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity against the load in vertical direction.

(6) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is usually carried by top 2 rows, where balls are contacting at two points. Because of this design, the bottom rows will carry the load when a large impact load is applied as shown in Fig. 3. This assures high resistance to the impact load.

(7) High accuracy

As showing in Fig. 4, fixing the measuring rollers to the ball grooves is simple thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(8) Easy to handle, and designed with safety in mind.

Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail.

(9) Abundant models and sizes come in series.

Each size of NS Series has several ball slide models, rendering the linear guide available for numerous uses. The NS Series also has standardized long stainless-steel rail (maximum 3 500 mm).

(10) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

High precision grade and medium preload types are also available in random matching. (Special high-carbon steel products)

Note: For customers who have used the former LS or SS series, NS series is recommended as a substitute. Please confirm the correlation between NS series and former ones on the comparative table at A321.

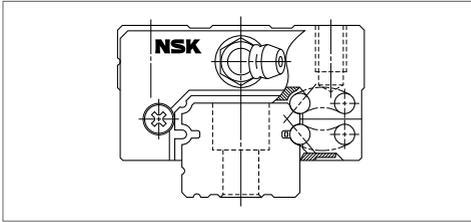


Fig. 1 NS Series

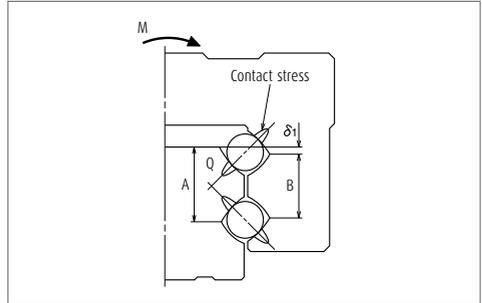


Fig. 2 Enlarged illustration of the offset Gothic arch groove

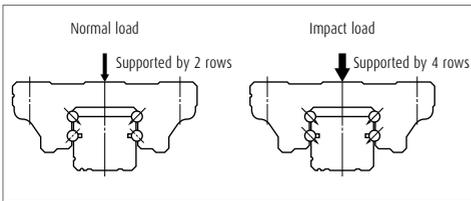


Fig. 3 When load is applied

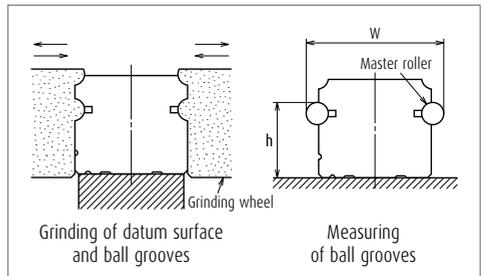


Fig. 4 Rail-grinding and measuring

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | |
|------------------|---------------------------|--|----------------|
| | | Medium-load type | High-load type |
| | | Standard | Long |
| AL CL | | CL | AL |
| | | JM | EM |
| EM JM | | JM | EM |

Note High-precision grade and medium preload of random-matching type are not applicable to EL, JL, FL and KL models.

A-5-1.4 NS Series

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly (not random matching) | | | | | Random-matching type | |
|------------------|---------|--|-----------------------|----------------------|-----------------------|--------------------|----------------------|--------------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN | High precision PH | Normal grade PC |
| over | or less | | | | | | | |
| - | 50 | 2 | 2 | 2 | 4.5 | 6 | 2 | 6 |
| 50 | - 80 | 2 | 2 | 3 | 5 | 6 | 3 | 6 |
| 80 | - 125 | 2 | 2 | 3.5 | 5.5 | 6.5 | 3.5 | 6.5 |
| 125 | - 200 | 2 | 2 | 4 | 6 | 7 | 4 | 7 |
| 200 | - 250 | 2 | 2.5 | 5 | 7 | 8 | 5 | 8 |
| 250 | - 315 | 2 | 2.5 | 5 | 8 | 9 | 5 | 9 |
| 315 | - 400 | 2 | 3 | 6 | 9 | 11 | 6 | 11 |
| 400 | - 500 | 2 | 3 | 6 | 10 | 12 | 6 | 12 |
| 500 | - 630 | 2 | 3.5 | 7 | 12 | 14 | 7 | 14 |
| 630 | - 800 | 2 | 4.5 | 8 | 14 | 16 | 8 | 16 |
| 800 | - 1000 | 2.5 | 5 | 9 | 16 | 18 | 9 | 18 |
| 1 000 | - 1 250 | 3 | 6 | 10 | 17 | 20 | 10 | 20 |
| 1 250 | - 1 600 | 4 | 7 | 11 | 19 | 23 | 11 | 23 |
| 1 600 | - 2 000 | 4.5 | 8 | 13 | 21 | 26 | 13 | 26 |
| 2 000 | - 2 500 | 5 | 10 | 15 | 22 | 29 | 15 | 29 |
| 2 500 | - 3 150 | 6 | 11 | 17 | 25 | 32 | 17 | 32 |
| 3 150 | - 4 000 | 9 | 16 | 23 | 30 | 34 | 23 | 34 |

(2) Accuracy standard

The preloaded assembly has five accuracy grades; Ultra precision P3, Super precision P4, High precision P5, Precision P6 and Normal PN grades, while the random-matching type has High-precision PH and Normal PC grade.

> Tolerance of preloaded assembly

Table 2

Unit : μm

| Characteristics | Accuracy grade | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|--------------------------------|-----------------------|----------------------|-----------------------|--------------------|
| Mounting height H | | ± 10 | ± 10 | ± 20 | ± 40 | ± 80 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 15 | ± 25 | ± 50 | ± 100 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 3 | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | See Table 1, Fig. 5 and Fig. 6 | | | | |

> Tolerance of random-matching type

Table 3

Unit : μm

| Characteristics | Model No. | High precision grade PH | Normal grade PC |
|--|-----------|--------------------------------|--------------------|
| Mounting height H | | ± 20 | ± 20 |
| Variation of mounting height H | | 15 ① 30 ② | 15 ① 30 ② |
| Mounting width W_2 or W_3 | | ± 30 | ± 30 |
| Variation of mounting width W_2 or W_3 | | 20 | 25 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | See Table 1, Fig. 5 and Fig. 6 | |

Notes: ① Variation on the same rail / ② Variation on multiple rails

(3) Combinations of accuracy and preload

Table 4

| | | Accuracy grade | | | | | | |
|--|---|-----------------|-----------------|----------------|-----------------|--------------|----------------|--------------|
| | | Ultra precision | Super precision | High precision | Precision grade | Normal grade | High precision | Normal grade |
| Without NSK K1 lubrication unit | | P3 | P4 | P5 | P6 | PN | PH | PC |
| With NSK K1 lubrication unit | | K3 | K4 | K5 | K6 | KN | KH | KC |
| With NSK K1 for food and medical equipment | | F3 | F4 | F5 | F6 | FN | FH | FC |
| Preload | Fine clearance Z0 | ○ | ○ | ○ | ○ | ○ | — | — |
| | Slight preload Z1 | ○ | ○ | ○ | ○ | ○ | — | — |
| | Medium preload Z3 | ○ | ○ | ○ | ○ | — | — | — |
| | Random-matching type with fine clearance ZT | — | — | — | — | — | — | ○ |
| | Random-matching type with slight preload ZZ | — | — | — | — | — | ○ | ○ |
| | Random-matching type with medium preload ZH | — | — | — | — | — | ○ | ○ |

(4) Assembled accuracy

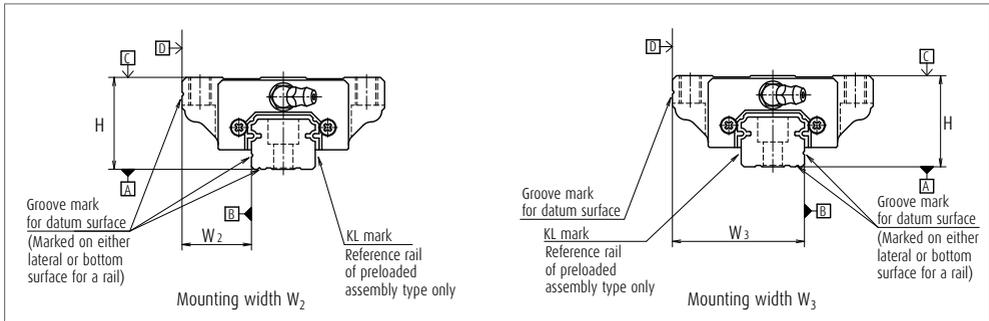


Fig. 5 Special high carbon steel

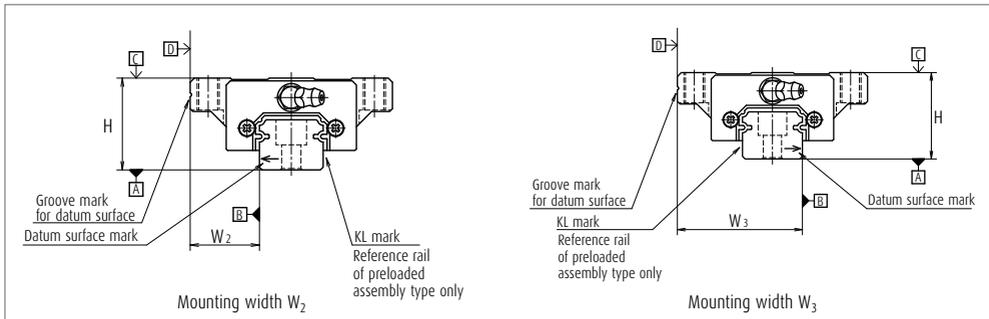


Fig. 6 Stainless steel

A-5-1.4 NS Series

(5) Preload and rigidity

We offer six levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with random-matching type of Medium preload ZH, Fine clearance ZT and Slight preload ZZ.

> Preload and rigidity of preloaded assembly

Table 5

| Model No. | | Preload (N) | | Rigidity (N/ μ m) | | | |
|------------------|-------------|-------------------|-------------------|-----------------------|-------------------|-------------------|-------------------|
| | | | | Vertical direction | | Lateral direction | |
| | | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 |
| High-load type | NS15 AL, EM | 69 | 390 | 127 | 226 | 88 | 167 |
| | NS20 AL, EM | 88 | 540 | 147 | 284 | 108 | 206 |
| | NS25 AL, EM | 147 | 880 | 206 | 370 | 147 | 275 |
| | NS30 AL, EM | 245 | 1 370 | 255 | 460 | 186 | 345 |
| | NS35 AL, EM | 345 | 1 960 | 305 | 550 | 216 | 400 |
| Medium-load type | NS15 CL, JM | 49 | 294 | 78 | 147 | 59 | 108 |
| | NS20 CL, JM | 69 | 390 | 108 | 186 | 78 | 137 |
| | NS25 CL, JM | 98 | 635 | 127 | 235 | 88 | 177 |
| | NS30 CL, JM | 147 | 980 | 147 | 275 | 108 | 206 |
| | NS35 CL, JM | 245 | 1 370 | 186 | 335 | 137 | 245 |

Note Clearance for Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15 μ m.

> Clearance and preload of random-matching type

Table 6

Unit : μ m

| Model No. | Fine clearance ZT | Slight preload ZZ | Medium preload ZH |
|-----------|-------------------|-------------------|-------------------|
| NS15 | -4 - 15 | -4 - 0 | -7 - -3 |
| NS20 | -4 - 15 | -4 - 0 | -7 - -3 |
| NS25 | -5 - 15 | -5 - 0 | -9 - -4 |
| NS30 | -5 - 15 | -5 - 0 | -9 - -4 |
| NS35 | -5 - 15 | -6 - 0 | -10 - -4 |

Note Minus sign denotes that a value is an amount of preload (elastic deformation of balls).

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit : mm

| Series | Material \ Size | 15 | 20 | 25 | 30 | 35 |
|--------|-----------------|-------|---------------------------|-------|-------|-------|
| | | NS | Special high carbon steel | 2 920 | 3 960 | 3 960 |
| | Stainless steel | 1 700 | 3 500 | 3 500 | 3 500 | 3 500 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK

5. Installation

(1) Permissible values of mounting error

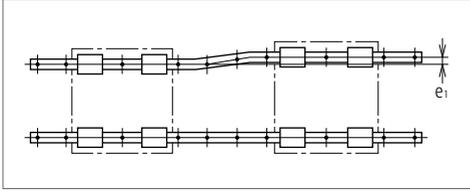


Fig. 7

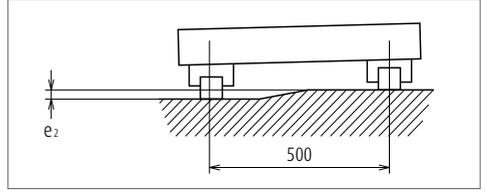


Fig. 8

Table 8

Unit : μm

| Value | Preload | Model No. | | | | |
|---|----------------|---------------------------------|------|------|------|------|
| | | NS15 | NS20 | NS25 | NS30 | NS35 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 20 | 22 | 30 | 35 | 40 |
| | Z1, ZZ | 15 | 17 | 20 | 25 | 30 |
| | Z3, ZH | 12 | 15 | 15 | 20 | 25 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 375 $\mu\text{m}/500\text{ mm}$ | | | | |
| | Z1, ZZ, Z3, ZH | 330 $\mu\text{m}/500\text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 9 Shoulder for the rail datum face




Fig. 10 Shoulder for the ball slide datum face

Table 9

Unit : mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-------|
| | r_a | r_b | H' | H'' |
| NS15 | 0.5 | 0.5 | 4 | 4 |
| NS20 | 0.5 | 0.5 | 4.5 | 5 |
| NS25 | 0.5 | 0.5 | 5 | 5 |
| NS30 | 0.5 | 0.5 | 6 | 6 |
| NS35 | 0.5 | 0.5 | 6 | 6 |

6. Maximum allowable speed

An indication of the standard maximum allowable speed aiming at 10,000km operation with NS series under normal conditions is shown in Table 10. However, the maximum allowable speed can be affected by accuracy of installation, operating temperature, external load, etc. If the operation is made exceeding the permissible distance and speed, please consult NSK.

Table 10 Maximum allowable speed

Unit : m/min

| Series | 15 | 20 | 25 | 30 | 30 | 35 |
|--------|-----|----|----|----|----|----|
| Size | | | | | | |
| NS | 300 | | | | | |

A-5-1.4 NS Series

7. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 11 and Table 11 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

When you require stainless lubrication accessories, please ask NSK.

Table 11 Grease fitting and tube fitting Unit : mm

| Model No. | Dust proof specification | Dimension L | | |
|-----------|--------------------------|--------------------------------|---------|---------|
| | | Grease fitting / Drive-in type | SF Type | LF Type |
| NS15 | Standard | 5 | - | - |
| | With NSK K1 | 10 | - | - |
| | Double seal | * | - | - |
| | Protector | * | - | - |
| NS20 | Standard | 5 | - | - |
| | With NSK K1 | 10 | - | - |
| | Double seal | 8 | - | - |
| | Protector | 8 | - | - |
| NS25 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 12 | 11 | 11 |
| | Double seal | 10 | 9 | 9 |
| | Protector | 10 | 9 | 9 |
| NS30 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 14 | 12 | 13 |
| | Double seal | 12 | 10 | 11 |
| | Protector | 12 | 10 | 11 |
| NS35 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 14 | 12 | 13 |
| | Double seal | 12 | 10 | 11 |
| | Protector | 12 | 10 | 11 |

*) A connector is required for this model. Please contact NSK for grease fittings.

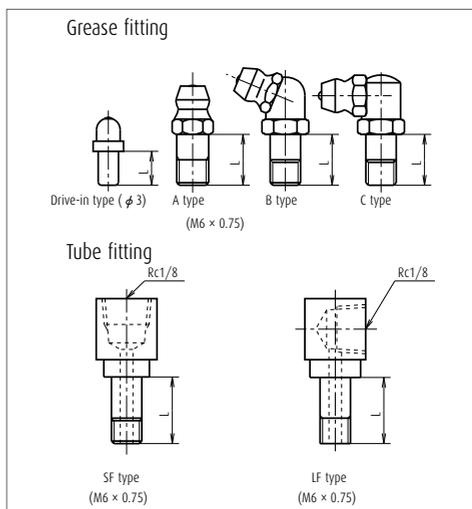


Fig. 11 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option.

(Fig. 12)

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

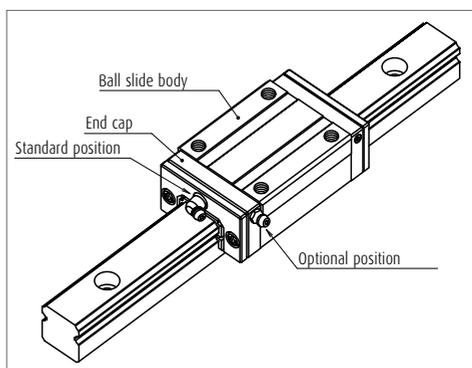


Fig. 12 Mounting position of lubrication accessories

8. Dust proof components

(1) Standard specification

The NS Series can be readily used as they have a dust protection for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

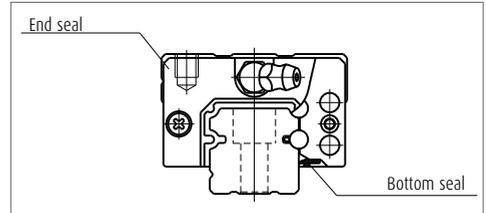


Fig. 13

Table 12 Seal friction per ball slide (maximum value)

| Size \ Series | 15 | 20 | 25 | 30 | 35 |
|---------------|----|----|----|----|----|
| NS | 8 | 9 | 9 | 9 | 10 |

Unit : N

(2) NSK K1 lubrication unit

Table 13 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

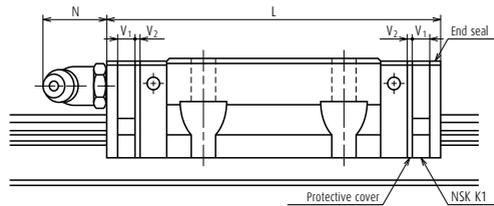


Table 13

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V ₁ | Protective cover thickness V ₂ | Protruding area of the grease fitting N |
|-----------|-------------------|------------------|----------------------------|---|-------------------------------------|---|---|
| NS15 | Standard | AL, EM | 56.8 | 66.4 | 4.0 | 0.8 | (5) |
| | Short | CL, JM | 40.4 | 50 | | | |
| NS20 | Standard | AL, EM | 65.2 | 75.8 | 4.5 | 0.8 | (14) |
| | Short | CL, JM | 47.2 | 57.8 | | | |
| NS25 | Standard | AL, EM | 81.6 | 92.2 | 4.5 | 0.8 | (14) |
| | Short | CL, JM | 59.6 | 70.2 | | | |
| NS30 | Standard | AL, EM | 96.4 | 108.4 | 5.0 | 1.0 | (14) |
| | Short | CL, JM | 67.4 | 79.4 | | | |
| NS35 | Standard | AL, EM | 108 | 121 | 5.5 | 1.0 | (14) |
| | Short | CL, JM | 77 | 90 | | | |

Unit : mm

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

A-5-1.4 NS Series

(3) Double seal

Use a double seal set as shown in **Table 14**, when installing an extra seal to completed standard products. (**Fig. 14**)

When installing a grease fitting after the installation of double seals, a connector as shown in **Fig.14** is required.

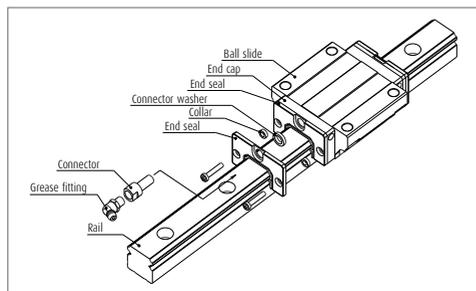


Fig. 14 Double seal

(4) Protector

Use a protector set as shown in **Table 15**, when installing a protector to completed standard products. (**Fig.15**)

When installing a grease fitting after the installation of protectors, a connector as shown in **Fig.15** is required.

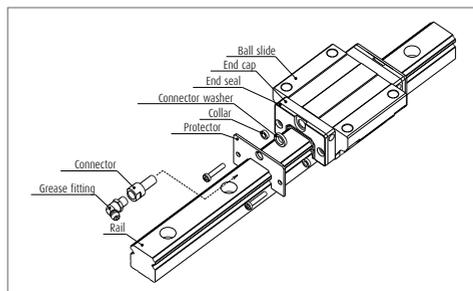


Fig. 15 Protector

Table 14 Double-seal set

| Model No. | Reference No. | | Increased thickness V_3 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| NS15 | LS15WS-01 | * | 2.8 |
| NS20 | LS20WS-01 | LS20WSC-01 | 2.5 |
| NS25 | LS25WS-01 | LS25WSC-01 | 2.8 |
| NS30 | LS30WS-01 | LS30WSC-01 | 3.6 |
| NS35 | LS35WS-01 | LS35WSC-01 | 3.6 |

Table 15 Protector set

| Model No. | Reference No. | | Increased thickness V_4 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| NS15 | LS15PT-01 | * | 3 |
| NS20 | LS20PT-01 | LS20PTC-01 | 2.7 |
| NS25 | LS25PT-01 | LS25PTC-01 | 3.2 |
| NS30 | LS30PT-01 | LS30PTC-01 | 4.2 |
| NS35 | LS35PT-01 | LS35PTC-01 | 4.2 |

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

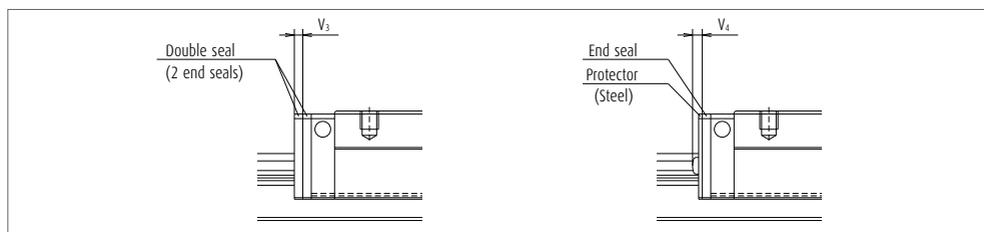


Fig. 16

(5) Cap to plug the rail mounting bolt hole

Table 16 Caps to plug rail bolt hole

| Modell No. | Bolt to secure rail | Cap reference No. | Quantity/case |
|------------|---------------------|-------------------|---------------|
| NS15 | M3 | LG-CAP/M3 | 20 |
| NS15 | M4 | LG-CAP/M4 | 20 |
| NS20 | M5 | LG-CAP/M5 | 20 |
| NS25, NS30 | M6 | LG-CAP/M6 | 20 |
| NS35 | M8 | LG-CAP/M8 | 20 |

(6) Inner seal

Inner seal is only available for the models shown below.

Table 17

| Series | Model No. |
|--------|------------------------|
| NS | NS20, NS25, NS30, NS35 |

(7) Bellows

- > A bellows fastener kit, which includes one of bellows faster, two of M1 set screws, two of M2 set screws, and two collars for M2 set screws as showing **Fig. 7.7** on page A55, is supplied with bellows for the ends.
- > Middle bellows are supplied with four set screws and four collars.
- > Use a bellows fastener kit as showing **Table 18**, when installing bellows to completed standard products.
- > When NSK K1, double seals or protectors are used, the set screws of bellows fastener kit are unable to use. Please contact NSK for details.
- > Bellows fastener is available only for the horizontal mounting positions. For other mounting positions, sliding plate is required (see **Fig. 7.10** on page A56).
- > For fixing to the rail, make tap holes to the rail end surface. Fix the bellows mounting plate to the rail end surface through these tap holes by using a machine screw. NSK processes a tap hole to the rail end face when ordered with a linear guide.

Table 18 Bellows fastner kit reference No.

| Modell No. | Kit reference No. |
|------------|-------------------|
| NS15 | LS15FS-01 |
| NS20 | LS20FS-01 |
| NS25 | LS25FS-01 |
| NS30 | LS30FS-01 |
| NS35 | LS35FS-01 |

A-5-1.4 NS Series

Dimension tables of bellows NS Series

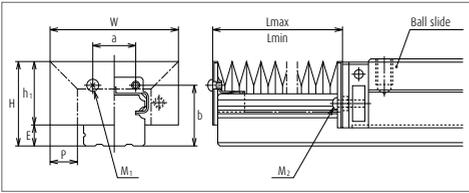


Fig. 17 Dimensions of bellows

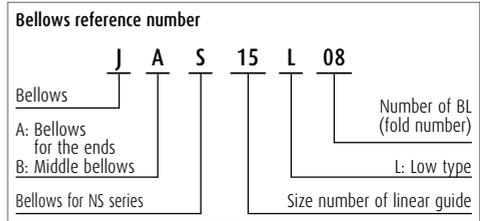


Table 19 Dimensions of bellows

Unit : mm

| Model No. | H | h ₁ | E | W | P | a | b | BL minimum length | M ₇ Tap × depth | M ₇ Tap × depth |
|-----------|------|----------------|------|----|----|----|------|-------------------|----------------------------|----------------------------|
| JAS15L | 23.5 | 18.9 | 4.6 | 43 | 10 | 8 | 16.5 | 17 | M3 × 5 | M3 × 14 |
| JAS20L | 27 | 21 | 6 | 48 | 10 | 13 | 19.7 | 17 | M3 × 5 | M2.5 × 14 |
| JAS25L | 32 | 25 | 7 | 51 | 10 | 15 | 23.2 | 17 | M3 × 5 | M3 × 18 |
| JAS30L | 41 | 32 | 9 | 66 | 15 | 16 | 29 | 17 | M4 × 6 | M4 × 19 |
| JAS35L | 47 | 36.5 | 10.5 | 72 | 15 | 22 | 33.5 | 17 | M4 × 6 | M4 × 22 |

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

| Model No. | Number of BL | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
|-----------|------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|
| | L _{min} | 34 | 68 | 102 | 136 | 170 | 204 | 238 | 272 | 306 | 340 |
| JAS15L | Stroke | 106 | 212 | 318 | 424 | 530 | 636 | 742 | 848 | 954 | 1 060 |
| | L _{max} | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1 120 | 1 260 | 1 400 |
| JAS20L | Stroke | 106 | 212 | 318 | 424 | 530 | 636 | 742 | 848 | 954 | 1 060 |
| | L _{max} | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1 120 | 1 260 | 1 400 |
| JAS25L | Stroke | 106 | 212 | 318 | 424 | 530 | 636 | 742 | 848 | 954 | 1 060 |
| | L _{max} | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1 120 | 1 260 | 1 400 |
| JAS30L | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{max} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| JAS35L | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{max} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both side, then by dividing the sum by 2.



A-5-1.4 NS Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|--|
| | NS | 30 | 1200 | AL | C | 2 | -** | P5 | 3 |
| Series name | | | | | | | | | Preload code (See page A160) 0: Z0, 1: Z1, 3: Z3 |
| Size | | | | | | | | | |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 22) |
| Ball slide shape code (See page A158) | | | | | | | | | |
| Material/surface treatment code (See Table 21) | | | | | | | | | Design serial number Added to the reference number. |
| C: Special high carbon steel (NSK standard), K: Stainless steel | | | | | | | | | |
| | | | | | | | | | Number of ball slides per rail |

(2) Reference number for random-matching type

| | | | | | | | |
|---|------------|-----------|-----------|----------|----------|-----------|--|
| Ball slide | NAS | 30 | AL | S | Z | -K | |
| Random-matching ball slide series code | | | | | | | Option code -K: Equipped with NSK K1 |
| NAS: NS Series random-matching ball slide | | | | | | | |
| Size | | | | | | | -F: Fluoride low temperature chrome plating+AS2 grease -F50: Fluoride low temperature chrome plating+LG2 grease |
| Ball slide shape code (See page A158.) | | | | | | | Preload code |
| | | | | | | | No code: Fine clearance, Z: Slight preload, H: Medium preload |
| | | | | | | | Material code |
| | | | | | | | No code: Special high carbon steel (NSK standard), S: Stainless steel |

| | | | | | | | | | |
|--|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|
| Rail | N1S | 30 | 1200 | L | C | N | -** | PC | Z |
| Random-matching rail series code | | | | | | | | | Preload code (See page A160.) T: Fine clearance Z: Slight preload (common rail for slight or medium preload) |
| N1S: NS Series random-matching rail | | | | | | | | | |
| Size | | | | | | | | | Accuracy code |
| Rail length (mm) | | | | | | | | | PH: High precision grade random-matching type PC: Normal grade random-matching type |
| Rail shape code: | | | | | | | | | Design serial number |
| L: Standard T: N1S with mounting holes for M4 | | | | | | | | | Added to the reference number. |
| Material/surface treatment code (See Table 21.) | | | | | | | | | *Butting rail specification |
| | | | | | | | | | N: Non-butting, L: Butting specification |
| | | | | | | | | | *Please consult with NSK for butting rail specification. |

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A160).

Table 21 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| K | Stainless steel |
| D | Special high carbon steel with surface treatment |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Note High-precision grade and medium preload of random-matching type are not available in stainless steel.

Table 22 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|---|------------------------------|-------------|---|
| Ultra precision grade | P3 | K3 | F3 |
| Super precision grade | P4 | K4 | F4 |
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |
| High precision grade (random-matching type) | PH | KH | FH |
| Normal grade (random-matching type) | PC | KC | FC |


Note Refer to pages A38 and A61 for NSK K1 lubrication unit.

A-5-1.4 NS Series


10. Dimensions

NS-CL (Medium-load type / Short)


NS-AL (High-load type / Standard)

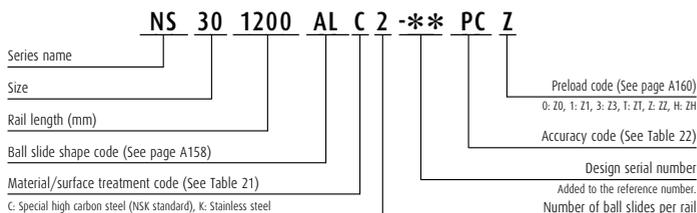


Front view of AL and CL type



Side view of AL type

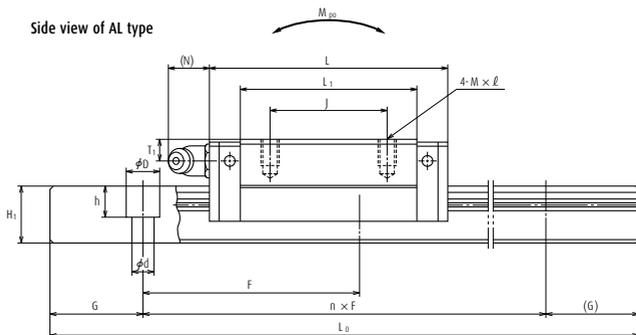

Side view of CL type



| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width W ₁ | Height H ₁ |
|-----------|-------------|------|----------------|------------|-------------|---------------|----|---------------|----------------|------|----|----------------|----------------|----|-------------------------|--------------------------|
| | Height H | E | W ₂ | Width W | Length L | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | |
| | | | | | | B | J | M × pitch × l | | | | Hole size | T ₁ | N | | |
| NS15CL | 24 | 4.6 | 9.5 | 34 | 40.4 | 26 | - | M4×0.7×6 | 23.6 | 19.4 | 10 | φ 3 | 6 | 3 | 15 | 12.5 |
| NS15AL | 24 | 4.6 | 9.5 | 34 | 56.8 | 26 | 26 | M4×0.7×6 | 40 | 19.4 | 10 | φ 3 | 6 | 3 | 15 | 12.5 |
| NS20CL | 28 | 6 | 11 | 42 | 47.2 | 32 | - | M5×0.8×7 | 30 | 22 | 12 | M6×0.75 | 5.5 | 11 | 20 | 15.5 |
| NS20AL | 28 | 6 | 11 | 42 | 65.2 | 32 | 32 | M5×0.8×7 | 48 | 22 | 12 | M6×0.75 | 5.5 | 11 | 20 | 15.5 |
| NS25CL | 33 | 7 | 12.5 | 48 | 59.6 | 35 | - | M6×1×9 | 38 | 26 | 12 | M6×0.75 | 7 | 11 | 23 | 18 |
| NS25AL | 33 | 7 | 12.5 | 48 | 81.6 | 35 | 35 | M6×1×9 | 60 | 26 | 12 | M6×0.75 | 7 | 11 | 23 | 18 |
| NS30CL | 42 | 9 | 16 | 60 | 67.4 | 40 | - | M8×1,25×12 | 42 | 33 | 13 | M6×0.75 | 8 | 11 | 28 | 23 |
| NS30AL | 42 | 9 | 16 | 60 | 96.4 | 40 | 40 | M8×1,25×12 | 71 | 33 | 13 | M6×0.75 | 8 | 11 | 28 | 23 |
| NS35CL | 48 | 10.5 | 18 | 70 | 77 | 50 | - | M8×1,25×12 | 49 | 37.5 | 14 | M6×0.75 | 8.5 | 11 | 34 | 27.5 |
| NS35AL | 48 | 10.5 | 18 | 70 | 108 | 50 | 50 | M8×1,25×12 | 80 | 37.5 | 14 | M6×0.75 | 8.5 | 11 | 34 | 27.5 |

Notes 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.

Reference number for ball slide of random-matching type

Ball slide

NAS 30 AL S Z -K

Random-matching ball slide series code

NAS: NS Series random-matching ball slide

Size

Ball slide shape code (See page A158.)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating + AS2 grease

-F50: Fluoride low temperature chrome plating + LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


AL and CL types



AL type



CL type



Reference number for rail of random-matching type

Rail

N15 30 1200 L C N - PC Z**

Random-matching rail series code

N15: NS Series random-matching rail

Size

Rail length (mm)

Rail shape code

L: Standard

T: NS15 with mounting holes for M4

Material/surface treatment code (See Table 21.)

Preload code (See page A160.)

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade, PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

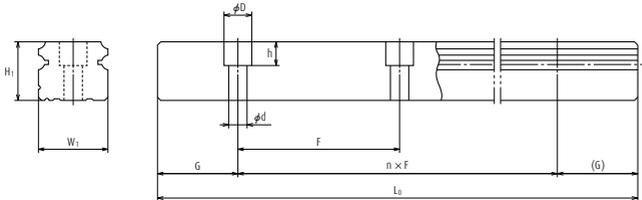

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|-------|-----------------------|-------------|--------------------------------|-------------------|---------------|-----------|----------|---------------------|------------|-----------|------------|-----------------|-------------|
| Pitch | Mounting bolt hole | G | Maximum length | 2) Dynamic | | Static | M_{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| F | $d \times D \times h$ | (reference) | L_{max} () for stainless | C_{50} (N) | C_{100} (N) | C_0 (N) | | M_{P0} | | M_{V0} | | | |
| | | | | [50km] | [100km] | | | One slide | Two slides | One slide | Two slides | | |
| 60 | *3.5×6×4.5 | 20 | 2 920 | 7 250 | 5 750 | 9 100 | 45.5 | 24.5 | 196 | 20.5 | 165 | 0.14 | 1.4 |
| 60 | 4.5×7.5×5.3 | 20 | (1 700) | 11 200 | 8 850 | 16 900 | 84.5 | 77 | 470 | 64.5 | 395 | 0.20 | 1.4 |
| 60 | 6×9.5×8.5 | 20 | 3 960 | 10 600 | 8 400 | 13 400 | 91.5 | 46.5 | 330 | 39 | 279 | 0.19 | 2.3 |
| 60 | 6×9.5×8.5 | 20 | (3 500) | 15 600 | 12 400 | 23 500 | 160 | 133 | 755 | 111 | 630 | 0.28 | 2.3 |
| 60 | 7×11×9 | 20 | 3 960 | 17 700 | 14 000 | 20 800 | 164 | 91 | 655 | 76 | 550 | 0.34 | 3.1 |
| 60 | 7×11×9 | 20 | (3 500) | 26 100 | 20 700 | 36 500 | 286 | 258 | 1 470 | 217 | 1 230 | 0.51 | 3.1 |
| 80 | 7×11×9 | 20 | 4 000 | 24 700 | 19 600 | 29 600 | 282 | 139 | 1 080 | 116 | 905 | 0.58 | 4.8 |
| 80 | 7×11×9 | 20 | (3 500) | 38 000 | 30 000 | 55 000 | 520 | 435 | 2 650 | 365 | 2 220 | 0.85 | 4.8 |
| 80 | 9×14×12 | 20 | 4 000 | 34 500 | 27 300 | 40 000 | 465 | 220 | 1 670 | 185 | 1 400 | 0.86 | 7.0 |
| 80 | 9×14×12 | 20 | (3 500) | 52 500 | 42 000 | 74 500 | 865 | 695 | 4 000 | 580 | 3 350 | 1.3 | 7.0 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.


3) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.

* Standard mounting hole of NS15 rail is for M3 bolts (Hole size: 3.5 × 6 × 4.5).


If you require mounting hole for M4 bolts (Hole size: 4.5 × 7.5 × 5.3), please specify when ordering.

A-5-1.4 NS Series


NS-JM (Medium-load type / Short)
NS-EM (High-load type / Standard)

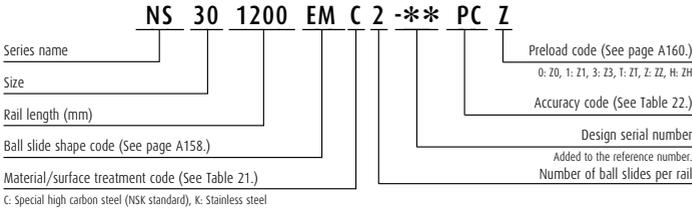


Front view of EM and JM types

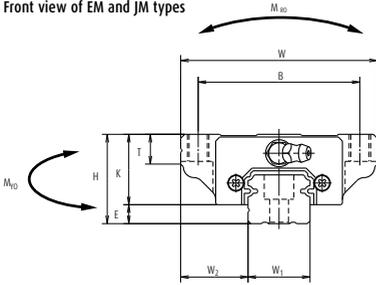

Side view of EM type

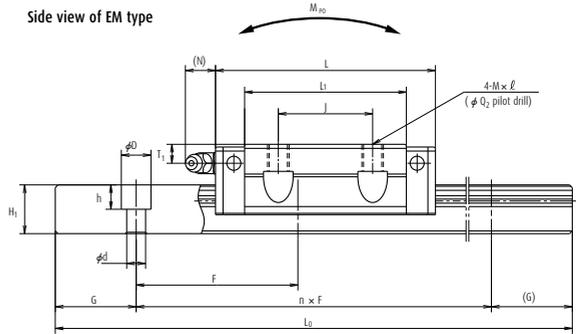

Side view of JM type

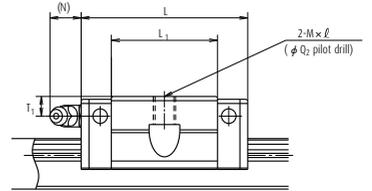

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | | | |
|-----------|----------|------|----------------|------------|--------|---------------|----|----------------|----------------|----------------|------|------|----------------|----------------|----|----------------|--------|
| | Height | | W ₂ | Width | Length | Mounting hole | | | | L ₁ | K | T | Grease fitting | | | W ₁ | Height |
| | H | E | | | | B | J | M × pitch × l | Q ₂ | | | | Hole size | T ₁ | N | | |
| NS15JM | 24 | 4.6 | 18.5 | 52 | 40.4 | 41 | - | M5×0.8×7 | 4.4 | 23.6 | 19.4 | 8 | φ 3 | 6 | 3 | 15 | 12.5 |
| NS15EM | 24 | 4.6 | 18.5 | 52 | 56.8 | 41 | 26 | M5×0.8×7 | 4.4 | 40 | 19.4 | 8 | φ 3 | 6 | 3 | 15 | 12.5 |
| NS20JM | 28 | 6 | 19.5 | 59 | 47.2 | 49 | - | M6×1×9 | 5.3 | 30 | 22 | 10 | M6×0.75 | 5.5 | 11 | 20 | 15.5 |
| NS20EM | 28 | 6 | 19.5 | 59 | 65.2 | 49 | 32 | (M6×1×9.5) | 5.3 | 48 | 22 | 10 | M6×0.75 | 5.5 | 11 | 20 | 15.5 |
| NS25JM | 33 | 7 | 25 | 73 | 59.6 | 60 | - | M8×1.25×10 | 6.8 | 38 | 26 | 11 | M6×0.75 | 7 | 11 | 23 | 18 |
| NS25EM | 33 | 7 | 25 | 73 | 81.6 | 60 | 35 | (M8×1.25×11.5) | 6.8 | 60 | 26 | (12) | M6×0.75 | 7 | 11 | 23 | 18 |
| NS30JM | 42 | 9 | 31 | 90 | 67.4 | 72 | - | M10×1.5×12 | 8.6 | 42 | 33 | 11 | M6×0.75 | 8 | 11 | 28 | 23 |
| NS30EM | 42 | 9 | 31 | 90 | 96.4 | 72 | 40 | (M10×1.5×14.5) | 8.6 | 71 | 33 | (15) | M6×0.75 | 8 | 11 | 28 | 23 |
| NS35JM | 48 | 10.5 | 33 | 100 | 77 | 82 | - | M10×1.5×13 | 8.6 | 49 | 37.5 | 12 | M6×0.75 | 8.5 | 11 | 34 | 27.5 |
| NS35EM | 48 | 10.5 | 33 | 100 | 108 | 82 | 50 | (M10×1.5×14.5) | 8.6 | 80 | 37.5 | (15) | M6×0.75 | 8.5 | 11 | 34 | 27.5 |

- Notes
- 1) External appearance of stainless steel ball slides differs from those of carbon steel ball slides.
 - 2) Parenthesized dimensions are for items made of stainless steel.

Reference number for ball slide of random-matching type

Ball slide

NAS 30 EM S Z -K

Random-matching ball slide series code

NAS: NS Series random-matching ball slide

Size

Ball slide shape code (See page A158.)

Option code

-K: Equipped with NSK K1

-F: Fluoride low temperature chrome plating + AS2 grease

-F50: Fluoride low temperature chrome plating + LG2 grease


Preload code

No code: Fine clearance, Z: Slight preload, H: Medium preload


Material code

No code: Special high carbon steel (NSK standard), S: Stainless steel


EM and JM types



EM type



JM type



Reference number for rail of random-matching type

Rail

N1S 30 1200 L C N - PC Z**

Random-matching rail series code

N1S: NS Series random-matching rail

Size

Rail length (mm)

Rail shape code

L: Standard

T: NS15 with mounting holes for M4

Material/surface treatment code (See Table 21.)

Preload code (See page A160.)

I: Fine clearance,

Z: Slight preload (common rail for medium preload)

Accuracy code

PH: High precision grade

PC: Normal grade


Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

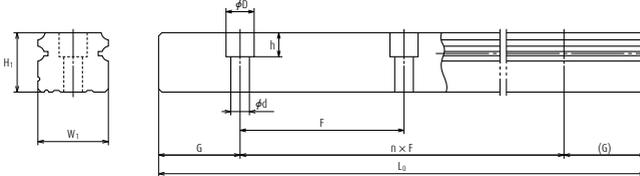

Unit: mm

| Rail | | | | Basic load rating | | | | | | | Weight | | |
|------------|------------------------------------|------------------|---|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|--------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{max} () for stainless | 3) Dynamic | | Static C ₀ (N) | M _{Ro} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{V0} | | | |
| | | | | | | One slide | Two slides | One slide | Two slides | | | | |
| 60 | *3.5×6×4.5 | 20 | 2 920 | 7 250 | 5 750 | 9 100 | 45.5 | 24.5 | 196 | 20.5 | 165 | 0.17 | 1.4 |
| 60 | 4.5×7.5×5.3 | 20 | (1 700) | 11 200 | 8 850 | 16 900 | 84.5 | 77 | 470 | 64.5 | 395 | 0.26 | 1.4 |
| 60 | 6×9.5×8.5 | 20 | 3 960 | 10 600 | 8 400 | 13 400 | 91.5 | 46.5 | 330 | 39 | 279 | 0.24 | 2.3 |
| 60 | 6×9.5×8.5 | 20 | (3 500) | 15 600 | 12 400 | 23 500 | 160 | 133 | 755 | 111 | 630 | 0.35 | 2.3 |
| 60 | 7×11×9 | 20 | 3 960 | 17 700 | 14 000 | 20 800 | 164 | 91 | 655 | 76 | 550 | 0.44 | 3.1 |
| 60 | 7×11×9 | 20 | (3 500) | 26 100 | 20 700 | 36 500 | 286 | 258 | 1 470 | 217 | 1 230 | 0.66 | 3.1 |
| 80 | 7×11×9 | 20 | 4 000 | 24 700 | 19 600 | 29 600 | 282 | 139 | 1 080 | 116 | 905 | 0.76 | 4.8 |
| 80 | 7×11×9 | 20 | (3 500) | 38 000 | 30 000 | 55 000 | 520 | 435 | 2 650 | 365 | 2 220 | 1.2 | 4.8 |
| 80 | 9×14×12 | 20 | 4 000 | 34 500 | 27 300 | 40 000 | 465 | 220 | 1 670 | 185 | 1 400 | 1.2 | 7.0 |
| 80 | 9×14×12 | 20 | (3 500) | 52 500 | 42 000 | 74 500 | 865 | 695 | 4 000 | 580 | 3 350 | 1.7 | 7.0 |

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

The basic static load rating shows static permissible load.

4) High-precision grade and medium preload of random-matching type are available for special high carbon steel products.

* Standard mounting hole of NS15 rail is for M3 bolts (Hole size: 3.5 × 6 × 4.5).

If you require mounting hole for M4 bolts (Hole size: 4.5 × 7.5 × 5.3), please specify when ordering.

A-5-1.5 LW Series

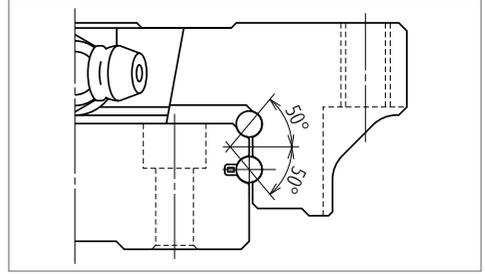
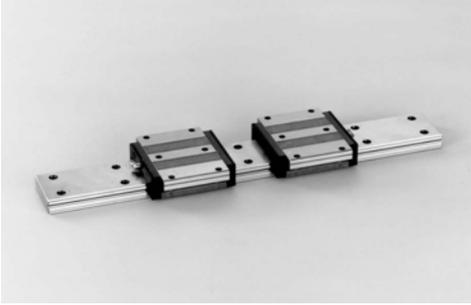


Fig. 1 Balls in contact

1. Features

(1) Ideal for use of single rail

Thanks to the wide rail, rigidity and load carrying capacity are high against moment load from rolling direction. This makes the LW Series ideal for a single rail, compact linear guideway system.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

Same as the NH and NS series, the offset Gothic arch grooves support a large load, such as an impact, by four rows.

(4) High accuracy

Fixing master rollers to ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(5) Easy to handle, and designed with safety in mind

Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail.

(6) Fast delivery

Lineup of random-matching rails and ball slides supports and facilitates fast delivery.

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type |
|------------------|---------------------------|------|
| EL | | |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly (not random matching) | | | Random-matching type |
|------------------|---------|--|--------------------|-----------------|----------------------|
| | | High precision P5 | Precision grade P6 | Normal grade PN | Normal grade PC |
| over | or less | | | | |
| - | 50 | 2 | 4.5 | 6 | 6 |
| 50 - | 80 | 3 | 5 | 6 | 6 |
| 80 - | 125 | 3.5 | 5.5 | 6.5 | 6.5 |
| 125 - | 200 | 4 | 6 | 7 | 7 |
| 200 - | 250 | 5 | 7 | 8 | 8 |
| 250 - | 315 | 5 | 8 | 9 | 9 |
| 315 - | 400 | 6 | 9 | 11 | 11 |
| 400 - | 500 | 6 | 10 | 12 | 12 |
| 500 - | 630 | 7 | 12 | 14 | 14 |
| 630 - | 800 | 8 | 14 | 16 | 16 |
| 800 - | 1 000 | 9 | 16 | 18 | 18 |
| 1 000 - | 1 250 | 10 | 17 | 20 | 20 |
| 1 250 - | 1 600 | 11 | 19 | 23 | 23 |
| 1 600 - | 2 000 | 13 | 21 | 26 | 26 |
| 2 000 - | 2 500 | 15 | 22 | 29 | 29 |
| 2 500 - | 3 150 | 17 | 25 | 32 | 32 |
| 3 150 - | 4 000 | 23 | 30 | 34 | 34 |

(2) Accuracy standard

The preloaded assembly has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal PC grade only.

> Tolerance of preloaded assembly type

Table 2

Unit: μm

| Characteristics | Accuracy grade | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|-----------------------------|--------------------|-----------------|
| Mounting height H | | ± 20 | ± 40 | ± 80 |
| Variation of H (All ball slides on a set of rails) | | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 25 | ± 50 | ± 100 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1 and Fig. 2 | | |

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

| Characteristics | Model No. |
|--|------------------------|
| | LW17, 21, 27, 35, 50 |
| Mounting height H | ± 20 |
| Variation of mounting height H | 15 ① 30 ② |
| Mounting width W_2 or W_3 | ± 30 |
| Variation of mounting width W_2 or W_3 | 25 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | See Table 1 and Fig. 2 |

Notes ① Variation on the same rail / ② Variation on multiple rails

A-5-1.5 LW Series

(3) Combinations of accuracy and preload

Table 4

| | | Accuracy grade | | | |
|--|--|----------------|-----------------|--------------|--------------|
| | | High precision | Precision grade | Normal grade | Normal grade |
| Without NSK K1 lubrication unit | | P5 | P6 | PN | PC |
| With NSK K1 lubrication unit | | K5 | K6 | KN | KC |
| With NSK K1 for food and medical equipment | | F5 | F6 | FN | FC |
| Preload | Fine clearance Z0 | ○ | ○ | ○ | — |
| | Slight preload Z1 | ○ | ○ | ○ | — |
| | Medium preload Z3 | ○ | ○ | — | — |
| | Random-matching type with fine clearance ZT | — | — | — | ○ |
| | Random-matching type with slight preload ZZ | — | — | — | ○ |

Note Z3 medium preload is only applicable to models of LW35 and LW50.

(4) Assembled accuracy

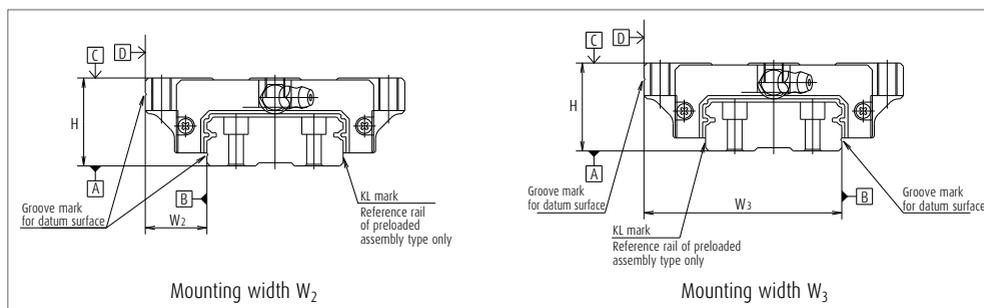


Fig. 2

(5) Preload and rigidity

We offer five levels of preload: Slight preload Z1, Medium preload Z3 and Fine clearance Z0, along with Random-matching type of Fine clearance ZT and Slight preload ZZ. Rigidities are for the median of the preload range.

> Preload and rigidity of preloaded assembly

Table 5

| Model No. | Preload (N) | | Rigidity (N/μm) | | | |
|-----------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| | | | Vertical direction | | Lateral direction | |
| | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 | Slight preload Z1 | Medium preload Z3 |
| LW17 EL | 0 - 245 | — | 156 | — | 112 | — |
| LW21 EL | 0 - 294 | — | 181 | — | 130 | — |
| LW27 EL | 0 - 390 | — | 226 | — | 167 | — |
| LW35 EL | 0 - 490 | 785 | 295 | 440 | 213 | 315 |
| LW50 EL | 0 - 590 | 1 470 | 345 | 600 | 246 | 425 |

Note Clearance for Fine clearance Z0 is 0 to 3μm. Therefore, preload is zero. However, Z0 of PN grade is 0 to 15μm.

> Clearance and preload of random-matching type

Table 6

Unit: μm

| Model No. | Fine clearance Z1 | Slight preload Z2 |
|-----------|-------------------|-------------------|
| LW17 | -3 - 15 | -3.5 - 0 |
| LW21 | -3 - 15 | -3.5 - 0 |
| LW27 | -4 - 15 | -4 - 0 |
| LW35 | -5 - 15 | -5 - 0 |
| LW50 | -5 - 15 | -7 - 0 |

Note Minus sign denotes elastic deformation of balls representing.

5. Installation

(1) Permissible values of mounting error

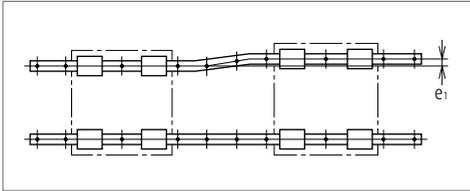


Fig. 3

4. Maximum rail length

Table 7 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 7 Length limitations of rails

Unit: mm

| Model No. | Material | Size | | | | |
|-----------|---------------------------|-------|-------|-------|-------|-------|
| | | 17 | 21 | 27 | 35 | 50 |
| LW | Special high carbon steel | 1 000 | 1 600 | 2 000 | 2 000 | 2 000 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

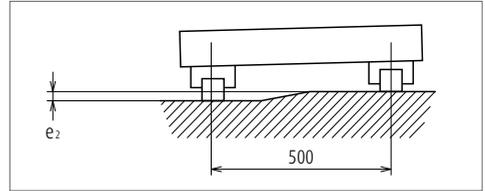


Fig. 4

Table 8

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|--------------------------|------|------|------|------|
| | | LW17 | LW21 | LW27 | LW35 | LW50 |
| Permissible values of parallelism in two rails e_1 | Z0, Z1 | 20 | 20 | 25 | 38 | 50 |
| | Z1, Z2 | 9 | 9 | 13 | 23 | 34 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, Z1 | 100 $\mu\text{m}/500$ mm | | | | |
| | Z1, Z2 | 45 $\mu\text{m}/500$ mm | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 5 Shoulder for the rail datum face




Fig. 6 Shoulder for the ball slide datum face

Table 9

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| LW17 | 0.3 | 0.3 | 2.2 | 4 |
| LW21 | 0.3 | 0.3 | 2.5 | 5 |
| LW27 | 0.5 | 0.5 | 3.5 | 5 |
| LW35 | 0.5 | 0.8 | 3.5 | 5 |
| LW50 | 0.8 | 0.8 | 4 | 6 |

A-5-1.5 LW Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 7 and Table 10 show grease fittings and tube fittings.

We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector.

We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant.

Please ask NSK for stainless lubrication accessories.

Table 10

Unit: mm

| Model No. | Dust-proof specification | Dimension L | | |
|-----------|--------------------------|--------------------------------|--------------|---------|
| | | Grease fitting / Drive-in type | Tube fitting | |
| | | | SF Type | LF Type |
| LW17 | Standard | 5 | - | - |
| | With NSK K1 | 10 | - | - |
| | Double seal | * | - | - |
| | Protector | * | - | - |
| LW21 | Standard | 5 | - | - |
| | With NSK K1 | 12 | - | - |
| | Double seal | 10 | - | - |
| | Protector | 10 | - | - |
| LW27 | Standard | 5 | 5 | 5 |
| | With NSK K1 | 12 | 12 | 12 |
| | Double seal | 10 | 9 | 9 |
| | Protector | 10 | 9 | 9 |
| LW35 | Standard | 5 | 6 | 6 |
| | With NSK K1 | 14 | 14 | 13 |
| | Double seal | 10 | 10 | 9 |
| | Protector | 10 | 10 | 9 |
| LW50 | Standard | 8 | 13.5 | 17 |
| | With NSK K1 | 18 | 18 | 19 |
| | Double seal | 14 | 16 | 17 |
| | Protector | 14 | 13.5 | 17 |

*) A connector is required for the grease fitting. Please contact NSK.

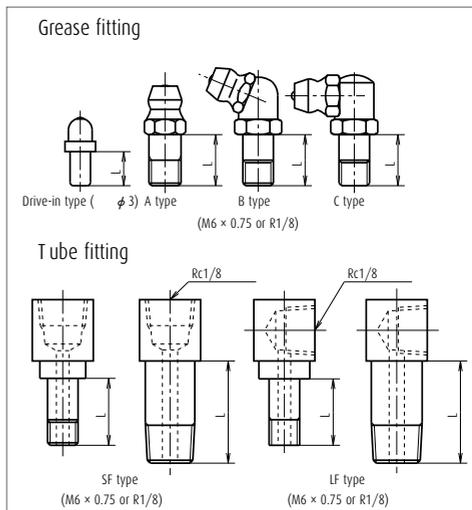


Fig. 7 Grease fitting and tube fitting

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We may mount them on a side of end cap for LW27, 35, and 50 as an option. **(Fig. 8)**

Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector for a connection to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

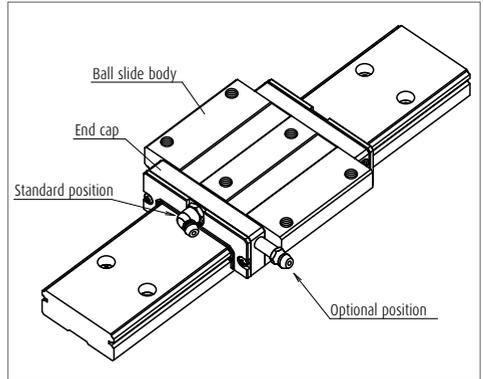


Fig. 8 Mounting position of lubrication accessories

A-5-1.5 LW Series

7. Dust-proof components

(1) Standard specification

The LW Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the series has an end seal on both ends and bottom seals at the bottom.

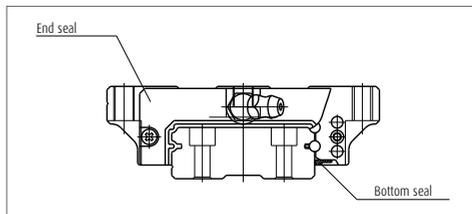


Fig. 13

Table 11 Seal friction per ball slide (maximum value)

Unit: N

| Size \ Series | 17 | 21 | 27 | 35 | 50 |
|---------------|----|----|----|----|----|
| LW | 6 | 8 | 12 | 16 | 20 |

(2) NSK K1 lubrication unit

Table 12 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

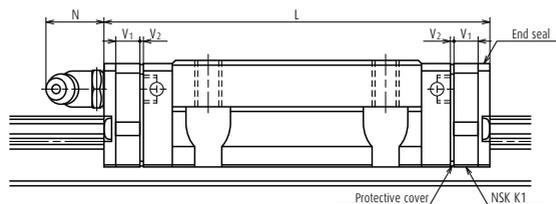


Table 12

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 | Per NSK K1 thickness | Protective cover thickness | Protruding area of the grease fitting |
|-----------|-------------------|------------------|----------------------------|---|----------------------|----------------------------|---------------------------------------|
| | | | | L | V ₁ | V ₂ | N |
| LW17 | Standard | EL | 51.4 | 61.6 | 4.5 | 0.6 | (5) |
| LW21 | Standard | EL | 58.8 | 71.4 | 5.5 | 0.8 | (13) |
| LW27 | Standard | EL | 74 | 86.6 | 5.5 | 0.8 | (13) |
| LW35 | Standard | EL | 108 | 123 | 6.5 | 1.0 | (13) |
| LW50 | Standard | EL | 140.6 | 155.6 | 6.5 | 1.0 | (14) |

- Note**
- 1) NSK K1 for food and medical equipments are available for the models of LW17 to LW35.
 - 2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover, V₂ × 2)

(3) Double seal

Use a double seal set as showing in **Table 13**, when installing an extra seal to completed standard products. **(Fig. 10)**
When installing a grease fitting after the installation of double seals, a connector as showing **Fig.10** is required.

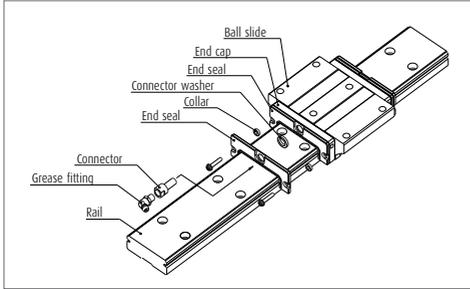


Fig. 10 Double seal

(4) Protector

Use a protector set as showing **Table 14**, when installing a protector to completed standard products. **(Fig.11)**
When installing a grease fitting after the installation of protectors, a connector as showing **Fig.11** is required.

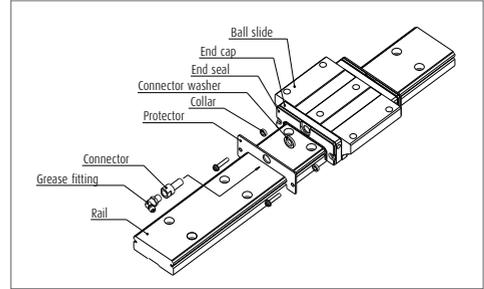


Fig. 11 Protector seal

Table 13 Double-seal set

| Model No. | Reference No. | | Increased thickness V_3 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| LW17 | LW17WS-01 | * | 2.6 |
| LW21 | LW21WS-01 | LW21WSC-01 | 2.8 |
| LW27 | LW27WS-01 | LW27WSC-01 | 2.5 |
| LW35 | LW35WS-01 | LW35WSC-01 | 3 |
| LW50 | LW50WS-01 | LW50WSC-01 | 3.6 |

Table 14 Protector set

| Model No. | Reference No. | | Increased thickness V_4 (mm) |
|-----------|-------------------|----------------|--------------------------------|
| | Without connector | With connector | |
| LW17 | LW17PT-01 | * | 3.2 |
| LW21 | LW21PT-01 | LW21PTC-01 | 3.2 |
| LW27 | LW27PT-01 | LW27PTC-01 | 2.9 |
| LW35 | LW35PT-01 | LW35PTC-01 | 3.6 |
| LW50 | LW50PT-01 | LW50PTC-01 | 4.2 |

*) For installation of a connector to a drive-in type grease fitting, contact NSK.

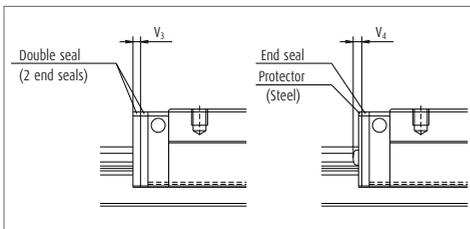


Fig. 12

(5) Cap to plug the rail mounting bolt hole

Table 15 Caps to plug rail bolt hole

| Modell No. | Bolt to secure rail | Cap reference No. | Quantity/case |
|------------------|---------------------|-------------------|---------------|
| LW17, LW21, LW27 | M4 | LG-CAP/M4 | 20 |
| LW35 | M6 | LG-CAP/M6 | 20 |
| LW50 | M8 | LG-CAP/M8 | 20 |

A-5-1.5 LW Series

(6) Bellows

- Make tap holes to the rail end face to fix the bellows mounting plate. NSK processes tap holes to the rail end face when ordered with a linear guide.

Dimension tables of bellows

LW Series

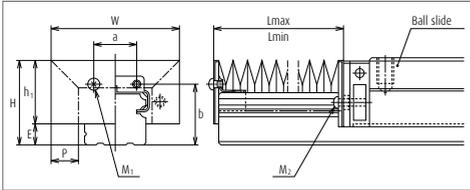


Fig. 17 Dimensions of bellows

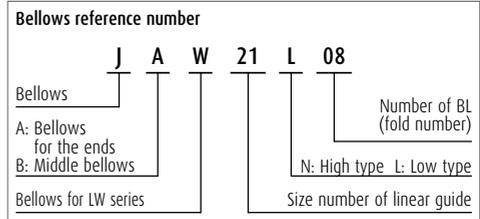


Table 16 Dimensions of bellows

Unit : mm

| Model No. | H | h ₁ | E | W | P | a | b | BL minimum length | Tap (M) × depth |
|-----------|------|----------------|-----|-----|----|----|----|-------------------|-----------------|
| JAW17N | 25.5 | 23 | 2.5 | 68 | 15 | 22 | 6 | 17 | M3 × 6 |
| JAW21N | 29 | 26 | 3 | 75 | 17 | 26 | 7 | 17 | M3 × 6 |
| JAW27N | 37 | 33 | 4 | 85 | 20 | 28 | 10 | 17 | M3 × 6 |
| JAW35L | 34 | 30 | 4 | 100 | 14 | 48 | 12 | 17 | M4 × 8 |
| JAW35N | 41 | 37 | 4 | 115 | 20 | 48 | 12 | 17 | M4 × 8 |
| JAW50L | 46.5 | 42 | 4.5 | 135 | 20 | 70 | 14 | 17 | M4 × 8 |
| JAW50N | 56.5 | 52 | 4.5 | 160 | 30 | 70 | 14 | 17 | M4 × 8 |

Table 20 Numbers of folds (BL) and lengths of bellows

Unit : mm

| Model No. | Number of BL | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
|-----------|------------------|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| | L _{min} | 34 | 68 | 102 | 136 | 170 | 204 | 238 | 272 | 306 | 340 |
| JAW17N | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| | L _{max} | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| JAW21N | Stroke | 204 | 408 | 612 | 816 | 1 020 | 1 224 | 1 428 | 1 632 | 1 836 | 2 040 |
| | L _{max} | 238 | 476 | 714 | 952 | 1 190 | 1 428 | 1 666 | 1 904 | 2 142 | 2 380 |
| JAW27N | Stroke | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| | L _{max} | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| JAW35L | Stroke | 162 | 324 | 486 | 648 | 810 | 972 | 1 134 | 1 296 | 1 458 | 1 620 |
| | L _{max} | 196 | 392 | 588 | 784 | 980 | 1 176 | 1 372 | 1 568 | 1 764 | 1 960 |
| JAW35N | Stroke | 218 | 436 | 654 | 872 | 1 090 | 1 308 | 1 526 | 1 744 | 1 962 | 2 180 |
| | L _{max} | 252 | 504 | 756 | 1 008 | 1 260 | 1 512 | 1 764 | 2 016 | 2 268 | 2 520 |
| JAW50L | Stroke | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| | L _{max} | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| JAW50N | Stroke | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| | L _{max} | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of even number BL on the both sides, then by dividing the sum by 2.



A-5-1.5 LW Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|--------------------------------|
| | LW | 35 | 1000 | EL | C | 2 | -** | P6 | 1 |
| Series name | | | | | | | | | Preload code (See page A177.) |
| Size | | | | | | | | | 0: Z0, 1: Z1, 3: Z3 |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 19.) |
| Ball slide shape code (See page A175.) | | | | | | | | | Design serial number |
| Material/surface treatment code (See Table 18.) | | | | | | | | | Added to the reference number. |
| C: Special high carbon steel (NSK standard) | | | | | | | | | Number of ball slides per rail |

(2) Reference number for random-matching type

| | | | | | |
|---|------------|-----------|-----------|----------|--|
| Ball slide | LAW | 35 | EL | Z | -K |
| Random-matching ball slide series code | | | | | Option code |
| LAW: LW Series random-matching ball slide | | | | | -K: Equipped with NSK K1 |
| Size | | | | | -F: Fluoride low temperature chrome plating + AS2 grease |
| Ball slide shape code (See page A175.) | | | | | -F50: Fluoride low temperature chrome plating + LG2 grease |
| | | | | | Preload code |
| | | | | | No code: Fine clearance, Z: Slight preload |

| | | | | | | | | | |
|---|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|
| Rail | L1W | 35 | 1000 | L | C | N | -** | PC | Z |
| Random-matching rail series code | | | | | | | | | Preload code (See page A177.) |
| L1W: LW Series random-matching rail | | | | | | | | | T: Fine clearance, Z: Slight preload |
| Size | | | | | | | | | Accuracy code |
| Rail length (mm) | | | | | | | | | PC: Normal grade is only available. |
| Rail shape code: L | | | | | | | | | Design serial number |
| L: Standard | | | | | | | | | Added to the reference number. |
| Material/surface treatment code (See Table 18.) | | | | | | | | | *Butting rail specification |
| | | | | | | | | | N: Non-butting, L: Butting specification |
| | | | | | | | | | *Please consult with NSK for butting rail specification. |

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload codes of "fine clearance T" and "slight preload Z" are available (refer to page A177).

Table 18 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| D | Special high carbon steel with surface treatment |
| Z | Other, special |

Table 19 Accuracy code


| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|-------------------------------------|------------------------------|-------------|---|
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |
| Normal grade (random-matching type) | PC | KC | FC |

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.


A-5-1.5 LW Series

(9) Dimensions


LW-EL

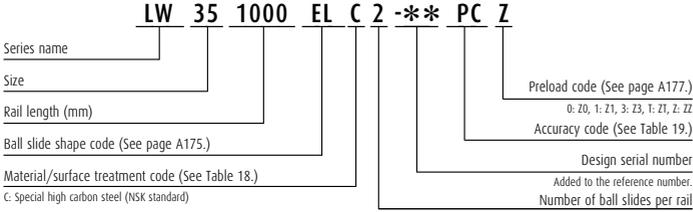

Front view


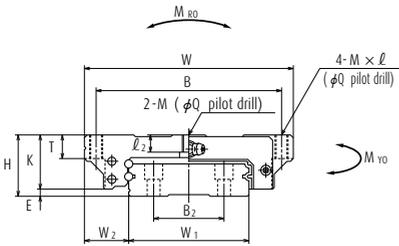


Side view


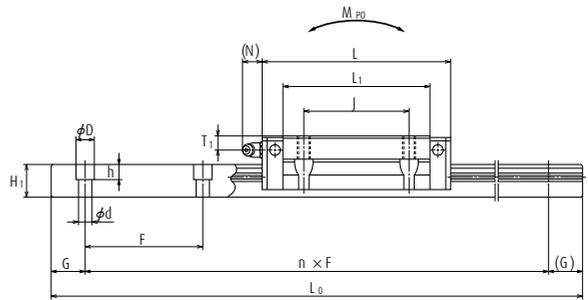


| Model No. | Assembly | | | Ball slide | | | | | | | | | | | | | | Width | Height | |
|-----------|----------|----------------|----------------|------------|--------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|-----------|----------------|----------------|----------------|----------------|-------|--------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | | | Grease fitting | | | | | | | | |
| | | | | | | B | J | M × pitch × l | l ₂ | Q | L ₁ | K | T | Hole size | | | W ₁ | | | H ₁ |
| | | | | | | | | | | | | | | Hole size | T ₁ | N | | | | |
| H | E | W ₂ | W | L | B | J | M × pitch × l | l ₂ | Q | L ₁ | K | T | Hole size | T ₁ | N | W ₁ | H ₁ | | | |
| LW17EL | 17 | 2.5 | 13.5 | 60 | 51.4 | 53 | 26 | M4×0.7×6 | 3.2 | 3.3 | 35 | 14.5 | 6 | φ 3 | 4 | 3 | 33 | 8.7 | | |
| LW21EL | 21 | 3 | 15.5 | 68 | 58.8 | 60 | 29 | M5×0.8×8 | 3.7 | 4.4 | 41 | 18 | 8 | M6×0.75 | 4.5 | 11 | 37 | 10.5 | | |
| LW27EL | 27 | 4 | 19 | 80 | 74 | 70 | 40 | M6×1×10 | 6 | 5.3 | 56 | 23 | 10 | M6×0.75 | 6 | 11 | 42 | 15 | | |
| LW35EL | 35 | 4 | 25.5 | 120 | 108 | 107 | 60 | M8×1.25×14 | 9 | 6.8 | 84 | 31 | 14 | M6×0.75 | 8 | 11 | 69 | 19 | | |
| LW50EL | 50 | 4.5 | 36 | 162 | 140.6 | 144 | 80 | M10×1.5×18 | 14 | 8.6 | 108 | 45.5 | 18 | Rc1/8 | 14 | 14 | 90 | 24 | | |

Reference number for ball slide of random-matching type

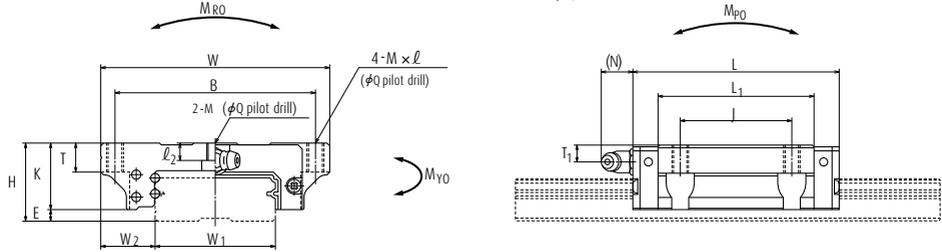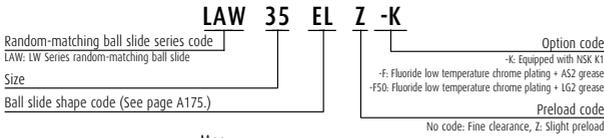

Reference number for rail of random-matching type

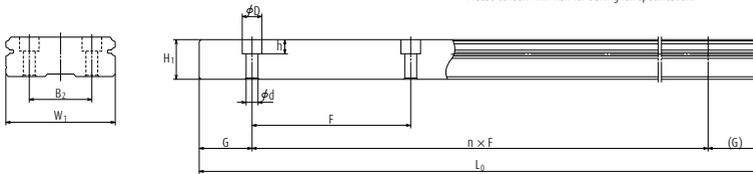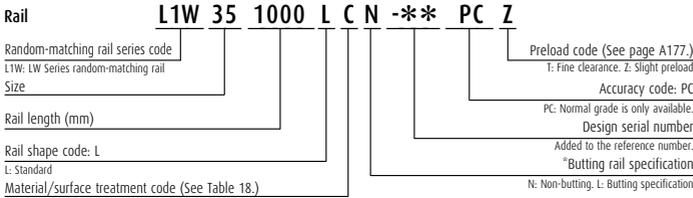

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | | |
|-------------------------|-------------------------|----------------------------|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|-----------|-----------------|-----------|-------------------|-------------------|
| Pitch B ₂ | Mounting bolt hole F | Mounting hole d × D × h | G (reference) | Maximum length L _{0max} () for stainless | 1) Dynamic | | Static C ₀ (N) | M _{RO} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100mm) |
| | | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | | | One slide | Two slides | One slide | Two slides | |
| 18 | 40 | 4.5×7.5×5.3 | 15 | 1 000 | 5 600 | 4 450 | 11 300 | 135 | 44 | 288 | 37 | 242 | 0.2 | 2.1 |
| 22 | 50 | 4.5×7.5×5.3 | 15 | 1 600 | 6 450 | 5 150 | 13 900 | 185 | 65.5 | 400 | 55 | 335 | 0.3 | 2.9 |
| 24 | 60 | 4.5×7.5×5.3 | 20 | 2 000 | 12 800 | 10 200 | 26 900 | 400 | 171 | 970 | 143 | 815 | 0.5 | 4.7 |
| 40 | 80 | 7×11×9 | 20 | 2 000 | 33 000 | 26 400 | 66 500 | 1 690 | 645 | 3 550 | 545 | 2 990 | 1.5 | 9.6 |
| 60 | 80 | 9×14×12 | 20 | 2 000 | 61 500 | 48 500 | 117 000 | 3 900 | 1 530 | 8 200 | 1 280 | 6 900 | 4.0 | 15.8 |

Note The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)
C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-2 Liquid Crystal Display and Semiconductor



| | Page |
|-------------------------------------|------|
| 1. PU Series | A191 |
| 2. LU Series | A201 |
| 3. PE Series | A213 |
| 4. LE Series | A223 |
| 5. Miniature LH Series | A237 |
| 6. LL Series | A247 |

A-5-2.1 PU Series (Miniature type)

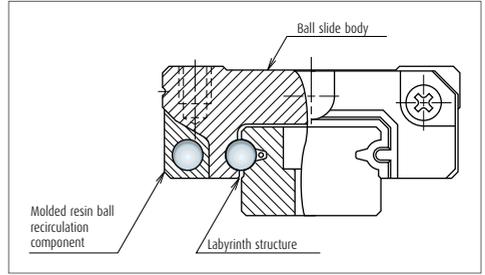
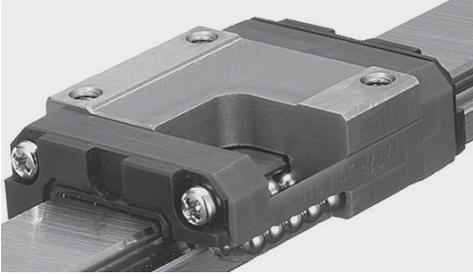


Fig. 1

1. Features

(1) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(2) Lightweight

The ball slide is fabricated to be approximately 20% lighter than LU Series by the application of resin to a part of its body.

(3) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(4) Low dust generation

The structure is designed to prevent dust generation.

(5) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(6) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provide excellent corrosion resistance.

(7) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(8) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

(9) Fast delivery

Lineup of random-matching rails and ball slides facilitates fast delivery. (PU09 to PU15)

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | |
|----------------------------------|---|---|--|
| | | Standard type | High-load type |
| | | Standard | Long |
| AR TR AL UR BL BR |  | TR, AR, AL  | UR, BL, BR  |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly (not random matching) | | | | Random-matching type |
|------------------|---------|--|----------------------|-----------------------|--------------------|----------------------|
| | | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN | Normal grade PC |
| over | or less | | | | | |
| - | 50 | 2 | 2 | 4.5 | 6 | 6 |
| 50 | 80 | 2 | 3 | 5 | 6 | 6 |
| 80 | 125 | 2 | 3.5 | 5.5 | 6.5 | 6.5 |
| 125 | 200 | 2 | 4 | 6 | 7 | 7 |
| 200 | 250 | 2.5 | 5 | 7 | 8 | 8 |
| 250 | 315 | 2.5 | 5 | 8 | 9 | 9 |
| 315 | 400 | 3 | 6 | 9 | 11 | 11 |
| 400 | 500 | 3 | 6 | 10 | 12 | 12 |
| 500 | 630 | 3.5 | 7 | 12 | 14 | 14 |
| 630 | 800 | 4.5 | 8 | 14 | 16 | 16 |
| 800 | 1 000 | 5 | 9 | 16 | 18 | 18 |
| 1 000 | 1 250 | 6 | 10 | 17 | 20 | 20 |

A-5-2.1 PU Series (Miniature type)

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision grade P6, and normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while Table 3 shows the accuracy standard for the random-matching types.

> Tolerance of preloaded assembly type

Table 2

Unit: μm

| Characteristics | Accuracy grade | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|-----------------------------|-----------------------|----------------------|-----------------------|--------------------|
| Mounting height H | | ± 10 | ± 15 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 20 | ± 30 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A | Shown in Table 1 and Fig. 2 | | | | |
| Running parallelism of surface D to surface B | Shown in Table 1 and Fig. 2 | | | | |

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

| Characteristics | Model No. | PU09, 12 and 15 |
|---|-----------------------------|-----------------|
| Mounting height H | | ± 20 |
| Variation of mounting height H | | 15 ① 30 ② |
| Mounting width W_2 or W_3 | | ± 20 |
| Variation of mounting width W_2 or W_3 | | 20 |
| Running parallelism of surface C to surface A | Shown in Table 1 and Fig. 2 | |
| Running parallelism of surface D to surface B | Shown in Table 1 and Fig. 2 | |

Notes ① Variation on the same rail / ② Variation on multiple rails

(3) Assembled accuracy

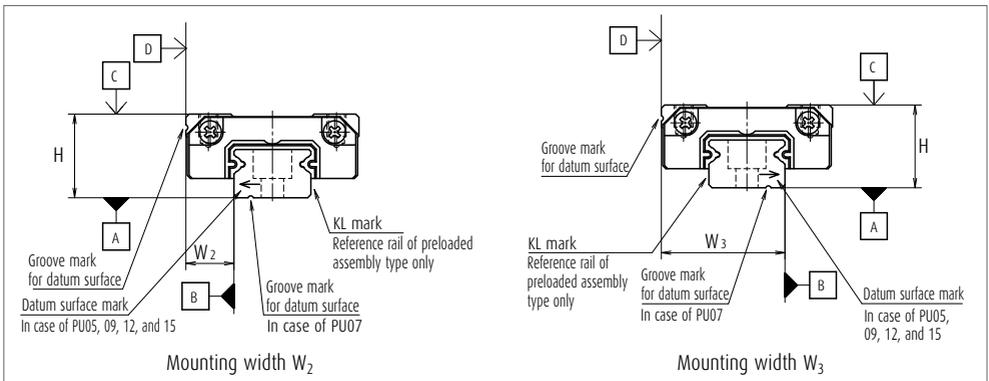


Fig. 2

Note Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for preloaded assembly type, along with Fine clearance ZT for random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

> Preload and rigidity of preloaded assembly

Table 4

| Model No. | | Preload (N) | Rigidity (N/μm) |
|----------------|--------|---------------------|---------------------|
| | | Slight preload (Z1) | Slight preload (Z1) |
| Standard type | PU05TR | 0 - 3 | 17 |
| | PU07AR | 0 - 8 | 22 |
| | PU09TR | 0 - 10 | 30 |
| | PU12TR | 0 - 17 | 33 |
| | PU15AL | 0 - 33 | 45 |
| High-load type | PU09UR | 0 - 14 | 46 |
| | PU12UR | 0 - 25 | 52 |
| | PU15BL | 0 - 51 | 75 |

Note Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

> Clearance of random-matching type

Table 5

Unit : μm

| Model No. | | Fine clearance ZT |
|----------------|--------|-------------------|
| Standard type | PU09TR | 3 or less |
| | PU12TR | |
| | PU15AL | |
| High-load type | PU09UR | 5 or less |
| | PU12UR | |
| | PU15BL | |

4. Maximum rail length

Table 6 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grade.

Table 6 Length limitations of rails

Unit: mm

| Series | Size | 05 | 07 | 09 | 12 | 15 |
|--------|-----------------|-----|-----|-----|-----|-------|
| | Material | | | | | |
| PU | Stainless steel | 210 | 375 | 600 | 800 | 1 000 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.1 PU Series (Miniature type)

5. Installation

(1) Permissible values of mounting error

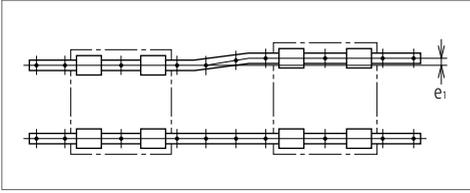


Fig. 3

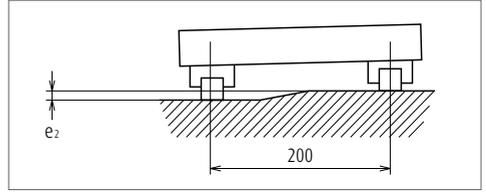


Fig. 4

Table 7

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|---------------------------------|------|------|------|------|
| | | PU05 | PU07 | PU09 | PU12 | PU15 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 10 | 12 | 15 | 20 | 25 |
| | Z1 | 7 | 10 | 13 | 15 | 21 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 150 $\mu\text{m}/200\text{ mm}$ | | | | |
| | Z1 | 90 $\mu\text{m}/200\text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 5 Shoulder for the rail datum face




Fig. 6 Shoulder for the ball slide datum face

Table 8

Unit: mm


| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|----------|
| | r_a | r_b | H' | $H''^*)$ |
| PU05 | 0.2 | 0.2 | 0.7 | 2.3 |
| PU07 | 0.2 | 0.3 | 1.2 | 2.5 |
| PU09 | 0.3 | 0.3 | 1.9 | 2.6 |
| PU12 | 0.3 | 0.3 | 2.5 | 3.4 |
| PU15 | 0.3 | 0.5 | 3.5 | 4.4 |

^{*)} H'' is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PU15 can select drive-in type grease fitting as an option.

For the models of PU05 to PU12, apply grease directly to the ball grooves of rail using a point nozzle.

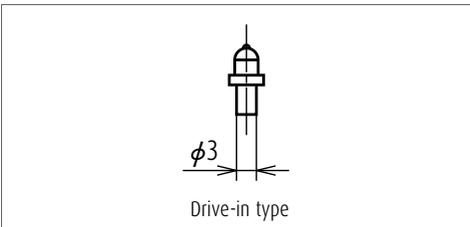

7. Dust-proof components

(1) Standard specification

An end seal provided to both ends of a ball slide as a standard feature.

Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

| Series | 05 | 07 | 09 | 12 | 15 |
|--------|-----|-----|-----|-----|-----|
| PU | 0.3 | 0.3 | 0.5 | 0.5 | 0.5 |

(2) NSK K1 lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

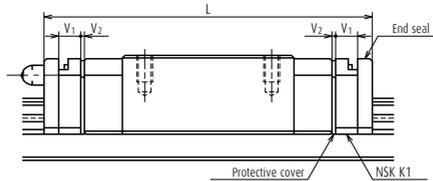


Table 10

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Thickness of NSK K1, V ₁ | Thickness of protective cover, V ₂ |
|-----------|-------------------|------------------|----------------------------|--|--|--|
| PU05 | Standard | TR | 19.4 | 24.4 | 2 | 0.5 |
| PU07 | Standard | AR | 23.4 | 29.4 | 2.5 | 0.5 |
| PU09 | Standard | TR | 30 | 36.4 | 2.7 | 0.5 |
| PU09 | Long | UR | 41 | 47.4 | 2.7 | 0.5 |
| PU12 | Standard | TR | 35 | 42 | 3 | 0.5 |
| PU12 | Long | UR | 48.7 | 55.7 | 3 | 0.5 |
| PU15 | Standard | AL | 43 | 51.2 | 3.5 | 0.6 |
| PU15 | Long | BL | 61 | 69.2 | 3.5 | 0.6 |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)

A-5-2.1 PU Series (Miniature type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|--------------------------------|--|
| | PU | 15 | 0470 | AL | K | 2 | -** | P5 | 1 | |
| Series name | | | | | | | | | Preload code (See page A194.) | |
| Size | | | | | | | | | 0: Z0, 1: Z1 | |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 12.) | |
| Ball slide shape code (See page A192.) | | | | | | | | | Design serial number | |
| Material/surface treatment code (See Table 11.) | | | | | | | | | Added to the reference number. | |
| K: Stainless steel | | | | | | | | | Number of ball slides per rail | |

(2) Reference number for random-matching type

| | | | | | | |
|---|------------|-----------|-----------|----------|--------------------------|--|
| Ball slide | PAU | 15 | AL | S | -K | |
| Random-matching ball slide series code | | | | | Option code | |
| PAU: PU Series random-matching ball slide | | | | | -K: Equipped with NSK K1 | |
| Size | | | | | Material code | |
| Ball slide shape code (See page A192.) | | | | | S: Stainless steel | |

| | | | | | | | | | | |
|---|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|--|
| Rail | P1U | 15 | 0470 | R | K | N | -** | PC | T | |
| Random-matching rail series code | | | | | | | | | Preload code (See page A194.) | |
| P1U: PU Series random-matching rail | | | | | | | | | T: Fine clearance | |
| Size | | | | | | | | | Accuracy code: PC | |
| Rail length (mm) | | | | | | | | | PC: Normal grade is only available. | |
| Rail shape code | | | | | | | | | Design serial number | |
| S: PU09, 12. R: PU15 | | | | | | | | | Added to the reference number. | |
| Material/surface treatment code (See Table 11.) | | | | | | | | | *Butting rail specification | |
| | | | | | | | | | N: Non-butting. L: Butting specification | |

*Please consult with NSK for butting rail specification.

The reference number coding for the assembly of random-matching type is the same as that of preloaded assembly. However, only preload code of "fine clearance T" is available (refer to page A194).

Table 11 Material/surface treatment code

| Code | Description |
|------|--|
| K | Stainless steel |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Table 12 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|-------------------------------------|------------------------------|-------------|---|
| Super precision grade | P4 | K4 | F4 |
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |
| Normal grade (random-matching type) | PC | KC | FC |


Note Refer to pages A38 and A61 for the NSK K1 lubrication unit.

A-5-2.1 PU Series (Miniature type)


9. Dimensions

PU-TR, AR, AL (Standard type / Standard)


PU-UR, BL (High-load type / Long)

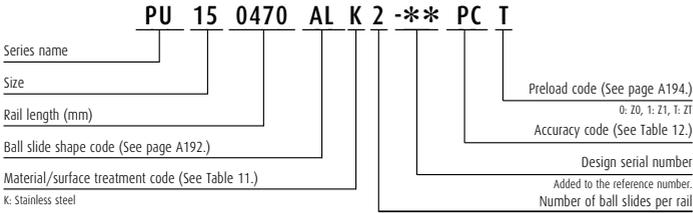

Front view

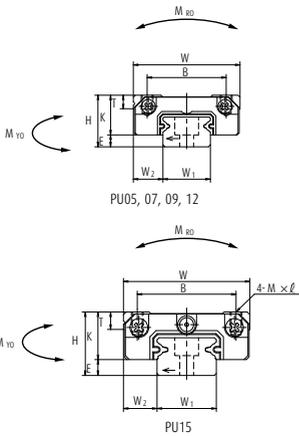

Side view

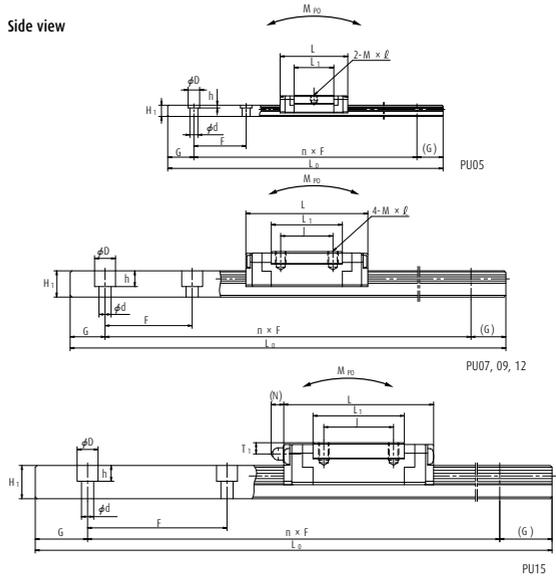

| Model No. | Assembly | | | Ball slide | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|-----------|----------------|------|-------|----------------|-------|--------|-----|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | L ₁ | K | T | Oil hole | | | | |
| | | | | | | B | J | M × pitch × ℓ | Hole size | | | | T ₁ | | | N | W ₁ |
| PU05TR | 6 | 1 | 3.5 | 12 | 19.4 | 8 | - | M2×0.4×1.5 | 11.4 | 5 | 2.3 | φ 0.9 | 1.5 | - | 5 | 3.2 | |
| PU07AR | 8 | 1.5 | 5 | 17 | 23.4 | 12 | 8 | M2×0.4×2.4 | 13.3 | 6.5 | 2.45 | φ 1.5 | 1.8 | - | 7 | 4.7 | |
| PU09TR | 10 | 2.2 | 5.5 | 20 | 30 | 15 | 10 | M3×0.5×3 | 19.6 | 7.8 | 2.6 | - | - | - | 9 | 5.5 | |
| PU09UR | 10 | 2.2 | 5.5 | 20 | 41 | 15 | 16 | M3×0.5×3 | 30.6 | 7.8 | 2.6 | - | - | - | 9 | 5.5 | |
| PU12TR | 13 | 3 | 7.5 | 27 | 35 | 20 | 15 | M3×0.5×3.5 | 20.4 | 10 | 3.4 | - | - | - | 12 | 7.5 | |
| PU12UR | 13 | 3 | 7.5 | 27 | 48.7 | 20 | 20 | M3×0.5×3.5 | 34.1 | 10 | 3.4 | - | - | - | 12 | 7.5 | |
| PU15AL | 16 | 4 | 8.5 | 32 | 43 | 25 | 20 | M3×0.5×5 | 26.2 | 12 | 4.4 | φ 3 | 3.2 | (3.6) | 15 | 9.5 | |
| PU15BL | 16 | 4 | 8.5 | 32 | 61 | 25 | 25 | M3×0.5×5 | 44.2 | 12 | 4.4 | φ 3 | 3.2 | (3.6) | 15 | 9.5 | |

Notes

1) The ball slide of PU05TR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type


PAU 15 AL S -K

Random-matching ball slide series code
PAU: PU Series random-matching ball slide

Size
Ball slide shape code (See page A192.)

Option code
-K: Equipped with NSK KT

Material code
S: Stainless steel

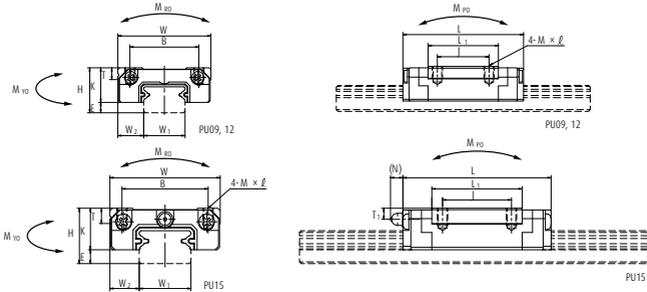

Reference number for rail of random-matching type

P1U 15 0470 R K N - PC T**


Random-matching rail series code
P1U: PU Series random-matching rail

Size
Rail length (mm)
Rail shape code
S: PU09, 12. R: PU15

Material/surface treatment code (See Table 11.)

Preload code (See page A194.)
T: Fine clearance
Accuracy code: PC
PC: Normal grade is only available.
Design serial number
Added to the reference number.
*Butting rail specification
N: Non-butting. L: Butting specification

*Please consult with NSK for butting rail specification.

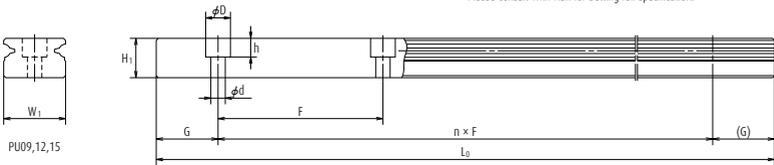

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|----------------------|-------------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | C ₀ (N) | M _{RO} | Static moment (N·m) | | | | Ball slide (g) | Rail (g/100mm) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 15 | 2.3×3.3×0.8 | 5 | 210 | 520 | 410 | 775 | 2.06 | 1.28 | 9.90 | 1.28 | 9.90 | 4 | 11 |
| 15 | 2.4×4.2×2.3 | 5 | 375 | 1 090 | 860 | 1 370 | 5.20 | 2.70 | 21.8 | 2.70 | 21.8 | 8 | 23 |
| 20 | 3.5×6×4.5 | 7.5 | 600 | 1 490 | 1 180 | 2 150 | 9.90 | 6.10 | 41.0 | 6.10 | 41.0 | 16 | 35 |
| 20 | 3.5×6×4.5 | 7.5 | 600 | 2 100 | 1 670 | 3 500 | 16.2 | 15.6 | 88.0 | 15.6 | 88.0 | 25 | 35 |
| 25 | 3.5×6×4.5 | 10 | 800 | 2 830 | 2 250 | 3 500 | 21.1 | 11.4 | 73.5 | 11.4 | 73.5 | 32 | 65 |
| 25 | 3.5×6×4.5 | 10 | 800 | 4 000 | 3 150 | 5 700 | 34.5 | 28.3 | 174 | 28.3 | 174 | 53 | 65 |
| 40 | 3.5×6×4.5 | 15 | 1 000 | 5 550 | 4 400 | 6 600 | 49.5 | 25.6 | 190 | 25.6 | 190 | 59 | 105 |
| 40 | 3.5×6×4.5 | 15 | 1 000 | 8 100 | 6 400 | 11 300 | 84.5 | 69.5 | 435 | 69.5 | 435 | 100 | 105 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

3) To fix rail of PU05TR, use M2 × 0.4 cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.1.)

(JIS: Japanese Camera Industrial Standard.)

A-5-2.2 LU Series (Miniature type)

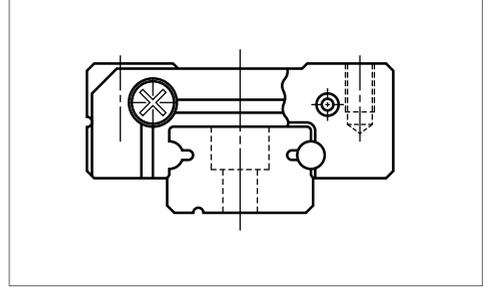


Fig. 1 LU Series

1. Features

(1) Super-small type

This compact guide owes its design to the single ball groove on both right and left sides (Gothic arch).

(2) Equal load carrying capacity in vertical and lateral directions

The contact angle is set at 45 degrees, thus facilitating the equal load carrying capacity in vertical and lateral directions. This also provides equal rigidity in both directions.

(3) Stainless steel is also standardized

Items made of the martensitic stainless steel are available as standard.

(4) Some series have a ball retainer

Ball slide types AR and TR come with a ball retainer. Balls are retained in the retainer and do not fall out when the ball slide is withdrawn from the rail. (Ball slides of random-matching type as well as LU15 come with ball retainer.)

(5) Fast delivery

Random-matching of rails and ball slides are available. (LU09 to LU15)

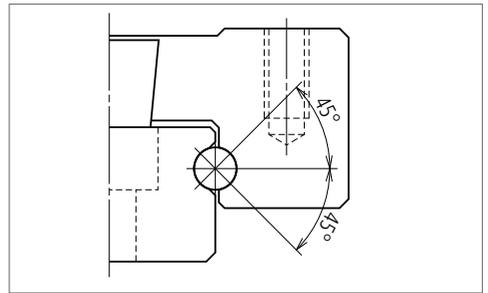





Fig. 2 Balls are in contact.

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | |
|----------------------------------|---|---|--|
| | | Standard type | High-load type |
| | | Standard | Long |
| AL TL AR TR BL UL |  | AL, TL, TR, AR  | BL, UL  |

| Specification | Detail | Type | |
|---------------|---------|---------|---------|
| Mounting hole | Normal | AL, AR | BL |
| | Large | TL, TR | UL |
| Ball retainer | Without | AL*, TL | BL*, UL |
| | With | AR, TR | - |

*) LU15 is equipped with ball retainer

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly type (not random matching) | | | | Random-matching type |
|------------------|---------|---|-------------------|--------------------|-----------------|----------------------|
| | | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN | Normal grade PC |
| over | or less | | | | | |
| - | 50 | 2 | 2 | 4.5 | 6 | 6 |
| 50 | - 80 | 2 | 3 | 5 | 6 | 6 |
| 80 | - 125 | 2 | 3.5 | 5.5 | 6.5 | 6.5 |
| 125 | - 200 | 2 | 4 | 6 | 7 | 7 |
| 200 | - 250 | 2.5 | 5 | 7 | 8 | 8 |
| 250 | - 315 | 2.5 | 5 | 8 | 9 | 9 |
| 315 | - 400 | 3 | 6 | 9 | 11 | 11 |
| 400 | - 500 | 3 | 6 | 10 | 12 | 12 |
| 500 | - 630 | 3.5 | 7 | 12 | 14 | 14 |
| 630 | - 800 | 4.5 | 8 | 14 | 16 | 16 |
| 800 | - 1 000 | 5 | 9 | 16 | 18 | 18 |
| 1 000 | - 1 250 | 6 | 10 | 17 | 20 | 20 |

A-5-2.2 LU Series (Miniature type)

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal grade PN, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type, while Table 3 shows the accuracy standard for the random-matching type.

> Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|-----------------------------|-------------------|--------------------|-----------------|
| Mounting height H | | ± 10 | ± 15 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 20 | ± 30 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Refer to Table 1 and Fig. 3 | | | |

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

| Characteristics | Accuracy grade |
|--|-----------------------------|
| Mounting height H | ± 20 |
| Variation of mounting height H | 40 |
| Mounting width W_2 or W_3 | ± 20 |
| Variation of mounting width W_2 or W_3 | 40 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | Refer to Table 1 and Fig. 3 |

(3) Assembled accuracy

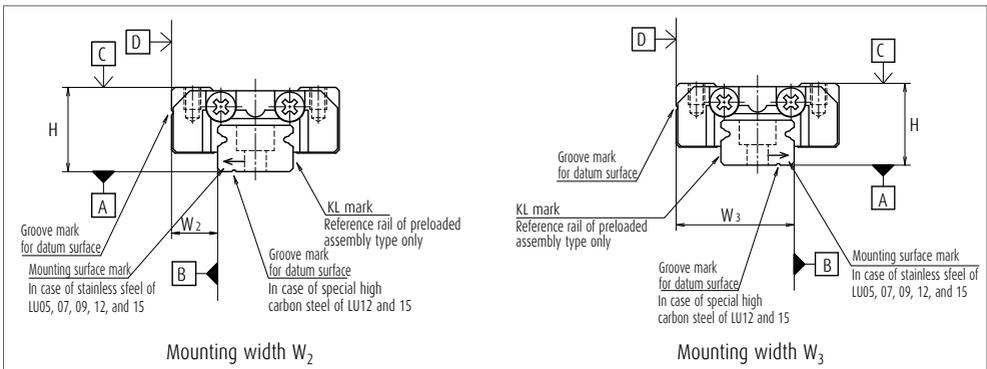


Fig. 3

Note Please refer to page A67 for marks on the datum surfaces.

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly type are shown in **Table 4**. Rigidities are for the median of the preload range.

› Preload and rigidity of preloaded assembly

Table 4

| Model No. | | Preload (N) | Rigidity (N/ μ m) |
|----------------|-------------|---------------------|-----------------------|
| | | Slight preload (Z1) | Slight preload (Z1) |
| Standard type | LU05 TL | 0 – 3 | 15 |
| | LU07 AL | 0 – 8 | 22 |
| | LU09 AL, TL | 0 – 12 | 26 |
| | LU09 AR, TR | 0 – 10 | 30 |
| | LU12 AL, TL | 0 – 17 | 33 |
| | LU12 AR, TR | 0 – 17 | 33 |
| | LU15 AL | 0 – 33 | 45 |
| High-load type | LU09 BL, UL | 0 – 17 | 43 |
| | LU12 BL, UL | 0 – 25 | 52 |
| | LU15 BL | 0 – 51 | 75 |

Note Clearance of Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μ m.

› Clearance of random-matching type

Table 5

Unit: μ m

| Model No. | Fine clearance ZT |
|-----------|-------------------|
| LU09 | 0 – 15 |
| LU12 | 0 – 15 |
| LU15 | 0 – 15 |

4. Maximum rail length

Table 6 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

| Series | Material \ Size | 05 | 07 | 09 | 12 | 15 |
|--------|-----------------|-----|---------------------------|-----|-----|-------|
| | | LU | Special high carbon steel | – | – | 1 200 |
| | Stainless steel | 210 | 375 | 600 | 800 | 1 000 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.2 LU Series (Miniature type)

5. Installation

(1) Permissible values of mounting error

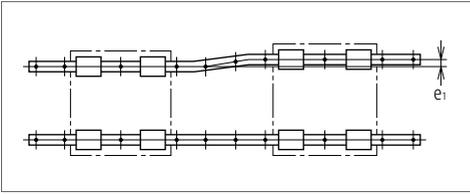


Fig. 4

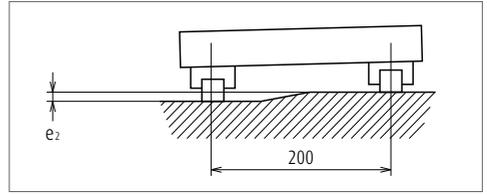


Fig. 5

Table 7

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|---------------------------------|------|------|------|------|
| | | LU05 | LU07 | LU09 | LU12 | LU15 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 10 | 12 | 15 | 20 | 25 |
| | Z1 | 7 | 10 | 13 | 15 | 21 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 150 $\mu\text{m}/200\text{ mm}$ | | | | |
| | Z1 | 90 $\mu\text{m}/200\text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface

Table 8

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-------|
| | r_a | r_b | H' | H'' |
| LU05 | 0.2 | 0.2 | 0.7 | 2 |
| LU07 | 0.2 | 0.3 | 1.2 | 3 |
| LU09 | 0.3 | 0.3 | 1.9 | 3 |
| LU12 | 0.3 | 0.3 | 2.5 | 4 |
| LU15 | 0.3 | 0.5 | 3.5 | 5 |

6. Lubrication accessories

There is no standard grease fitting for LU05 to LU15.
For the LU Series, apply grease directly to the ball grooves of rail using a point nozzle.

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.
LU05TL, LU07AL, LU09AL, and LU09TL can install the side seal as an option.

› Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

| Series | Size | 05 | 07 | 09 | 12 | 15 |
|--------|------|-----|-----|-----|-----|-----|
| LU | | 0.3 | 0.3 | 0.5 | 0.5 | 0.5 |

(2) NSK K1 lubrication unit

The installed dimensions of the NSK K1 lubrication unit are shown in **Table 10**.

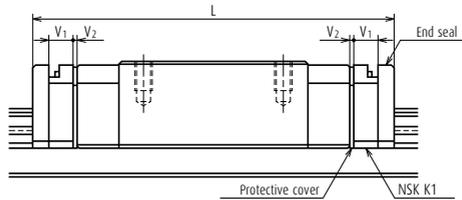


Table 10

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V ₁ | Protective cover thickness V ₂ |
|-----------|-------------------|------------------|----------------------------|---|-------------------------------------|---|
| LU05 | Standard | TL | 18* | 24.4 | 2.0 | 0.5 |
| LU07 | Standard | AL | 20.4* | 29.4 | 2.5 | 0.5 |
| LU09 | Standard | AR, TR | 30 | 36.4 | 2.7 | 0.5 |
| LU09 | Standard | AL, TL | 26.8* | 34.2 | 2.7 | 0.5 |
| LU09 | Long | BL, UL | 41 | 47.4 | 2.7 | 0.5 |
| LU12 | Standard | AR, TR | 35.2 | 42.2 | 3.0 | 0.5 |
| LU12 | Standard | AL, TL | 34 | 41 | 3.0 | 0.5 |
| LU12 | Long | BL, UL | 47.5 | 54.5 | 3.0 | 0.5 |
| LU15 | Standard | AL | 43.6 | 51.8 | 3.5 | 0.6 |
| LU15 | Long | BL | 61 | 69.2 | 3.5 | 0.6 |

*) Standard ball slide length of LU05TL, LU07AL, LU09AL and LU09TL does not include the thickness of the end seal (1.5 mm). However, it includes the height of the screw head for end cap installation (Included length - LU05, 0.8 mm; LU07, no projection; LU09, 1 mm)

Note Ball slide length equipped with NSK K1 =
(Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) +
(Thickness of the protective cover V₂ × 2)

A-5-2.2 LU Series (Miniature type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|--|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|---|--|
| | LU | 12 | 0270 | AR | K | 2 | -** | P5 | 1 | |
| Series name | | | | | | | | | Preload code (See page A204.) | |
| Size | | | | | | | | | Accuracy code (See Table 12.) 0: Z0, 1: Z1 | |
| Rail length (mm) | | | | | | | | | Design serial number | |
| Ball slide shape code (See page A202.) | | | | | | | | | Added to the reference number. | |
| Material/surface treatment code (See Table 11.) C: Special high carbon steel (NSK standard), K: Stainless steel | | | | | | | | | Number of ball slides per rail | |

(2) Reference number for random-matching type

| | | | | | | |
|---|------------|-----------|-----------|----------|--|--|
| Ball slide | LAU | 12 | AR | S | -K | |
| Random-matching ball slide series code LAU: LU Series random-matching ball slide | | | | | Option code -K: Equipped with NSK K1 | |
| Size | | | | | Material code No code: Special high carbon steel (NSK standard), S: Stainless steel | |
| Ball slide shape code (See page A202.) | | | | | | |

| | | | | | | | | | | |
|--|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|--|
| Rail | L1U | 12 | 0270 | R | K | N | -** | PC | T | |
| Random-matching rail series code L1U: LU Series random-matching rail | | | | | | | | | Preload code (See page A204.) T: Fine clearance | |
| Size | | | | | | | | | Accuracy code: PC PC: Normal grade is only available. | |
| Rail length (mm) | | | | | | | | | Design serial number | |
| Rail shape code L: Standard, R: LU09 and LU12 standard, equipped with ball retainer. S: LU09 and LU12 with ball retainer and mounting holes for M3 T: LU09 and LU12 without ball retainer and mounting holes for M3 | | | | | | | | | Added to the reference number. *Butting rail specification | |
| Material/surface treatment code (See Table 11.) | | | | | | | | | N: Non-butting, L: Butting specification *Please consult with NSK for butting rail specification. | |

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A204).

Table 11 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| K | Stainless steel |
| D | Special high carbon steel with surface treatment |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Table 12 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 |
|-------------------------------------|------------------------------|-------------|
| Super precision grade | P4 | K4 |
| High precision grade | P5 | K5 |
| Precision grade | P6 | K6 |
| Normal grade | PN | KN |
| Normal grade (random-matching type) | PC | KC |

Note Refer to page A38 for NSK K1 lubrication unit.

A-5-2.2 LU Series (Miniature type)


9. Dimensions

LU-AL (Standard type / Standard, LU15 is equipped with ball retainer)


LU-TL (Standard type / Standard, Large mounting hole)

LU-AR (Standard type / Standard, With ball retainer)


LU-TR (Standard type / Standard, Large mounting hole, with ball retainer)

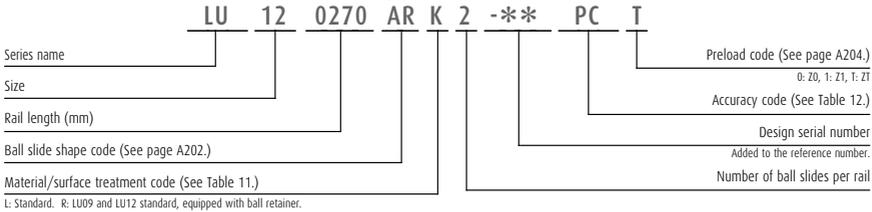

Front view

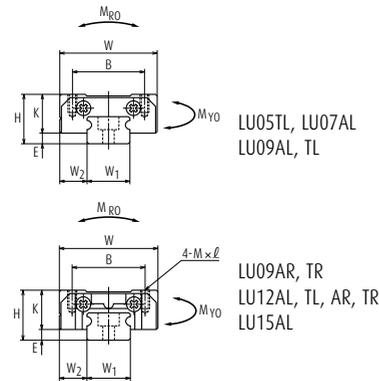

Side view

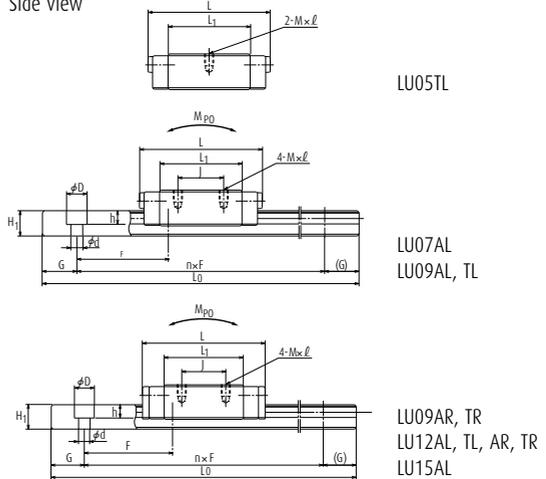

| Model No. | Assembly | | | Ball slide | | | | | | | Width | Height | Pitch |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|----------------|-----|-------|--------|-------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | | | |
| | | | | | | B | J | M × pitch × l | | | | | |
| LU05TL | 6 | 1 | 3.5 | 12 | 18 | 8 | — | M2×0.4×1.5 | 12 | 5 | 5 | 3.2 | 15 |
| LU05TL | 6 | 1 | 3.5 | 12 | 18 | 8 | — | M2×0.4×1.5 | 12 | 5 | 5 | 3.2 | 15 |
| LU07AL | 8 | 1.5 | 5 | 17 | 20.4 | 12 | 8 | M2×0.4×2.4 | 13.6 | 6.5 | 7 | 4.7 | 15 |
| LU07AL | 8 | 1.5 | 5 | 17 | 20.4 | 12 | 8 | M2×0.4×2.4 | 13.6 | 6.5 | 7 | 4.7 | 15 |
| LU09AL | 10 | 2.2 | 5.5 | 20 | 26.8 | 15 | 13 | M2×0.4×2.5 | 18 | 7.8 | 9 | 5.5 | 20 |
| LU09AL | 10 | 2.2 | 5.5 | 20 | 26.8 | 15 | 10 | M3×0.5×3 | 18 | 7.8 | 9 | 5.5 | 20 |
| LU09AR | 10 | 2.2 | 5.5 | 20 | 30 | 15 | 13 | M2×0.4×2.5 | 20 | 7.8 | 9 | 5.5 | 20 |
| LU09TR | 10 | 2.2 | 5.5 | 20 | 30 | 15 | 10 | M3×0.5×3 | 20 | 7.8 | 9 | 5.5 | 20 |
| LU12AL | 13 | 3 | 7.5 | 27 | 34 | 20 | 15 | M2.5×0.45×3 | 21.8 | 10 | 12 | 7.5 | 25 |
| LU12TL | 13 | 3 | 7.5 | 27 | 34 | 20 | 15 | M3×0.5×3.5 | 21.8 | 10 | 12 | 7.5 | 25 |
| LU12AR | 13 | 3 | 7.5 | 27 | 35.2 | 20 | 15 | M2.5×0.45×3 | 21.8 | 10 | 12 | 7.5 | 25 |
| LU12TR | 13 | 3 | 7.5 | 27 | 35.2 | 20 | 15 | M3×0.5×3.5 | 21.8 | 10 | 12 | 7.5 | 25 |
| LU15AL | 16 | 4 | 8.5 | 32 | 43.6 | 25 | 20 | M3×0.5×4 | 27 | 12 | 15 | 9.5 | 40 |
| LU15AL | 16 | 4 | 8.5 | 32 | 43.6 | 25 | 20 | M3×0.5×4 | 27 | 12 | 15 | 9.5 | 40 |

- Notes
- 1) LU05TL, LU07AL, LU09TL, LU09AR, LU09TR, LU12AR and LU12TR come in stainless steel only.
 - 2) Ball slide of LU05TL has only two mounting tap holes in the center.
 - 3) End seals of LU05TL, LU07AL, LU09AL and LU09TL are available on request.




Reference number for ball slide of random-matching type

Random matching with retainer: LU09 - 12 are AR/TR, LU15 is AL.


LAU-AR (With ball retainer)

LAU-TR (Large mounting hole, with ball retainer)

LAU-AL (LU15 is equipped with ball retainer)

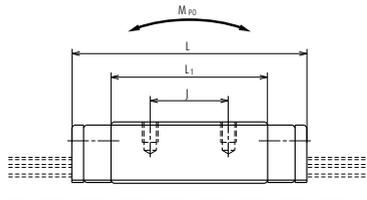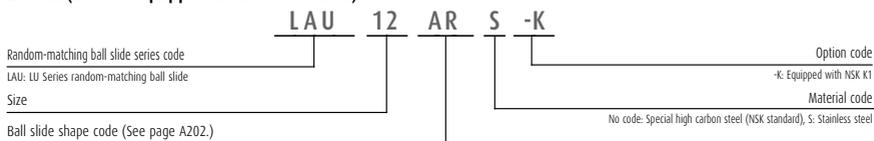


Reference number for rail of random-matching type

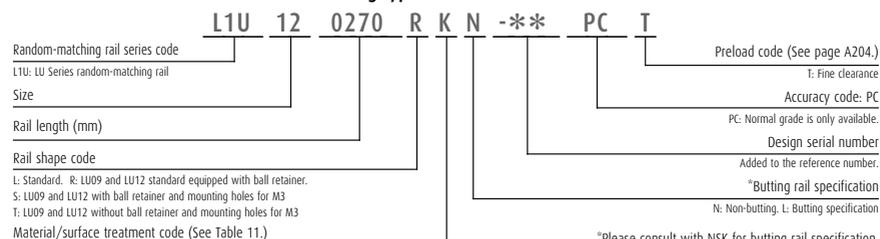

L: Standard. R: LU09 and LU12 standard equipped with ball retainer.
S: LU09 and LU12 with ball retainer and mounting holes for M3
T: LU09 and LU12 without ball retainer and mounting holes for M3

Material/surface treatment code (See Table 11.)

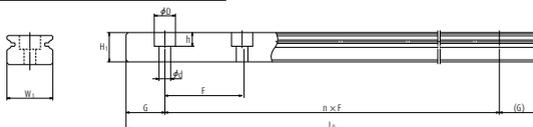

Unit: mm

| Rail | | Basic load rating | | | | | | | Weight | | | |
|---|------------------|--|------------------------|--------------------------|------------------------|----------|---------------------|------------|-----------|------------|-------------------|--------------------|
| Mounting bolt hole $d \times D \times h$ | G (reference) | Max. length L_{0max} () for stainless | Dynamic | | Static C_0 (N) | M_{R0} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) |
| | | | [50km] C_{50} (N) | [100km] C_{100} (N) | | | M_{P0} | | M_{Y0} | | | |
| | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 2.3×3.3×1.5 | 5 | — | 545 | 435 | 740 | 1.93 | 1.22 | 8.85 | 1.22 | 8.85 | 4 | 11 |
| 2.3×3.3×1.5 | 5 | (210) | 545 | 435 | 740 | 1.93 | 1.22 | 8.85 | 1.22 | 8.85 | 4 | 11 |
| 2.4×4.2×2.3 | 5 | — | 1 090 | 865 | 1 370 | 4.90 | 2.66 | 18.6 | 2.66 | 18.6 | 10 | 23 |
| 2.4×4.2×2.3 | 5 | (375) | 1 090 | 865 | 1 370 | 4.90 | 2.66 | 18.6 | 2.66 | 18.6 | 10 | 23 |
| 2.6×4.5×3 | 7.5 | 1 200 | 1 760 | 1 400 | 2 220 | 10.2 | 6.10 | 38.5 | 6.10 | 38.5 | 17 | 35 |
| 3.5×6×4.5 | 7.5 | (600) | 1 760 | 1 400 | 2 220 | 10.2 | 6.10 | 38.5 | 6.10 | 38.5 | 17 | 35 |
| 2.6×4.5×3 | 7.5 | — | 1 490 | 1 180 | 2 150 | 9.9 | 6.10 | 41.0 | 6.10 | 41.0 | 19 | 35 |
| 3.5×6×4.5 | 7.5 | (600) | 1 490 | 1 180 | 2 150 | 9.9 | 6.10 | 41.0 | 6.10 | 41.0 | 19 | 35 |
| 3×5.5×3.5 | 10 | 1 800 | 2 830 | 2 250 | 3 500 | 21.1 | 11.4 | 78.5 | 11.4 | 78.5 | 38 | 65 |
| 3.5×6×4.5 | 10 | (800) | 2 830 | 2 250 | 3 500 | 21.1 | 11.4 | 78.5 | 11.4 | 78.5 | 38 | 65 |
| 3×5.5×3.5 | 10 | — | 2 830 | 2 250 | 3 500 | 21.1 | 11.4 | 81.5 | 11.4 | 81.5 | 38 | 65 |
| 3.5×6×4.5 | 10 | (800) | 2 830 | 2 250 | 3 500 | 21.1 | 11.4 | 81.5 | 11.4 | 81.5 | 38 | 65 |
| 3.5×6×4.5 | 15 | 2 000 | 5 550 | 4 400 | 6 600 | 49.5 | 25.6 | 193 | 25.6 | 193 | 70 | 105 |
| 3.5×6×4.5 | 15 | (1 000) | 5 550 | 4 400 | 6 600 | 49.5 | 25.6 | 193 | 25.6 | 193 | 70 | 105 |

4) To fix rail of LU05TL, use $M2 \times 0.4$ cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.1.)

(JIS: Japanese Camera Industrial Standard.)


5) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life


A-5-2.2 LU Series (Miniature type)

LU-BL (High-load type / Long)

LU-UL (High-load type / Long, large mounting hole)

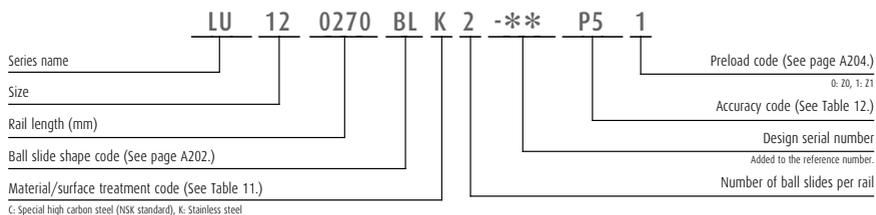


Front view



| Model No. | Assembly | | | Ball slide | | | | | | | Width | Height | Pitch | | | |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|----------------|-----|-------|--------|-------|----------------|----------------|---|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | | | | W ₁ | H ₁ | F |
| | | | | | | B | J | M × pitch × ℓ | | | | | | | | |
| LU09BL | 10 | 2.2 | 5.5 | 20 | 41 | 15 | 16 | M2×0.4×2.5 | 31.2 | 7.8 | 9 | 5.5 | 20 | | | |
| LU09UL | 10 | 2.2 | 5.5 | 20 | 41 | 15 | 16 | M3×0.5×3 | 31.2 | 7.8 | 9 | 5.5 | 20 | | | |
| LU12BL | 13 | 3 | 7.5 | 27 | 47.5 | 20 | 20 | M2.5×0.45×3 | 35.3 | 10 | 12 | 7.5 | 25 | | | |
| LU12UL | 13 | 3 | 7.5 | 27 | 47.5 | 20 | 20 | M3×0.5×3.5 | 35.3 | 10 | 12 | 7.5 | 25 | | | |
| LU15BL | 16 | 4 | 8.5 | 32 | 61 | 25 | 25 | M3×0.5×4 | 44.4 | 12 | 15 | 9.5 | 40 | | | |

- Notes**
- 1) LU09UL is available only in stainless steel.
 - 2) LU15BL is equipped with ball retainer.

Side view

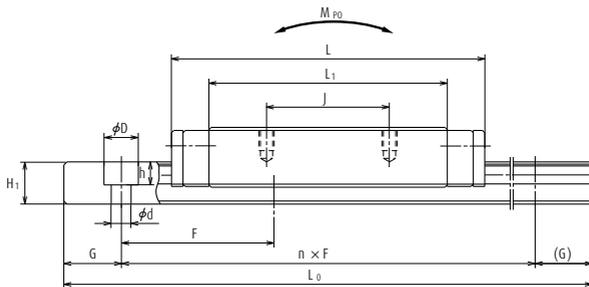

Unit: mm

| Rail | | Basic load rating | | | | | | | | Weight | | |
|--|------------------|--|------------------------|--------------------------|------------------------|----------|---------------------|-----------|------------|--------|-------------------|--------------------|
| Mounting bolt hole $d \times D \times h$ | G (reference) | Maximum length L_{0max} () for stainless | 3) Dynamic | | Static C_N (N) | M_{Ro} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) |
| | | | [50km] C_{50} (N) | [100km] C_{100} (N) | | | M_{Po} | | M_{Yo} | | | |
| | | | | | One slide | | Two slides | One slide | Two slides | | | |
| 2.6×4.5×3 | 7.5 | 1 200 | 2 600 | 2 070 | 3 900 | 17.9 | 17.2 | 98.0 | 17.2 | 98.0 | 29 | 35 |
| 3.5×6×4.5 | 7.5 | (600) | 2 600 | 2 070 | 3 900 | 17.9 | 17.2 | 98.0 | 17.2 | 98.0 | 29 | 35 |
| 3×5.5×3.5 | 10 | 1 800 | 4 000 | 3 150 | 5 700 | 34.5 | 28.3 | 169 | 28.3 | 169 | 59 | 65 |
| 3.5×6×4.5 | 10 | (800) | 4 000 | 3 150 | 5 700 | 34.5 | 28.3 | 169 | 28.3 | 169 | 59 | 65 |
| 3.5×6×4.5 | 15 | 2 000 | 8 100 | 6 400 | 11 300 | 84.5 | 69.5 | 435 | 69.5 | 435 | 107 | 105 |
| 3.5×6×4.5 | 15 | (1 000) | 8 100 | 6 400 | 11 300 | 84.5 | 69.5 | 435 | 69.5 | 435 | 107 | 105 |

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

A-5-2.3 PE Series (Miniature wide type)

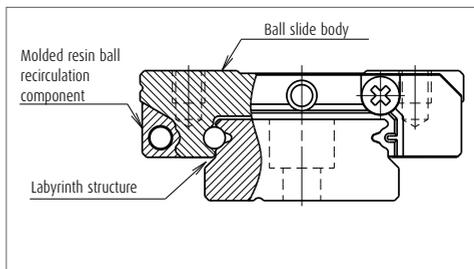
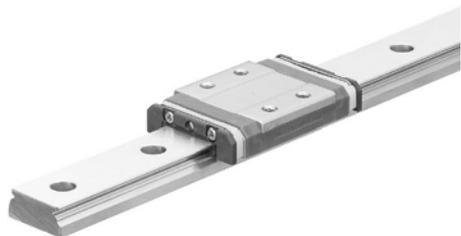


Fig. 1

1. Features

(1) Ideal for use of single rail

The PE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Motion performance

Newly designed recirculation component facilitates smooth circulation of steel balls.

(3) Lightweight

The ball slide is fabricated to be approximately 20% lighter than that of the LE Series by the application of resin to a part of its body.

(4) Reduced noise intensity

Resin components applied in ball circulating circuits reduce collision noise between steel balls and the inner wall of circulating circuits.

(5) Low dust generation

The structure is designed to prevent dust generation.

(6) Excellent dust-proofing

It is designed to minimize the clearance between the side of rails and the inner walls of the slide, and prevent foreign matters from entering the ball slide.

(7) High corrosion resistance

High corrosion-resistant martensite stainless steel incorporated as a standard feature provides excellent resistance to corrosion.

(8) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail.




(9) Long-term maintenance-free

Equipped with NSK K1 Lubrication Unit realizes long-term, maintenance-free use.

(10) Fast delivery

Lineup of random-matching rails and ball slides in the series supports random matching and facilitates fast delivery. (PE09 to PE15)

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | |
|----------------------|---|---|--|
| | | Standard type | High-load type |
| | | Standard | Long |
| AR TR UR BR |  | AR, TR  | UR, BR  |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly type (not random matching) | | | | Random-matching type |
|------------------|---------|---|-------------------|--------------------|-----------------|----------------------|
| | | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN | Normal grade PC |
| over | or less | | | | | |
| - | 50 | 2 | 2 | 4.5 | 6 | 6 |
| 50 | - 80 | 2 | 3 | 5 | 6 | 6 |
| 80 | - 125 | 2 | 3.5 | 5.5 | 6.5 | 6.5 |
| 125 | - 200 | 2 | 4 | 6 | 7 | 7 |
| 200 | - 250 | 2.5 | 5 | 7 | 8 | 8 |
| 250 | - 315 | 2.5 | 5 | 8 | 9 | 9 |
| 315 | - 400 | 3 | 6 | 9 | 11 | 11 |
| 400 | - 500 | 3 | 6 | 10 | 12 | 12 |
| 500 | - 630 | 3.5 | 7 | 12 | 14 | 14 |
| 630 | - 800 | 4.5 | 8 | 14 | 16 | 16 |
| 800 | - 1 000 | 5 | 9 | 16 | 18 | 18 |
| 1 000 | - 1 250 | 6 | 10 | 17 | 20 | 20 |

A-5-2.3 PE Series (Miniature wide type)

(2) Accuracy standard

The preloaded assembly type has four accuracy grades; Super precision P4, High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while Table 3 shows the accuracy standard for the random-matching types.

> Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|-----------------------------|-------------------|--------------------|-----------------|
| Mounting height H | | ± 10 | ± 15 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 5 | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 15 | ± 20 | ± 30 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 7 | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1 and Fig. 2 | | | |

> Tolerance of random-matching type: Normal grade PC

Table 3

Unit: μm

| Characteristics | Model No. |
|--|-----------------------------|
| | PE09, 12 and 15 |
| Mounting height H | ± 20 |
| Variation of mounting height H | 15① 30② |
| Mounting width W_2 or W_3 | ± 20 |
| Variation of mounting width W_2 or W_3 | 20 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | Shown in Table 1 and Fig. 2 |

Note ① Variation on the same rail ② Variation on multiple rails

(3) Assembled accuracy

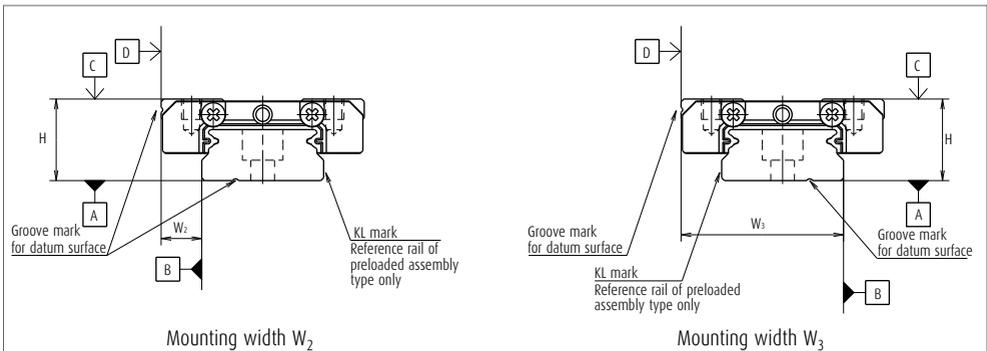


Fig. 2

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0, along with random-matching type of Fine clearance ZT. Values for preload and rigidity of the preloaded assembly types are shown in **Table 4**. Rigidities are for the median of the preload range.

› Preload and rigidity of preloaded assembly

Table 4

| Model No. | | Preload (N) | Rigidity (N/μm) |
|----------------|--------|---------------------|---------------------|
| | | Slight preload (Z1) | Slight preload (Z1) |
| Standard type | PE05AR | 0 - 28 | 45 |
| | PE07TR | 0 - 29 | 46 |
| | PE09TR | 0 - 37 | 61 |
| | PE12AR | 0 - 40 | 63 |
| | PE15AR | 0 - 49 | 66 |
| High-load type | PE09UR | 0 - 54 | 86 |
| | PE12BR | 0 - 59 | 97 |
| | PE15BR | 0 - 75 | 114 |

Note Clearance of Fine clearance Z0 is 0 to 3 μm. Therefore, preload is zero.

› Clearance of random-matching typ

Table 5

Unit: μm

| Model No. | | Fine clearance ZT |
|----------------|--------|-------------------|
| Standard type | PE09TR | 3 or less |
| | PE12AR | 3 or less |
| | PE15AR | 3 or less |
| High-load type | PE09UR | 5 or less |
| | PE12BR | 5 or less |
| | PE15BR | 5 or less |

4. Maximum rail length

Table 6 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

| Series | Material | Size | 05 | 07 | 09 | 12 | 15 |
|--------|-----------------|------|-----|-----|-----|-------|-------|
| | | | | | | | |
| PE | Stainless steel | | 150 | 600 | 800 | 1 000 | 1 200 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.3 PE Series (Miniature wide type)

5. Installation

(1) Permissible values of mounting error

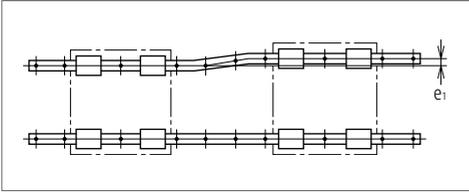


Fig. 3

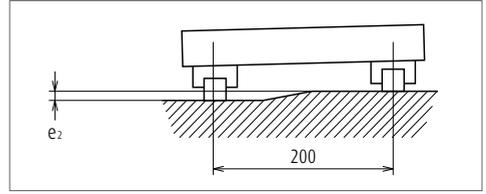


Fig. 4

Table 7

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|--------------------------------|------|------|------|------|
| | | PE05 | PE07 | PE09 | PE12 | PE15 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 10 | 12 | 15 | 18 | 22 |
| | Z1 | 5 | 7 | 10 | 13 | 17 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 50 $\mu\text{m}/200\text{ mm}$ | | | | |
| | Z1 | 35 $\mu\text{m}/200\text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius r




Fig. 5 Shoulder for the rail datum surface




Fig. 6 Shoulder for the ball slide datum surface

Table 8

Unit: mm


| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|---------|
| | r_a | r_b | H' | H''^* |
| PE05 | 0.2 | 0.2 | 1.1 | 2.5 |
| PE07 | 0.2 | 0.3 | 1.7 | 3 |
| PE09 | 0.3 | 0.3 | 3.5 | 2.8 |
| PE12 | 0.3 | 0.3 | 3.5 | 3.2 |
| PE15 | 0.3 | 0.5 | 3.5 | 4.1 |

*) H'' is the minimum recommended value based on the dimension T in dimension table.

6. Lubrication accessory

Model of PE15 can select drive-in type grease fitting as an option.

For the model of PE05 to PE12, apply grease directly to the ball grooves of rail using a point nozzle.

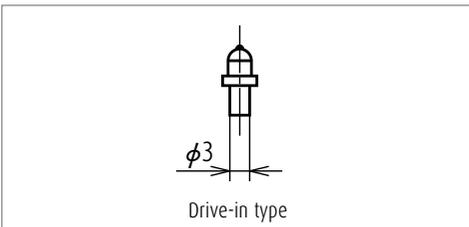

7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

| Series \ Size | 05 | 07 | 09 | 12 | 15 |
|---------------|-----|-----|-----|----|-----|
| PE | 0.4 | 0.4 | 0.8 | 1 | 1.2 |

(2) NSK K1 lubrication unit

Table 10 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

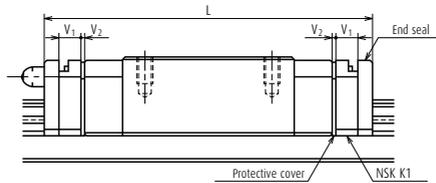


Table 10

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length equipped with two NSK K1 L | Thickness of NSK K1, V ₁ | Thickness of protective cover, V ₂ |
|-----------|-------------------|------------------|----------------------------|--|-------------------------------------|---|
| PE05 | Standard | AR | 24.1 | 28.9 | 2 | 0.4 |
| PE07 | Standard | TR | 31.1 | 37.1 | 2.5 | 0.5 |
| PE09 | Standard | TR | 39.8 | 46.8 | 3 | 0.5 |
| PE09 | Long | UR | 51.2 | 58.2 | 3 | 0.5 |
| PE12 | Standard | AR | 45 | 53 | 3.5 | 0.5 |
| PE12 | Long | BR | 60 | 68 | 3.5 | 0.5 |
| PE15 | Standard | AR | 56.6 | 66.2 | 4 | 0.8 |
| PE15 | Long | BR | 76 | 85.6 | 4 | 0.8 |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)

A-5-2.3 PE Series (Miniature wide type)

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|--|--|
| | PE | 15 | 0470 | AR | K | 2 | -** | P5 | 1 | |
| Series name | | | | | | | | | | |
| Size | | | | | | | | | Preload code (See page A216.) | |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 12.) 0: Z0, 1: Z1 | |
| Ball slide shape code (See page A214.) | | | | | | | | | Design serial number | |
| Material/surface treatment code (See Table 11.) K: Stainless steel | | | | | | | | | Added to the reference number. Number of ball slides per rail | |

(2) Reference number for random-matching type

| | | | | | | | |
|---|------------|-----------|-----------|----------|-----------|--|---|
| Ball slide | PAE | 15 | AR | S | -K | | |
| Random-matching ball slide series code PAE: PE Series random-matching ball slide | | | | | | | Option code -K: Equipped with NSK K1 |
| Size | | | | | | | Material code S: Stainless steel |
| Ball slide shape code (See page A214.) | | | | | | | |

| | | | | | | | | | | |
|---|------------|-----------|-------------|----------|----------|----------|------------|-----------|---|--|
| Rail | P1E | 15 | 0470 | P | K | N | -** | PC | T | |
| Random-matching rail series code P1E: PE Series random-matching rail | | | | | | | | | Preload code (See page A216.) T: Fine clearance | |
| Size | | | | | | | | | Accuracy code: PC PC: Normal grade is only available. | |
| Rail length (mm) | | | | | | | | | Design serial number | |
| Rail shape code R: PE09, 12. P: PE15 | | | | | | | | | Added to the reference number. *Butting rail specification | |
| Material/surface treatment code (See Table 11.) | | | | | | | | | N: Non-butting, L: Butting specification | |

*Please consult with NSK for butting rail specification.

Reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only preload code of "Fine clearance T" is available (refer to page A216).

Table 11 Material/surface treatment code

| Code | Description |
|------|--|
| K | Stainless steel |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Table 12 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|--|------------------------------|-------------|---|
| Super precision grade | P4 | K4 | F4 |
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |
| Normal grade (random-matching type) | PC | KC | FC |


Note Refer to pages A38 and A61 for NSK K1 lubrication unit.

A-5-2.3 PE Series (Miniature wide type)

9. Dimensions


PE-AR, TR (Standard type / Standard)

PE-UR, BR (High-load type / Long)

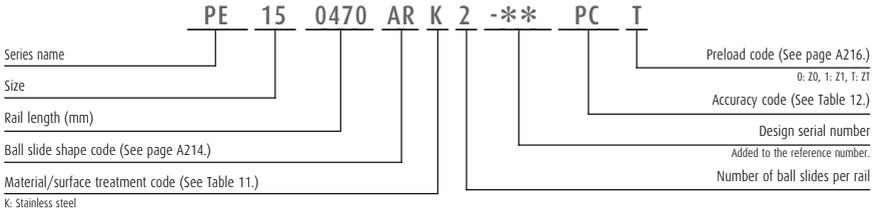

Front view



Side view

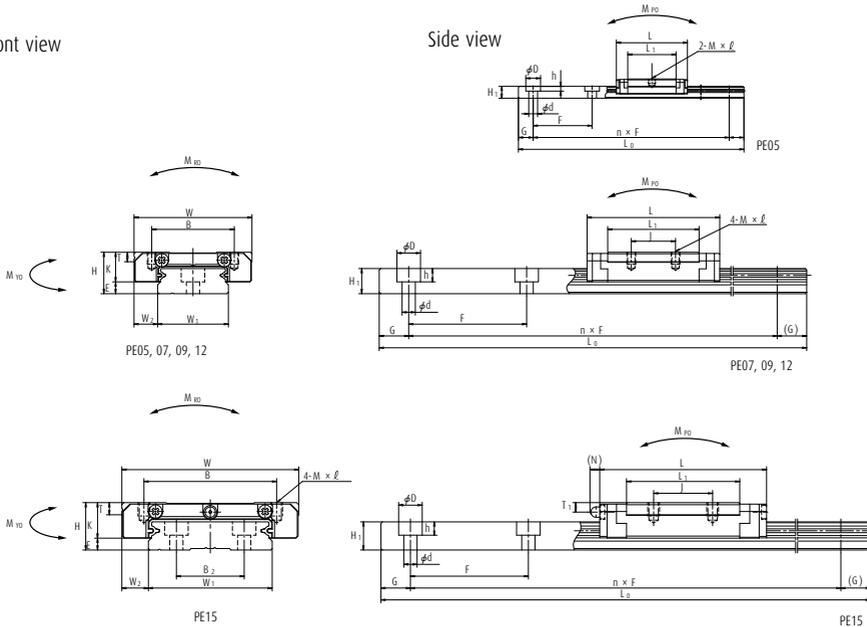



| Model No. | Assembly | | | Ball slide | | | | | | | | | | | | |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|----------------|-----|-----|-----------|----------------|-------|-------|--------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Oil hole | | | Width | Height |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | |
| PE05AR | 6.5 | 1.4 | 3.5 | 17 | 24.1 | 13 | — | M2.5×0.45×1.5 | 16.4 | 5.1 | 2.5 | φ 0.9 | 1.3 | — | 10 | 4 |
| PE07TR | 9 | 2 | 5.5 | 25 | 31.1 | 19 | 10 | M3×0.5×2.8 | 20.8 | 7 | 3 | φ 1.9 | 1.9 | — | 14 | 5.2 |
| PE09TR | 12 | 4 | 6 | 30 | 39.8 | 21 | 12 | M3×0.5×3 | 26.6 | 8 | 2.8 | φ 2 | 2.3 | — | 18 | 7.5 |
| PE09UR | 12 | 4 | 6 | 30 | 51.2 | 23 | 24 | M3×0.5×3 | 38 | 8 | 2.8 | φ 2 | 2.3 | — | 18 | 7.5 |
| PE12AR | 14 | 4 | 8 | 40 | 45 | 28 | 15 | M3×0.5×4 | 31 | 10 | 3.2 | φ 2.5 | 2.7 | — | 24 | 8.5 |
| PE12BR | 14 | 4 | 8 | 40 | 60 | 28 | 28 | M3×0.5×4 | 46 | 10 | 3.2 | φ 2.5 | 2.7 | — | 24 | 8.5 |
| PE15AR | 16 | 4 | 9 | 60 | 56.6 | 45 | 20 | M4×0.7×4.5 | 38.4 | 12 | 4.1 | φ 3 | 3.2 | (3.3) | 42 | 9.5 |
| PE15BR | 16 | 4 | 9 | 60 | 76 | 45 | 35 | M4×0.7×4.5 | 57.8 | 12 | 4.1 | φ 3 | 3.2 | (3.3) | 42 | 9.5 |

Notes 1) Ball slide of PE05AR has only two mounting tap holes in the center.

Reference number for ball slide of random-matching type

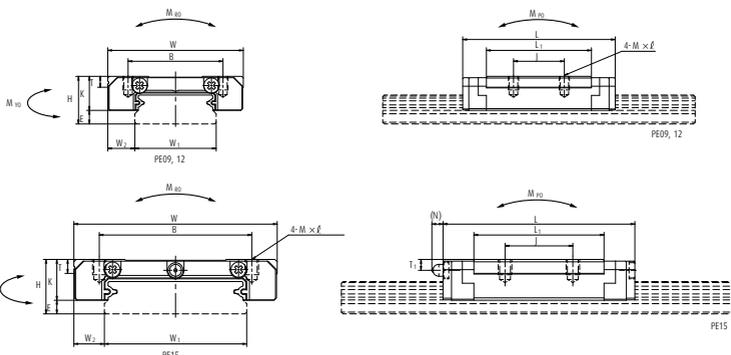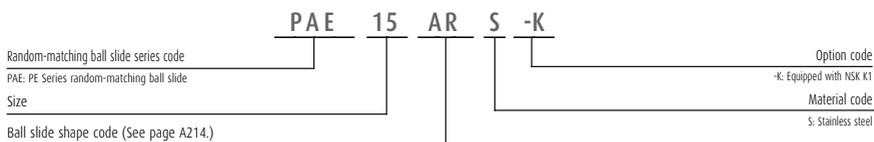

Reference number for rail of random-matching type

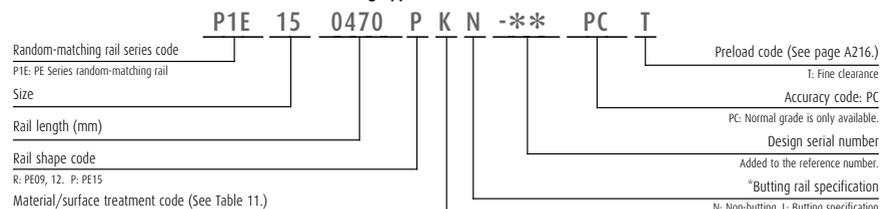

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | | |
|----------------|----|------------------------------|---------------|----------------------------------|---------------------|----------------------|---------------------------|-----------------|---------------------|------------|-----------------|------------|----------------|-----------------|
| B ₂ | F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static C ₀ (N) | M _{RO} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) |
| | | | | | C ₅₀ (N) | C ₁₀₀ (N) | | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| — | 20 | 3.5×1.6 | 7.5 | 150 | 690 | 550 | 1 160 | 6.00 | 2.75 | 17.5 | 2.75 | 17.5 | 7 | 34 |
| — | 30 | 3.5×6×3.2 | 10 | 600 | 1 580 | 1 260 | 2 350 | 16.7 | 7.20 | 46.0 | 7.20 | 46.0 | 19 | 55 |
| — | 30 | 3.5×6×4.5 | 10 | 800 | 3 000 | 2 390 | 4 500 | 36.5 | 17.3 | 113 | 17.3 | 113 | 35 | 95 |
| — | 30 | 3.5×6×4.5 | 10 | 800 | 4 000 | 3 150 | 6 700 | 54.5 | 37.5 | 210 | 37.5 | 210 | 50 | 95 |
| — | 40 | 4.5×8×4.5 | 15 | 1 000 | 4 350 | 3 450 | 6 350 | 70.5 | 29.3 | 180 | 29.3 | 180 | 66 | 140 |
| — | 40 | 4.5×8×4.5 | 15 | 1 000 | 5 800 | 4 600 | 9 550 | 106 | 63.5 | 345 | 63.5 | 345 | 98 | 140 |
| 23 | 40 | 4.5×8×4.5 | 15 | 1 200 | 7 600 | 6 050 | 10 400 | 207 | 59.0 | 370 | 59.0 | 370 | 140 | 275 |
| 23 | 40 | 4.5×8×4.5 | 15 | 1 200 | 10 300 | 8 200 | 16 000 | 320 | 135 | 740 | 135 | 740 | 211 | 275 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

5) To fix rail of PE05AR, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instrument.

(JIS 10-70 No. 0 pan head machine screw No.3.)

(JIS: Japanese Camera Industrial Standard.)

A-5-2.4 LE Series (Miniature wide type)

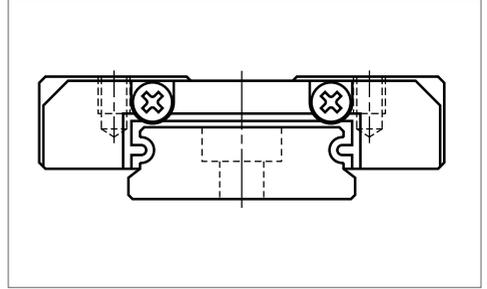


Fig. 1 LE Series

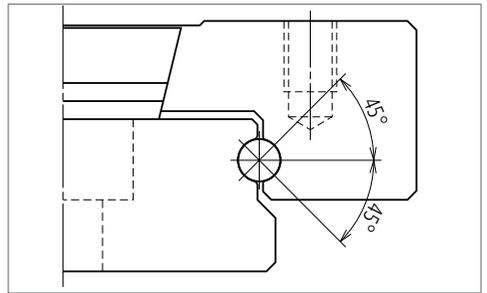


Fig. 2 Balls are in contact.

1. Features

(1) Ideal for use of single rail

The LE Series linear guides are miniature and wide rail type. Thanks to the wide rail, load carrying capacity is high against moment load from rolling direction.

(2) Equal load carrying capacity in vertical and lateral directions

Contact angle is set at 45 degrees, equally dispersing the load from vertical and lateral directions. This also provides equal rigidity in the two directions.

(3) Guides are super-thin.

Super-thin guides owe their design to the single ball groove on right and left sides (Gothic arch).

(4) High accuracy

Fixing the master rollers to the ball grooves is easy thanks to the Groove arch groove. This makes easy and accurate measuring of ball grooves.

(5) Stainless steel is standard.

Rails and ball slides are made of martensitic stainless steel.





(6) Ball retainer is available in some series.

Some series come with a ball retainer (ball slide shape: AR and TR). Balls are retained in the retainer and do not fall out when a ball slide is withdrawn from the rail (random-matching type ball slides come with a ball retainer).

(7) Fast delivery

Random matching of rails and ball slides are available. (LE09 to LE15)

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Ball slide length) | | |
|--|---|---|---|--|
| | | Medium-load type | Standard type | High-load type |
| | | Short | Standard | Long |
| AL TL AR TR BL UL CL SL |  | CL, SL  | AL, TL, AR, TR  | BL, UL  |

| Specification | Detail | Type | | |
|---------------|---------|--------|--------|--------|
| Mounting hole | Normal | CL* | AL, AR | BL* |
| Mounting hole | Large | SL* | TL, TR | UL* |
| Ball retainer | Without | CL, SL | AL, TL | BL, UL |
| Ball retainer | With | — | AR, TR | — |

* Only applicable to LE09

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly type (not random matching) | | | Random-matching type |
|------------------|---------|---|--------------------|-----------------|----------------------|
| | | High precision P5 | Precision grade P6 | Normal grade PN | Normal grade PC |
| over | or less | | | | |
| — | 50 | 2 | 4.5 | 6 | 6 |
| 50 | — 80 | 3 | 5 | 6 | 6 |
| 80 | — 125 | 3.5 | 5.5 | 6.5 | 6.5 |
| 125 | — 200 | 4 | 6 | 7 | 7 |
| 200 | — 250 | 5 | 7 | 8 | 8 |
| 250 | — 315 | 5 | 8 | 9 | 9 |
| 315 | — 400 | 6 | 9 | 11 | 11 |
| 400 | — 500 | 6 | 10 | 12 | 12 |
| 500 | — 630 | 7 | 12 | 14 | 14 |
| 630 | — 800 | 8 | 14 | 16 | 16 |
| 800 | — 1 000 | 9 | 16 | 18 | 18 |
| 1 000 | — 1 250 | 10 | 17 | 20 | 20 |

A-5-2.4 LE Series (Miniature wide type)

(2) Accuracy standard

The preloaded assembly type has three accuracy grades; High precision P5, Precision P6, and Normal PN grades, while the random-matching type has Normal grade PC only.

Table 2 shows the accuracy standard for the preloaded assembly type while **Table 3** shows the accuracy standard for the random-matching type.

> Tolerance of preloaded assembly

Table 2

| Characteristics | Accuracy grade | Unit: μm | | |
|--|----------------|---|--------------------|-----------------|
| | | High precision P5 | Precision grade P6 | Normal grade PN |
| Mounting height H | | ± 15 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 7 | 15 | 25 |
| Mounting width W_2 or W_3 | | ± 20 | ± 30 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 10 | 20 | 30 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Refer to Table 1 and Fig. 3 | | |

> Tolerance of random-matching type: Normal grade PC

Table 3

| Characteristics | Accuracy grade | Unit: μm |
|--|----------------|---|
| | | LU09, 12, 15 |
| Mounting height H | | ± 20 |
| Variation of mounting height H | | 40 |
| Mounting width W_2 or W_3 | | ± 20 |
| Variation of mounting width W_2 or W_3 | | 40 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Refer to Table 1 and Fig. 3 |

(3) Assembled accuracy

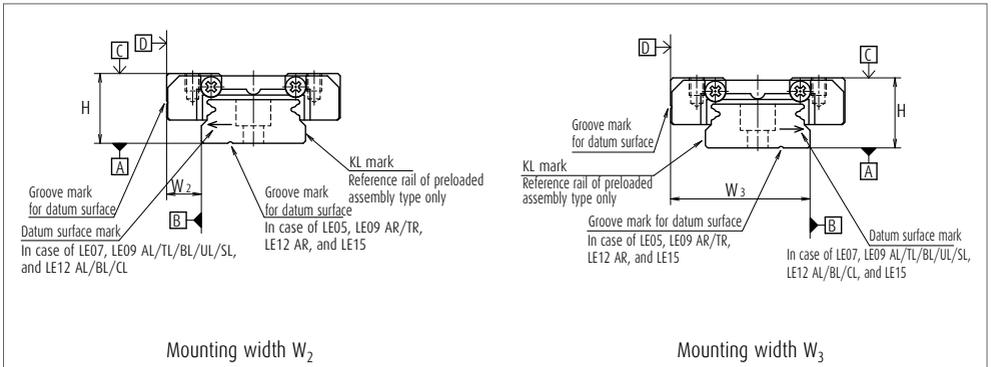


Fig. 3

(4) Preload and rigidity

We offer three levels of preload: Slight preload Z1 and Fine clearance Z0 for the preloaded assembly type, along with Fine clearance Z1 for the random-matching type. Values for preload and rigidity of the preloaded assembly type are shown in Table 4. Rigidities are for the median of the preload range.

› Preload and rigidity of preloaded assembly

Table 4

| Model No. | | Preload (N) | Rigidity (N/ μ m) |
|------------------|---------------------|---------------------|-----------------------|
| | | Slight preload (Z1) | Slight preload (Z1) |
| Standard type | LE05 AL | 0 - 23 | 36 |
| | LE07 TL | 0 - 29 | 46 |
| | LE09 AL, TL, AR, TR | 0 - 37 | 61 |
| | LE12 AL, AR | 0 - 40 | 63 |
| | LE15 AL, AR | 0 - 49 | 66 |
| Medium-load type | LE05 CL | 0 - 18 | 29 |
| | LE07 SL | 0 - 16 | 28 |
| | LE09 CL, SL | 0 - 21 | 33 |
| | LE12 CL | 0 - 23 | 36 |
| | LE15 CL | 0 - 29 | 44 |
| High-load type | LE07 UL | 0 - 43 | 71 |
| | LE09 BL, UL | 0 - 54 | 86 |
| | LE12 BL | 0 - 59 | 97 |
| | LE15 BL | 0 - 75 | 114 |

Note The clearance of Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, the clearance of the Z0 of PN grade is 3 to 10 μ m.

› Clearance of random-matching type

Table 5

Unit: μ m

| Model No. | Fine clearance Z1 |
|-----------|-------------------|
| LE09 | 0 - 15 |
| LE12 | 0 - 15 |
| LE15 | 0 - 15 |

4. Maximum rail length

Table 6 shows the limitations of rail length. The limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

| Series | Material \ Size | 05 | 07 | 09 | 12 | 15 |
|--------|-----------------|-----|-----|-----|-------|-------|
| | | | | | | |
| LE | Stainless steel | 150 | 600 | 800 | 1 000 | 1 200 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

A-5-2.4 LE Series (Miniature wide type)

5. Installation

(1) Permissible values of mounting error

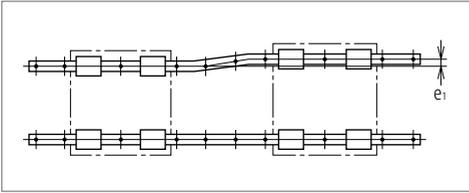


Fig. 4

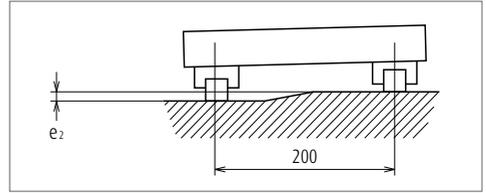


Fig. 5

Table 7

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|---------------------------------|------|------|------|------|
| | | LU05 | LU07 | LU09 | LU12 | LU15 |
| Permissible values of parallelism in two rails e_1 | Z0, ZT | 10 | 12 | 15 | 18 | 22 |
| | Z1 | 5 | 7 | 10 | 13 | 17 |
| Permissible values of parallelism (height) in two rails e_2 | Z0, ZT | 50 $\mu\text{m}/200 \text{ mm}$ | | | | |
| | Z1 | 35 $\mu\text{m}/200 \text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius r




Fig. 6 Shoulder for the rail datum surface




Fig. 7 Shoulder for the ball slide datum surface

Table 8


Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-------|
| | r_a | r_b | H' | H'' |
| LE05 | 0.2 | 0.2 | 1.1 | 2 |
| LE07 | 0.2 | 0.3 | 1.7 | 3 |
| LE09 | 0.3 | 0.3 | 3.5 | 3 |
| LE12 | 0.3 | 0.3 | 3.5 | 4 |
| LE15 | 0.3 | 0.5 | 3.5 | 5 |

6. Lubrication accessories

Model of LE15AR can select drive-in type grease fitting as option. There is no standard grease fitting for LE05 to LE12.

For the models of LE05 to LE15 except for LE15AR, apply grease directly to the ball grooves of rail, using a point nozzle.



7. Dust-proof components

(1) Standard specification

End seal: Provided to both ends of the ball slide as a standard feature.

› Seal friction per standard ball slide is shown in **Table 9**.

Table 9 Seal friction per ball slide (maximum value)

Unit: N

| Size Series | 05 | 07 | 09 | 12 | 15 |
|----------------|-----|-----|-----|-----|-----|
| LE | 0.4 | 0.4 | 0.8 | 1.0 | 1.2 |

(2) NSK K1 lubrication unit

The installed dimensions of the NSK K1 lubrication unit are shown in **Table 10**.

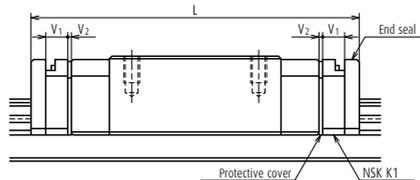


Table 10

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V_1 | Protective cover thickness V_2 |
|-----------|-------------------|------------------|----------------------------|---|----------------------------|----------------------------------|
| LE07 | Standard | TL | 31 | 37 | 2.5 | 0.5 |
| LE07 | Long | UL | 42 | 48 | 2.5 | 0.5 |
| LE07 | Short | SL | 22.4 | 28.4 | 2.5 | 0.5 |
| LE09 | Standard | AL, TL | 39 | 46 | 3.0 | 0.5 |
| LE09 | Standard | AR, TR | 39.8 | 46.8 | 3.0 | 0.5 |
| LE09 | Long | BL, UL | 50.4 | 57.4 | 3.0 | 0.5 |
| LE09 | Short | CL, SL | 26.4 | 33.4 | 3.0 | 0.5 |
| LE12 | Standard | AL | 44 | 52 | 3.5 | 0.5 |
| LE12 | Standard | AR | 45 | 53 | 3.5 | 0.5 |
| LE12 | Long | BL | 59 | 67 | 3.5 | 0.5 |
| LE12 | Short | CL | 30.5 | 38.5 | 3.5 | 0.5 |
| LE15 | Standard | AL | 55.0 | 64.6 | 4.0 | 0.8 |
| LE15 | Standard | AR | 56.6 | 66.2 | 4.0 | 0.8 |
| LE15 | Long | BL | 74.4 | 84 | 4.0 | 0.8 |
| LE15 | Short | CL | 41.4 | 51 | 4.0 | 0.8 |

Note Ball slide length equipped with NSK K1 =
(Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover $V_2 \times 2$)


A-5-2.4 LE Series (Miniature wide type)

8. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

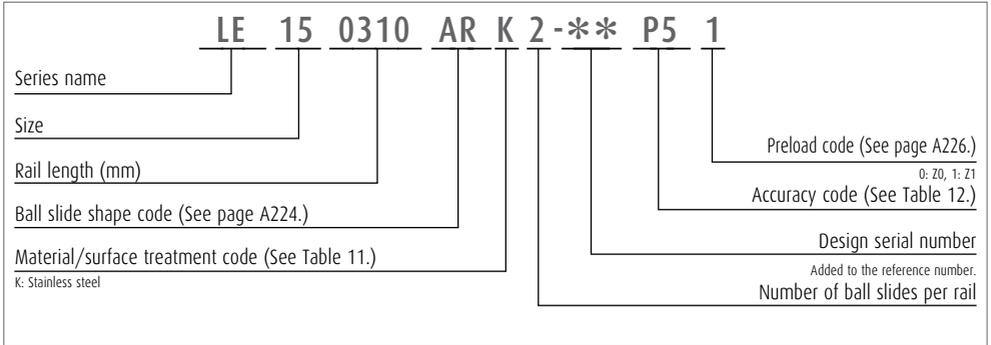

(2) Reference number for random-matching type

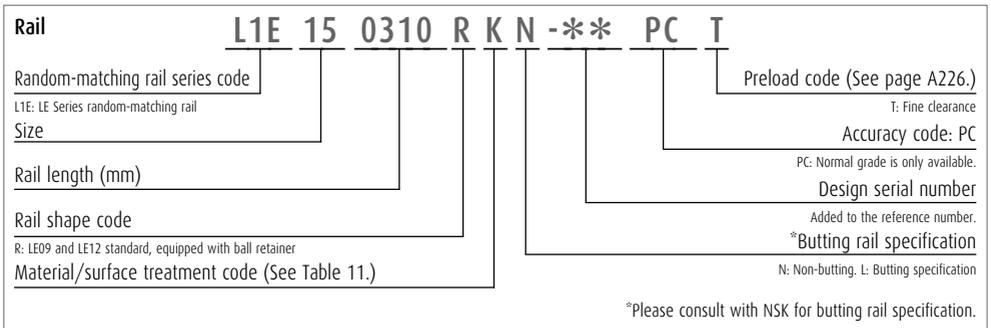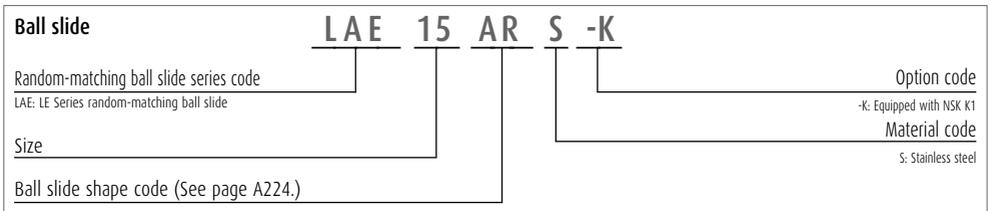

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, only the preload code of "Fine clearance T" is available (refer to page A226).

Table 11 Material/surface treatment code

| Code | Description |
|------|--|
| K | Stainless steel |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Table 12 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 |
|-------------------------------------|------------------------------|-------------|
| High precision grade | P5 | K5 |
| Precision grade | P6 | K6 |
| Normal grade | PN | KN |
| Normal grade (random-matching type) | PC | KC |

Note Refer to page A38 for NSK K1 lubrication unit.

A-5-2.4 LE Series (Miniature wide type)


9. Dimensions

LE-AL (Standard type / Standard)


LE-TL (Standard type / Standard, large mounting hole)

LE-AR (Standard type / Standard, with ball retainer)


LE-TR (Standard type / Standard, large mounting hole, with ball retainer)

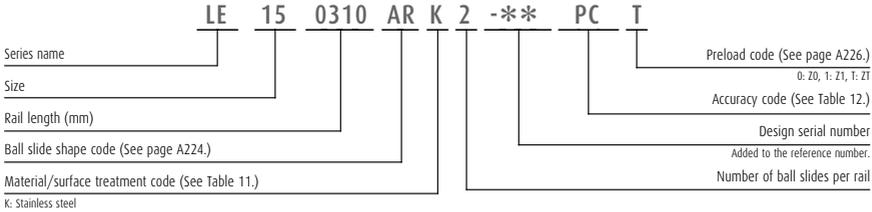

Front view




LE05, 07, 09, 12




LE15

Side view



LE05

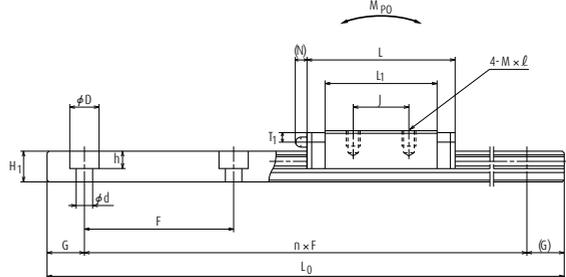

LE07, 09, 12, 15

| Model No. | Assembly | | | | Ball slide | | | | | | | Grease fitting | | | | | | |
|-----------|----------|-----|-----|----------------|------------|--------|---------------|---|-------------|----------------|-----|----------------|----------------|---|-------|--------|-------|----|
| | Height | H | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | Hole size | T ₁ | N | Width | Height | Pitch | |
| | | | | | | | W | L | B | | | | | | | | | J |
| LE05AL | 6.5 | 1.4 | 3.5 | 17 | 24 | 13 | — | — | M2.5×0.45×2 | 17 | 5.1 | — | — | — | 10 | 4 | — | 20 |
| LE07TL | 9 | 2 | 5.5 | 25 | 31 | 19 | 10 | — | M3×0.5×3 | 21.2 | 7 | — | — | — | 14 | 5.2 | — | 30 |
| LE09AL | 12 | 4 | 6 | 30 | 39 | 21 | 12 | — | M2.6×0.45×3 | 27.6 | 8 | — | — | — | 18 | 7.5 | — | 30 |
| LE09TL | 12 | 4 | 6 | 30 | 39 | 21 | 12 | — | M3×0.5×3 | 27.6 | 8 | — | — | — | 18 | 7.5 | — | 30 |
| LE09AR | 12 | 4 | 6 | 30 | 39.8 | 21 | 12 | — | M2.6×0.45×3 | 27.6 | 8 | — | — | — | 18 | 7.5 | — | 30 |
| LE09TR | 12 | 4 | 6 | 30 | 39.8 | 21 | 12 | — | M3×0.5×3 | 27.6 | 8 | — | — | — | 18 | 7.5 | — | 30 |
| LE12AL | 14 | 4 | 8 | 40 | 44 | 28 | 15 | — | M3×0.5×4 | 31 | 10 | — | — | — | 24 | 8.5 | — | 40 |
| LE12AR | 14 | 4 | 8 | 40 | 45 | 28 | 15 | — | M3×0.5×4 | 31 | 10 | — | — | — | 24 | 8.5 | — | 40 |
| LE15AL | 16 | 4 | 9 | 60 | 55 | 45 | 20 | — | M4×0.7×4.5 | 38.4 | 12 | — | — | — | 42 | 9.5 | 23 | 40 |
| LE15AR | 16 | 4 | 9 | 60 | 56.6 | 45 | 20 | — | M4×0.7×4.5 | 38.4 | 12 | φ3 | 3.2 | 3 | 42 | 9.5 | 23 | 40 |


Notes 1) Ball slide of LE05 has only two mounting tap holes.

Reference number for ball slide of random-matching type


Random matching with retainer: LAE09AR/TR, LAE12AR, LAE15AR

LAE-AR (With ball retainer)

LAE-TR (Large mounting hole with ball retainer)

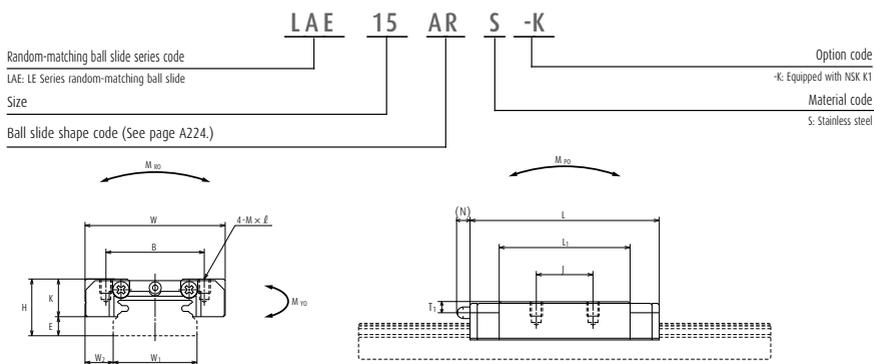


Reference number for rail of random-matching type

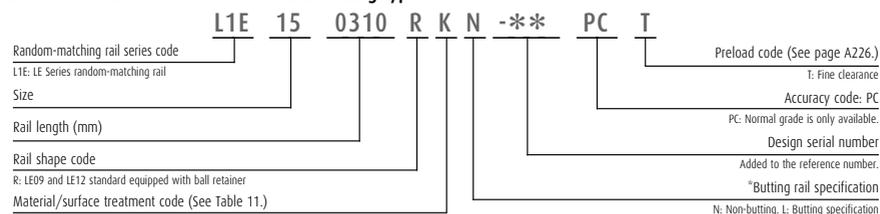


*Please consult with NSK for butting rail specification.



LE09, 12



LE15

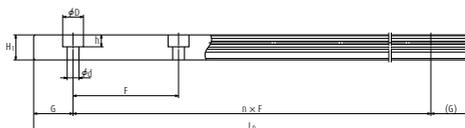

Unit: mm


| Rail | | Basic load rating | | | | | | | | Weight | | |
|---|------------------|---------------------------|-----------------------|-------------------------|------------------------|----------|---------------------|-----------|------------|--------|-------------------|--------------------|
| Mounting bolt hole $d \times D \times h$ | G (reference) | Max. length L_{0max} | 2) Dynamic | | Static C_0 (N) | M_{R0} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) |
| | | | [50km] $C_{50}(N)$ | [100km] $C_{100}(N)$ | | | M_{P0} | | M_{Y0} | | | |
| | | | | | One slide | | Two slides | One slide | Two slides | | | |
| 3.5×1.6 | 7.5 | 150 | 725 | 575 | 1 110 | 5.65 | 2.58 | 16.9 | 2.58 | 16.9 | 11 | 34 |
| 3.5×6×3.2 | 10 | 600 | 1 580 | 1 260 | 2 350 | 16.7 | 7.20 | 46.0 | 7.20 | 46.0 | 25 | 55 |
| 3.5×6×4.5 | 10 | 800 | 3 000 | 2 400 | 4 500 | 36.5 | 17.3 | 110 | 17.3 | 110 | 40 | 95 |
| 3.5×6×4.5 | 10 | 800 | 3 000 | 2 400 | 4 500 | 36.5 | 17.3 | 110 | 17.3 | 110 | 40 | 95 |
| 3.5×6×4.5 | 10 | 800 | 3 000 | 2 400 | 4 500 | 36.5 | 17.3 | 113 | 17.3 | 113 | 40 | 95 |
| 3.5×6×4.5 | 10 | 800 | 3 000 | 2 400 | 4 500 | 36.5 | 17.3 | 113 | 17.3 | 113 | 40 | 95 |
| 4.5×8×4.5 | 15 | 1 000 | 4 350 | 3 450 | 6 350 | 70.5 | 29.3 | 175 | 29.3 | 175 | 75 | 140 |
| 4.5×8×4.5 | 15 | 1 000 | 4 350 | 3 450 | 6 350 | 70.5 | 29.3 | 180 | 29.3 | 180 | 75 | 140 |
| 4.5×8×4.5 | 15 | 1 200 | 7 600 | 6 050 | 10 400 | 207 | 59.0 | 360 | 59.0 | 360 | 150 | 275 |
| 4.5×8×4.5 | 15 | 1 200 | 7 600 | 6 050 | 10 400 | 207 | 59.0 | 370 | 59.0 | 370 | 150 | 275 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

3) For fixing a rail of LE05AL, use M2.5 × 0.45 cross-recessed pan head machine screw for precision instruments.

(JCS 10-70: No.0 pan head machine screw No.3) (JCS: Japanese Camera Industrial Standard)

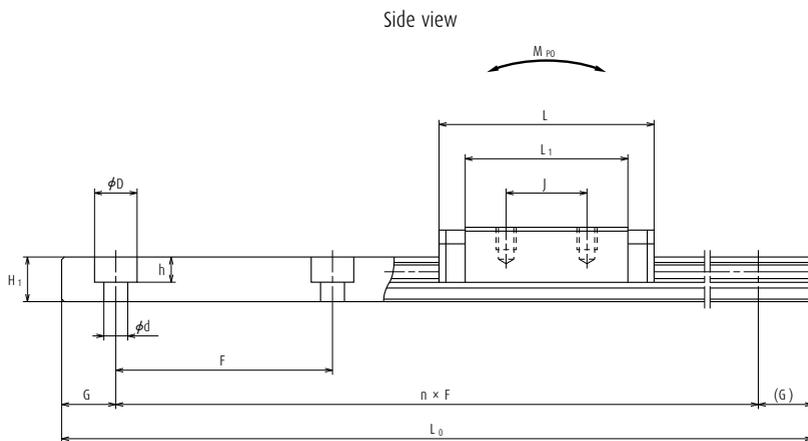


Unit: mm

| Rail | | | Basic load rating | | | | | | | | Weight | |
|--|----------------------|-------------------------------------|-----------------------|-------------------------|--------------|---------------------|-----------|------------|-----------|-----------------------|------------------------|------------|
| Mounting bolt hole $d \times D \times h$ | G (reference) | Maximum length L_{0max} | 3) Dynamic | | Static | Static moment (N·m) | | | | Ball slide (g) | Rail (g/100 mm) | |
| | | | [50km] $C_{50}(N)$ | [100km] $C_{100}(N)$ | C_0 (N) | M_{R0} | M_{P0} | | M_{Y0} | | | |
| | | | | | | | One slide | Two slides | One slide | | | Two slides |
| 3.5×6×3.2 | 10 | 600 | 2 180 | 1 730 | 3 700 | 26.4 | 17.3 | 94.5 | 17.3 | 94.5 | 39 | 55 |
| 3.5×6×4.5 | 10 | 800 | 4 000 | 3 150 | 6 700 | 54.5 | 37.5 | 206 | 37.5 | 206 | 58 | 95 |
| 3.5×6×4.5 | 10 | 800 | 4 000 | 3 150 | 6 700 | 54.5 | 37.5 | 206 | 37.5 | 206 | 58 | 95 |
| 4.5×8×4.5 | 15 | 1 000 | 5 800 | 4 600 | 9 550 | 106 | 63.5 | 340 | 63.5 | 340 | 115 | 140 |
| 4.5×8×4.5 | 15 | 1 200 | 10 300 | 8 200 | 16 000 | 320 | 135 | 725 | 135 | 725 | 235 | 275 |

Note 1) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life

C_{100} : the basic dynamic load rating for 100 km rated fatigue life

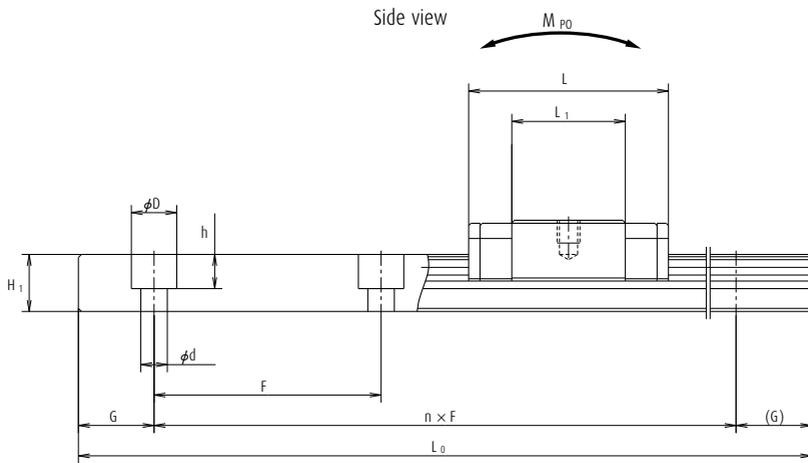

Unit: mm

| Rail | | Basic load rating | | | | | | | | Weight | | |
|--|------------------|---------------------------------|------------------------|--------------------------|------------------------|----------|---------------------|-----------|------------|--------|-------------------|--------------------|
| Mounting bolt hole $d \times D \times h$ | G (reference) | Maximum length L_{0max} | 3) Dynamic | | Static C_N (N) | M_{R0} | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) |
| | | | [50km] C_{50} (N) | [100km] C_{100} (N) | | | M_{P0} | | M_{Y0} | | | |
| | | | | | One slide | | Two slides | One slide | Two slides | | | |
| 3×5×1.6 | 7.5 | 150 | 595 | 470 | 835 | 4.25 | 1.51 | 10.0 | 1.51 | 10.0 | 8 | 34 |
| 3.5×6×3.2 | 10 | 600 | 980 | 775 | 1 170 | 8.35 | 2.01 | 18.5 | 2.01 | 18.5 | 17 | 55 |
| 3.5×6×4.5 | 10 | 800 | 1 860 | 1 480 | 2 240 | 18.2 | 4.85 | 41.0 | 4.85 | 41.0 | 25 | 95 |
| 3.5×6×4.5 | 10 | 800 | 1 860 | 1 480 | 2 240 | 18.2 | 4.85 | 41.0 | 4.85 | 41.0 | 25 | 95 |
| 4.5×8×4.5 | 15 | 1 000 | 2 700 | 2 140 | 3 150 | 35.0 | 8.15 | 67.0 | 8.15 | 67.0 | 50 | 140 |
| 4.5×8×4.5 | 15 | 1 200 | 5 000 | 3 950 | 5 650 | 113 | 19.4 | 162 | 19.4 | 162 | 110 | 275 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} : the basic dynamic load rating for 100 km rated fatigue life

3) For fixing a rail of LE05CL, use cross-recessed pan head machine screw for precision instruments M2.5 × 0.45 (JIS 10-70: Japan Camera Industry Association, No.0, class 3).

A-5-2.5 Miniature LH Series

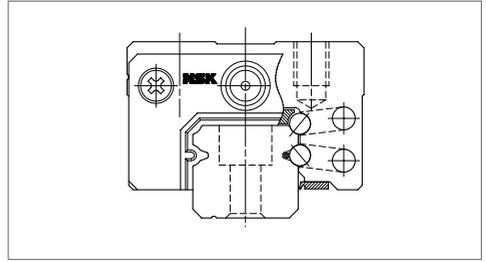
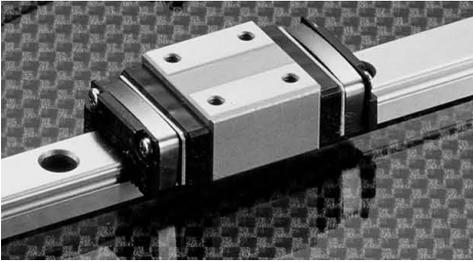


Fig. 1 LH Series

1. Features

(1) High self-aligning capability (rolling direction)

Same as the DF combination in angular contact bearings, self-aligning capability is high because the cross point of the contact lines of balls and grooves comes inside, and thus reducing moment rigidity.

This increases the capacity to absorb errors in installation.

(2) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, and thus increasing load carrying capacity as well as rigidity in vertical direction.

(3) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is generally carried by the top ball rows, where balls are contacting at two points. Because of this design, the bottom ball rows will carry load when a large impact load is applied vertically as shown in Fig. 3. This assures high resistance to the impact load.

(4) High accuracy

As showing in Fig. 4, fixing the master rollers to the ball grooves is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(5) High corrosion resistance

High corrosion-resistant martensite stainless steel is incorporated as a standard feature to provides excellent corrosion resistance.

(6) Easy to handle

Safety design includes a retainer that prevents steel balls from dropping out of the ball slide even when the slide is removed from the rail. (LH10-12)

(7) Long-term maintenance-free

Superb features of NSK K1 Lubrication unit realize a long-term, maintenance-free operation.

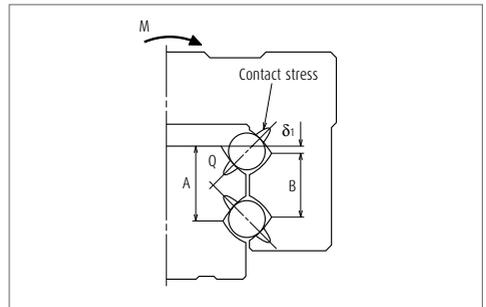


Fig. 2 Enlarged illustration of the offset Gothic arch groove

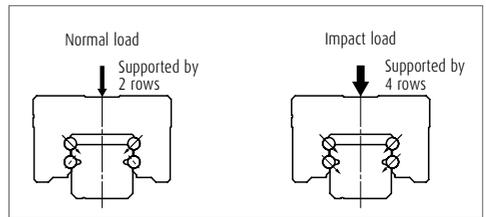


Fig. 3 When load is applied

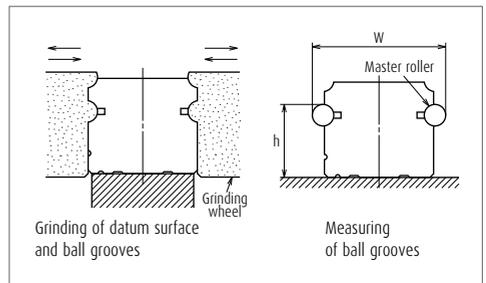




Fig. 4 Rail grinding and measuring

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type |
|------------------|---|--|
| AN |  | AN  |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly | | | |
|------------------|---------|--------------------|-------------------|--------------------|-----------------|
| | | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
| over | or less | | | | |
| - | 50 | 2 | 2 | 4.5 | 6 |
| 50 | - 80 | 2 | 3 | 5 | 6 |
| 80 | - 125 | 2 | 3.5 | 5.5 | 6.5 |
| 125 | - 200 | 2 | 4 | 6 | 7 |
| 200 | - 250 | 2.5 | 5 | 7 | 8 |
| 250 | - 315 | 2.5 | 5 | 8 | 9 |
| 315 | - 400 | 3 | 6 | 9 | 11 |
| 400 | - 500 | 3 | 6 | 10 | 12 |
| 500 | - 630 | 3.5 | 7 | 12 | 14 |
| 630 | - 800 | 4.5 | 8 | 14 | 16 |

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Super precision P4, High precision P5, Precision P6 and Normal PN grades.

› Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Super precision P4 | High precision P5 | Precision grade P6 | Normal grade PN |
|--|----------------|--------------------------|-------------------|--------------------|-----------------|
| Mounting height H | | ± 10 | ± 20 | ± 40 | ± 80 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 |
| Mounting width W_2 or W_3 | | ± 10 | ± 15 | ± 25 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 5 | 7 | 10 | 20 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1, Fig. 5 | | | |

A-5-2.5 Miniature LH Series

(3) Combinations of accuracy and preload

Table 3

| | | Accuracy grade | | | |
|--|-------------------|-----------------|----------------|-----------------|--------------|
| | | Super precision | High precision | Precision grade | Normal grade |
| Without NSK K1 lubrication unit | | P4 | P5 | P6 | PN |
| With NSK K1 lubrication unit | | K4 | K5 | K6 | KN |
| With NSK K1 for food and medical equipment | | F4 | F5 | F6 | FN |
| Preload | Fine clearance Z0 | ○ | ○ | ○ | ○ |
| | Slight preload Z1 | ○ | ○ | ○ | ○ |

(4) Assembled accuracy

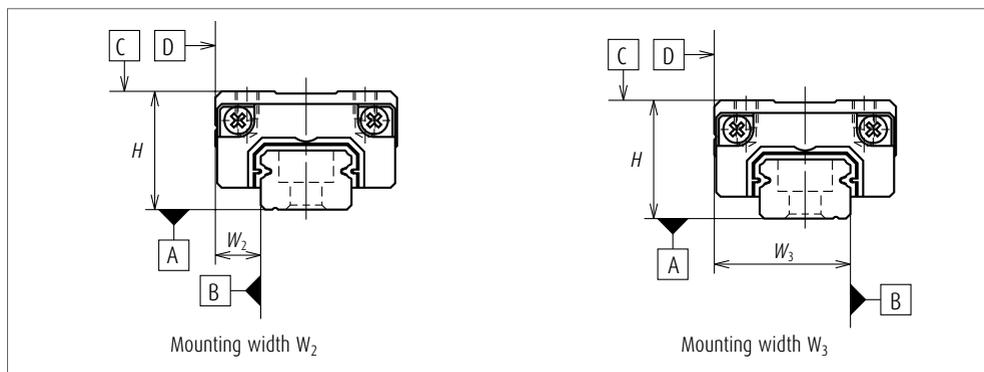


Fig. 5

(5) Preload and rigidity

We offer two levels of preload: Slight preload Z1 and Fine clearance Z0.

> Preload and rigidity of preloaded assembly

Table 4

| Model No. | Preload (N) | Rigidity (N/ μ m) | |
|-----------|-------------------|-----------------------|-------------------|
| | | Vertical direction | Lateral direction |
| | Slight preload Z1 | Slight preload Z1 | Slight preload Z1 |
| LH08AN | 5 | 33 | 23 |
| LH10AN | 9 | 44 | 31 |
| LH12AN | 22 | 68 | 47 |

Note Clearance for Fine clearance Z0 is 0 to 3 μ m. Therefore, preload is zero. However, Z0 of PN grade is 0 to 5 μ m.

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 5 Length limitation of rails

Unit: mm

| Series | Material | Size | 08 | 10 | 12 |
|--------|-----------------|------|-----|-----|-----|
| | | | | | |
| LH | Stainless steel | | 375 | 600 | 800 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

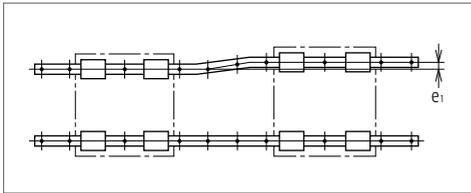


Fig. 6

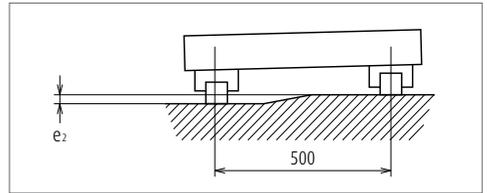


Fig. 7

Table 6

Unit: μm

| Value | Preload | Model No. | | |
|---|---------|---------------------------------|------|------|
| | | LH08 | LH10 | LH12 |
| Permissible values of parallelism in two rails e_1 | Z0 | 9 | 12 | 19 |
| | Z1 | 8 | 11 | 18 |
| Permissible values of parallelism (height) in two rails e_2 | Z0 | 375 $\mu\text{m}/500\text{ mm}$ | | |
| | Z1 | 330 $\mu\text{m}/500\text{ mm}$ | | |

(2) Shoulder height of the mounting surface and corner radius r




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 7

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-------|
| | r_a | r_b | H' | H'' |
| LH08 | 0.3 | 0.5 | 1.8 | 3 |
| LH10 | 0.3 | 0.5 | 2.1 | 4 |
| LH12 | 0.3 | 0.5 | 2.7 | 4 |

A-5-2.5 Miniature LH Series

6. Lubrication accessory

Model of LH12 can select drive-in type grease fitting as an option.

For the models of LH08 to LH10, apply grease directly to the ball grooves of rail using a point nozzle.

7. Dust-proof components

(1) Standard specification

The LH Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

However, the bottom seals are not used to LH08 and 10.

Table 8 Seal friction per ball slide (maximum value)

Unit: N

| Series \ Size | 08 | 10 | 12 |
|---------------|-----|----|-----|
| LE | 0.5 | 1 | 1.5 |




Fig. 10

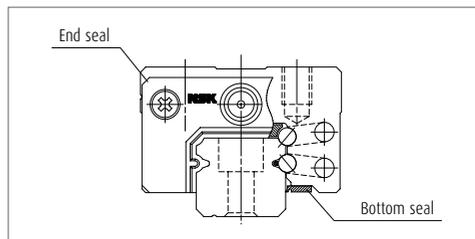


Fig. 11

(2) NSK K1 lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit

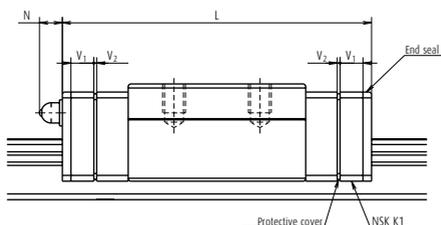


Table 9

Unit: N

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V_1 | Protective cover thickness V_2 | Protruding area of the grease fitting N |
|-----------|-------------------|------------------|----------------------------|---|----------------------------|----------------------------------|---|
| LH08 | Standard | AN | 24 | 31 | 3 | 0.5 | — |
| LH10 | Standard | AN | 31 | 40 | 4 | 0.5 | — |
| LH12 | Standard | AN | 45 | 54 | 4 | 0.5 | (4) |

Notes 1) NSK K1 for food and medical equipment are available for LH12.

2) Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover, $V_2 \times 2$)

(3) Cap to plug the rail mounting bolt hole

Table 10 Caps to plug rail bolt hole

| Model No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|-----------|---------------------|-------------------|----------------|
| LH12 | M3 | LG-CAP/M3 | 20 |

A-5-2.5 Miniature LH Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|----------|---|
| | LH | 12 | 0800 | AN | K | 2 | -** | P5 | 1 | |
| Series name | | | | | | | | | | |
| Size | | | | | | | | | | |
| Rail length (mm) | | | | | | | | | | |
| Ball slide shape code (See page A238.) | | | | | | | | | | |
| Material/surface treatment code (See Table 11.) | | | | | | | | | | |
| <small>K: Stainless steel</small> | | | | | | | | | | |
| | | | | | | | | | | Preload code (See page A239.) |
| | | | | | | | | | | <small>0: Z0, 1: Z1</small> Accuracy code (See Table 12.) |
| | | | | | | | | | | Design serial number |
| | | | | | | | | | | <small>Added to the reference number.</small> Number of ball slides per rail |

Table 11 Material/surface treatment code

| Code | Description |
|----------|--|
| K | Stainless steel |
| H | Stainless steel with surface treatment |
| Z | Other, special |

Table 12 Accuracy code


| Accuracy | Standard (Without NSK K1) | With NSK K1 | With NSK K1 for food and medical equipment |
|-----------------------|------------------------------|-------------|---|
| Super precision grade | P4 | K4 | F4 |
| High precision grade | P5 | K5 | F5 |
| Precision grade | P6 | K6 | F6 |
| Normal grade | PN | KN | FN |

Note Refer to pages A38 and A61 for NSK K1 lubrication unit.




A-5-2.5 Miniature LH Series

9. Dimensions

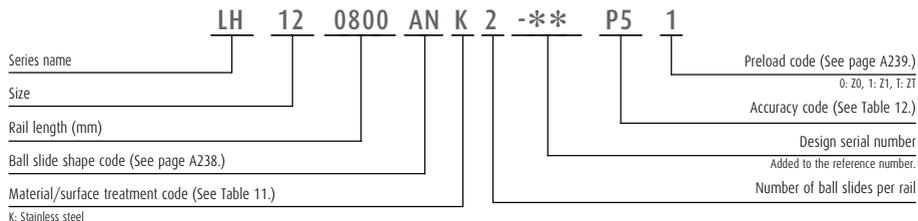

Front view

Side view

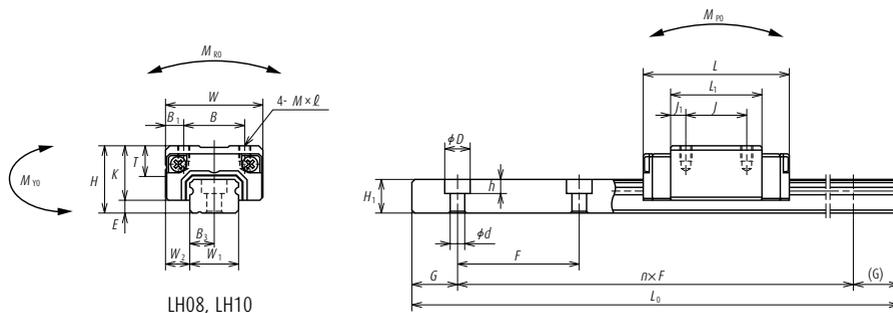


LH08, LH10

| Model No. | Assembly | | | | Ball slide | | | | | | | | | | | |
|-----------|----------|-----|----------------|-------|------------|---------------|----|---------------|----------------|------|---|----------------|----------------|---|-------|--------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | Width | Height |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | |
| LH08AN | 11 | 2.1 | 4 | 16 | 24 | 10 | 10 | M2×0.4×2.5 | 15 | 8.9 | — | — | — | — | 8 | 5.5 |
| LH10AN | 13 | 2.4 | 5 | 20 | 31 | 13 | 12 | M2.6×0.45×3 | 20.2 | 10.6 | 6 | — | — | — | 10 | 6.5 |
| LH12AN | 20 | 3.2 | 7.5 | 27 | 45 | 15 | 15 | M4×0.7×5 | 31 | 16.8 | 6 | φ 3 | 5 | 4 | 12 | 10.5 |

Notes 1) LH08 does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Front view

Side view

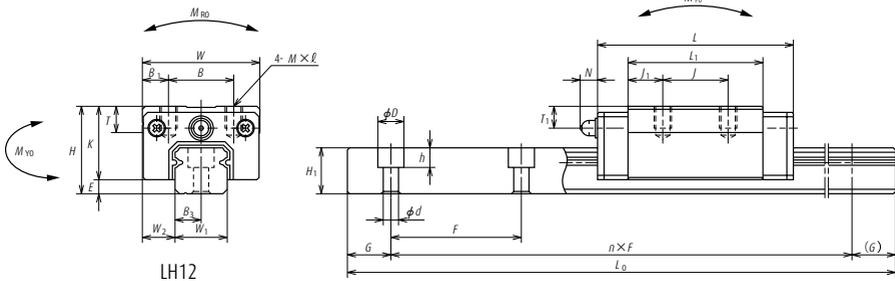

LH12

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|-----------------------|---------------------|-----------------|------------|-----------------|-------------------|--------------------|------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static | Static moment (N-m) | | | | Ball slide (g) | Rail (g/100 mm) | |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | M _{RO} | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | | | Two slides |
| 20 | 2.4×4.2×2.3 | 7.5 | 375 | 1 240 | 985 | 2 630 | 7.25 | 4.55 | 32.5 | 3.8 | 27.2 | 13 | 31 |
| 25 | 3.5×6×3.5 | 10 | 600 | 2 250 | 1 790 | 4 500 | 16.2 | 10.5 | 73.0 | 8.8 | 61.0 | 26 | 44 |
| 40 | 3.5×6×4.5 | 15 | 800 | 5 650 | 4 500 | 11 300 | 47.5 | 41.5 | 254 | 35 | 214 | 82 | 88 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀; the basic dynamic load rating for 50 km rated fatigue life C₁₀₀; the basic dynamic load rating for 100 km rated fatigue life

A-3-2.6 LL Series



1. Features

(1) Super light-weight

This compact guide has a single ball groove on both right and left sides (Gothic arch). Rails and ball slides are made of stainless steel plate, therefore they are lightweight.

(2) Compact

The ball groove is made outside the ball slide to reduce overall size and to obtain high speed.

(3) High corrosion resistance

High corrosion resistant martensitic stainless steel is used as standard material.

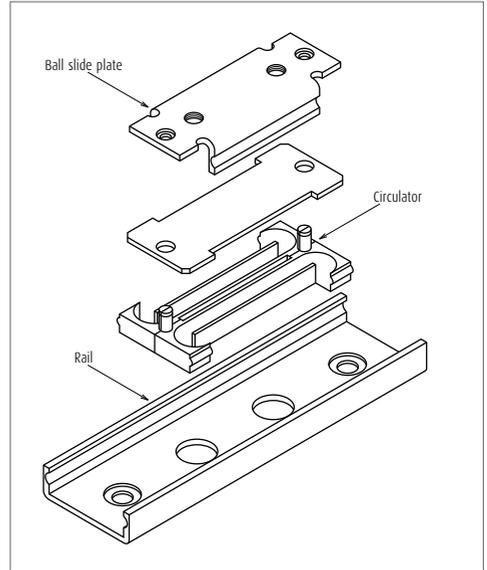


Fig. 1 LL Series structure

2. Ball slide model

| Ball slide model | Shape/installation method |
|------------------|---------------------------|
| PL | |

3. Accuracy and preload

(1) Accuracy standard

The LL Series has a Normal grade PN as the accuracy grade.

Table 1 shows the tolerance.

Table 1 Tolerance of Normal grade (PN)

Unit: μm

| Characteristic | Model No. | LL15 |
|---|-----------|---------------|
| Mounting height | | ± 20 |
| Running parallelism of surface C | | 20 |
| Running parallelism of surface D to surface B | | (See Fig. 2.) |

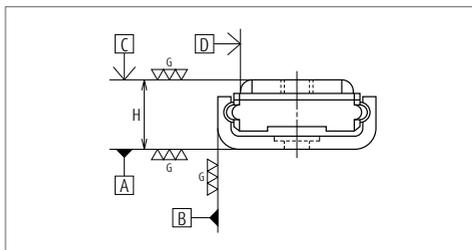


Fig. 2 Standard LL

(2) Preload

We offer clearance for the LL Series.

Table 2 shows the specification of clearance.

Table 2 Radial clearance

Unit: μm

| Model No. | Clearance |
|-----------|-----------|
| LL15 | 0 - 10 |

4. Maximum rail length

Table 3 Length limitation of rails

Unit: mm

| Series | Material | Size | | | | |
|--------|-----------------|------|----|----|----|-----|
| | | 15 | | | | |
| LL | Stainless steel | 40 | 60 | 75 | 90 | 120 |

5. Reference number



Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

| | | | | | | | | | |
|--|-----------|-----------|-------------|-----------|----------|---------------|-----------|----------|-------------------------------------|
| | LL | 15 | 0060 | PL | K | 1 - ** | PN | 0 | |
| Series name | | | | | | | | | |
| Size | | | | | | | | | |
| Rail length (mm) | | | | | | | | | |
| Ball slide shape code (See page A247.) | | | | | | | | | |
| Material/surface treatment code: K | | | | | | | | | |
| K: Stainless steel | | | | | | | | | |
| | | | | | | | | | Preload code: 0 |
| | | | | | | | | | 0: 20 |
| | | | | | | | | | Accuracy code: PN |
| | | | | | | | | | PN: Normal grade is only available. |
| | | | | | | | | | Design serial number |
| | | | | | | | | | Added to the reference number. |
| | | | | | | | | | Number of ball slides per rail |

A-3-2.6 LL Series

6. Dimensions

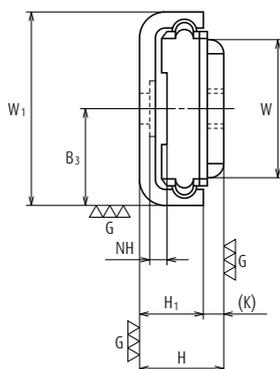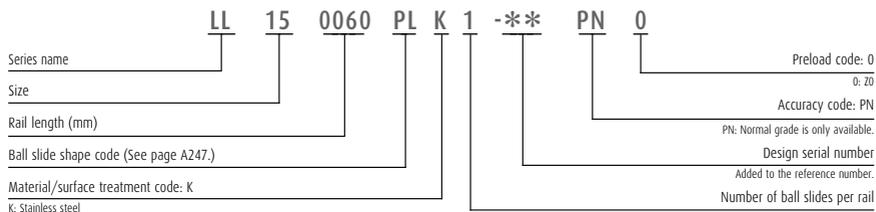

| Model No. | Assembly | | Ball slide | | | | | | | Height | Height | N | | |
|-----------|----------|----------------|------------|--------|---------------|---------------|-----|----------------|-----|--------|--------|---|----------------|---|
| | Height | W ₁ | Width | Length | Mounting hole | | | J ₁ | K | | | | H ₁ | F |
| | | | | | J | M × pitch × ℓ | MT | | | | | | | |
| LL15 | 6.5 | 15 | 10.6 | 27 | 13 | M3×0.5 | 1.2 | 7 | 1.5 | 5 | 30 | 1 | | |
| LL15 | 6.5 | 15 | 10.6 | 27 | 13 | M3×0.5 | 1.2 | 7 | 1.5 | 5 | 40 | 1 | | |
| LL15 | 6.5 | 15 | 10.6 | 27 | 13 | M3×0.5 | 1.2 | 7 | 1.5 | 5 | 30 | 2 | | |
| LL15 | 6.5 | 15 | 10.6 | 27 | 13 | M3×0.5 | 1.2 | 7 | 1.5 | 5 | 40 | 2 | | |
| LL15 | 6.5 | 15 | 10.6 | 27 | 13 | M3×0.5 | 1.2 | 7 | 1.5 | 5 | 50 | 2 | | |

- Notes**
- 1) The LL Series does not have a ball retainer. Be aware that the balls fall out when the ball slide is withdrawn from the rail.
 - 2) Seals are not available. Please provide the dust-prevention measures on the equipment.
 - 3) Do not use an installation screw on the ball slide which exceeds the dimension MT (maximum screw-in depth) in the dimension table.
 - 4) To fix the rail, use M2 × 0.4 cross recessed machine screw for precision instrument.
(JIS10-70 No.0 pan head machine screw No.1)
(JIS: Japanese Camera Industrial Standard)

A-5-3 Machine Tools



| | Page |
|--------------------|------|
| 1. RA Series | A253 |
| 2. LA Series | A273 |

A-5-3.1 Roller Guide RA Series

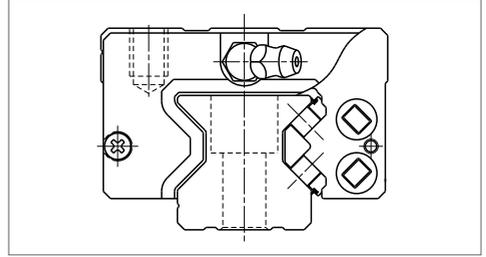


Fig. 1 RA Series

1. Features

(1) Super-high load capacity

By installing rollers that are the largest possible diameter and length within the existing standard cross-section dimension in a rational layout based on our advanced analysis technology, we have realized the world's highest load capacity,* far superior to conventional roller guides. Super-long life is achieved and impact load can be sufficiently handled.

* As of September 1, 2003; NSK's research and comparison on the existing products of the same sizes.

(2) Super-high rigidity

Using NSK's advanced analysis technology, we pursued a complete, optimal design, down to the detailed shape of roller slides and rails, thereby realizing super-high rigidity superior to that of competitor's roller guides.

(3) Super-high motion accuracy

NSK has developed its own unique method of simulating rolling element passage vibration and method of designing optimal roller slide specifications for damping roller passage vibration. These developments have dramatically enhanced roller slide motion accuracy for the RA series.

(4) Smooth motion

Installation of a retaining piece between rollers restrains the roller skew peculiar to roller slides, thereby achieving smooth motion.

(5) Low friction

Using rollers for rolling elements helps minimize dynamic friction.

(6) Random matching

Random-matching of rails and roller slides are available. (RA25 to RA65)

(7) Specification with highly dustproof V1 seal

Specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance is also available. (RA35 - 55)

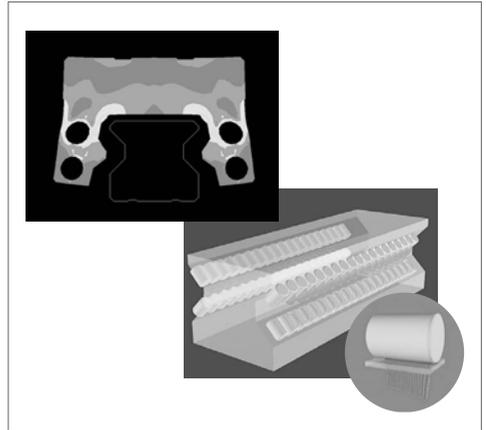











Fig. 2 Analysis example



Fig. 3 Random-matching type

2. Roller slide shape

| Roller slide model | Shape/installation method | Type (Upper row, Rating: Lower row, Roller slide length) | |
|--------------------|---|---|--|
| | | High-load type | Super-high-load type |
| | | Standard | Long |
| AN BN |  | AN  | BN  |
| AL BL |  | AL  | BL  |
| EM GM |  | EM  | GM  |

3. Accuracy and preload

(1) Running parallelism of roller slide

Table 1

| Rail length (mm) | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 |
|------------------|--------------------|--------------------|--|--------------------|
| | Preloaded assembly | Preloaded assembly | Preloaded assembly Random-matching type | Preloaded assembly |
| - 50 | 2 | 2 | 2 | 4.5 |
| 50 - 80 | 2 | 2 | 3 | 5 |
| 80 - 125 | 2 | 2 | 3.5 | 5.5 |
| 125 - 200 | 2 | 2 | 4 | 6 |
| 200 - 250 | 2 | 2.5 | 5 | 7 |
| 250 - 315 | 2 | 2.5 | 5 | 8 |
| 315 - 400 | 2 | 3 | 6 | 9 |
| 400 - 500 | 2 | 3 | 6 | 10 |
| 500 - 630 | 2 | 3.5 | 7 | 12 |
| 630 - 800 | 2 | 4 | 8 | 14 |
| 800 - 1 000 | 2.5 | 4.5 | 9 | 16 |
| 1 000 - 1 250 | 3 | 5 | 10 | 17 |
| 1 250 - 1 600 | 4 | 6 | 11 | 19 |
| 1 600 - 2 000 | 4.5 | 7 | 13 | 21 |
| 2 000 - 2 500 | 5 | 8 | 15 | 22 |
| 2 500 - 3 150 | 6 | 9.5 | 17 | 25 |
| 3 150 - 3 500 | 9 | 16 | 23 | 30 |

Unit: μm

A-5-3.1 Roller Guide RA Series

(2) Accuracy standard

The preloaded assembly has four accuracy grades; Ultra precision P3, Super precision P4, High precision P5, and Precision P6 grades, while the random-matching type has High precision PH grade only.

> Tolerance of preloaded assembly

Table 2

Unit: μm

| Characteristics | Accuracy grade | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 |
|--|----------------|-----------------------------|--------------------|-------------------|--------------------|
| Mounting height H | | ± 8 | ± 10 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 |
| Mounting width W_2 or W_3 | | ± 10 | ± 15 | ± 25 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 3 | 7 | 10 | 20 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1 and Fig. 4 | | | |

> Tolerance of random-matching type

Table 3

Unit: μm

| Characteristics | Accuracy grade | High precision PH |
|--|----------------|------------------------|
| Mounting height H | | ± 20 |
| Variation of mounting height H | | 15① |
| | | 25② |
| Mounting width W_2 or W_3 | | ± 25 |
| Variation of mounting width W_2 or W_3 | | 20 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | See Table 1 and Fig. 4 |

Note ① Variation on the same rail ② Variation on multiple rails

(3) Combination of accuracy and preload

Table 4

| | | Accuracy grade | | | | |
|---------------------------------|---|-----------------|-----------------|----------------|-----------------|----------------|
| | | Ultra precision | Super precision | High precision | Precision grade | High precision |
| Without NSK K1 lubrication unit | | P3 | P4 | P5 | P6 | PH |
| With NSK K1 lubrication unit | | K3 | K4 | K5 | K6 | KH |
| Preload | Slight preload Z1 | ○ | ○ | ○ | ○ | — |
| | Medium preload Z3 | ○ | ○ | ○ | ○ | — |
| | Random-matching type with slight preload ZZ | — | — | — | — | ○ |
| | Random-matching type with medium preload ZH | — | — | — | — | ○ |

(4) Assembled accuracy

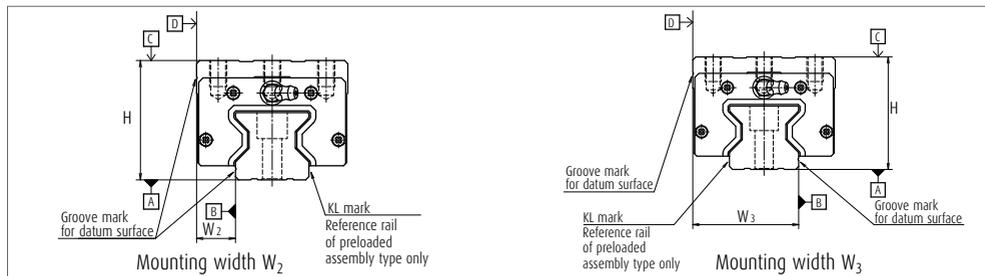


Fig. 3

(5) Preload and rigidity

Four types of preload are available: Medium preload Z3 and Slight preload Z1 for preloaded assembly, and Medium preload ZH and slight preload ZZ for Random-matching type.

► Preload of preloaded assembly

Table 5

| Model No. | | Preload (N) | |
|----------------------|-----------------|---------------------|---------------------|
| | | Slight preload (Z1) | Medium preload (Z3) |
| High-load type | RA15 AN, AL, EM | — | 1 030 |
| | RA20 AN, EM | — | 1 920 |
| | RA25 AN, AL, EM | 880 | 2 920 |
| | RA30 AN, AL, EM | 1 170 | 3 890 |
| | RA35 AN, AL, EM | 1 600 | 5 330 |
| | RA45 AN, AL, EM | 2 780 | 9 280 |
| | RA55 AN, AL, EM | 3 870 | 12 900 |
| | RA65 AN, EM | 6 300 | 21 000 |
| Super-high-load type | RA15 BN, BL, GM | — | 1 300 |
| | RA20 BN, GM | — | 2 400 |
| | RA25 BN, BL, GM | 1 060 | 3 540 |
| | RA30 BN, BL, GM | 1 430 | 4 760 |
| | RA35 BN, BL, GM | 2 020 | 6 740 |
| | RA45 BN, BL, GM | 3 480 | 11 600 |
| | RA55 BN, BL, GM | 5 040 | 16 800 |
| | RA65 BN, GM | 8 640 | 28 800 |

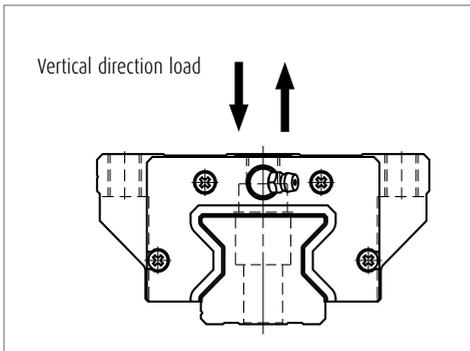


Fig. 5 Direction of load

A-5-3.1 Roller Guide RA Series

> Rigidity of medium preload

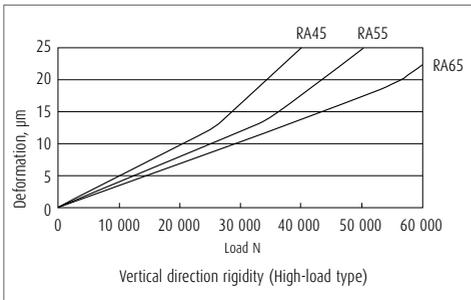
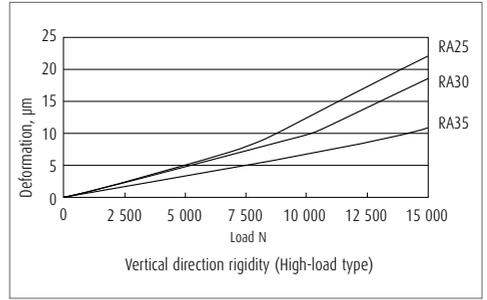
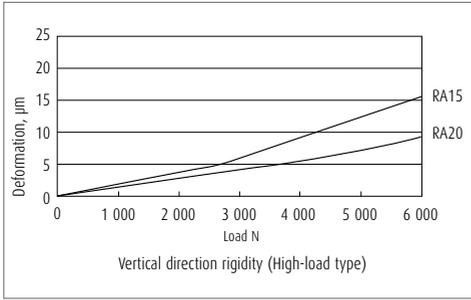


Fig. 6 Vertical direction theoretical rigidity line:
High-load type (Roller slide shape: AN, AL, EM)

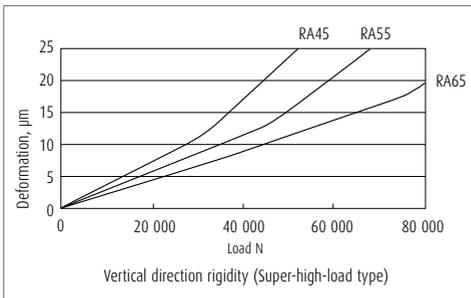
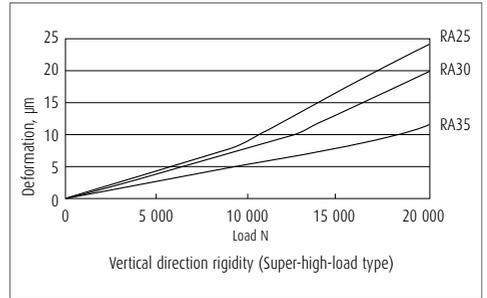
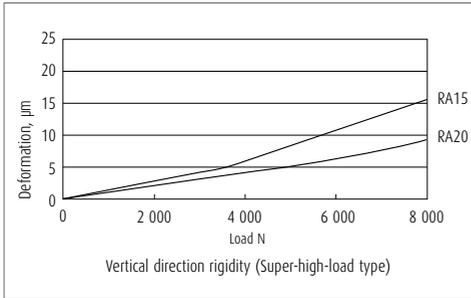


Fig. 7 Vertical direction theoretical rigidity line:
Super-high-load type (Roller slide shape: BN, BL, GM)

4. Maximum rail length

Table 5 shows the limitations of rail length (maximum length). However, the limitations vary by accuracy grades.

Table 6 Length limitation of rails

Unit: mm

| Series | Size | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 |
|--------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| RA | | 2 000 | 3 000 | 3 900 | 3 900 | 3 900 | 3 650 | 3 600 | 3 600 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

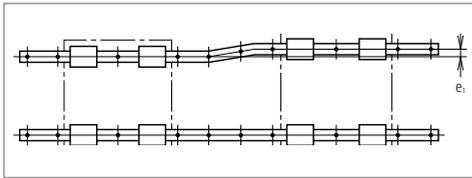


Fig. 8

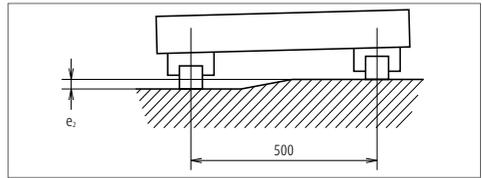


Fig. 9

Table 7

Unit: μm

| Value | Preload | Model No. | | | | | | | |
|---|---------|----------------------------|------|------|------|------|------|------|------|
| | | RA15 | RA20 | RA25 | RA30 | RA35 | RA45 | RA55 | RA65 |
| Permissible values of parallelism in two rails e_1 | Z1, ZZ | — | — | 14 | 18 | 21 | 27 | 31 | 49 |
| | Z3, ZH | 5 | 7 | 9 | 11 | 13 | 17 | 19 | 30 |
| Permissible values of parallelism (height) in two rails e_2 | Z1, ZZ | 290 μm / 500 mm | | | | | | | |
| | Z3, ZH | 150 μm / 500 mm | | | | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 10 Shoulder for the rail datum surface




Fig. 11 Shoulder for the roller slide datum surface

Table 8

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| RA15 | 0.5 | 0.5 | 3 | 4 |
| RA20 | 0.5 | 0.5 | 4 | 5 |
| RA25 | 0.5 | 1 | 4 | 5 |
| RA30 | 1 | 1 | 5 | 6 |
| RA35 | 1 | 1 | 5 | 6 |
| RA45 | 1.5 | 1 | 6 | 8 |
| RA55 | 1.5 | 1.5 | 7 | 10 |
| RA65 | 1.5 | 1.5 | 11 | 11 |

A-5-3.1 Roller Guide RA Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 14 and Table 11 show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- ▶ The standard position of grease fittings and tube fittings is the end face of roller slide. We can mount them on a side of end cap for an option. (Fig. 12) Please consult NSK for installation of grease or tube fittings to the roller slide body or the side of end cap.
- ▶ A lubrication hole can also be provided on the top of the end cap. Fig.13, Table 9 and Table 10 show the mounting position. A spacer is required for AN and BN shape roller slides. The spacers are available from NSK.
- ▶ When using a piping unit with thread of M6 × 1, you require a connector to connect it to a grease fitting mounting hole with M6 × 0.75. The connectors are available from NSK.

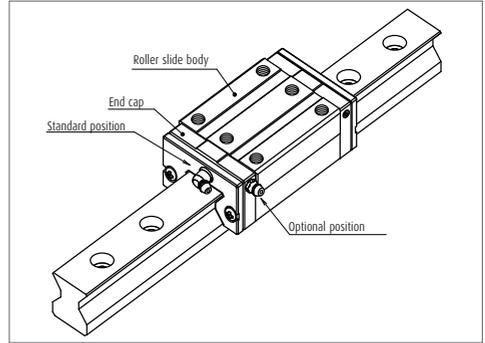


Fig. 12 Mounting position of lubrication accessories

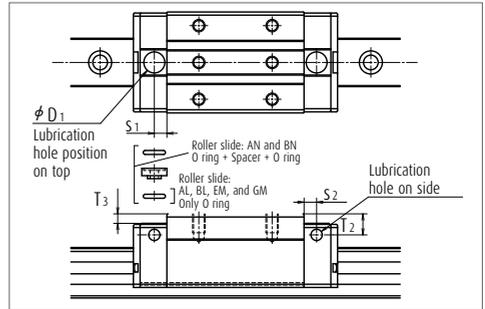


Fig.13 Top and side lubrication hole positions

Table 9 Top and side lubrication hole positions

Unit : mm

| Model No. | Roller slide model | Grease fitting size | S_2 | T_2 | O ring (JIS) | Spacer | D_1 | S_1 | T_3 |
|-----------|--------------------|---------------------|-------|-------|--------------|-----------|-------|-------|-------|
| RA15 | AN, BN | $\phi 3$ | 4 | 7 | P5 | Necessary | 8.2 | 4.4 | 4.2 |
| RA20 | AN, BN | $\phi 3$ | 4 | 4 | P6 | — | 9.2 | 5.4 | 0.2 |
| RA25 | AN, BN | M6×0.75 | 6 | 10 | P7 | Necessary | 10.2 | 6 | 4.5 |
| RA30 | AN, BN | M6×0.75 | 5 | 10 | P7 | Necessary | 10.2 | 6 | 3.5 |
| RA35 | AN, BN | M6×0.75 | 5.5 | 15 | P7 | Necessary | 10.2 | 7 | 7.4 |
| RA45 | AN, BN | Rc 1/8 | 7.2 | 20 | P7 | Necessary | 10.2 | 7.2 | 10.4 |
| RA55 | AN, BN | Rc 1/8 | 7.2 | 21 | P7 | Necessary | 10.2 | 7.2 | 10.4 |
| RA65 | AN, BN | Rc 1/8 | 7.2 | 19 | P7 | — | 10.2 | 7.2 | 0.4 |

Table 10 Top and side lubrication hole positions

Unit : mm

| Model No. | Roller slide model | Grease fitting size | S_2 | T_2 | O ring (JIS) | D_1 | S_1 | T_3 |
|-----------|--------------------|---------------------|-------|-------|--------------|-------|-------|-------|
| RA15 | AL, BL, EM, GM | $\phi 3$ | 4 | 3 | P5 | 8.2 | 4.4 | 0.2 |
| RA20 | EM, GM | $\phi 3$ | 4 | 4 | P6 | 9.2 | 5.4 | 0.2 |
| RA25 | AL, BL, EM, GM | M6×0.75 | 6 | 6 | P7 | 10.2 | 6 | 0.4 |
| RA30 | AL, BL, EM, GM | M6×0.75 | 5 | 7 | P7 | 10.2 | 6 | 0.4 |
| RA35 | AL, BL, EM, GM | M6×0.75 | 5.5 | 8 | P7 | 10.2 | 7 | 0.4 |
| RA45 | AL, BL, EM, GM | Rc 1/8 | 7.2 | 10 | P7 | 10.2 | 7.2 | 0.4 |
| RA55 | AL, BL, EM, GM | Rc 1/8 | 7.2 | 11 | P7 | 10.2 | 7.2 | 0.4 |
| RA65 | EM, GM | Rc 1/8 | 7.2 | 19 | P7 | 10.2 | 7.2 | 0.4 |

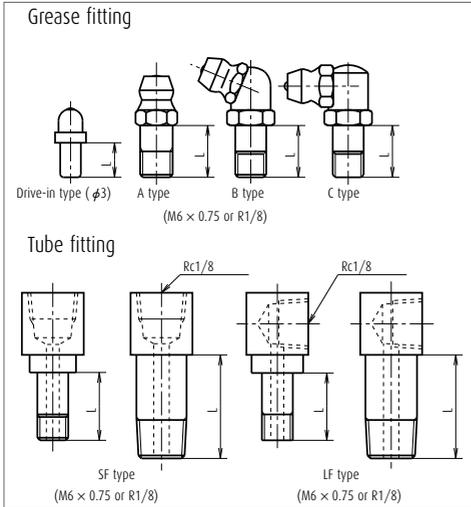


Fig. 14 Grease fitting and tube fitting

7. Dust-proof components

(1) Standard specification

The RA series is equipped with end, inner* and bottom seals to prevent foreign matter from entering the inside of the roller slide. Under normal applications, the RA series can be used without modification.

For severe usage conditions, optional rail covers** are available. Contact NSK for information on how to mount the cover.

*) Inner seals for the models of RA15 and RA20 are available as options.

***) The rail cover is available to the models of RA25 to RA65.

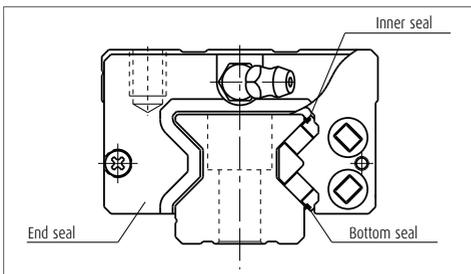


Fig. 15

Table 11

| Model No. | Dust proof specification | Dimension L | | |
|-----------|--------------------------|-------------------------------------|-------------------------|---------|
| | | Grease fitting/ Drive-in fitting | Tube fitting SF Type | LF Type |
| RA15 | Standard | 5 | - | - |
| RA15 | With NSK K1 | 10 | - | - |
| RA15 | Double seal | 8 | - | - |
| RA15 | Protector | 8 | - | - |
| RA20 | Standard | 5 | - | - |
| RA20 | With NSK K1 | 10 | - | - |
| RA20 | Double seal | 8 | - | - |
| RA20 | Protector | 10 | - | - |
| RA25 | Standard | 5 | 5 | 5 |
| RA25 | With NSK K1 | 12 | 12 | 12 |
| RA25 | Double seal | 10 | 9 | 9 |
| RA25 | Protector | 10 | 9 | 9 |
| RA30 | Standard | 5 | 6 | 6 |
| RA30 | With NSK K1 | 14 | 14 | 15 |
| RA30 | Double seal | 12 | 12 | 11 |
| RA30 | Protector | 12 | 10 | 11 |
| RA35 | Standard | 5 | 6 | 6 |
| RA35 | With NSK K1 | 14 | 14 | 15 |
| RA35 | Double seal | 12 | 12 | 11 |
| RA35 | Protector | 12 | 10 | 11 |
| RA45 | Standard | 8 | 13.5 | 17 |
| RA45 | With NSK K1 | 18 | 20 | 21.5 |
| RA45 | Double seal | 14 | 16 | 17 |
| RA45 | Protector | 14 | 16 | 17 |
| RA55 | Standard | 8 | 13.5 | 17 |
| RA55 | With NSK K1 | 18 | 20 | 21.5 |
| RA55 | Double seal | 14 | 16 | 17 |
| RA55 | Protector | 14 | 16 | 17 |
| RA65 | Standard | 8 | 13.5 | 17 |
| RA65 | With NSK K1 | 20 | 20 | 20 |
| RA65 | Double seal | 14 | 18 | 17 |
| RA65 | Protector | 14 | 16 | 17 |



Fig. 16 Rail cover

Table 12 Seal friction per roller side (maximum value)

| Series | Size | Unit: mm | | | | | | | |
|--------|------|----------|-----|----|----|----|----|----|----|
| | | 15 | 20 | 25 | 30 | 35 | 45 | 55 | 65 |
| RA | | 4 | 5.5 | 5 | 5 | 6 | 8 | 8 | 14 |

A-5-3.1 Roller Guide RA Series

(2) NSK K1 lubrication unit

Table 12 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

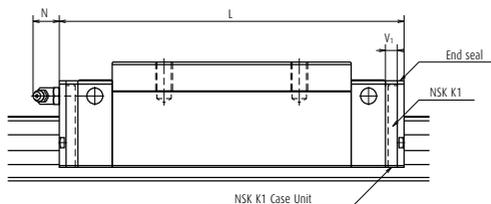


Table 13

Unit: mm

| Model No. | Roller slide length | Roller slide model | Standard roller slide length | With two NSK K1 | Thickness of NSK K1 V1 | Protruding area of the grease fitting N |
|-----------|---------------------|--------------------|------------------------------|-----------------|------------------------|---|
| RA15 | Standard | AN, AL, EM | 70 | 79 | 4.5 | (3) |
| RA15 | Long | BN, BL, GM | 85.4 | 94.4 | 4.5 | (3) |
| RA20 | Standard | AN, EM | 86.5 | 95.5 | 4.5 | (3) |
| RA20 | Long | BN, GM | 106.3 | 115.3 | 4.5 | (3) |
| RA25 | Standard | AN, AL, EM | 97.5 | 107.5 | 5 | (11) |
| RA25 | Long | BN, BL, GM | 115.5 | 125.5 | 5 | (11) |
| RA30 | Standard | AN, AL, EM | 110.8 | 122.8 | 6 | (11) |
| RA30 | Long | BN, BL, GM | 135.4 | 147.4 | 6 | (11) |
| RA35 | Standard | AN, AL, EM | 123.8 | 136.8 | 6.5 | (11) |
| RA35 | Long | BN, BL, GM | 152 | 165 | 6.5 | (11) |
| RA45 | Standard | AN, AL, EM | 154 | 168 | 7 | (14) |
| RA45 | Long | BN, BL, GM | 190 | 204 | 7 | (14) |
| RA55 | Standard | AN, AL, EM | 184 | 198 | 7 | (14) |
| RA55 | Long | BN, BL, GM | 234 | 248 | 7 | (14) |
| RA65 | Standard | AN, EM | 228.4 | 243.4 | 7.5 | (14) |
| RA65 | Long | BN, GM | 302.5 | 317.5 | 7.5 | (14) |

Note Roller slide length equipped with NSK K1 = (Standard roller slide length) + (Thickness of NSK K1 Case Unit × Number of NSK K1 Case Unit)

(3) Double seal and protector

For RA Series, double seal and protector can be installed only before shipping from the factory.

Table 14 shows the increased thickness when end seal and protector are installed.

Table 14

Unit: mm

| Modell No. | Thickness of end seal V ₃ | Thickness of protector V ₄ |
|------------|--------------------------------------|---------------------------------------|
| RA15 | 3 | 2.7 |
| RA20 | 3 | 3.3 |
| RA25 | 3.2 | 3.3 |
| RA30 | 3.4 | 3.6 |
| RA35 | 3.4 | 3.6 |
| RA45 | 4 | 4.2 |
| RA55 | 4 | 4.2 |
| RA65 | 5 | 5.5 |

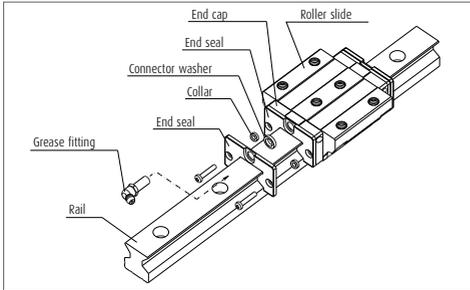


Fig. 17 Double seal

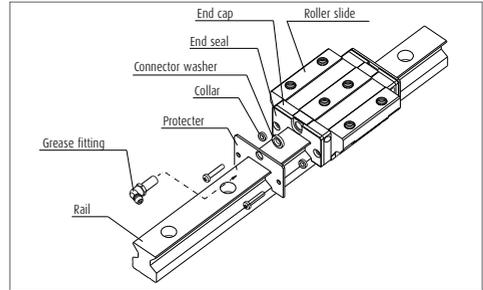


Fig. 18 Protector

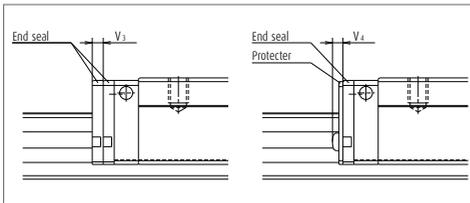


Fig. 19

(4) Rail cover

When the rail cover is used, use the cover bracket to secure the rail cover. Fig.20 shows the dimensions for the cover bracket. The required room at the end of the rail is:

- > Inside: 10.5 mm or less
- > Outside: 4 mm or less (Common to the models of RA25 to RA65)
Please confirm the interference with your machine at the stroke end.
- > Machine stroke
- > Room for the end of the rail

The height of the rail with the rail cover is shown in Table 15.

Table 15 Height of rails equipped with rail cover

Unit: mm

| Modell No. | Standard height H1 | Cover installation |
|------------|--------------------|--------------------|
| RA25 | 24 | 24.25 |
| RA30 | 28 | 28.25 |
| RA35 | 31 | 31.25 |
| RA45 | 38 | 38.3 |
| RA55 | 43.5 | 43.8 |
| RA65 | 55 | 55.3 |

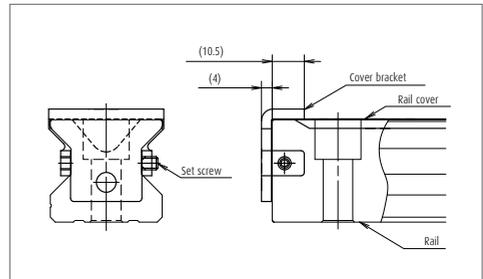


Fig. 20 End configuration of rail equipped with the rail cover

(5) Cap to plug the rail mounting bolt hole




Table 16 Caps to plug rail bolt hole

| Modell No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| RA15 | M4 | LG-CAP/M4 | 20 |
| RA20 | M5 | LG-CAP/M5 | 20 |
| RA25 | M6 | LG-CAP/M6 | 20 |
| RA30, RA35 | M8 | LG-CAP/M8 | 20 |
| RA45 | M12 | LG-CAP/M12 | 20 |
| RA55 | M14 | LG-CAP/M14 | 20 |
| RA65 | M16 | LG-CAP/M16 | 20 |

A-5-3.1 Roller Guide RA Series

(6) Specification with highly dustproof V1 seal

RA35, RA45, and RA55 also have the specification with newly developed, highly dustproof V1 seal which is the end seal with enhanced abrasion resistance. Highly dustproof V1 Seal made of new materials and in a new shape for better abrasion resistance prevents foreign matter getting into the roller slide for a long period. Inner seal and bottom seal are equipped as standard. In addition, outstanding lubrication effects by NSK K1 further improves the durability. The bolt hole caps whose shape is partly changed eliminate building up of foreign matter in and around the rail mounting holes and prevent foreign matter from entering into the roller slide. Otherwise, the rail cover with higher dustproofness can be selected. See A262 for the details of the rail cover.

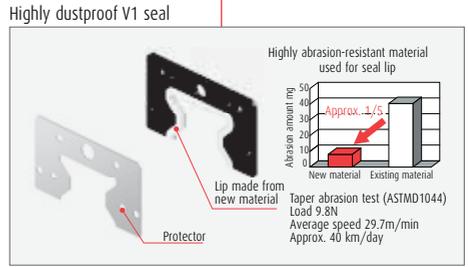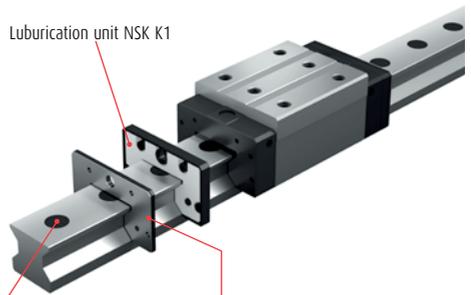

> Durability test under extreme conditions - no



With this new material, even if lubrication is poor, damage such as roughening of surfaces will not occur.

Test sample: RA35

Operation without lubrication on the seal

Feed speed: 500 mm/sec

Table 17 shows the dimension for roller slide with V1 seal.

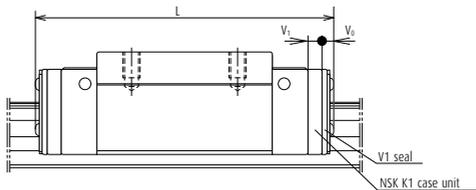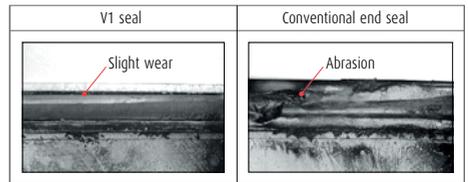

Since the sealing property (resistance to foreign matter) is affected by usage or the lubrication environment, please conduct an evaluation test for your particular application.

Table 17

Unit: mm

| Modell No. | Roller slide length | Roller slide type | Standard roller slide length L | Roller slide length equipped with V1 seal | Roller slide length equipped with V1 seal and NSK K1 L | Thickness of V1 seal V ₀ | Thickness of K1 case unit V ₁ |
|------------|---------------------|-------------------|--------------------------------|---|--|-------------------------------------|--|
| RA35 | Standard | AN, AL, EM | 123.8 | 127.8 | 140.8 | 3.4 | 6.5 |
| | Long | BN, BL, GM | 152 | 156 | 169 | | |
| RA45 | Standard | AN, AL, EM | 154 | 159.2 | 173.2 | 4 | 7 |
| | Long | BN, BL, GM | 190 | 195.2 | 209.2 | | |
| RA55 | Standard | AN, AL, EM | 184 | 189.2 | 203.2 | 4 | 7 |
| | Long | BN, BL, GM | 234 | 239.2 | 253.2 | | |

(7) Dynamic friction

- › Dynamic friction indications per roller slide are shown in table 18.
- › These values are assumed under actual condition with standard specification (two end seals, inner seal and bottom seal equipped) packed with standard grease (NSK Grease AS2)
- › Dynamic friction varies with grease.

Table 18 Dynamic friction

Unit: N

| Modell No. | High-load type | Super-high-load type |
|------------|----------------|----------------------|
| RA15 | 21 | 24 |
| RA20 | 22 | 28 |
| RA25 | 27 | 34 |
| RA30 | 33 | 42 |
| RA35 | 42 | 53 |
| RA45 | 56 | 69 |
| RA55 | 80 | 95 |
| RA65 | 120 | 138 |

Note Values in Table 18 are indications. Please refer to them.

A-5-3.1 Roller Guide RA Series

9. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

(1) Reference number for preloaded assembly

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|----------------------------------|--|
| | RA | 35 | 1000 | AN | C | 2 | -** | P6 | 3 | |
| Series name | | | | | | | | | Preload code (See page A255.) | |
| Size | | | | | | | | | 1: Z1, 3: Z3 | |
| Rail length (mm) | | | | | | | | | Accuracy code (See Table 18.) | |
| Roller slide shape code (See page A254.) | | | | | | | | | Design serial number | |
| Material/surface treatment code (See Table 17.) | | | | | | | | | Added to the reference number. | |
| C: Special high carbon steel (NSK standard) | | | | | | | | | Number of roller slides per rail | |

(2) Reference number for random-matching type

| | | | | | | | |
|---|------------|-----------|-----------|-----------|----------|-----------|---|
| Roller slide | RAA | 35 | AN | PH | H | -F | |
| Random-matching roller slide series code | | | | | | | Option code |
| RAA: RA Series random-matching roller slide | | | | | | | No code: No surface treatment |
| Size | | | | | | | -F: Fluoride low temperature chrome plating |
| Roller slide shape code (See page A254.) | | | | | | | -C: No surface treatment + Rail cover |
| | | | | | | | -CF: Fluoride low temperature chrome plating + Rail cover |
| | | | | | | | Preload code: Z |
| | | | | | | | Z: Slight preload, H: Medium preload |
| | | | | | | | Accuracy code |
| | | | | | | | PH, KH: High-precision grade random-matching type (See Table 18.) |

| | | | | | | | | | | |
|---|------------|-----------|-------------|----------|----------|----------|------------|-----------|--|--|
| Rail | R1A | 35 | 1000 | L | C | N | -** | PH | Z | |
| Random-matching rail series code | | | | | | | | | Preload code: Z | |
| R1A: RA Series random-matching rail | | | | | | | | | Z: Common for slight and medium preload (See page A255.) | |
| Size | | | | | | | | | Accuracy code (See Table 18.) | |
| Rail length (mm) | | | | | | | | | PH: High-precision grade random-matching type | |
| Rail shape code: L | | | | | | | | | Design serial number | |
| L: Standard | | | | | | | | | Added to the reference number. | |
| Material/surface treatment code (See Table 17.) | | | | | | | | | *Butting rail specification | |
| | | | | | | | | | N: Non-butting, L: Butting specification | |
| | | | | | | | | | *Please consult with NSK for butting rail specification. | |

The reference number coding for the assembly of random-matching type is the same as that of the preloaded assembly. However, the applicable preload codes are "slight preload Z" and "medium preload H". (See page A255.)

Table 19 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| D | Special high carbon steel with surface treatment |
| P | Special high carbon steel with V1 seal |
| R | Special high carbon steel with surface treatment and V1 seal |
| Z | Other, special |

Note P and R are not available for randommatching slides and rails.

Table 20 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 |
|---|------------------------------|-------------|
| Ultra precision grade | P3 | K3 |
| Super precision grade | P4 | K4 |
| High precision grade | P5 | K5 |
| Precision grade | P6 | K6 |
| High precision grade (random-matching type) | PH | KH |



Note Refer to pages A38 for NSK K1 lubrication unit.

A-5-3.1 Roller Guide RA Series

10. Dimensions

RA-AN (High-load type / Standard)

RA-BN (Super-high-load type / Long)

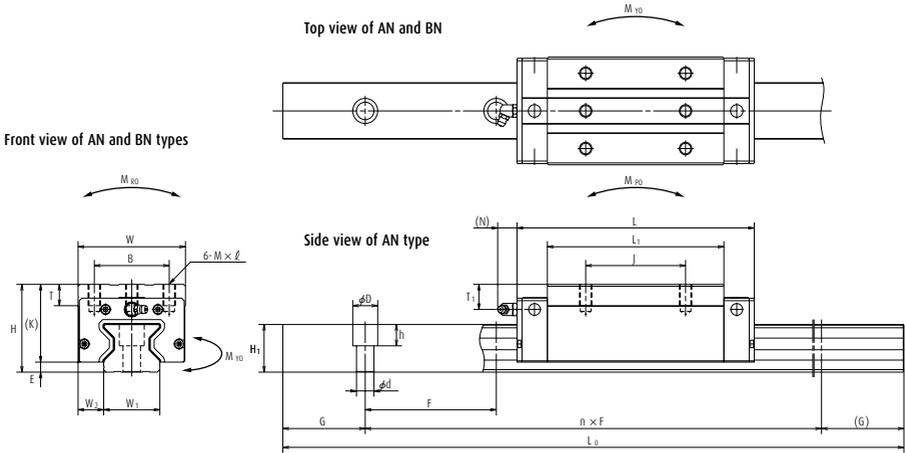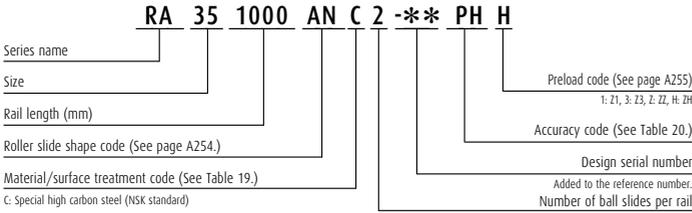

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|---------------|----------------|------|----|----------------|----------------|----|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | | | |
| RA15AN | 28 | 4 | 9.5 | 34 | 70 | 26 | 26 | M4×0.7×6 | 44.8 | 24 | 8 | φ 3 | 8 | 3 | 15 | 16.3 | | |
| RA15BN | 28 | 4 | 9.5 | 34 | 85.4 | 26 | 26 | M4×0.7×6 | 60.2 | 24 | 8 | φ 3 | 8 | 3 | 15 | 16.3 | | |
| RA20AN | 30 | 5 | 12 | 44 | 86.5 | 32 | 36 | M5×0.8×6 | 57.5 | 25 | 12 | φ 3 | 4 | 3 | 20 | 20.8 | | |
| RA20BN | 30 | 5 | 12 | 44 | 106.3 | 32 | 50 | M5×0.8×6 | 77.3 | 25 | 12 | φ 3 | 4 | 3 | 20 | 20.8 | | |
| RA25AN | 40 | 5 | 12.5 | 48 | 97.5 | 35 | 35 | M6×1×9 | 65.5 | 35 | 12 | M6×0.75 | 10 | 11 | 23 | 24 | | |
| RA25BN | 40 | 5 | 12.5 | 48 | 115.5 | 35 | 50 | M6×1×9 | 83.5 | 35 | 12 | M6×0.75 | 10 | 11 | 23 | 24 | | |
| RA30AN | 45 | 6.5 | 16 | 60 | 110.8 | 40 | 40 | M8×1.25×11 | 74 | 38.5 | 14 | M6×0.75 | 10 | 11 | 28 | 28 | | |
| RA30BN | 45 | 6.5 | 16 | 60 | 135.4 | 40 | 60 | M8×1.25×11 | 98.6 | 38.5 | 14 | M6×0.75 | 10 | 11 | 28 | 28 | | |
| RA35AN | 55 | 6.5 | 18 | 70 | 123.8 | 50 | 50 | M8×1.25×12 | 83.2 | 48.5 | 15 | M6×0.75 | 15 | 11 | 34 | 31 | | |
| RA35BN | 55 | 6.5 | 18 | 70 | 152 | 50 | 72 | M8×1.25×12 | 111.4 | 48.5 | 15 | M6×0.75 | 15 | 11 | 34 | 31 | | |
| RA45AN | 70 | 8 | 20.5 | 86 | 154 | 60 | 60 | M10×1.5×17 | 105.4 | 62 | 17 | Rc1/8 | 20 | 14 | 45 | 38 | | |
| RA45BN | 70 | 8 | 20.5 | 86 | 190 | 60 | 80 | M10×1.5×17 | 141.4 | 62 | 17 | Rc1/8 | 20 | 14 | 45 | 38 | | |
| RA55AN | 80 | 9 | 23.5 | 100 | 184 | 75 | 75 | M12×1.75×18 | 128 | 71 | 18 | Rc1/8 | 21 | 14 | 53 | 43.5 | | |
| RA55BN | 80 | 9 | 23.5 | 100 | 234 | 75 | 95 | M12×1.75×18 | 178 | 71 | 18 | Rc1/8 | 21 | 14 | 53 | 43.5 | | |
| RA65AN | 90 | 13 | 31.5 | 126 | 228.4 | 76 | 70 | M16×2×20 | 155.4 | 77 | 22 | Rc1/8 | 19 | 14 | 63 | 55 | | |
| RA65BN | 90 | 13 | 31.5 | 126 | 302.5 | 76 | 120 | M16×2×20 | 229.5 | 77 | 22 | Rc1/8 | 19 | 14 | 63 | 55 | | |

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Reference number for roller slide of random-matching type

Ball slide

RAA 35 AN PH H -F

Random-matching roller slide series code

RAA: RA Series random-matching roller slide

Size

Roller slide shape code (See page A254.)

Option code

No code: No surface treatment

-F: Fluoride low temperature chrome plating

-C: No surface treatment + Rail cover

-CF: Fluoride low temperature chrome plating + Rail cover


Preload code: Z

Z: Slight preload, H: Medium preload


Accuracy code

PH, KH: High-precision grade random-matching type (See Table 18.)


AN and BN types



AN type

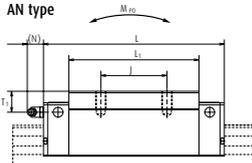

BN type



Reference number for rail of random-matching type

R1A 35 1000 L C N - PH Z**

Rail

Random-matching rail series code

R1A: RA Series random-matching rail

Size

Rail length (mm)

Rail shape code: L

L: Standard

Material/surface treatment code (See Table 19.)

Preload code: Z

Z: Common for slight and medium preload (See A255.)

Accuracy code

PH: High-precision grade random-matching type



Design serial number

Added to the reference number.

*Butting rail specification

N: Non-butting, L: Butting specification

*Please consult with NSK for butting rail specification.

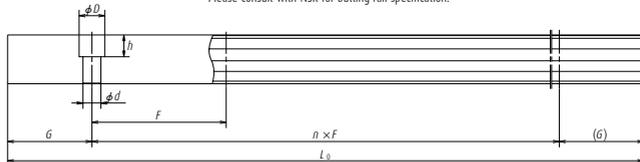

Unit: mm

| Rail | | | Basic load rating | | | | | | | | Weight | | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d x D x h | G (reference) | Maximum length L _{0max} | 3) Dynamic | | Static | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 4.5x7.5x5.3 | 20 | 2 000 | 12 600 | 10 300 | 27 500 | 260 | 210 | 1 320 | 210 | 1 320 | 0.21 | 1.6 |
| (30) | 4.5x7.5x5.3 | 20 | 2 000 | 16 000 | 13 000 | 37 000 | 350 | 375 | 2 130 | 375 | 2 130 | 0.30 | 1.6 |
| 60 | 6x9.5x8.5 | 20 | 3 000 | 23 600 | 19 200 | 52 500 | 665 | 505 | 3 100 | 505 | 3 100 | 0.38 | 2.6 |
| (30) | 6x9.5x8.5 | 20 | 3 000 | 29 500 | 24 000 | 70 000 | 890 | 900 | 5 000 | 900 | 5 000 | 0.50 | 2.6 |
| 30 | 7x11x9 | 20 | 3 900 | 36 000 | 29 200 | 72 700 | 970 | 760 | 4 850 | 760 | 4 850 | 0.60 | 3.4 |
| (60) | 7x11x9 | 20 | 3 900 | 43 500 | 35 400 | 92 900 | 1 240 | 1 240 | 7 200 | 1 240 | 7 200 | 0.91 | 3.4 |
| 40 | 9x14x12 | 20 | 3 900 | 47 800 | 38 900 | 93 500 | 1 670 | 1 140 | 7 100 | 1 140 | 7 100 | 1.0 | 4.9 |
| (80) | 9x14x12 | 20 | 3 900 | 58 500 | 47 600 | 121 000 | 2 170 | 1 950 | 11 500 | 1 950 | 11 500 | 1.3 | 4.9 |
| 40 | 9x14x12 | 20 | 3 900 | 65 500 | 53 300 | 129 000 | 2 810 | 1 800 | 11 000 | 1 800 | 11 000 | 1.6 | 6.8 |
| (80) | 9x14x12 | 20 | 3 900 | 82 900 | 67 400 | 175 000 | 3 810 | 3 250 | 17 800 | 3 250 | 17 800 | 2.1 | 6.8 |
| 52.5 | 14x20x17 | 22.5 | 3 650 | 114 000 | 92 800 | 229 000 | 6 180 | 4 080 | 24 000 | 4 080 | 24 000 | 3.0 | 10.9 |
| (105) | 14x20x17 | 22.5 | 3 650 | 143 000 | 116 000 | 305 000 | 8 240 | 7 150 | 39 000 | 7 150 | 39 000 | 4.1 | 10.9 |
| 60 | 16x23x20 | 30 | 3 600 | 159 000 | 129 000 | 330 000 | 10 200 | 7 060 | 41 000 | 7 060 | 41 000 | 4.9 | 14.6 |
| (120) | 16x23x20 | 30 | 3 600 | 207 000 | 168 000 | 462 000 | 14 300 | 13 600 | 72 000 | 13 600 | 72 000 | 6.7 | 14.6 |
| 75 | 18x26x22 | 35 | 3 600 | 259 000 | 210 000 | 504 000 | 19 200 | 12 700 | 78 500 | 12 700 | 78 500 | 9.3 | 22.0 |
| (150) | 18x26x22 | 35 | 3 600 | 355 000 | 288 000 | 756 000 | 28 700 | 28 600 | 153 000 | 28 600 | 153 000 | 12.2 | 22.0 |

2) The random-matching type is available for the models of RA25 to RA65.



3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.1 Roller Guide RA Series

RA-AL (High-load type / Standard)
 RA-BL (Super-high-load type / Long)

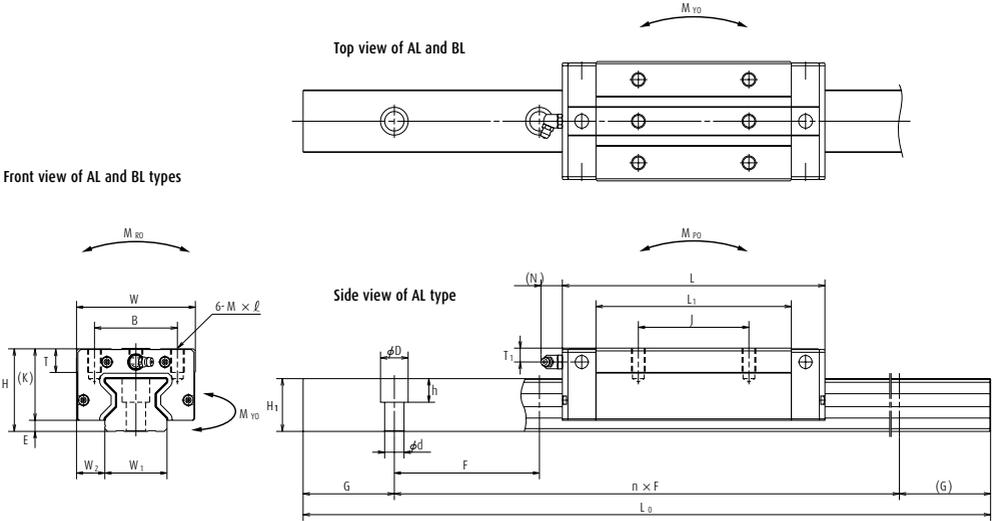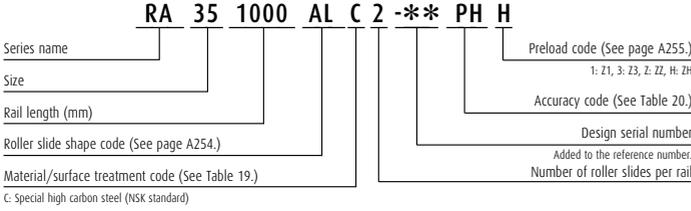


| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height |
|-----------|----------|-----|----------------|------------|--------|---------------|----|---------------|----------------|------|----|----------------|----------------|----|-------|--------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | |
| RA15AL | 24 | 4 | 9.5 | 34 | 70 | 26 | 26 | M4×0.7×5.5 | 44.8 | 20 | 8 | φ 3 | 4 | 3 | 15 | 16.3 |
| RA15BL | 24 | 4 | 9.5 | 34 | 85.4 | 26 | 26 | M4×0.7×5.5 | 60.2 | 20 | 8 | φ 3 | 4 | 3 | 15 | 16.3 |
| RA25AL | 36 | 5 | 12.5 | 48 | 97.5 | 35 | 35 | M6×1×8 | 65.5 | 31 | 12 | M6×0.75 | 6 | 11 | 23 | 24 |
| RA25BL | 36 | 5 | 12.5 | 48 | 115.5 | 35 | 50 | M6×1×8 | 83.5 | 31 | 12 | M6×0.75 | 6 | 11 | 23 | 24 |
| RA30AL | 42 | 6.5 | 16 | 60 | 110.8 | 40 | 40 | M8×1.25×11 | 74 | 35.5 | 14 | M6×0.75 | 7 | 11 | 28 | 28 |
| RA30BL | 42 | 6.5 | 16 | 60 | 135.4 | 40 | 60 | M8×1.25×11 | 98.6 | 35.5 | 14 | M6×0.75 | 7 | 11 | 28 | 28 |
| RA35AL | 48 | 6.5 | 18 | 70 | 123.8 | 50 | 50 | M8×1.25×12 | 83.2 | 41.5 | 15 | M6×0.75 | 8 | 11 | 34 | 31 |
| RA35BL | 48 | 6.5 | 18 | 70 | 152 | 50 | 72 | M8×1.25×12 | 111.4 | 41.5 | 15 | M6×0.75 | 8 | 11 | 34 | 31 |
| RA45AL | 60 | 8 | 20.5 | 86 | 154 | 60 | 60 | M10×1.5×16 | 105.4 | 52 | 17 | Rc1/8 | 10 | 14 | 45 | 38 |
| RA45BL | 60 | 8 | 20.5 | 86 | 190 | 60 | 80 | M10×1.5×16 | 141.4 | 52 | 17 | Rc1/8 | 10 | 14 | 45 | 38 |
| RA55AL | 70 | 9 | 23.5 | 100 | 184 | 75 | 75 | M12×1.75×18 | 128 | 61 | 18 | Rc1/8 | 11 | 14 | 53 | 43.5 |
| RA55BL | 70 | 9 | 23.5 | 100 | 234 | 75 | 95 | M12×1.75×18 | 178 | 61 | 18 | Rc1/8 | 11 | 14 | 53 | 43.5 |


Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.

Reference number for roller slide of random-matching type


Ball slide

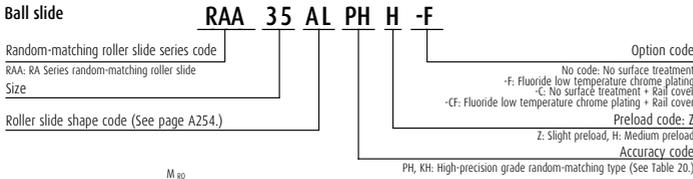


AL and BL types





AL type



BL type

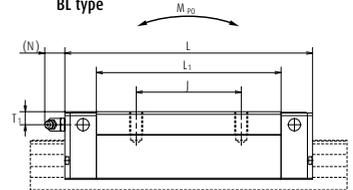

Reference number for rail of random-matching type

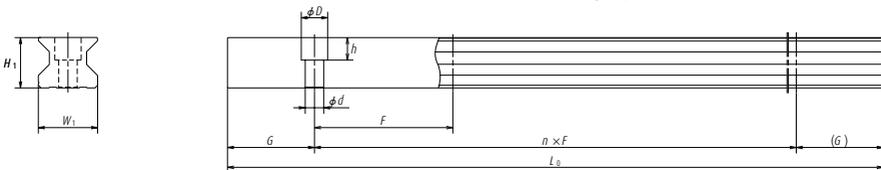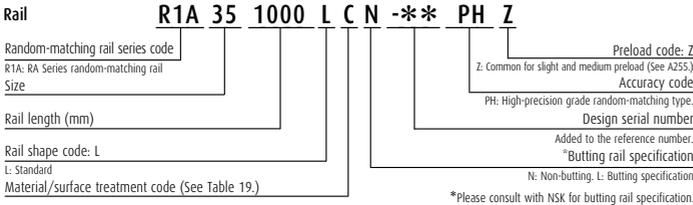

Unit: mm

| Rail | | | Basic load rating | | | | | | | Weight | | | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|-----------|-----------------|--------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 3) Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | One slide | | Two slides | One slide | Two slides | | | |
| 60 | 4.5×7.5×5.3 | 20 | 2 000 | 12 600 | 10 300 | 27 500 | 260 | 210 | 1 320 | 210 | 1 320 | 0.17 | 1.6 |
| (30) | 4.5×7.5×5.3 | 20 | 2 000 | 16 000 | 13 000 | 37 000 | 350 | 375 | 2 130 | 375 | 2 130 | 0.25 | 1.6 |
| 30 | 7×11×9 | 20 | 3 900 | 36 000 | 29 200 | 72 700 | 970 | 760 | 4 850 | 760 | 4 850 | 0.45 | 3.4 |
| (60) | 7×11×9 | 20 | 3 900 | 43 500 | 35 400 | 92 900 | 1 240 | 1 240 | 7 200 | 1 240 | 7 200 | 0.80 | 3.4 |
| 40 | 9×14×12 | 20 | 3 900 | 47 800 | 38 900 | 93 500 | 1 670 | 1 140 | 7 100 | 1 140 | 7 100 | 0.85 | 4.9 |
| (80) | 9×14×12 | 20 | 3 900 | 58 500 | 47 600 | 121 000 | 2 170 | 1 950 | 11 500 | 1 950 | 11 500 | 1.1 | 4.9 |
| 40 | 9×14×12 | 20 | 3 900 | 65 500 | 53 300 | 129 000 | 2 810 | 1 800 | 11 000 | 1 800 | 11 000 | 1.2 | 6.8 |
| (80) | 9×14×12 | 20 | 3 900 | 82 900 | 67 400 | 175 000 | 3 810 | 3 250 | 17 800 | 3 250 | 17 800 | 1.7 | 6.8 |
| 52.5 | 14×20×17 | 22.5 | 3 650 | 114 000 | 92 800 | 229 000 | 6 180 | 4 080 | 24 000 | 4 080 | 24 000 | 2.5 | 10.9 |
| (105) | 14×20×17 | 22.5 | 3 650 | 143 000 | 116 000 | 305 000 | 8 240 | 7 150 | 39 000 | 7 150 | 39 000 | 3.4 | 10.9 |
| 60 | 16×23×20 | 30 | 3 600 | 159 000 | 129 000 | 330 000 | 10 200 | 7 060 | 41 000 | 7 060 | 41 000 | 4.1 | 14.6 |
| (120) | 16×23×20 | 30 | 3 600 | 207 000 | 168 000 | 462 000 | 14 300 | 13 600 | 72 000 | 13 600 | 72 000 | 5.7 | 14.6 |

2) The random-matching type is available for the models of RA25 to RA55.



3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.1 Roller Guide RA Series


RA-EM (High-load type / Standard)
RA-GM (Super-high-load type / Long)

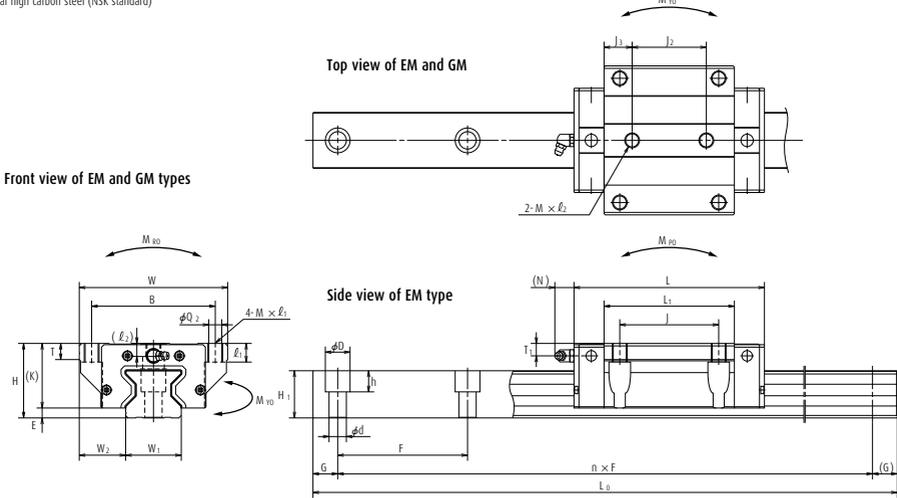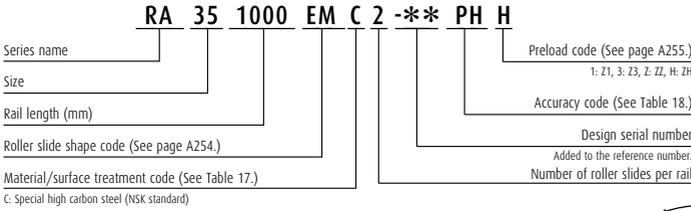


| Model No. | Assembly | | | | | Ball slide | | | | | | | | | | |
|-----------|----------|-----|----------------|-------|--------|---------------|-----|----------------|--|----------------|----------------|------|----|-----------|----------------|----|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | | Grease fitting | | | | | |
| | | | | | | B | J | J ₂ | M × pitch × l ₁ (l ₂) | O ₂ | L ₁ | K | T | Hole size | T ₁ | N |
| RA15EM | 24 | 4 | 16 | 47 | 70 | 38 | 30 | 26 | M5×0.8×8.5 (6.5) | 4.4 | 44.8 | 20 | 8 | φ 3 | 4 | 3 |
| RA15GM | 24 | 4 | 16 | 47 | 85.4 | 38 | 30 | 26 | M5×0.8×8.5 (6.5) | 4.4 | 60.2 | 20 | 8 | φ 3 | 4 | 3 |
| RA20EM | 30 | 5 | 21.5 | 63 | 86.5 | 53 | 40 | 35 | M6×1×9.5 (8) | 5.3 | 57.5 | 25 | 10 | φ 3 | 4 | 3 |
| RA20GM | 30 | 5 | 21.5 | 63 | 106.3 | 53 | 40 | 35 | M6×1×9.5 (8) | 5.3 | 77.3 | 25 | 10 | φ 3 | 4 | 3 |
| RA25EM | 36 | 5 | 23.5 | 70 | 97.5 | 57 | 45 | 40 | M8×1.25×10 (11) | 6.8 | 65.5 | 31 | 11 | M6×0.75 | 6 | 11 |
| RA25GM | 36 | 5 | 23.5 | 70 | 115.5 | 57 | 45 | 40 | M8×1.25×10 (11) | 6.8 | 83.5 | 31 | 11 | M6×0.75 | 6 | 11 |
| RA30EM | 42 | 6.5 | 31 | 90 | 110.8 | 72 | 52 | 44 | M10×1.5×12 (12.5) | 8.6 | 74 | 35.5 | 11 | M6×0.75 | 7 | 11 |
| RA30GM | 42 | 6.5 | 31 | 90 | 135.4 | 72 | 52 | 44 | M10×1.5×12 (12.5) | 8.6 | 98.6 | 35.5 | 11 | M6×0.75 | 7 | 11 |
| RA35EM | 48 | 6.5 | 33 | 100 | 123.8 | 82 | 62 | 52 | M10×1.5×13 (7) | 8.6 | 83.2 | 41.5 | 12 | M6×0.75 | 8 | 11 |
| RA35GM | 48 | 6.5 | 33 | 100 | 152 | 82 | 62 | 52 | M10×1.5×13 (7) | 8.6 | 111.4 | 41.5 | 12 | M6×0.75 | 8 | 11 |
| RA45EM | 60 | 8 | 37.5 | 120 | 154 | 100 | 80 | 60 | M12×1.75×15 (10.5) | 10.5 | 105.4 | 52 | 13 | Rc1/8 | 10 | 14 |
| RA45GM | 60 | 8 | 37.5 | 120 | 190 | 100 | 80 | 60 | M12×1.75×15 (10.5) | 10.5 | 141.4 | 52 | 13 | Rc1/8 | 10 | 14 |
| RA55EM | 70 | 9 | 43.5 | 140 | 184 | 116 | 95 | 70 | M14×2×18 (13) | 12.5 | 128 | 61 | 15 | Rc1/8 | 11 | 14 |
| RA55GM | 70 | 9 | 43.5 | 140 | 234 | 116 | 95 | 70 | M14×2×18 (13) | 12.5 | 178 | 61 | 15 | Rc1/8 | 11 | 14 |
| RA65EM | 90 | 13 | 53.5 | 170 | 228.4 | 142 | 110 | 82 | M16×2×24 (18.5) | 14.6 | 155.4 | 77 | 22 | Rc1/8 | 19 | 14 |
| RA65GM | 90 | 13 | 53.5 | 170 | 302.5 | 142 | 110 | 82 | M16×2×24 (18.5) | 14.6 | 229.5 | 77 | 22 | Rc1/8 | 19 | 14 |

Notes 1) Select either one of two F dimensions, the standard or the parenthesized semi-standard dimension, for the pitch of rail fixing bolt holes. If not specified, the standard dimension of F is applied.


Reference number for roller slide of random-matching type

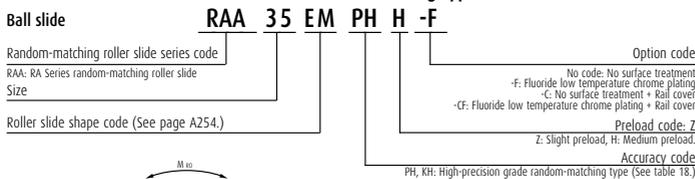


EM and GM types






EM type



GM type



Reference number for rail of random-matching type

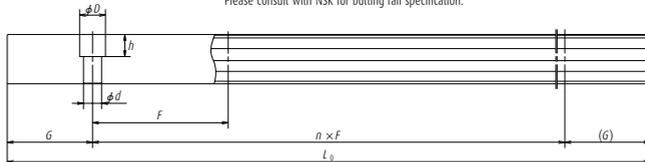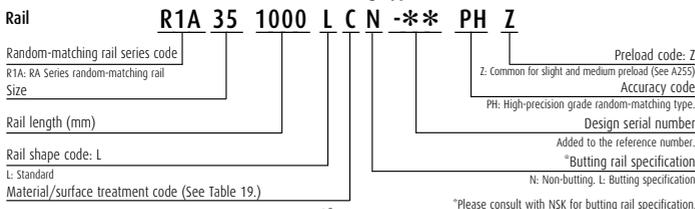

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | | | Weight | |
|-------------------------|--------------------------|------------|------------------------------------|-------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Width W ₁ | Height H ₁ | Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 3) Dynamic | | Static C ₀ (N) | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 15 | 16.3 | 60 | 4.5×7.5×5.3 | 20 | 2 000 | 12 600 | 10 300 | 27 500 | 260 | 210 | 1 320 | 210 | 1 320 | 0.21 | 1.6 |
| 15 | 16.3 | (30) | 4.5×7.5×5.3 | 20 | 2 000 | 16 000 | 13 000 | 37 000 | 350 | 375 | 2 130 | 375 | 2 130 | 0.28 | 1.6 |
| 20 | 20.8 | 60 | 6×9.5×8.5 | 20 | 3 000 | 23 600 | 19 200 | 52 500 | 665 | 505 | 3 100 | 505 | 3 100 | 0.45 | 2.6 |
| 20 | 20.8 | (30) | 6×9.5×8.5 | 20 | 3 000 | 29 500 | 24 000 | 70 000 | 890 | 900 | 5 000 | 900 | 5 000 | 0.65 | 2.6 |
| 23 | 24 | 30 | 7×11×9 | 20 | 3 900 | 36 000 | 29 200 | 72 700 | 970 | 760 | 4 850 | 760 | 4 850 | 0.80 | 3.4 |
| 23 | 24 | (60) | 7×11×9 | 20 | 3 900 | 43 500 | 35 400 | 92 900 | 1 240 | 1 240 | 7 200 | 1 240 | 7 200 | 1.1 | 3.4 |
| 28 | 28 | 40 | 9×14×12 | 20 | 3 900 | 47 800 | 38 900 | 93 500 | 1 670 | 1 140 | 7 100 | 1 140 | 7 100 | 1.3 | 4.9 |
| 28 | 28 | (80) | 9×14×12 | 20 | 3 900 | 58 500 | 47 600 | 121 000 | 2 170 | 1 950 | 11 500 | 1 950 | 11 500 | 1.7 | 4.9 |
| 34 | 31 | 40 | 9×14×12 | 20 | 3 900 | 65 500 | 53 300 | 129 000 | 2 810 | 1 800 | 11 000 | 1 800 | 11 000 | 1.7 | 6.8 |
| 34 | 31 | (80) | 9×14×12 | 20 | 3 900 | 82 900 | 67 400 | 175 000 | 3 810 | 3 250 | 17 800 | 3 250 | 17 800 | 2.3 | 6.8 |
| 45 | 38 | 52.5 | 14×20×17 | 22.5 | 3 650 | 114 000 | 92 800 | 229 000 | 6 180 | 4 080 | 24 000 | 4 080 | 24 000 | 3.2 | 10.9 |
| 45 | 38 | (105) | 14×20×17 | 22.5 | 3 650 | 143 000 | 116 000 | 305 000 | 8 240 | 7 150 | 39 000 | 7 150 | 39 000 | 4.3 | 10.9 |
| 53 | 43.5 | 60 | 16×23×20 | 30 | 3 600 | 159 000 | 129 000 | 330 000 | 10 200 | 7 060 | 41 000 | 7 060 | 41 000 | 5.4 | 14.6 |
| 53 | 43.5 | (120) | 16×23×20 | 30 | 3 600 | 207 000 | 168 000 | 462 000 | 14 300 | 13 600 | 72 000 | 13 600 | 72 000 | 7.5 | 14.6 |
| 63 | 55 | 75 | 18×26×22 | 35 | 3 600 | 259 000 | 210 000 | 504 000 | 19 200 | 12 700 | 78 500 | 12 700 | 78 500 | 12.2 | 22.0 |
| 63 | 55 | (150) | 18×26×22 | 35 | 3 600 | 355 000 | 288 000 | 756 000 | 28 700 | 28 600 | 153 000 | 28 600 | 153 000 | 16.5 | 22.0 |

2) The random-matching type is available for the models of RA25 to RA65.

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 LA Series

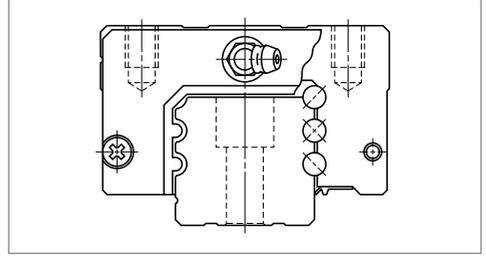
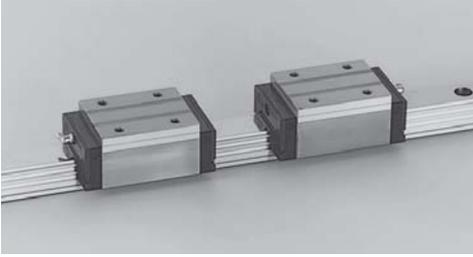


Fig. 1 LA Series

1. Features

(1) High rigidity and high load carrying capacity

A set of three ball grooves is made on both sides of ball slide and a rail. This contributes to the increased rigidity and load carrying capacity. The top and bottom groove are formed in the circular arc with a closer radius of ball, which ensures great rigidity and load carrying capacity. With the Gothic arch center groove, rigidity and load carrying capacity are further increased.

(2) Moderate friction

A well-balanced combination of 2-point contacts at the top and bottom grooves and 4 points contact at the center groove provides moderate friction while ensuring rigidity by appropriate preload.

(3) Four-way equal load distribution

The contact angle of balls is set at 45 degrees in all grooves, thereby dispersing the load equally to four rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(4) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball rows which receive the load is larger than in other linear guides, making this series stronger against shock load.

(5) High accuracy

As showing in Fig. 4, fixing the measuring rollers is easy thanks to the Gothic arch groove of the central ball groove. This benefits an accurate and measuring of ball groove for a highly precise and stable manufacturing.

(6) The dust protection design

The rail's cross section is designed as simple as possible, thereby improving the sealing efficiency combined with the enhanced sealing function. In addition, optional inner seals are available.

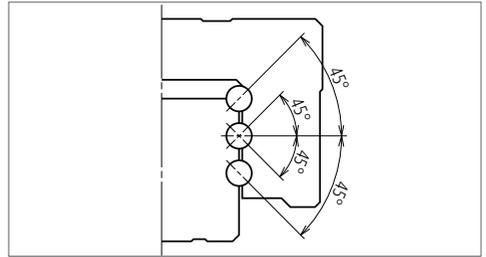


Fig. 2 Super rigidity design

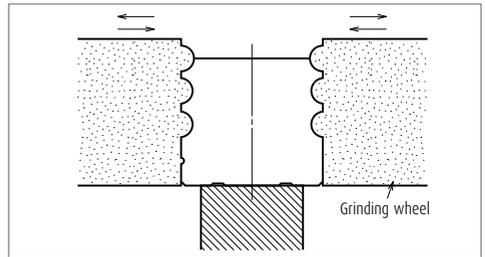


Fig. 3 Rail grinding

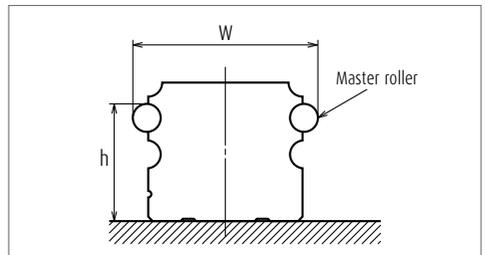














Fig. 4 Measuring groove accuracy

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type (Upper row, Rating: Lower row, Roller slide length) | |
|------------------|---|---|--|
| | | High-load type | Super-high-load type |
| | | Standard | Long |
| AN BN |  | AN  | BN  |
| AL BL |  | AL  | BL  |
| EL GL |  | EL  | GL  |
| FL HL |  | FL  | HL  |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | Preloaded assembly (not random matching) | | | | | |
|------------------|--|---------|--------------------|--------------------|-------------------|--------------------|
| | over | or less | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 |
| | - | 50 | 2 | 2 | 2 | 4.5 |
| | 50 | 80 | 2 | 2 | 3 | 5 |
| | 80 | 125 | 2 | 2 | 3.5 | 5.5 |
| | 125 | 200 | 2 | 2 | 4 | 6 |
| | 200 | 250 | 2 | 2.5 | 5 | 7 |
| | 250 | 315 | 2 | 2.5 | 5 | 8 |
| | 315 | 400 | 2 | 3 | 6 | 9 |
| | 400 | 500 | 2 | 3 | 6 | 10 |
| | 500 | 630 | 2 | 3.5 | 7 | 12 |
| | 630 | 800 | 2 | 4.5 | 8 | 14 |
| | 800 | 1 000 | 2.5 | 5 | 9 | 16 |
| | 1 000 | 1 250 | 3 | 6 | 10 | 17 |
| | 1 250 | 1 600 | 4 | 7 | 11 | 19 |
| | 1 600 | 2 000 | 4.5 | 8 | 13 | 21 |
| | 2 000 | 2 500 | 5 | 10 | 15 | 22 |
| | 2 500 | 3 150 | 6 | 11 | 17 | 25 |
| | 3 150 | 4 000 | 9 | 16 | 23 | 30 |

A-5-3.2 LA Series

(2) Accuracy standard

The LA Series has four accuracy grades: Ultra precision P3, Super precision P4, High precision P5, and Precision grade P6.

Table 2

| Characteristics | Accuracy grade | Unit: μm | | | |
|--|----------------|---|--------------------|-------------------|--------------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5 | Precision grade P6 |
| Mounting height H | | ± 10 | ± 10 | ± 20 | ± 40 |
| Variation of H (All ball slides on a set of rails) | | 3 | 5 | 7 | 15 |
| Mounting width W_2 or W_3 | | ± 15 | ± 15 | ± 25 | ± 50 |
| Variation of W_2 or W_3 (All ball slides on reference rail) | | 3 | 7 | 10 | 20 |
| Running parallelism of surface C to surface A Running parallelism of surface D to surface B | | Shown in Table 1 and Fig. 5 | | | |

(3) Assembled accuracy

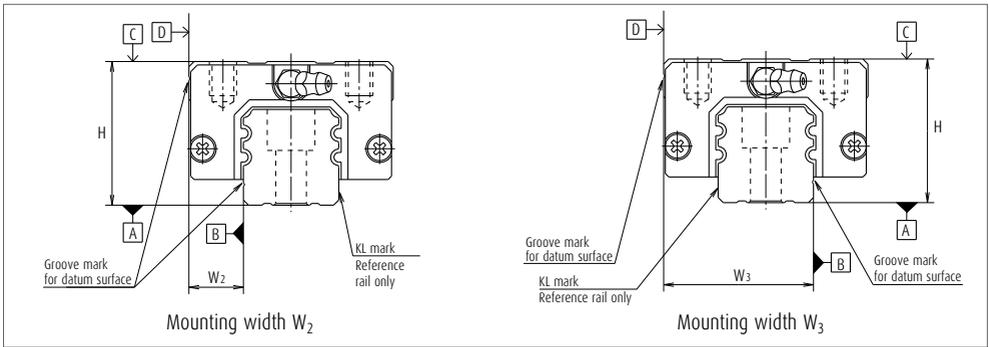


Fig. 5

(4) Preload and rigidity

Table 3 shows preload and rigidity of LA Series.

The LA Series has two types of preload specification: Medium preload Z3 and Heavy preload Z4.

Table 3

| Model No. | | Preload (N) | | Rigidity (N/ μm) | |
|----------------------|---------------------|-------------------|------------------|------------------------------|------------------|
| | | Medium preload Z3 | Heavy preload Z4 | Medium preload Z3 | Heavy preload Z4 |
| High-load type | LA25 AL, AN, EL, FL | 1 670 | 2 110 | 475 | 550 |
| | LA30 AL, AN, EL, FL | 2 450 | 3 150 | 705 | 835 |
| | LA35 AL, AN, EL, FL | 3 450 | 4 300 | 825 | 970 |
| | LA45 AL, AN, EL, FL | 5 050 | 6 350 | 1 100 | 1 240 |
| | LA55 AL, AN, EL, FL | 8 100 | 10 200 | 1 400 | 1 540 |
| | LA65 AN, EL, FL | 13 800 | 18 800 | 1 730 | 2 030 |
| Super-high-load type | LA25 BL, BN, GL, HL | 2 260 | 2 840 | 700 | 820 |
| | LA30 BL, BN, GL, HL | 3 250 | 4 050 | 1 000 | 1 180 |
| | LA35 BL, BN, GL, HL | 4 450 | 5 650 | 1 200 | 1 400 |
| | LA45 BL, BN, GL, HL | 6 150 | 7 750 | 1 450 | 1 640 |
| | LA55 BL, BN, GL, HL | 9 550 | 12 100 | 1 840 | 2 020 |
| | LA65 BN, GL, HL | 18 000 | 24 400 | 2 450 | 2 840 |

4. Maximum rail length

Table 4 shows the limitations of rail length. However, the limitations vary by accuracy grades.

Table 4 Length limitation of rails

Unit: mm

| Series | Size | 25 | 30 | 35 | 45 | 55 | 65 |
|--------|------|-------|-------|-------|-------|-------|-------|
| LA | | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 | 3 900 |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

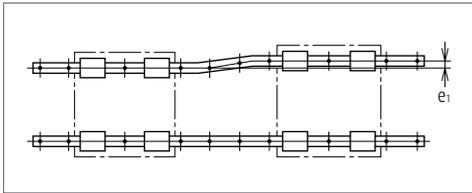


Fig. 6

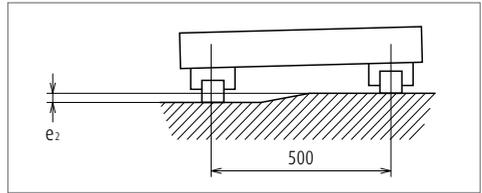


Fig. 7

Table 5

Unit: μm

| Value | Preload | Model No. | | | | | |
|---|---------|---------------------------------|------|------|------|------|------|
| | | LA25 | LA30 | LA35 | LA45 | LA55 | LA65 |
| Permissible values of parallelism in two rails e_1 | Z3 | 15 | 17 | 20 | 25 | 30 | 40 |
| | Z4 | 13 | 15 | 17 | 20 | 25 | 30 |
| Permissible values of parallelism (height) in two rails e_2 | Z3, Z4 | 185 $\mu\text{m}/500\text{ mm}$ | | | | | |

(2) Shoulder height of the mounting surface and corner radius




Fig. 8 Shoulder for the rail datum surface




Fig. 9 Shoulder for the ball slide datum surface

Table 6

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| LA25 | 0.5 | 0.5 | 5 | 5 |
| LA30 | 0.5 | 0.5 | 6 | 6 |
| LA35 | 0.5 | 0.5 | 6 | 6 |
| LA45 | 0.7 | 0.7 | 8 | 8 |
| LA55 | 0.7 | 0.7 | 10 | 10 |
| LA65 | 1 | 1 | 11 | 11 |

A-5-3.2 LA Series

6. Lubrication components

Refer to pages A38 and D13 for the lubrication of linear guides.

(1) Types of lubrication accessories

Fig. 10 and Table 7 show grease fittings and tube fittings.

(2) Mounting position of lubrication accessories

- > The standard position of grease fittings is the end face of ball slide. We mount them on a side of end cap for an option. (Fig. 11) .
- > Please consult NSK for installation of grease or tube fittings to the ball slide body or side of end cap.
- > When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

Table 7

Unit: mm

| Model No. | Dust proof specification | Dimension L | | |
|-----------|--------------------------|----------------|--------------|---------|
| | | Grease fitting | Tube fitting | |
| | | | SF Type | LF Type |
| LA25 | Standard | 5 | 5 | 5 |
| LA25 | With NSK K1 | 14 | 12 | 12 |
| LA25 | Double seal | 10 | 9 | 9 |
| LA25 | Protector | 10 | 9 | 9 |
| LA30 | Standard | 5 | 6 | 6 |
| LA30 | With NSK K1 | 14 | 12 | 13 |
| LA30 | Double seal | 12 | 10 | 11 |
| LA30 | Protector | 12 | 11 | 11 |
| LA35 | Standard | 5 | 6 | 6 |
| LA35 | With NSK K1 | 14 | 12 | 13 |
| LA35 | Double seal | 12 | 10 | 11 |
| LA35 | Protector | 12 | 11 | 11 |
| LA45 | Standard | 8 | 13.5 | 17 |
| LA45 | With NSK K1 | 18 | 22 | 21.5 |
| LA45 | Double seal | 14 | 18 | 17 |
| LA45 | Protector | 14 | 16 | 17 |
| LA55 | Standard | 8 | 13.5 | 17 |
| LA55 | With NSK K1 | 18 | 22 | 21.5 |
| LA55 | Double seal | 14 | 18 | 17 |
| LA55 | Protector | 14 | 16 | 17 |
| LA65 | Standard | 8 | 13.5 | 17 |
| LA65 | With NSK K1 | 22 | 24 | 25.5 |
| LA65 | Double seal | 16 | 20 | 19 |
| LA65 | Protector | 16 | 16 | 17 |

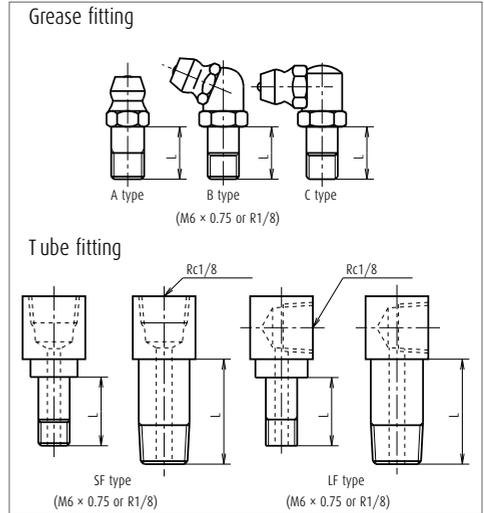


Fig. 10 Grease fitting and tube fitting

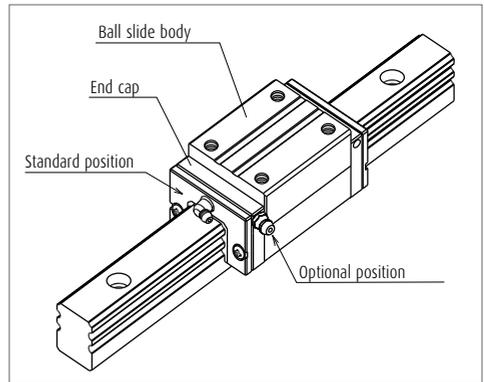


Fig. 11 Mounting position of lubrication accessories

7. Dust-proof components

(1) Standard Specification

The LA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, and bottom seals at the bottom.

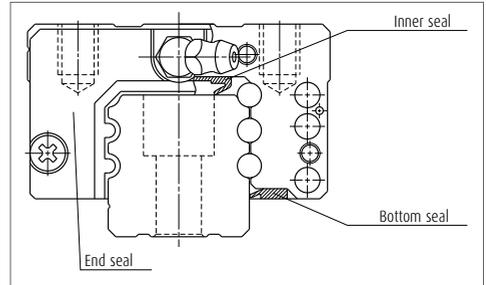


Fig. 12

Table 6 Length limitation of rails

Unit: N

| Series \ Size | 25 | 30 | 35 | 45 | 55 | 65 |
|---------------|----|----|----|----|----|----|
| LA | 11 | 11 | 12 | 17 | 17 | 23 |

(2) NSK K1 lubrication unit

Table 9 shows the dimension of linear guides equipped with the NSK K1 lubrication unit.

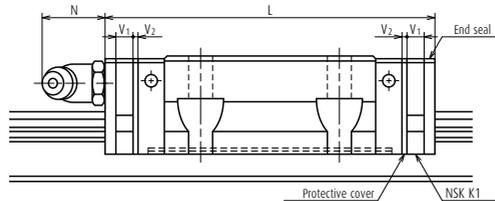


Table 9

Unit: mm

| Model No. | Ball slide length | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V1 | Protective cover thickness V2 | Protruding area of the grease fitting N |
|-----------|-------------------|------------------|----------------------------|---|-------------------------|-------------------------------|---|
| LA25 | Standard | AL, AN, EL, FL | 79.8 | 91.8 | 5.0 | 1.0 | (14) |
| LA25 | Long | BL, BN, GL, HL | 107.8 | 119.8 | 5.0 | 1.0 | (14) |
| LA30 | Standard | AL, AN, EL, FL | 100.2 | 113.2 | 5.5 | 1.0 | (14) |
| LA30 | Long | BL, BN, GL, HL | 126.2 | 139.2 | 5.5 | 1.0 | (14) |
| LA35 | Standard | AL, AN, EL, FL | 110.6 | 123.6 | 5.5 | 1.0 | (14) |
| LA35 | Long | BL, BN, GL, HL | 144.6 | 157.6 | 5.5 | 1.0 | (14) |
| LA45 | Standard | AL, AN, EL, FL | 141.4 | 156.4 | 6.5 | 1.0 | (15) |
| LA45 | Long | BL, BN, GL, HL | 173.4 | 188.4 | 6.5 | 1.0 | (15) |
| LA55 | Standard | AL, AN, EL, FL | 165.4 | 180.4 | 6.5 | 1.0 | (15) |
| LA55 | Long | BL, BN, GL, HL | 203.4 | 218.4 | 6.5 | 1.0 | (15) |
| LA65 | Standard | AN, EL, FL | 196.2 | 214.2 | 8.0 | 1.0 | (16) |
| LA65 | Long | BN, GL, HL | 256.2 | 274.2 | 8.0 | 1.0 | (16) |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover $V_2 \times 2$)

A-5-3.2 LA Series

(3) Double seal and protector

For the LA Series, a double seal and a protector can be installed only before shipping from the factory. Please consult with NSK when the double seal and the protectors are required.

Table 10 shows the increased thickness of V3 and V4 when end seals and protectors are installed (Fig. 15).

Table 10

Unit: mm

| Modell No. | Thickness of end seal: V ₃ | Thickness of protector: V ₄ |
|------------|---------------------------------------|--|
| LA25 | 3.2 | 3.6 |
| LA30 | 4.4 | 4.2 |
| LA35 | 4.4 | 4.2 |
| LA45 | 5.5 | 4.9 |
| LA55 | 5.5 | 4.9 |
| LA65 | 6.5 | 5.5 |

(4) Cap to plug the rail mounting bolt hole

Table 11

Unit: mm

| Modell No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| LA25 | M6 | LG-CAP/M6 | 20 |
| LA30, LA35 | M8 | LG-CAP/M8 | 20 |
| LA45 | M12 | LG-CAP/M12 | 20 |
| LA55 | M14 | LG-CAP/M14 | 20 |
| LA65 | M16 | LG-CAP/M16 | 20 |

(5) Bellows

Make tap holes to the rail end face to fix the bellows mounting plate.

NSK processes tap holes to the rail end face when ordered with a linear guide.

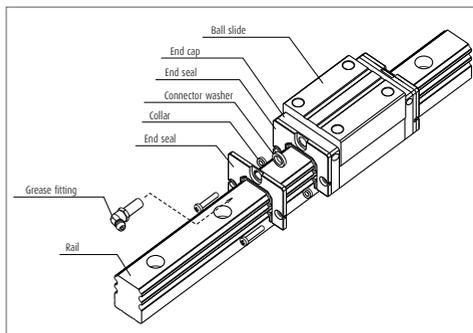


Fig. 13 Double seal

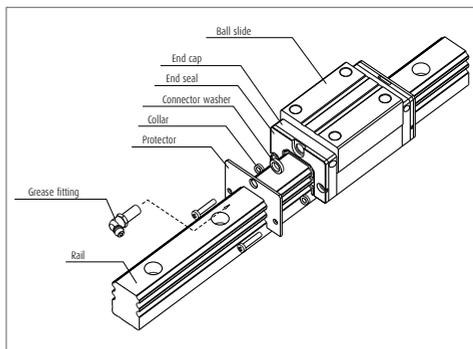


Fig. 14 Protector

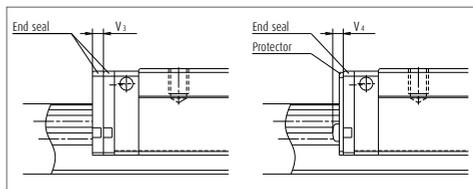


Fig. 15

Dimension tables of bellows LA Series

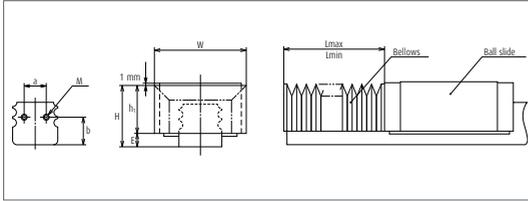


Fig. 16 Dimensions of bellows

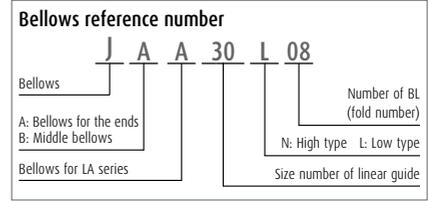


Table 12 Dimensions of bellows

Unit: mm

| Model No. | H | h ₁ | E | W | P | a | b | Length of BL | Tap (M) × depth |
|-----------|----|----------------|-----|-----|----|----|------|--------------|-----------------|
| JAA25L | 35 | 29.5 | 5.5 | 55 | 12 | 12 | 13.8 | 17 | M3 × 5 |
| JAA25N | 39 | 33.5 | 5.5 | 61 | 15 | 12 | 13.8 | 17 | M3 × 5 |
| JAA30L | 41 | 33.5 | 7.5 | 60 | 12 | 14 | 17.5 | 17 | M4 × 6 |
| JAA30N | 44 | 36.5 | 7.5 | 66 | 15 | 14 | 17.5 | 17 | M4 × 6 |
| JAA35L | 47 | 39.5 | 7.5 | 72 | 15 | 15 | 18.8 | 17 | M4 × 6 |
| JAA35N | 54 | 46.5 | 7.5 | 82 | 20 | 15 | 18.8 | 17 | M4 × 6 |
| JAA45L | 59 | 49 | 10 | 93 | 20 | 25 | 22.5 | 17 | M5 × 8 |
| JAA45N | 69 | 59 | 10 | 113 | 30 | 25 | 22.5 | 17 | M5 × 8 |
| JAA55L | 69 | 57 | 12 | 101 | 20 | 35 | 27.1 | 17 | M5 × 8 |
| JAA55N | 79 | 67 | 12 | 121 | 30 | 35 | 27.1 | 17 | M5 × 8 |
| JAA65N | 89 | 75 | 14 | 131 | 30 | 40 | 33.3 | 17 | M6 × 12 |

Table 13 Numbers of folds (BL) and length of bellows

Unit: mm

| Type | Model No. | Length of BL | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
|-----------|-----------|--------------|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|
| | | Lmin | 34 | 68 | 102 | 136 | 170 | 204 | 238 | 272 | 306 | 340 |
| Low type | JAA25L | Stroke | 134 | 268 | 402 | 536 | 670 | 804 | 938 | 1 072 | 1 206 | 1 340 |
| Low type | JAA25L | Lmax | 168 | 336 | 504 | 672 | 840 | 1 008 | 1 176 | 1 344 | 1 512 | 1 680 |
| High type | JAA25N | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| High type | JAA25N | Lmax | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| Low type | JAA30L | Stroke | 134 | 268 | 402 | 536 | 670 | 804 | 938 | 1 072 | 1 206 | 1 340 |
| Low type | JAA30L | Lmax | 168 | 336 | 504 | 672 | 840 | 1 008 | 1 176 | 1 344 | 1 512 | 1 680 |
| High type | JAA30N | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| High type | JAA30N | Lmax | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| Low type | JAA35L | Stroke | 176 | 352 | 528 | 704 | 880 | 1 056 | 1 232 | 1 408 | 1 584 | 1 760 |
| Low type | JAA35L | Lmax | 210 | 420 | 630 | 840 | 1 050 | 1 260 | 1 470 | 1 680 | 1 890 | 2 100 |
| High type | JAA35N | Stroke | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| High type | JAA35N | Lmax | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| Low type | JAA45L | Stroke | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| Low type | JAA45L | Lmax | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| High type | JAA45N | Stroke | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| High type | JAA45N | Lmax | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |
| Low type | JAA55L | Stroke | 246 | 492 | 738 | 984 | 1 230 | 1 476 | 1 722 | 1 968 | 2 214 | 2 460 |
| Low type | JAA55L | Lmax | 280 | 560 | 840 | 1 120 | 1 400 | 1 680 | 1 960 | 2 240 | 2 520 | 2 800 |
| High type | JAA55N | Stroke | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| High type | JAA55N | Lmax | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |
| Low/high | JAA65N* | Stroke | 386 | 772 | 1 158 | 1 544 | 1 930 | 2 316 | 2 702 | 3 088 | 3 474 | 3 860 |
| Low type | JAA65N* | Lmax | 420 | 840 | 1 260 | 1 680 | 2 100 | 2 520 | 2 940 | 3 360 | 3 780 | 4 200 |

*) Bellows for LA65 is for both low and high types.

Note The values of an odd number BL quantity (3, 5, 7, ...) can be obtained by adding two values of the even number BL on the both sides, then by dividing the sum by 2.

A-5-3.2 LA Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

| | | | | | | | | | | |
|---|-----------|-----------|-------------|-----------|----------|----------|------------|-----------|----------|--------------------------------|
| | LA | 35 | 0840 | AL | C | 2 | -** | P6 | 3 | |
| Series name | | | | | | | | | | |
| Size | | | | | | | | | | |
| Rail length (mm) | | | | | | | | | | Preload code (See page A275.) |
| Ball slide shape code (See page A274.) | | | | | | | | | | 3: Z3, 4: Z4 |
| Material/surface treatment code (See Table 14.) | | | | | | | | | | Accuracy code (See Table 15.) |
| | | | | | | | | | | Design serial number |
| | | | | | | | | | | Added to the reference number. |
| | | | | | | | | | | Number of ball slides per rail |


Table 14 Material/surface treatment code

| Code | Description |
|----------|--|
| C | Special high carbon steel (NSK standard) |
| D | Special high carbon steel with surface treatment |
| Z | Other, special |

Table 15 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 |
|------------------------------|------------------------------|-------------|
| Ultra precision grade | P3 | K3 |
| Super precision grade | P4 | K4 |
| High precision grade | P5 | K5 |
| Precision grade | P6 | K6 |

Note Refer to pages A38 for NSK K1 lubrication unit.




A-5-3.2 LA Series


9. Dimensions

LA-AL (High-load type / Standard)

LA-BL (Super-high-load type / Long)

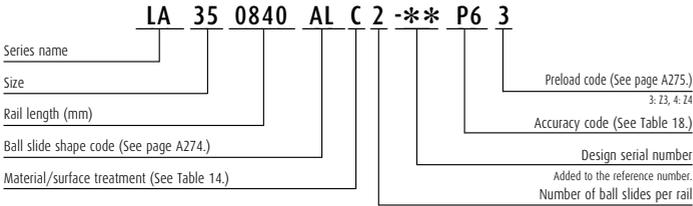

Front view of AL and BL types




| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | |
|-----------|----------|-----|----------------|------------|--------|----|---------------|-------------|---------------|----------------|----|---------|----------------|----------------|-------|--------|---|
| | Height | | W ₂ | Width | Length | | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | |
| | H | E | | | W | L | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | | | N |
| LA25AL | 36 | 5.5 | 12.5 | 48 | 79.8 | 35 | 35 | M6×1×7 | 58 | 30.5 | 8 | M6×0.75 | 6 | 11 | 23 | 22 | |
| LA25BL | 36 | 5.5 | 12.5 | 48 | 107.8 | 35 | 50 | M6×1×7 | 86 | 30.5 | 8 | M6×0.75 | 6 | 11 | 23 | 22 | |
| LA30AL | 42 | 7.5 | 16 | 60 | 100.2 | 40 | 40 | M8×1.25×10 | 72 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | |
| LA30BL | 42 | 7.5 | 16 | 60 | 126.2 | 40 | 60 | M8×1.25×10 | 98 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | |
| LA35AL | 48 | 7.5 | 18 | 70 | 110.6 | 50 | 50 | M8×1.25×10 | 80 | 40.5 | 15 | M6×0.75 | 8 | 11 | 34 | 30.8 | |
| LA35BL | 48 | 7.5 | 18 | 70 | 144.6 | 50 | 72 | M8×1.25×10 | 114 | 40.5 | 15 | M6×0.75 | 8 | 11 | 34 | 30.8 | |
| LA45AL | 60 | 10 | 20.5 | 86 | 141.4 | 60 | 60 | M10×1.5×16 | 105 | 50 | 17 | Rc1/8 | 10 | 13 | 45 | 36 | |
| LA45BL | 60 | 10 | 20.5 | 86 | 173.4 | 60 | 80 | M10×1.5×16 | 137 | 50 | 17 | Rc1/8 | 10 | 13 | 45 | 36 | |
| LA55AL | 70 | 12 | 23.5 | 100 | 165.4 | 75 | 75 | M12×1.75×16 | 126 | 58 | 18 | Rc1/8 | 11 | 13 | 53 | 43.2 | |
| LA55BL | 70 | 12 | 23.5 | 100 | 203.4 | 75 | 95 | M12×1.75×16 | 164 | 58 | 18 | Rc1/8 | 11 | 13 | 53 | 43.2 | |


Notes

1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of AL type



Side view of BL type

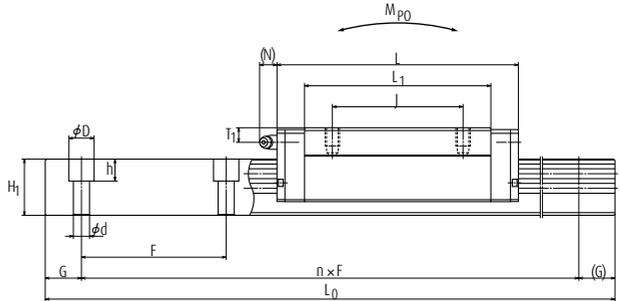

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static | M _{RO} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | 20 | 3 960 | 30 000 | 23 900 | 50 000 | 290 | 410 | 2 490 | 410 | 2 490 | 0.5 | 3.7 |
| 60 | 7×11×9 | 20 | 3 960 | 40 500 | 32 500 | 77 000 | 445 | 935 | 5 000 | 935 | 5 000 | 0.8 | 3.7 |
| 80 | 9×14×12 | 20 | 4 000 | 47 000 | 37 000 | 77 500 | 535 | 820 | 4 800 | 820 | 4 800 | 0.8 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 58 000 | 46 000 | 105 000 | 725 | 1 470 | 8 050 | 1 470 | 8 050 | 1.2 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 61 500 | 49 000 | 98 000 | 845 | 1 130 | 6 750 | 1 130 | 6 750 | 1.3 | 7.7 |
| 80 | 9×14×12 | 20 | 4 000 | 80 500 | 64 000 | 143 000 | 1 240 | 2 330 | 12 500 | 2 330 | 12 500 | 1.6 | 7.7 |
| 105 | 14×20×17 | 22.5 | 3 990 | 91 000 | 72 000 | 148 000 | 1 840 | 2 210 | 12 900 | 2 210 | 12 900 | 2.5 | 12.0 |
| 105 | 14×20×17 | 22.5 | 3 990 | 111 000 | 88 000 | 197 000 | 2 460 | 3 850 | 20 600 | 3 850 | 20 600 | 3.2 | 12.0 |
| 120 | 16×23×20 | 30 | 3 960 | 139 000 | 111 000 | 215 000 | 3 150 | 3 800 | 22 000 | 3 800 | 22 000 | 3.9 | 17.2 |
| 120 | 16×23×20 | 30 | 3 960 | 172 000 | 137 000 | 292 000 | 4 250 | 6 800 | 36 000 | 6 800 | 36 000 | 5.1 | 17.2 |


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life


C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 LA Series

LA-AN (High-load type / Standard)
 LA-BN (Super-high-load type / Long)

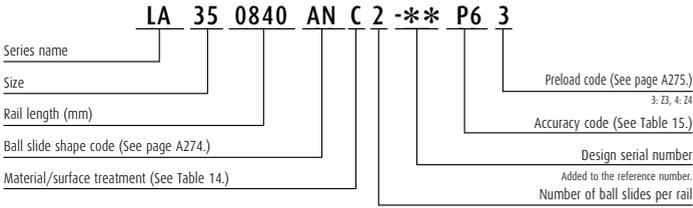


Front view of AN and BN types




| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|---------------|----------------|------|----|----------------|----------------|----|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × l | | | | Hole size | T ₁ | N | | | | |
| LA25AN | 40 | 5.5 | 12.5 | 48 | 79.8 | 35 | 35 | M6×1×10 | 58 | 34.5 | 12 | M6×0.75 | 10 | 11 | 23 | 22 | | |
| LA25BN | 40 | 5.5 | 12.5 | 48 | 107.8 | 35 | 50 | M6×1×10 | 86 | 34.5 | 12 | M6×0.75 | 10 | 11 | 23 | 22 | | |
| LA30AN | 45 | 7.5 | 16 | 60 | 100.2 | 40 | 40 | M8×1.25×11 | 72 | 37.5 | 14 | M6×0.75 | 9.5 | 11 | 28 | 28 | | |
| LA30BN | 45 | 7.5 | 16 | 60 | 126.2 | 40 | 60 | M8×1.25×11 | 98 | 37.5 | 14 | M6×0.75 | 9.5 | 11 | 28 | 28 | | |
| LA35AN | 55 | 7.5 | 18 | 70 | 110.6 | 50 | 50 | M8×1.25×12 | 80 | 47.5 | 15 | M6×0.75 | 15 | 11 | 34 | 30.8 | | |
| LA35BN | 55 | 7.5 | 18 | 70 | 144.6 | 50 | 72 | M8×1.25×12 | 114 | 47.5 | 15 | M6×0.75 | 15 | 11 | 34 | 30.8 | | |
| LA45AN | 70 | 10 | 20.5 | 86 | 141.4 | 60 | 60 | M10×1.5×16 | 105 | 60 | 17 | Rc1/8 | 20 | 13 | 45 | 36 | | |
| LA45BN | 70 | 10 | 20.5 | 86 | 173.4 | 60 | 80 | M10×1.5×16 | 137 | 60 | 17 | Rc1/8 | 20 | 13 | 45 | 36 | | |
| LA55AN | 80 | 12 | 23.5 | 100 | 165.4 | 75 | 75 | M12×1.75×18 | 126 | 68 | 18 | Rc1/8 | 21 | 13 | 53 | 43.2 | | |
| LA55BN | 80 | 12 | 23.5 | 100 | 203.4 | 75 | 95 | M12×1.75×18 | 164 | 68 | 18 | Rc1/8 | 21 | 13 | 53 | 43.2 | | |
| LA65AN | 90 | 14 | 31.5 | 126 | 196.2 | 76 | 70 | M16×2×19 | 147 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |
| LA65BN | 90 | 14 | 31.5 | 126 | 256.2 | 76 | 120 | M16×2×19 | 207 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of AN type



Side view of BN type

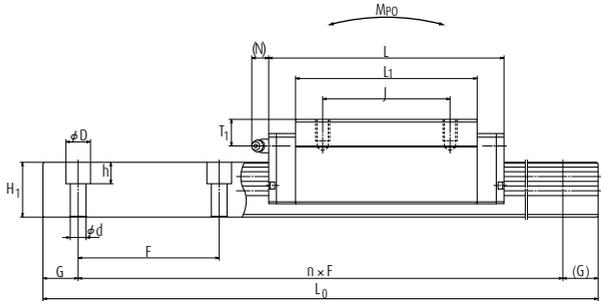

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | 20 | 3 960 | 30 000 | 23 900 | 50 000 | 290 | 410 | 2 490 | 410 | 2 490 | 0.6 | 3.7 |
| 60 | 7×11×9 | 20 | 3 960 | 40 500 | 32 500 | 77 000 | 445 | 935 | 5 000 | 935 | 5 000 | 0.9 | 3.7 |
| 80 | 9×14×12 | 20 | 4 000 | 47 000 | 37 000 | 77 500 | 535 | 820 | 4 800 | 820 | 4 800 | 0.9 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 58 000 | 46 000 | 105 000 | 725 | 1 470 | 8 050 | 1 470 | 8 050 | 1.3 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 61 500 | 49 000 | 98 000 | 845 | 1 130 | 6 750 | 1 130 | 6 750 | 1.5 | 7.7 |
| 80 | 9×14×12 | 20 | 4 000 | 80 500 | 64 000 | 143 000 | 1 240 | 2 330 | 12 500 | 2 330 | 12 500 | 2.1 | 7.7 |
| 105 | 14×20×17 | 22.5 | 3 990 | 91 000 | 72 000 | 148 000 | 1 840 | 2 210 | 12 900 | 2 210 | 12 900 | 3.0 | 12.0 |
| 105 | 14×20×17 | 22.5 | 3 990 | 111 000 | 88 000 | 197 000 | 2 460 | 3 850 | 20 600 | 3 850 | 20 600 | 3.9 | 12.0 |
| 120 | 16×23×20 | 30 | 3 960 | 139 000 | 111 000 | 215 000 | 3 150 | 3 800 | 22 000 | 3 800 | 22 000 | 4.7 | 17.2 |
| 120 | 16×23×20 | 30 | 3 960 | 172 000 | 137 000 | 292 000 | 4 250 | 6 800 | 36 000 | 6 800 | 36 000 | 6.1 | 17.2 |
| 150 | 18×26×22 | 35 | 3 900 | 260 000 | 206 000 | 420 000 | 7 300 | 9 050 | 51 000 | 9 050 | 51 000 | 7.7 | 25.9 |
| 150 | 18×26×22 | 35 | 3 900 | 340 000 | 269 000 | 615 000 | 10 700 | 18 700 | 95 000 | 18 700 | 95 000 | 10.8 | 25.9 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life


A-5-3.2 LA Series

LA-EL (High-load type / Standard)

LA-GL (Super-high-load type / Long)

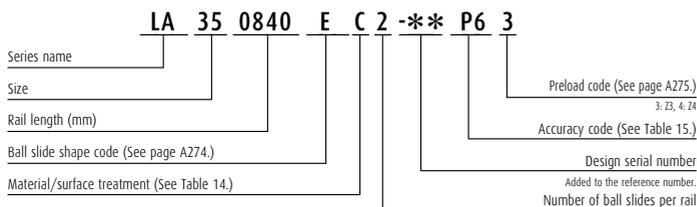


Front view of EL and GL types




| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|---------------|----------------|------|----|----------------|----------------|----|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | | | |
| LA25EL | 36 | 5.5 | 23.5 | 70 | 79.8 | 57 | 45 | M8×1.25×12 | 58 | 30.5 | 11 | M6×0.75 | 6 | 11 | 23 | 22 | | |
| LA25GL | 36 | 5.5 | 23.5 | 70 | 107.8 | 57 | 45 | M8×1.25×12 | 86 | 30.5 | 11 | M6×0.75 | 6 | 11 | 23 | 22 | | |
| LA30EL | 42 | 7.5 | 31 | 90 | 100.2 | 72 | 52 | M10×1.5×16 | 72 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | | |
| LA30GL | 42 | 7.5 | 31 | 90 | 126.2 | 72 | 52 | M10×1.5×16 | 98 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | | |
| LA35EL | 48 | 7.5 | 33 | 100 | 110.6 | 82 | 62 | M10×1.5×15 | 80 | 40.5 | 12 | M6×0.75 | 8 | 11 | 34 | 30.8 | | |
| LA35GL | 48 | 7.5 | 33 | 100 | 144.6 | 82 | 62 | M10×1.5×15 | 114 | 40.5 | 12 | M6×0.75 | 8 | 11 | 34 | 30.8 | | |
| LA45EL | 60 | 10 | 37.5 | 120 | 141.4 | 100 | 80 | M12×1.75×18 | 105 | 50 | 13 | Rc1/8 | 10 | 13 | 45 | 36 | | |
| LA45GL | 60 | 10 | 37.5 | 120 | 173.4 | 100 | 80 | M12×1.75×18 | 137 | 50 | 13 | Rc1/8 | 10 | 13 | 45 | 36 | | |
| LA55EL | 70 | 12 | 43.5 | 140 | 165.4 | 116 | 95 | M14×2×21 | 126 | 58 | 15 | Rc1/8 | 11 | 13 | 53 | 43.2 | | |
| LA55GL | 70 | 12 | 43.5 | 140 | 203.4 | 116 | 95 | M14×2×21 | 164 | 58 | 15 | Rc1/8 | 11 | 13 | 53 | 43.2 | | |
| LA65EL | 90 | 14 | 53.5 | 170 | 196.2 | 142 | 110 | M16×2×24 | 147 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |
| LA65GL | 90 | 14 | 53.5 | 170 | 256.2 | 142 | 110 | M16×2×24 | 207 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of EL type



Side view of GL type

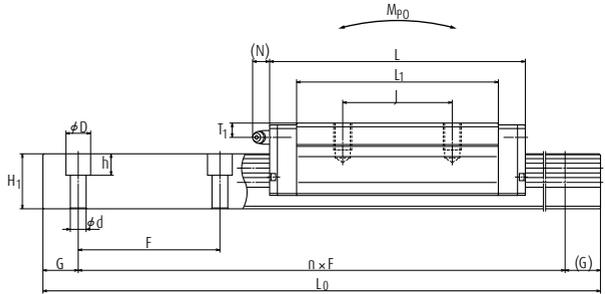

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static C ₀ (N) | M _{RO} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | 20 | 3 960 | 30 000 | 23 900 | 50 000 | 290 | 410 | 2 490 | 410 | 2 490 | 0.8 | 3.7 |
| 60 | 7×11×9 | 20 | 3 960 | 40 500 | 32 500 | 77 000 | 445 | 935 | 5 000 | 935 | 5 000 | 1.1 | 3.7 |
| 80 | 9×14×12 | 20 | 4 000 | 47 000 | 37 000 | 77 500 | 535 | 820 | 4 800 | 820 | 4 800 | 1.3 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 58 000 | 46 000 | 105 000 | 725 | 1 470 | 8 050 | 1 470 | 8 050 | 1.8 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 61 500 | 49 000 | 98 000 | 845 | 1 130 | 6 750 | 1 130 | 6 750 | 1.9 | 7.7 |
| 80 | 9×14×12 | 20 | 4 000 | 80 500 | 64 000 | 143 000 | 1 240 | 2 330 | 12 500 | 2 330 | 12 500 | 2.6 | 7.7 |
| 105 | 14×20×17 | 22.5 | 3 990 | 91 000 | 72 000 | 148 000 | 1 840 | 2 210 | 12 900 | 2 210 | 12 900 | 3.3 | 12.0 |
| 105 | 14×20×17 | 22.5 | 3 990 | 111 000 | 88 000 | 197 000 | 2 460 | 3 850 | 20 600 | 3 850 | 20 600 | 4.3 | 12.0 |
| 120 | 16×23×20 | 30 | 3 960 | 139 000 | 111 000 | 215 000 | 3 150 | 3 800 | 22 000 | 3 800 | 22 000 | 5.5 | 17.2 |
| 120 | 16×23×20 | 30 | 3 960 | 172 000 | 137 000 | 292 000 | 4 250 | 6 800 | 36 000 | 6 800 | 36 000 | 7.2 | 17.2 |
| 150 | 18×26×22 | 35 | 3 900 | 260 000 | 206 000 | 420 000 | 7 300 | 9 050 | 51 000 | 9 050 | 51 000 | 11.0 | 25.9 |
| 150 | 18×26×22 | 35 | 3 900 | 340 000 | 269 000 | 615 000 | 10 700 | 18 700 | 95 000 | 18 700 | 95 000 | 15.5 | 25.9 |


2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life


C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-3.2 LA Series

LA-FL (High-load type / Standard)
 LA-HL (Super-high-load type / Long)

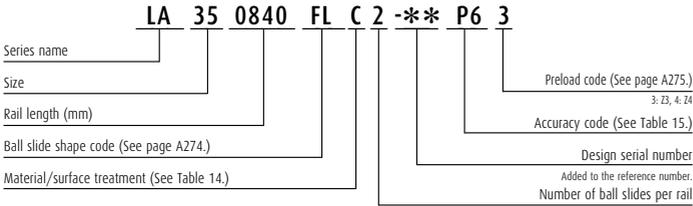


Front view of FL and HL types




| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|-----|----------------|------------|--------|---------------|-----|---------------|----------------|------|----|----------------|----------------|----|-------|--------|----------------|----------------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | L ₁ | K | T | Grease fitting | | | | | W ₁ | H ₁ |
| | | | | | | B | J | M × pitch × ℓ | | | | Hole size | T ₁ | N | | | | |
| LA25FL | 36 | 5.5 | 23.5 | 70 | 79.8 | 57 | 45 | 7×10 | 58 | 30.5 | 11 | M6×0.75 | 6 | 11 | 23 | 22 | | |
| LA25HL | 36 | 5.5 | 23.5 | 70 | 107.8 | 57 | 45 | 7×10 | 86 | 30.5 | 11 | M6×0.75 | 6 | 11 | 23 | 22 | | |
| LA30FL | 42 | 7.5 | 31 | 90 | 100.2 | 72 | 52 | 9×12 | 72 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | | |
| LA30HL | 42 | 7.5 | 31 | 90 | 126.2 | 72 | 52 | 9×12 | 98 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 | | |
| LA35FL | 48 | 7.5 | 33 | 100 | 110.6 | 82 | 62 | 9×13 | 80 | 40.5 | 12 | M6×0.75 | 8 | 11 | 34 | 30.8 | | |
| LA35HL | 48 | 7.5 | 33 | 100 | 144.6 | 82 | 62 | 9×13 | 114 | 40.5 | 12 | M6×0.75 | 8 | 11 | 34 | 30.8 | | |
| LA45FL | 60 | 10 | 37.5 | 120 | 141.4 | 100 | 80 | 11×15 | 105 | 50 | 13 | Rc1/8 | 10 | 13 | 45 | 36 | | |
| LA45HL | 60 | 10 | 37.5 | 120 | 173.4 | 100 | 80 | 11×15 | 137 | 50 | 13 | Rc1/8 | 10 | 13 | 45 | 36 | | |
| LA55FL | 70 | 12 | 43.5 | 140 | 165.4 | 116 | 95 | 14×18 | 126 | 58 | 15 | Rc1/8 | 11 | 13 | 53 | 43.2 | | |
| LA55HL | 70 | 12 | 43.5 | 140 | 203.4 | 116 | 95 | 14×18 | 164 | 58 | 15 | Rc1/8 | 11 | 13 | 53 | 43.2 | | |
| LA65FL | 90 | 14 | 53.5 | 170 | 196.2 | 142 | 110 | 16×23 | 147 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |
| LA65HL | 90 | 14 | 53.5 | 170 | 256.2 | 142 | 110 | 16×23 | 207 | 76 | 22 | Rc1/8 | 19 | 13 | 63 | 55 | | |

Notes 1) LA Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.

Side view of FL type



Side view of HL type

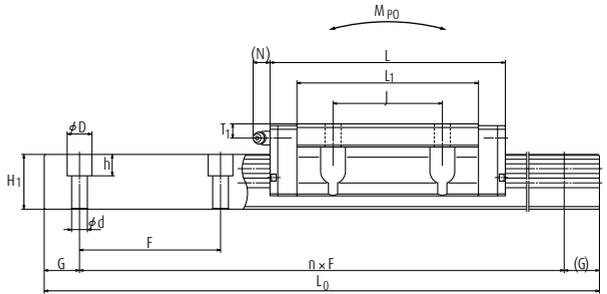

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2) Dynamic | | Static C ₀ (N) | M _{R0} | Static moment (N-m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{P0} | | M _{Y0} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 60 | 7×11×9 | 20 | 3 960 | 30 000 | 23 900 | 50 000 | 290 | 410 | 2 490 | 410 | 2 490 | 0.8 | 3.7 |
| 60 | 7×11×9 | 20 | 3 960 | 40 500 | 32 500 | 77 000 | 445 | 935 | 5 000 | 935 | 5 000 | 1.1 | 3.7 |
| 80 | 9×14×12 | 20 | 4 000 | 47 000 | 37 000 | 77 500 | 535 | 820 | 4 800 | 820 | 4 800 | 1.3 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 58 000 | 46 000 | 105 000 | 725 | 1 470 | 8 050 | 1 470 | 8 050 | 1.8 | 5.8 |
| 80 | 9×14×12 | 20 | 4 000 | 61 500 | 49 000 | 98 000 | 845 | 1 130 | 6 750 | 1 130 | 6 750 | 1.9 | 7.7 |
| 80 | 9×14×12 | 20 | 4 000 | 80 500 | 64 000 | 143 000 | 1 240 | 2 330 | 12 500 | 2 330 | 12 500 | 2.6 | 7.7 |
| 105 | 14×20×17 | 22.5 | 3 990 | 91 000 | 72 000 | 148 000 | 1 840 | 2 210 | 12 900 | 2 210 | 12 900 | 3.3 | 12.0 |
| 105 | 14×20×17 | 22.5 | 3 990 | 111 000 | 88 000 | 197 000 | 2 460 | 3 850 | 20 600 | 3 850 | 20 600 | 4.3 | 12.0 |
| 120 | 16×23×20 | 30 | 3 960 | 139 000 | 111 000 | 215 000 | 3 150 | 3 800 | 22 000 | 3 800 | 22 000 | 5.5 | 17.2 |
| 120 | 16×23×20 | 30 | 3 960 | 172 000 | 137 000 | 292 000 | 4 250 | 6 800 | 36 000 | 6 800 | 36 000 | 7.2 | 17.2 |
| 150 | 18×26×22 | 35 | 3 900 | 260 000 | 206 000 | 420 000 | 7 300 | 9 050 | 51 000 | 9 050 | 51 000 | 11.0 | 25.9 |
| 150 | 18×26×22 | 35 | 3 900 | 340 000 | 269 000 | 615 000 | 10 700 | 18 700 | 95 000 | 18 700 | 95 000 | 15.5 | 25.9 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life

C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life

A-5-4 High-Precision Machine and High-Precision Measuring Equipment



| | |
|-------------------|--------------|
| 1. HA Series..... | Page A293 |
| 2. HS Series..... | A307 |

HA Series

A-5-4.1 HA Series



1. Features

(1) High motion accuracy

High motion accuracy is achieved in both narrow and wide ranges by the adoption of ultra-long ball slides and the optimum design of the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models

Our extensive performance tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy

Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch. In addition, the length of mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction

High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design

Reduced body size enables more compact machinery.

(6) Four-way equal load distribution

Contact angle is set at 45 degrees in all grooves, dispersing the load to four ball rows irrespective of load direction. This realizes equal rigidity and load carrying capacity in vertical and lateral directions and provides well-balanced design.

(7) Strong against shock load

Load from any direction, vertical and lateral, is received by four ball rows at all times. The number of the ball row which receives the load is larger than in other linear guides, making this series stronger against shock load.

(8) High accuracy at manufacturing

Fixing the measuring rollers to the ball grooves is easy thanks to the Gothic arch groove. Ball-groove measuring is accurate and simple. This benefits a highly precise and stable manufacturing.

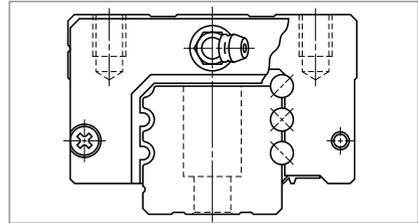


Fig. 1 HA Series

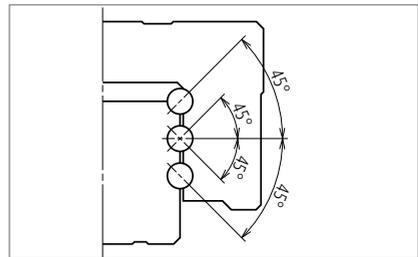


Fig. 2 Super rigidity design

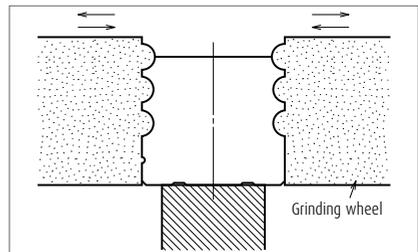


Fig. 3 Rail grinding

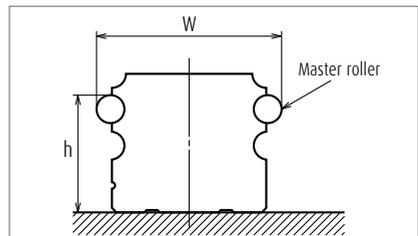


Fig. 4 Measuring groove accuracy

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HA Series, this vibration has been substantially reduced to one-third of conventional models.


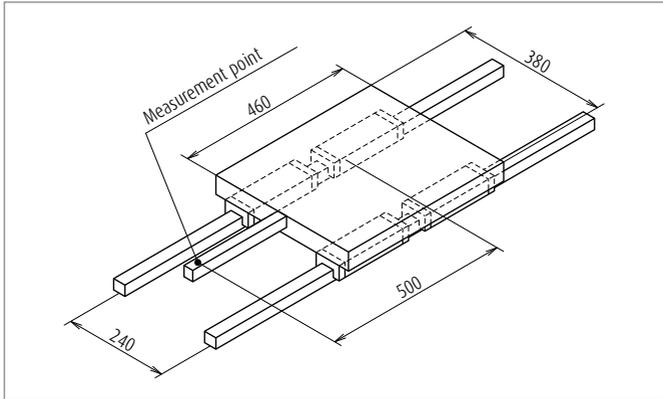



Fig. 5 Schematic view of measurement of ball passage vibration

HA Series

Model No.: HA30
Preload: Z3
Table dimensions: 460 mm × 380 mm



The same table is used.

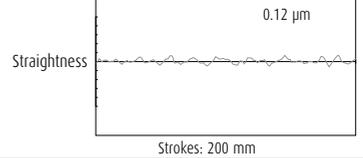

Conventional Series

Model No.: LA30
Preload: Z3
Table dimensions: 460 mm × 380 mm

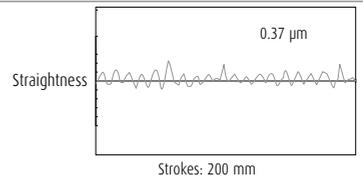



Fig. 6 Measurement results of HA Series and conventional Series

HA Series

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type |
|------------------|---------------------------|--------|
| AN | | AN |
| AL | | AL |
| EM | | EM |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly | | |
|------------------|---------|--------------------|--------------------|-------------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5 |
| over | or less | | | |
| - | 200 | 2 | 2 | 4 |
| 200 | - 250 | 2 | 2.5 | 5 |
| 250 | - 315 | 2 | 2.5 | 5 |
| 315 | - 400 | 2 | 3 | 6 |
| 400 | - 500 | 2 | 3 | 6 |
| 500 | - 630 | 2 | 3.5 | 7 |
| 630 | - 800 | 2 | 4.5 | 8 |
| 800 | - 1 000 | 2.5 | 5 | 9 |
| 1 000 | - 1 250 | 3 | 6 | 10 |
| 1 250 | - 1 600 | 4 | 7 | 11 |
| 1 600 | - 2 000 | 4.5 | 8 | 13 |
| 2 000 | - 2 500 | 5 | 10 | 15 |
| 2 500 | - 3 150 | 6 | 11 | 17 |
| 3 150 | - 4 000 | 9 | 16 | 23 |

(2) Accuracy Standard

Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2

Unit: μm

| Accuracy grade | Ultra precision P3 | Super precision P4 | High precision P5 |
|--|-----------------------------|--------------------|-------------------|
| Characteristics | | | |
| Mounting height H | ± 10 | ± 10 | ± 20 |
| Variation of H (All ball slides on a set of rails) | 3 | 5 | 7 |
| Mounting width W2 or W3 | ± 15 | ± 15 | ± 25 |
| Variation of W2 or W3 (All ball slides on reference rail) | 3 | 7 | 10 |
| Running parallelism of surface C to surface A | Refer to Table 1 and Fig. 7 | | |
| Running parallelism of surface D to surface B | | | |

(3) Assembled accuracy

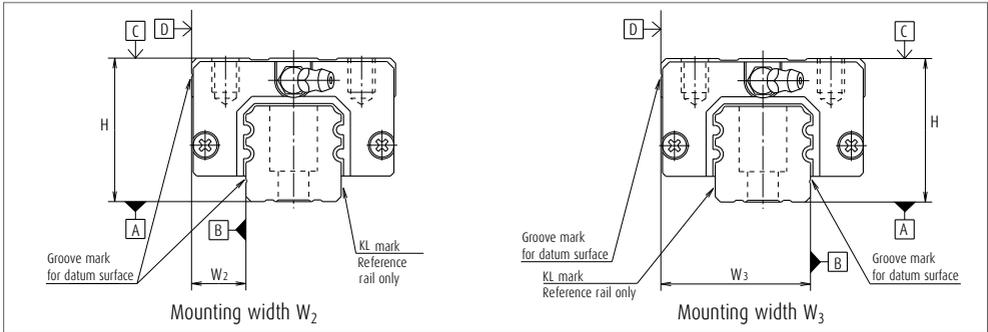


Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

| Model No. | Preload (N) | | Rigidity (N/ μm) | |
|-----------|---------------------|---------------------|------------------------------|---------------------|
| | Slight preload (Z1) | Medium preload (Z3) | Slight preload (Z1) | Medium preload (Z3) |
| HA25 | 735 | 2 990 | 635 | 1 030 |
| HA30 | 1 030 | 4 400 | 880 | 1 270 |
| HA35 | 1 470 | 6 100 | 1 030 | 1 620 |
| HA45 | 1 960 | 8 150 | 1 230 | 2 060 |
| HA55 | 3 150 | 13 100 | 1 520 | 2 450 |

4. Maximum rail length

Table 4 shows the limitation. The dimension in parenthesis is for stainless steel products. However, the limitations vary by accuracy grades.

Table 4 Length limitations of rails

Unit: mm

| Series | Size | 25 | 30 | 35 | 45 | 55 |
|--------|------|-------|-------|-------|-------|-------|
| HA | | 3 960 | 4 000 | 4 000 | 3 990 | 3 960 |

Note: Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

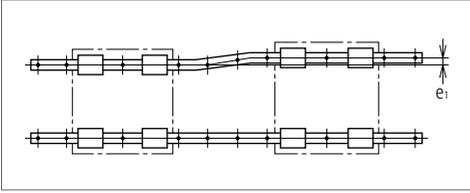


Fig. 8

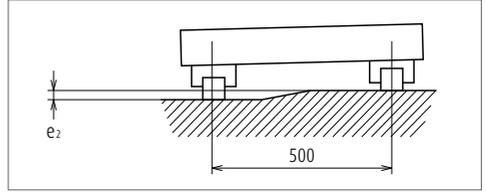


Fig. 9

Table 5

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|----------------------------------|------|------|------|------|
| | | HA25 | HA30 | HA35 | HA45 | HA55 |
| Permissible values of parallelism in two rails e_1 | Z1 | 20 | 20 | 23 | 26 | 34 |
| | Z3 | 15 | 14 | 17 | 19 | 25 |
| Permissible values of parallelism (height) in two rails e_2 | Z1, Z3 | 250 $\mu\text{m}/500 \text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius

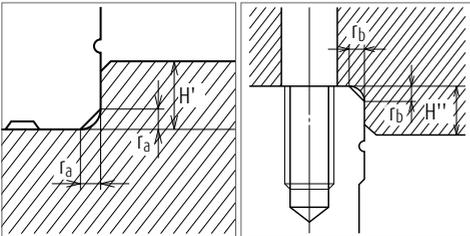


Fig. 10 Shoulder for the rail datum surface

Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-----|
| | r_a | r_b | H' | H'' |
| HA25 | 0.5 | 0.5 | 5 | 5 |
| HA30 | 0.5 | 0.5 | 6 | 6 |
| HA35 | 0.5 | 0.5 | 6 | 6 |
| HA45 | 0.7 | 0.7 | 8 | 8 |
| HA55 | 0.7 | 0.7 | 10 | 10 |

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings. We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector. We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant. When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option.

(Fig. 13)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of $M6 \times 1$, you require a connector to connect to a grease fitting mounting hole with $M6 \times 0.75$. The connector is available from NSK.

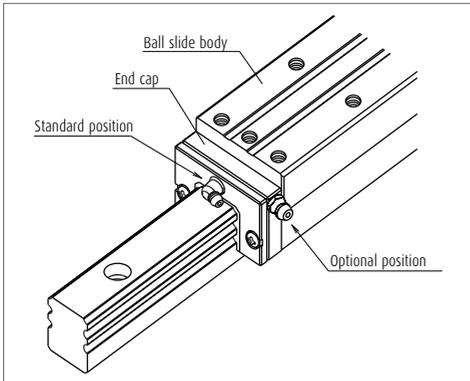


Fig. 13 Mounting position of lubrication accessories

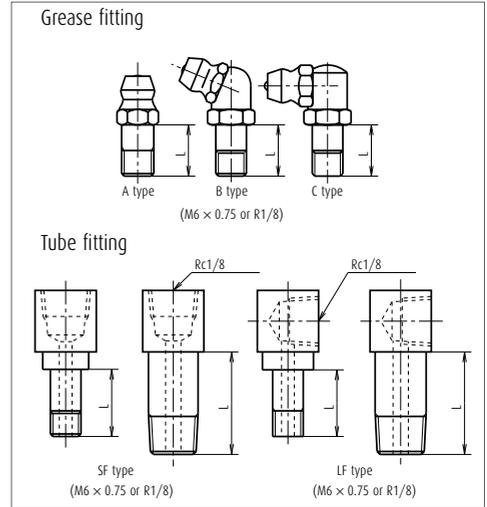


Fig. 12 Grease fitting and tube fitting

Table 7

Unit: mm

| Model No. | Dust-proof specification | Dimension L | | |
|-----------|--------------------------|----------------|--------------|---------|
| | | Grease fitting | Tube fitting | |
| | | | SF Type | LF Type |
| HA25 | Standard | 5 | 5 | 5 |
| HA25 | With NSK K1 | 14 | 12 | 12 |
| HA25 | Double seal | 10 | 9 | 9 |
| HA25 | Protector | 10 | 9 | 9 |
| HA30 | Standard | 5 | 6 | 6 |
| HA30 | With NSK K1 | 14 | 12 | 13 |
| HA30 | Double seal | 12 | 10 | 11 |
| HA30 | Protector | 12 | 11 | 11 |
| HA35 | Standard | 5 | 6 | 6 |
| HA35 | With NSK K1 | 14 | 12 | 13 |
| HA35 | Double seal | 12 | 10 | 11 |
| HA35 | Protector | 12 | 11 | 11 |
| HA45 | Standard | 8 | 13.5 | 17 |
| HA45 | With NSK K1 | 18 | 22 | 21.5 |
| HA45 | Double seal | 14 | 18 | 17 |
| HA45 | Protector | 14 | 16 | 17 |
| HA55 | Standard | 8 | 13.5 | 17 |
| HA55 | With NSK K1 | 18 | 22 | 21.5 |
| HA55 | Double seal | 14 | 18 | 17 |
| HA55 | Protector | 14 | 16 | 17 |

HA Series

7. Dust-proof components

(1) Standard Specification

The HA Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends, bottom seals at the bottom, and an inner seal in inside.

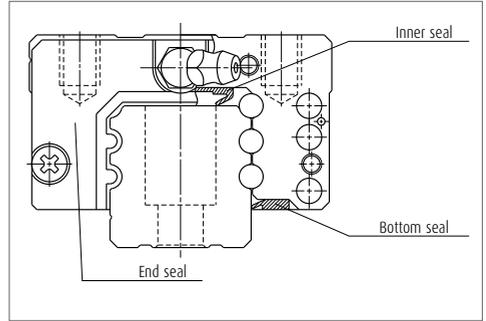


Fig. 14

Table 8 Seal friction per ball slide (maximum value)

| | | Unit: N | | | | |
|--------|------|---------|----|----|----|----|
| Series | Size | 25 | 30 | 35 | 45 | 55 |
| HA | | 17 | 17 | 19 | 21 | 22 |

(2) NSK K1 lubrication unit

Table 9 shows the dimensions of linear guides equipped with the NSK K1 lubrication unit.

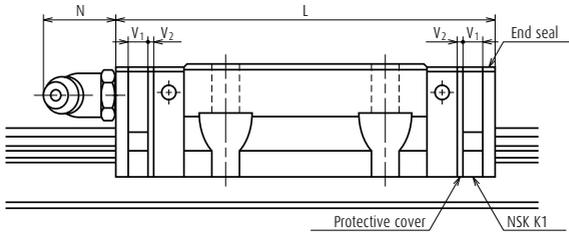


Table 9

| | | | | | | | Unit: mm |
|-----------|------------------|----------------------------|---|----------------------------|----------------------------------|---|----------|
| Model No. | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V_1 | Protective cover thickness V_2 | Protruding area of the grease fitting N | |
| HA25 | AN, EM | 147.8 | 159.8 | 5.0 | 1.0 | (14) | |
| HA30 | AN, EM | 177.2 | 190.2 | 5.5 | 1.0 | (14) | |
| HA35 | AN, AL, EM | 203.6 | 216.6 | 5.5 | 1.0 | (14) | |
| HA45 | AN, AL, EM | 233.4 | 248.4 | 6.5 | 1.0 | (15) | |
| HA55 | AN, AL, EM | 284.4 | 299.4 | 6.5 | 1.0 | (15) | |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, $V_1 \times$ Number of NSK K1) + (Thickness of the protective cover $V_2 \times 2$)

(3) Double seal and protector

For the HA Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3 , and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

| Model No. | Thickness of end seal: V_3 | Thickness of protector: V_4 |
|-----------|------------------------------|-------------------------------|
| HA25 | 3.2 | 3.6 |
| HA30 | 4.4 | 4.2 |
| HA35 | 4.4 | 4.2 |
| HA45 | 5.5 | 4.9 |
| HA55 | 5.5 | 4.9 |

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

| Model No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| HA25 | M6 | LG-CAP/M6 | 20 |
| HA30, HA35 | M8 | LG-CAP/M8 | 20 |
| HA45 | M12 | LG-CAP/M12 | 20 |
| HA55 | M14 | LG-CAP/M14 | 20 |

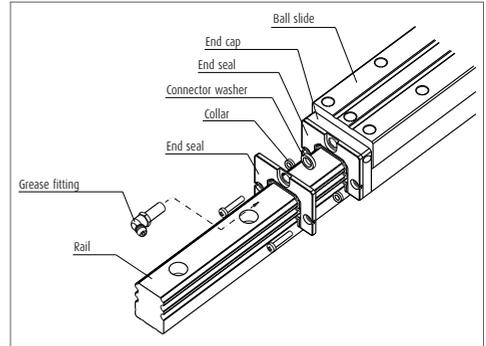


Fig. 15 Double seal

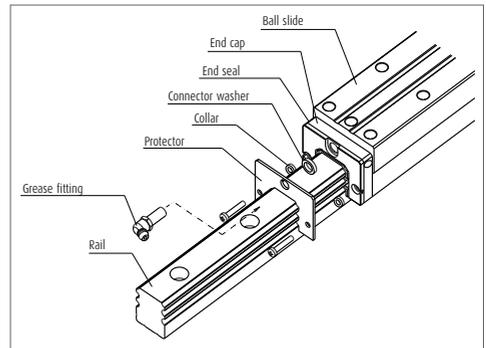


Fig. 16 Protector

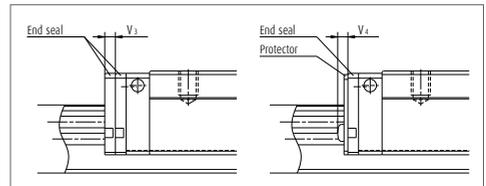


Fig. 17

HA Series

8. Reference number

Reference numbers shall be set to individual NSK linear guide when its specifications are finalized, and it is indicated on its specification drawing.

Please specify the reference number, except design serial number, to identify the product when ordering, requiring estimates, or inquiring about specifications from NSK.

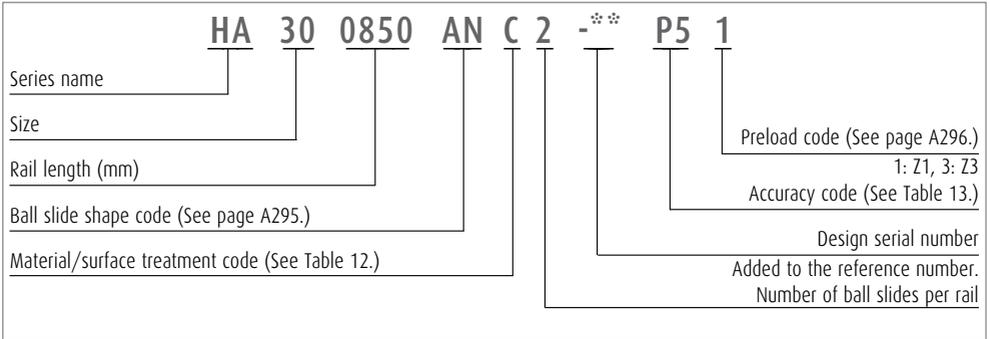


Table 12 Material/surface treatment code

| Code | Description |
|------|--|
| C | Special high carbon steel (NSK standard) |
| D | Special high carbon steel with surface treatment |
| Z | Other, special |

Table 13 Accuracy code

| Accuracy | Standard (Without NSK K1) | With NSK K1 |
|-----------------------|---------------------------|-------------|
| Ultra precision grade | P3 | K3 |
| Super precision grade | P4 | K4 |
| High precision grade | P5 | K5 |

Note Refer to page A38 for NSK K1 lubrication unit.




HA Series

9. Dimensions


HA-AN

HA-AL

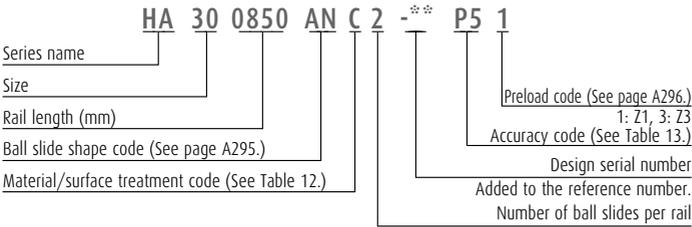

Front view of AL type


Side view of AL type

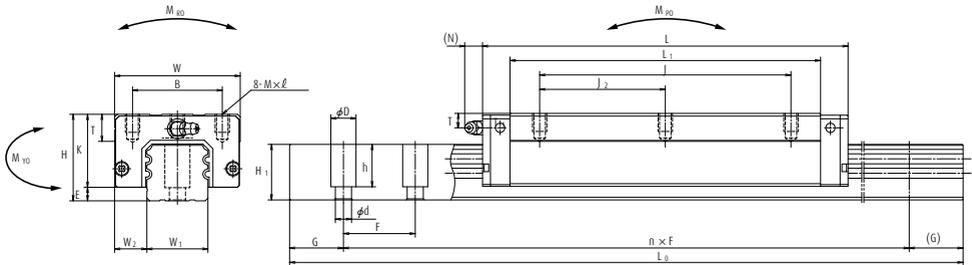


| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Rail | | |
|-----------|-------------|-----|----------------|------------|-------------|---------------|-----|----------------|---------------|----------------|------|----|----------------|----------------|------|----------------|----------------|
| | Height H | E | W ₂ | Width W | Length L | Mounting hole | | | | L ₁ | K | T | Grease fitting | | | W ₁ | H ₁ |
| | | | | | | B | J | J ₂ | M × pitch × ℓ | | | | Hole size | T ₁ | N | | |
| HA25AN | 40 | 5.5 | 12.5 | 48 | 147.8 | 35 | 100 | 50 | M6×1.0×10 | 126 | 34.5 | 12 | M6×0.75 | 10 | 11 | 23 | 22 |
| HA30AN | 45 | 7.5 | 16 | 60 | 177.2 | 40 | 120 | 60 | M8×1.25×11 | 149 | 37.5 | 14 | M6×0.75 | 9.5 | 11 | 28 | 28 |
| HA35AN | 55 | 7.5 | 18 | 70 | 203.6 | 50 | 140 | 70 | M8×1.25×12 | 173 | 47.5 | 15 | M6×0.75 | 15 | 11 | 34 | 30.8 |
| HA35AL | 48 | 7.5 | 18 | 70 | 203.6 | 50 | 140 | 70 | M8×1.25×10 | 173 | 40.5 | 15 | M6×0.75 | 8 | 11 | 34 | 30.8 |
| HA45AN | 70 | 10 | 20.5 | 86 | 233.4 | 60 | 160 | 80 | M10×1.5×16 | 197 | 60 | 17 | Rc1/8 | 20 | 13 | 45 | 36 |
| HA45AL | 60 | 10 | 20.5 | 86 | 233.4 | 60 | 160 | 80 | M10×1.5×16 | 197 | 50 | 17 | Rc1/8 | 10 | 13 | 45 | 36 |
| HA55AN | 80 | 12 | 23.5 | 100 | 284.4 | 75 | 206 | 103 | M12×1.75×18 | 245 | 68 | 18 | Rc1/8 | 21 | 13 | 53 | 43.2 |
| HA55AL | 70 | 12 | 23.5 | 100 | 284.4 | 75 | 206 | 103 | M12×1.75×16 | 245 | 58 | 18 | Rc1/8 | 11 | 13 | 53 | 43.2 |

Notes 1) The HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Front view of AN type



Side view of AN type

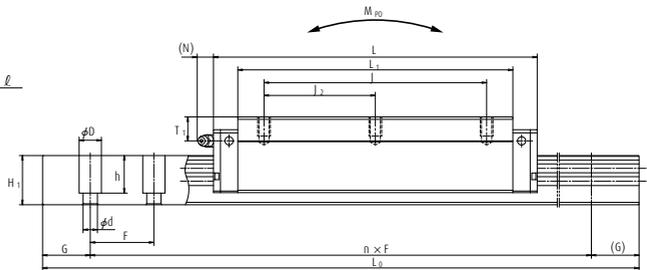

Unit: mm


| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|--|------------------|---------------------------------|-----------------------|-------------------------|--------------|----------|---------------------|------------|-----------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole $d \times D \times h$ | G (reference) | Maximum length L_{0max} | Dynamic | | Static | M_{R0} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] $C_{50}(N)$ | [100km] $C_{100}(N)$ | C_0 (N) | | M_{P0} | | M_{Y0} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 30 | 7×11×16.5 | 20 | 3 960 | 54 000 | 43 000 | 115 000 | 670 | 2 060 | 10 100 | 2 060 | 10 100 | 1.2 | 3.7 |
| 40 | 9×14×21 | 20 | 4 000 | 79 500 | 63 500 | 166 000 | 1 140 | 3 550 | 17 400 | 3 550 | 17 400 | 1.8 | 5.8 |
| 40 | 9×14×23.5 | 20 | 4 000 | 111 000 | 88 000 | 226 000 | 1 950 | 5 650 | 27 100 | 5 650 | 27 100 | 3.0 | 7.7 |
| 40 | 9×14×23.5 | 20 | 4 000 | 111 000 | 88 000 | 226 000 | 1 950 | 5 650 | 27 100 | 5 650 | 27 100 | 2.6 | 7.7 |
| 52.5 | 14×20×27 | 22.5 | 3 990 | 147 000 | 117 000 | 295 000 | 3 700 | 8 450 | 40 500 | 8 450 | 40 500 | 6.0 | 12.0 |
| 52.5 | 14×20×27 | 22.5 | 3 990 | 147 000 | 117 000 | 295 000 | 3 700 | 8 450 | 40 500 | 8 450 | 40 500 | 5.0 | 12.0 |
| 60 | 16×23×32.5 | 30 | 3 960 | 232 000 | 184 000 | 445 000 | 6 500 | 15 400 | 75 000 | 15 400 | 75 000 | 9.4 | 17.2 |
| 60 | 16×23×32.5 | 30 | 3 960 | 232 000 | 184 000 | 445 000 | 6 500 | 15 400 | 75 000 | 15 400 | 75 000 | 7.8 | 17.2 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C_{50} : the basic dynamic load rating for 50 km rated fatigue life C_{100} ; the basic dynamic load rating for 100 km rated fatigue life

HA Series

HA-EM

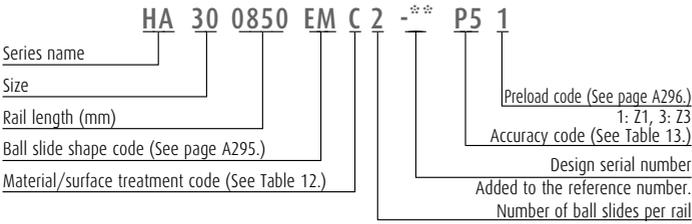


Front view of EM type

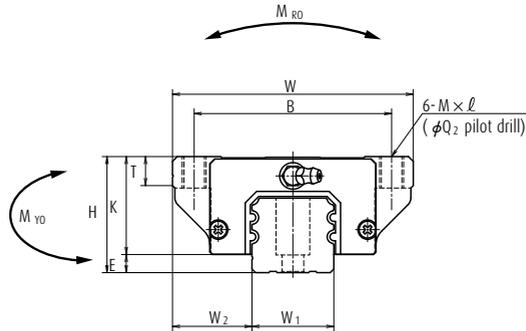

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Rail | | | |
|-----------|-------------|-----|----------------|------------|-------------|---------------|-----|----------------|---------------|----------------|----------------|------|----|----------------|----------------|----|-------------------------|--------------------------|
| | Height H | E | W ₂ | Width W | Length L | Mounting hole | | | | | L ₁ | K | T | Grease fitting | | | Width W ₁ | Height H ₁ |
| | | | | | | B | J | J ₂ | M × pitch × l | Q ₁ | | | | Hole size | T ₁ | N | | |
| HA25EM | 36 | 5.5 | 23.5 | 70 | 147.8 | 57 | 100 | 50 | M8×1.25×10 | 6.8 | 126 | 30.5 | 11 | M6×0.75 | 6 | 11 | 23 | 22 |
| HA30EM | 42 | 7.5 | 31 | 90 | 177.2 | 72 | 120 | 60 | M10×1.5×12 | 8.6 | 149 | 34.5 | 11 | M6×0.75 | 6.5 | 11 | 28 | 28 |
| HA35EM | 48 | 7.5 | 33 | 100 | 203.6 | 82 | 140 | 70 | M10×1.5×13 | 8.6 | 173 | 40.5 | 12 | M6×0.75 | 8 | 11 | 34 | 30.8 |
| HA45EM | 60 | 10 | 37.5 | 120 | 233.4 | 100 | 160 | 80 | M12×1.75×15 | 10.5 | 197 | 50 | 13 | Rc1/8 | 10 | 13 | 45 | 36 |
| HA55EM | 70 | 12 | 43.5 | 140 | 284.4 | 116 | 206 | 103 | M14×2×18 | 12.5 | 245 | 58 | 15 | Rc1/8 | 11 | 13 | 53 | 43.2 |

Notes 1) The HA Series does not have a ball retainer. Be aware that the balls fall out when a ball slide is withdrawn from the rail.

Side view of EM type

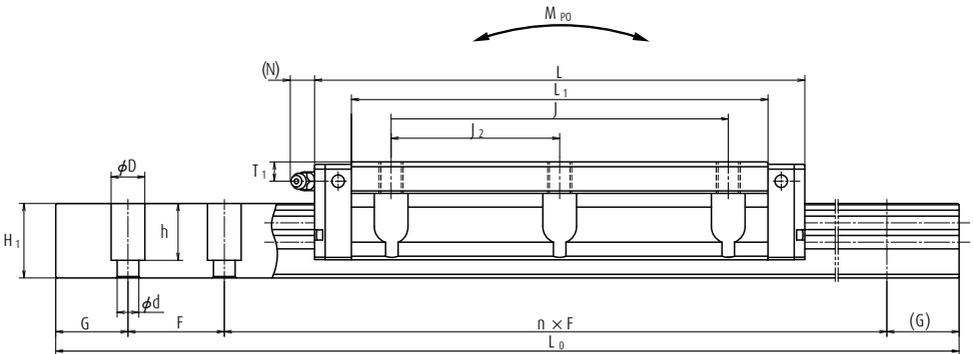

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|------------------------------------|------------------|--|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Maximum length L _{0max} | 2)Dynamic | | Static | M _{R0} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 30 | 7×11×16.5 | 20 | 3 960 | 54 000 | 43 000 | 115 000 | 670 | 2 060 | 10 100 | 2 060 | 10 100 | 1.6 | 3.7 |
| 40 | 9×14×21 | 20 | 4 000 | 79 500 | 63 500 | 166 000 | 1 140 | 3 550 | 17 400 | 3 550 | 17 400 | 2.6 | 5.8 |
| 52.5 | 9×14×23.5 | 20 | 4 000 | 111 000 | 88 000 | 226 000 | 1 950 | 5 650 | 27 100 | 5 650 | 27 100 | 3.8 | 7.7 |
| 60 | 14×20×27 | 22.5 | 3 990 | 147 000 | 117 000 | 295 000 | 3 700 | 8 450 | 40 500 | 8 450 | 40 500 | 6.6 | 12.0 |
| 60 | 16×23×32.5 | 30 | 3 960 | 232 000 | 184 000 | 445 000 | 6 500 | 15 400 | 75 000 | 15 400 | 75 000 | 11 | 17.2 |

2) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀; the basic dynamic load rating for 100 km rated fatigue life

HS Series

A-5-4.2 HS Series



1. Features

(1) High motion accuracy

High motion accuracy is achieved in both narrow and wide ranges by adopting ultra-long ball slides and optimum design features for the ball recirculation component.

(2) Ball passage vibration reduced to one-third of our conventional models

Tests show ball passage vibration has been reduced to one-third of our conventional models, dramatically improving straightness in table unit.

(3) Installation of rail with greater accuracy

Increased counterbore depth of the rail mounting hole reduces rail deflection, which is caused by bolt tightening when fixing the rail to the mounting base, to 50% or less. This feature restrains the pitching motion of ball slide whose frequency matches to the mounting hole pitch.

In addition, the mounting hole pitch has been reduced by one-half of the conventional models, so the rail can be more accurately installed in position.

(4) High rigidity and load capacity with lower friction

High rigidity, high load capacity and low friction are achieved by increasing the number of balls.

(5) Compact design

Reduced body size enables more compact machinery.

(6) High load carrying capacity to vertical direction

The contact angle is set at 50 degrees, increasing load carrying capacity as well as rigidity against the load in vertical direction.

(7) High resistance against impact load

The bottom ball groove is formed in Gothic arch and the center of the top and bottom grooves are offset as shown in Fig. 2. The vertical load is usually carried by top two ball rows at where balls are contacting at two points. Because of this design, the bottom ball rows will carry the load when a large impact load is applied as shown in Fig. 3. This assures high resistance to the impact load.

(8) High accuracy at manufacturing

As showing in Fig. 4, fixing the measuring rollers to the ball groove is easy thanks to the Gothic arch groove. This makes easy and accurate measuring of ball grooves.

(9) Improve rating life dramatically

New ball groove geometry is introduced, which has been developed by utilizing NSK's state-of-the-art tribological and analytical technologies. Due to the optimized distribution of contact surface pressures, the rating life has dramatically increased.

As compared with the conventional products, the load rating capacity has increased to 1.3 times, while the life span has increased to twice*1.

*1: Representative values of series.

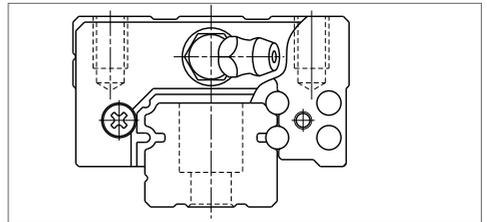


Fig. 1 HS Series

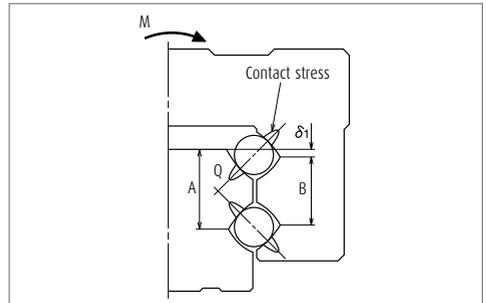


Fig. 2 Enlarged illustration: Offset Gothic arch

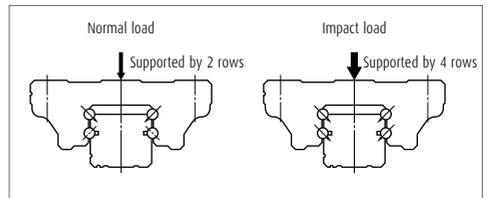


Fig. 3 When load is applied

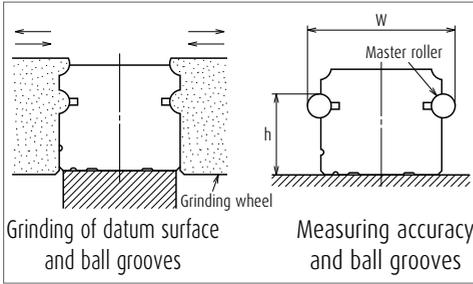


Fig. 4 Rail-grinding and measuring

Measurement results of ball passage vibration

Ball passage vibration can translate into posture changes in the ball slide which result from ball passage (circulation). In the HS Series, this vibration has been substantially reduced to one-third of conventional models.

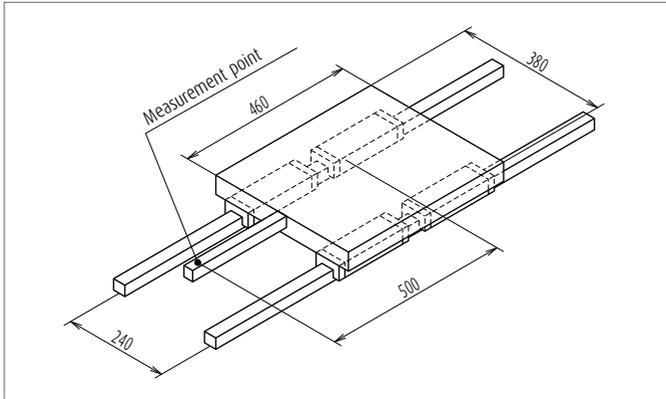


Fig. 5 Schematic view of measurement of ball passage vibration

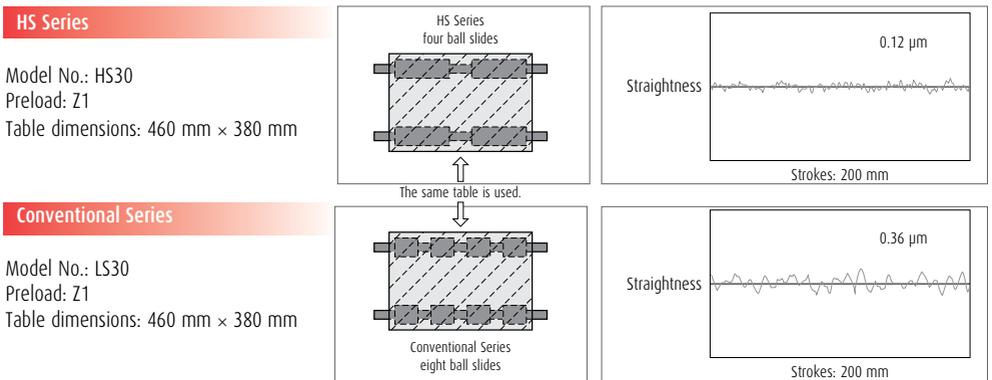


Fig. 6 Measurement results of HS Series and conventional Series

HS Series

2. Ball slide shape

| Ball slide Model | Shape/installation method | Type |
|------------------|---------------------------|------|
| AL | | AL |
| EM | | EM |

3. Accuracy and preload

(1) Running parallelism of ball slide

Table 1

Unit: μm

| Rail length (mm) | | Preloaded assembly | | |
|------------------|---------|--------------------|--------------------|-------------------|
| | | Ultra precision P3 | Super precision P4 | High precision P5 |
| over | or less | | | |
| - | 200 | 2 | 2 | 4 |
| 200 | - 250 | 2 | 2.5 | 5 |
| 250 | - 315 | 2 | 2.5 | 5 |
| 315 | - 400 | 2 | 3 | 6 |
| 400 | - 500 | 2 | 3 | 6 |
| 500 | - 630 | 2 | 3.5 | 7 |
| 630 | - 800 | 2 | 4.5 | 8 |
| 800 | - 1 000 | 2.5 | 5 | 9 |
| 1 000 | - 1 250 | 3 | 6 | 10 |
| 1 250 | - 1 600 | 4 | 7 | 11 |
| 1 600 | - 2 000 | 4.5 | 8 | 13 |
| 2 000 | - 2 500 | 5 | 10 | 15 |
| 2 500 | - 3 150 | 6 | 11 | 17 |
| 3 150 | - 4 000 | 9 | 16 | 23 |

(2) Accuracy Standard

Three accuracy grades are available: Ultra precision P3, Super precision P4 and High precision P5.

Table 2

Unit: μm

| Characteristics | Ultra precision P3 | Super precision P4 | High precision P5 |
|--|-----------------------------|--------------------|-------------------|
| Mounting height H | ± 10 | ± 10 | ± 20 |
| Variation of H (All ball slides on a set of rails) | 3 | 5 | 7 |
| Mounting width W2 or W3 | ± 15 | ± 15 | ± 25 |
| Variation of W2 or W3 (All ball slides on reference rail) | 3 | 7 | 10 |
| Running parallelism of surface C to surface A | Refer to Table 1 and Fig. 7 | | |
| Running parallelism of surface D to surface B | Refer to Table 1 and Fig. 7 | | |

(3) Assembled accuracy

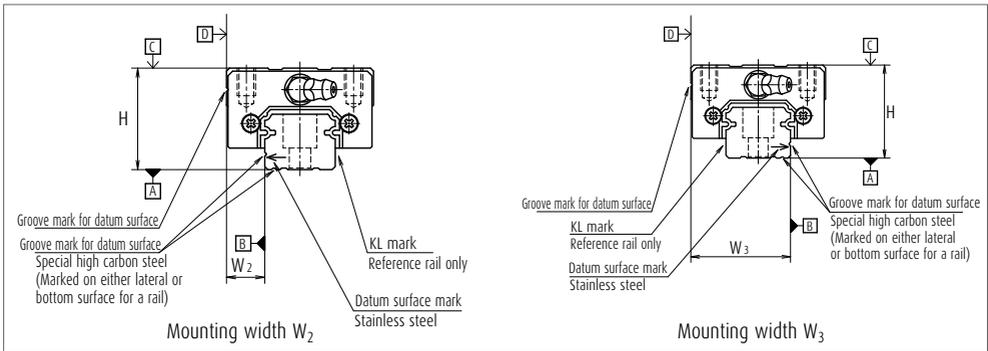


Fig. 7

(4) Preload and rigidity

Slight preload Z1 and Medium preload Z3 are available for preload, which can be selected for specific applications.

Table 3

| Model No. | Preload (N) | | Rigidity (N/ μm) | | | |
|-----------|---------------------|---------------------|------------------------------|---------------------|---------------------|---------------------|
| | | | Vertical direction | | Lateral direction | |
| | Slight preload (Z1) | Medium preload (Z3) | Slight preload (Z1) | Medium preload (Z3) | Slight preload (Z1) | Medium preload (Z3) |
| HS15 | 98 | 785 | 260 | 530 | 173 | 355 |
| HS20 | 147 | 1 030 | 305 | 600 | 212 | 415 |
| HS25 | 245 | 1 620 | 385 | 735 | 263 | 505 |
| HS30 | 390 | 2 550 | 505 | 965 | 345 | 665 |
| HS35 | 590 | 3 550 | 610 | 1 140 | 415 | 780 |

4. Maximum rail length

Table 4 shows the limitation. The dimension in parenthesis is for stainless steel products. However, the limitations vary by accuracy grades.

Table 2

Unit: mm

| Series | Size | 15 | 20 | 25 | 30 | 35 |
|--------|------|---------------|---------------|---------------|---------------|---------------|
| HS | | 2 000 (1 700) | 3 960 (3 500) | 3 960 (3 500) | 4 000 (3 500) | 4 000 (3 500) |

Note Rails can be butted if user requirement exceeds the rail length shown in the table. Please consult NSK.

5. Installation

(1) Permissible values of mounting error

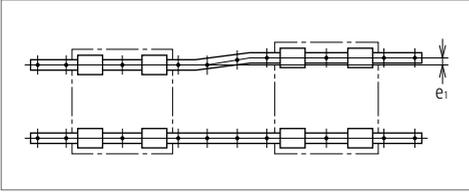


Fig. 8

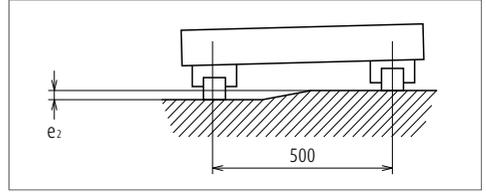


Fig. 9

Table 5

Unit: μm

| Value | Preload | Model No. | | | | |
|---|---------|----------------------------------|------|------|------|------|
| | | HS15 | HS20 | HS25 | HS30 | HS35 |
| Permissible values of parallelism in two rails e_1 | Z1 | 18 | 20 | 26 | 31 | 37 |
| | Z3 | 12 | 14 | 18 | 22 | 26 |
| Permissible values of parallelism (height) in two rails e_2 | Z1, Z3 | 330 $\mu\text{m}/500 \text{ mm}$ | | | | |

(2) Shoulder height of the mounting surface and corner radius

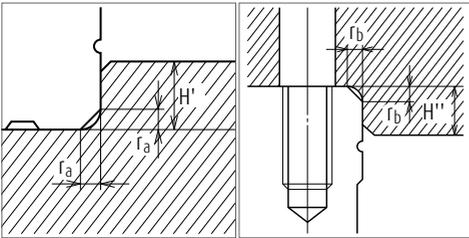


Fig. 10 Shoulder for the rail datum surface

Fig. 11 Shoulder for the ball slide datum surface

Table 6

Unit: mm

| Model No. | Corner radius (maximum) | | Shoulder height | |
|-----------|-------------------------|-------|-----------------|-------|
| | r_a | r_b | H' | H'' |
| HS15 | 0.5 | 0.5 | 4 | 4 |
| HS20 | 0.5 | 0.5 | 4.5 | 5 |
| HS25 | 0.5 | 0.5 | 5 | 5 |
| HS30 | 0.5 | 0.5 | 6 | 6 |
| HS35 | 0.5 | 0.5 | 6 | 6 |

6. Lubrication components

Refer to pages A38 and D13 for linear guide lubrication.

(1) Types of lubrication accessories

Fig. 12 and **Table 7** show grease fittings and tube fittings. We provide lubrication accessories with extended thread body length (L) for the addition of dust-proof accessories such as NSK K1 lubrication unit, double seal and protector. We provide a suitable lubrication accessory for the special requirement on dust-proof accessories.

Consult NSK for a lubrication accessory with extended length of thread body for your convenience of replenishing lubricant. When you require stainless lubrication accessories, please ask NSK.

(2) Mounting position of lubrication accessories

The standard position of grease fittings is the end face of ball slide. We mount them on the side of end cap for an option.

(Fig. 13)

Please consult NSK for installation of grease or tube fittings to the ball slide body or the side of end cap.

When using a piping unit with thread of M6 × 1, you require a connector to connect to a grease fitting mounting hole with M6 × 0.75. The connector is available from NSK.

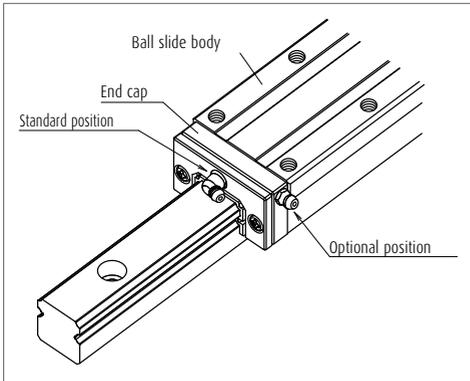


Fig. 13 Mounting position of lubrication accessories

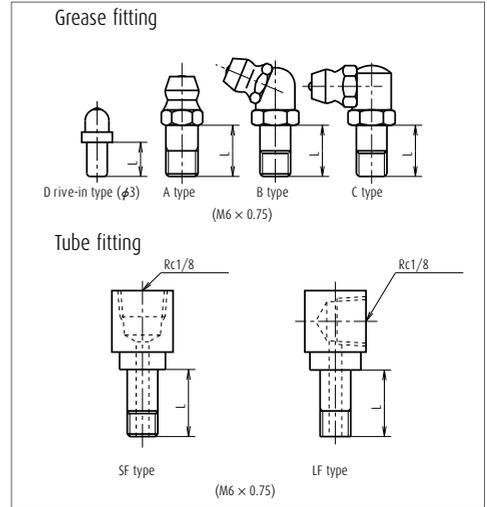


Fig. 12 Grease fitting and tube fitting

Table 7

Unit: mm

| Model No. | Dust-proof specification | Dimension L | | |
|-----------|--------------------------|--------------------------------|--------------|---------|
| | | Grease fitting / Drive-in type | Tube fitting | |
| | | | SF Type | LF Type |
| HS15 | Standard | 5 | - | - |
| HS15 | With NSK K1 | 10 | - | - |
| HS15 | Double seal | * | - | - |
| HS15 | Protector | * | - | - |
| HS20 | Standard | 5 | - | - |
| HS20 | With NSK K1 | 10 | - | - |
| HS20 | Double seal | 8 | - | - |
| HS20 | Protector | 8 | - | - |
| HS25 | Standard | 5 | 6 | 6 |
| HS25 | With NSK K1 | 12 | 11 | 11 |
| HS25 | Double seal | 10 | 9 | 9 |
| HS25 | Protector | 10 | 9 | 9 |
| HS30 | Standard | 5 | 6 | 6 |
| HS30 | With NSK K1 | 14 | 12 | 13 |
| HS30 | Double seal | 12 | 10 | 11 |
| HS30 | Protector | 12 | 10 | 11 |
| HS35 | Standard | 5 | 6 | 6 |
| HS35 | With NSK K1 | 14 | 12 | 13 |
| HS35 | Double seal | 12 | 10 | 11 |
| HS35 | Protector | 12 | 10 | 11 |

*) A connector is required for this model. Please contact NSK.

HS Series

7. Dust-proof components

(1) Standard Specification

The HS Series can be readily used as they have a dust protection means for normal conditions. As the standard equipment, the ball slides have an end seal on both ends. Bottom seal is equipped on bottom as an option.

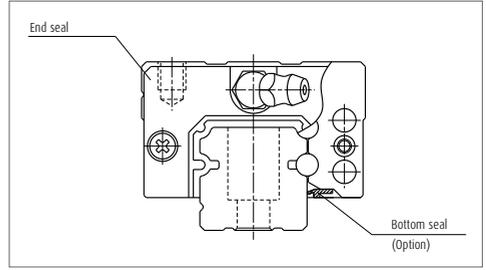


Fig. 14

Table 8 Seal friction per ball slide (maximum): end seal only

| | | Unit: N | | | | |
|--------|------|---------|----|----|----|----|
| Series | Size | 15 | 20 | 25 | 30 | 35 |
| HS | | 3 | 3 | 3 | 3 | 4 |

(2) NSK K1 lubrication unit

Refer to **Table 9** for dimension of linear guides equipped with the NSK K1 lubrication unit.

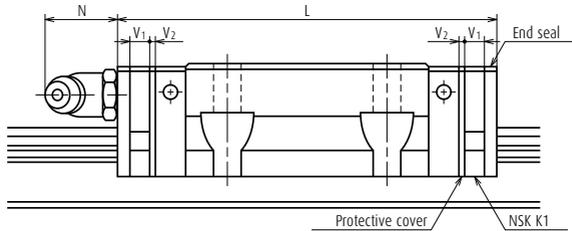


Table 9

| | | | | | | | Unit: mm |
|-----------|------------------|----------------------------|---|-------------------------------------|---|---|----------|
| Model No. | Ball slide model | Standard ball slide length | Ball slide length installed with two NSK K1 L | Per NSK K1 thickness V ₁ | Protective cover thickness V ₂ | Protruding area of the grease fitting N | |
| HS15 | AL, EM | 106 | 115.6 | 4.0 | 0.8 | (5) | |
| HS20 | AL, EM | 119.7 | 130.3 | 4.5 | 0.8 | (14) | |
| HS25 | AL, EM | 148 | 158.6 | 4.5 | 0.8 | (14) | |
| HS30 | AL, EM | 176.1 | 188.1 | 5.0 | 1.0 | (14) | |
| HS35 | AL, EM | 203.6 | 216.6 | 5.5 | 1.0 | (14) | |

Note Ball slide length equipped with NSK K1 = (Standard ball slide length) + (Thickness of NSK K1, V₁ × Number of NSK K1) + (Thickness of the protective cover V₂ × 2)

(3) Double seal and protector

For the HS Series, double seal and protectors can be installed only before shipping from the factory. Please consult with NSK when you require dust tight protection.

Table 10 shows the increased thickness of V_3 and V_4 when the end seal and the protector are installed.

Table 10

Unit: mm

| Model No. | Thickness of end seal: V_3 | Thickness of protector: V_4 |
|-----------|------------------------------|-------------------------------|
| HS15 | 2.8 | 3 |
| HS20 | 2.5 | 2.7 |
| HS25 | 2.8 | 3.2 |
| HS30 | 3.6 | 4.2 |
| HS35 | 3.6 | 4.2 |

(4) Caps to plug the rail mounting bolt hole

Table 11 Caps to plug rail bolt hole

| Model No. | Bolt to secure rail | Cap reference No. | Quantity /case |
|------------|---------------------|-------------------|----------------|
| HS15 | M3 | LG-CAP/M3 | 20 |
| HS15 | M4 | LG-CAP/M4 | 20 |
| HS20 | M5 | LG-CAP/M5 | 20 |
| HS25, HS30 | M6 | LG-CAP/M6 | 20 |
| HS35 | M8 | LG-CAP/M8 | 20 |

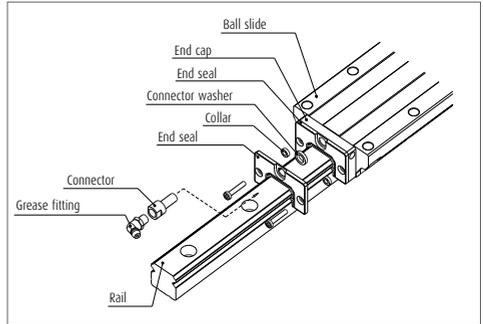


Fig. 15 Double seal

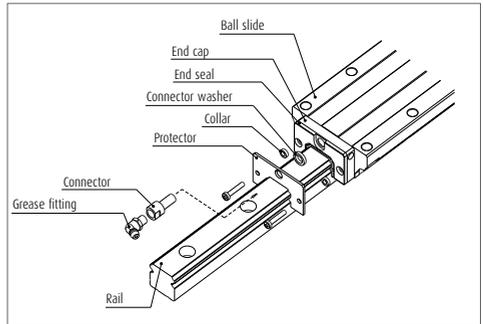


Fig. 16 Protector

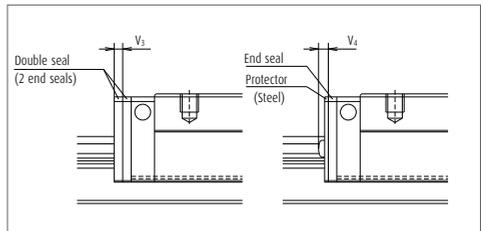



Fig. 17




HS Series

9. Dimensions

HS-AL

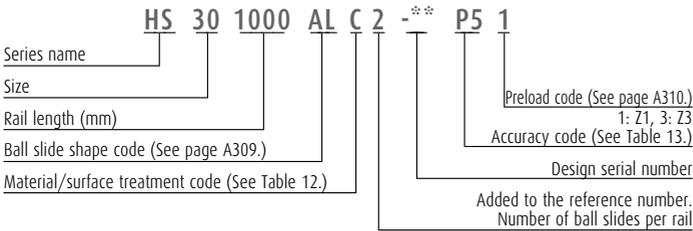


Front view of AL types

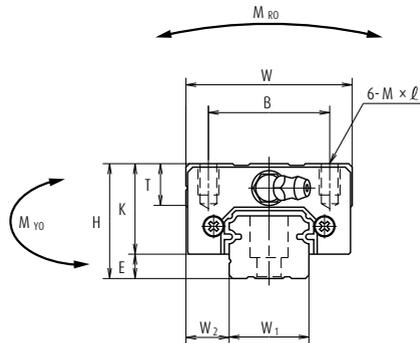

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|------|----------------|------------|--------|---------------|-----|----------------|---------------|-----------|----------------|----|---------|----------------|-------|--------|------|----------------|
| | Height | | W ₂ | Width | Length | Mounting hole | | | | | L ₁ | K | T | Grease fitting | | | | |
| | H | E | | | | B | J | J ₂ | M × pitch × ℓ | Hole size | | | | T ₁ | | | N | W ₁ |
| HS15AL | 24 | 4.6 | 9.5 | 34 | 106 | 26 | 60 | 30 | M4×0.7×6 | 89.2 | 19.4 | 10 | φ 3 | 6 | 3 | 15 | 12.5 | |
| HS20AL | 28 | 6 | 11 | 42 | 119.7 | 32 | 80 | 40 | M5×0.8×7 | 102.5 | 22 | 12 | M6×0.75 | 5.5 | 11 | 20 | 15.5 | |
| HS25AL | 33 | 7 | 12.5 | 48 | 148 | 35 | 100 | 50 | M6×1×9 | 126.4 | 26 | 12 | M6×0.75 | 7 | 11 | 23 | 18 | |
| HS30AL | 42 | 9 | 16 | 60 | 176.1 | 40 | 120 | 60 | M8×1.25×12 | 150.7 | 33 | 13 | M6×0.75 | 8 | 11 | 28 | 23 | |
| HS35AL | 48 | 10.5 | 18 | 70 | 203.6 | 50 | 140 | 70 | M8×1.25×12 | 175.6 | 37.5 | 14 | M6×0.75 | 8.5 | 11 | 34 | 27.5 | |

- Note**
- 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

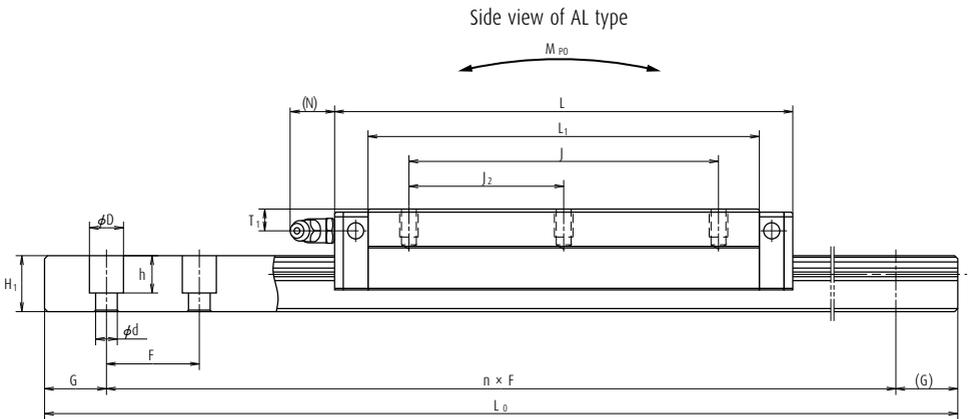

Unit: mm

| Rail | | | | Basic load rating | | | | | | | | Weight | |
|------------|--|------------------|--|-------------------------------|---------------------------------|-----------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Max. length L _{0max.} () for stainless | 3)Dynamic | | Static | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | C ₀ (N) | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 30 | ^{a)} 3.5×6×8.5 4.5×7.5×8.5 | 20 | 2 000 (1 700) | 20 500 | 16 300 | 40 000 | 199 | 395 | 1 990 | 335 | 1 670 | 0.34 | 1.4 |
| 30 | 6×9.5×10.5 | 20 | 3 960 (3 500) | 27 300 | 21 600 | 52 000 | 350 | 590 | 2 930 | 495 | 2 460 | 0.52 | 2.3 |
| 30 | 7×11×12 | 20 | 3 960 (3 500) | 44 500 | 35 000 | 78 000 | 605 | 1 090 | 5 450 | 910 | 4 600 | 0.85 | 3.1 |
| 40 | 7×11×16 | 20 | 4 000 (3 500) | 68 000 | 54 000 | 127 000 | 1 190 | 2 120 | 10 600 | 1 780 | 8 850 | 1.7 | 4.8 |
| 40 | 9×14×20 | 20 | 4 000 (3 500) | 94 500 | 75 000 | 172 000 | 1 980 | 3 350 | 16 600 | 2 820 | 13 900 | 2.5 | 7.0 |

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)


C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

4) Parenthesized dimensions are applicable to stainless steel products.


^{a)} Standard rail mounting bolt hole for HS15 is specified as hole for M3 (3.5 × 6 × 8.5). Please contact us to request a different hole for M4 (4.5 × 7.5 × 8.5).

HS Series

HS-EM

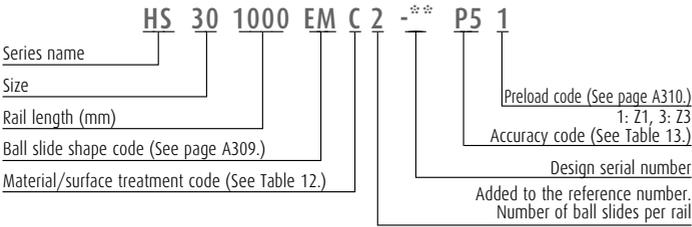


Front view of EM type

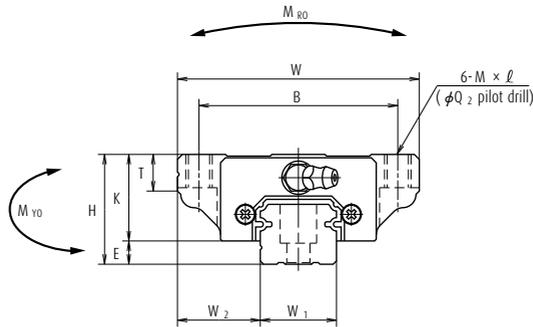

| Model No. | Assembly | | | Ball slide | | | | | | | | | | | Width | Height | | |
|-----------|----------|------|----------------|------------|--------|---------------|-----|----------------|------------------------------|----------------|----------------|------|------------|----------------|-------|--------|----------------|------|
| | Height | E | W ₂ | Width | Length | Mounting hole | | | | | L ₁ | K | T | Grease fitting | | | | |
| | | | | | | B | J | J ₂ | M × pitch × ℓ | Q ₂ | | | | Hole size | | | T ₁ | N |
| HS15EM | 24 | 4.6 | 18.5 | 52 | 106 | 41 | 60 | 30 | M5×0.8×7 | 4.4 | 89.2 | 19.4 | 8 | φ 3 | 6 | 3 | 15 | 12.5 |
| HS20EM | 28 | 6 | 19.5 | 59 | 119.7 | 49 | 80 | 40 | M6×1×9 (M6×1×9.5) | 5.3 | 102.5 | 22 | 10 | M6×0.75 | 5.5 | 11 | 20 | 15.5 |
| HS25EM | 33 | 7 | 25 | 73 | 148 | 60 | 100 | 50 | M8×1.25×10 (M8×1.25×11.5) | 6.8 | 126.4 | 26 | 11 (12) | M6×0.75 | 7 | 11 | 23 | 18 |
| HS30EM | 42 | 9 | 31 | 90 | 176.1 | 72 | 120 | 60 | M10×1.5×12 (M10×1.5×14.5) | 8.6 | 150.7 | 33 | 11 (15) | M6×0.75 | 8 | 11 | 28 | 23 |
| HS35EM | 48 | 10.5 | 33 | 100 | 203.6 | 82 | 140 | 70 | M10×1.5×13 (M10×1.5×14.5) | 8.6 | 175.6 | 37.5 | 12 (15) | M6×0.75 | 8.5 | 11 | 34 | 27.5 |

- Note**
- 1) The HS Series does not have a ball retainer. Be aware that balls fall out when the ball slide is withdrawn from the rail.
 - 2) External appearance of stainless steel ball slides differ from those of carbon steel ball slide.

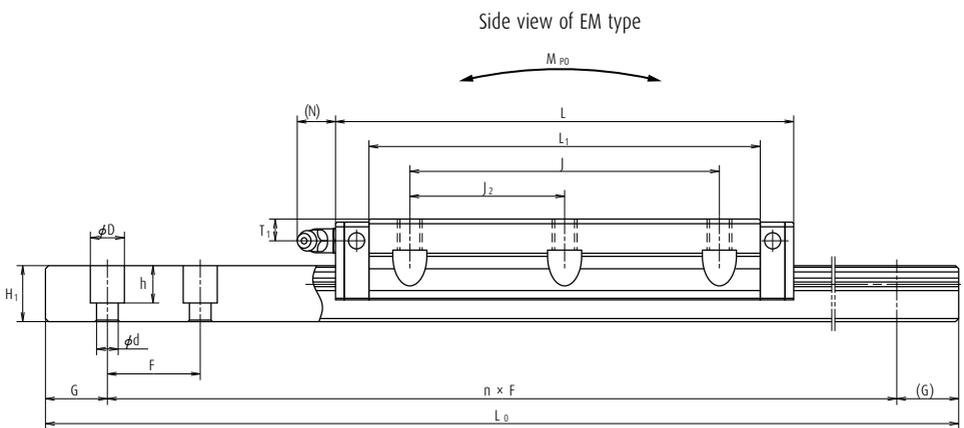

Unit: mm

| Rail | | Basic load rating | | | | | | | | Weight | | | |
|------------|--|-------------------|--|-------------------------------|---------------------------------|---------------------------------|-----------------|---------------------|------------|-----------------|------------|-----------------------|----------------|
| Pitch F | Mounting bolt hole d × D × h | G (reference) | Max. length L _{0max.} () for stainless | 3)Dynamic | | Static C ₀ (N) | M _{RO} | Static moment (N·m) | | | | Ball slide (kg) | Rail (kg/m) |
| | | | | [50km] C ₅₀ (N) | [100km] C ₁₀₀ (N) | | | M _{PO} | | M _{YO} | | | |
| | | | | | | | | One slide | Two slides | One slide | Two slides | | |
| 30 | ^{a)} 3.5×6×8.5 4.5×7.5×8.5 | 20 | 2 000 (1 700) | 20 500 | 16 300 | 40 000 | 199 | 395 | 1 990 | 335 | 1 670 | 0.45 | 1.4 |
| 30 | 6×9.5×10.5 | 20 | 3 960 (3 500) | 27 300 | 21 600 | 52 000 | 350 | 590 | 2 930 | 495 | 2 460 | 0.67 | 2.3 |
| 30 | 7×11×12 | 20 | 3 960 (3 500) | 44 500 | 35 000 | 78 000 | 605 | 1 090 | 5 450 | 910 | 4 600 | 1.3 | 3.1 |
| 40 | 7×11×16 | 20 | 4 000 (3 500) | 68 000 | 54 000 | 127 000 | 1 190 | 2 120 | 10 600 | 1 780 | 8 850 | 2.4 | 4.8 |
| 40 | 9×14×20 | 20 | 4 000 (3 500) | 94 500 | 75 000 | 172 000 | 1 980 | 3 350 | 16 600 | 2 820 | 13 900 | 3.4 | 7.0 |

3) The basic load rating comply with the ISO standard. (ISO 14728-1, 14728-2)

C₅₀: the basic dynamic load rating for 50 km rated fatigue life C₁₀₀: the basic dynamic load rating for 100 km rated fatigue life
The basic static load rating shows static permissible load.

4) Parenthesized dimensions are applicable to stainless steel products.

^{a)} Standard rail mounting bolt hole for HS15 is specified as hole for M3 (3.5 × 6 × 8.5). Please contact us to request a different hole for M4 (4.5 × 7.5 × 8.5).

5. The Comparative Table of Old and New Series

| New Series | | | Former series | | | | | |
|------------|---|--|---------------|---|--|-----------|---|--|
| Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm] | Dynamic load rating C ₅₀ [N] | Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm] | Dynamic load rating C ₅₀ [N] | Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm] | Dynamic load rating C ₅₀ [N] |
| NH15AN | M4×0.7×6 | 14 200 | LH15AN | M4×0.7×6 | 10 800 | SH15AN | M4×0.7×6 | 10 100 |
| NH15BN | M4×0.7×6 | 18 100 | LH15BN | M4×0.7×6 | 14 600 | SH15BN | M4×0.7×6 | 13 400 |
| NH15EM | M5×0.8×7 <4.4> | 14 200 | LH15EL | M5×0.8×8 | 10 800 | SH15EL | M5×0.8×8 | 10 100 |
| | | | LH15EM | M5×0.8×7 <4.4> | 10 800 | SH15EM | M5×0.8×7 <4.4> | 10 100 |
| NH15GM | M5×0.8×7 <4.4> | 18 100 | LH15FL | 4.5×7 | 10 800 | SH15FL | 4.5×7 | 10 100 |
| | | | LH15GL | M5×0.8×8 | 14 600 | SH15GL | M5×0.8×8 | 13 400 |
| | | | LH15GM | M5×0.8×7 <4.4> | 14 600 | SH15GM | M5×0.8×7 <4.4> | 13 400 |
| NH20AN | M5×0.8×6 | 23 700 | LH15HL | 4.5×7 | 14 600 | SH15HL | 4.5×7 | 13 400 |
| | | | LH20AN | M5×0.8×6 | 17 400 | SH20AN | M5×0.8×6 | 16 300 |
| | | | LH20BN | M5×0.8×6 | 23 500 | SH20BN | M5×0.8×6 | 21 600 |
| NH20EM | M6×1×9.5 <5.3> | 23 700 | LH20EL | M6×1×10 | 17 400 | SH20EL | M6×1×10 | 16 300 |
| | | | LH20EM | M6×1×9.5 <5.3> | 17 400 | SH20EM | M6×1×9.5 <5.3> | 16 300 |
| | | | LH20FL | 6×9.5 | 17 400 | SH20FL | 6×9.5 | 16 300 |
| NH20GM | M6×1×9.5 <5.3> | 30 000 | LH20GL | M6×1×10 | 23 500 | SH20GL | M6×1×10 | 21 600 |
| | | | LH20GM | M6×1×9.5 <5.3> | 23 500 | SH20GM | M6×1×9.5 <5.3> | 21 600 |
| | | | LH20HL | 6×9.5 | 23 500 | SH20HL | 6×9.5 | 21 600 |
| NH25AL | M6×1×6 | 33 500 | LH25AL | M6×1×6 | 25 600 | SH25AL | M6×1×6 | 22 400 |
| NH25AN | M6×1×9 | 33 500 | LH25AN | M6×1×9 | 25 600 | SH25AN | M6×1×9 | 22 400 |
| NH25BL | M6×1×6 | 45 500 | LH25BL | M6×1×6 | 34 500 | SH25BL | M6×1×6 | 32 000 |
| NH25BN | M6×1×9 | 45 500 | LH25BN | M6×1×9 | 34 500 | SH25BN | M6×1×9 | 32 000 |
| NH25EM | M8×1.25×10(11.5) <6.8> | 33 500 | LH25EL | M8×1.25×16(12) | 25 600 | SH25EL | M8×1.25×16(12) | 22 400 |
| | | | LH25EM | M8×1.25×10(11.5) <6.8> | 25 600 | SH25EM | M8×1.25×10(11.5) <6.8> | 22 400 |
| | | | LH25FL | 7×10(11.5) | 25 600 | SH25FL | 7×10(11.5) | 22 400 |
| NH25GM | M8×1.25×10(11.5) <6.8> | 45 500 | LH25GL | M8×1.25×16(12) | 34 500 | SH25GL | M8×1.25×16(12) | 32 000 |
| | | | LH25GM | M8×1.25×10(11.5) <6.8> | 34 500 | SH25GM | M8×1.25×10(11.5) <6.8> | 32 000 |
| | | | LH25HL | 7×10(11.5) | 34 500 | SH25HL | 7×10(11.5) | 32 000 |
| NH30AL | M8×1.25×8 | 41 000 | LH30AL | M8×1.25×8 | 31 000 | SH30AL | M8×1.25×8 | 31 000 |
| NH30AN | M8×1.25×10 | 41 000 | LH30AN | M8×1.25×10 | 31 000 | SH30AN | M8×1.25×10 | 31 000 |
| NH30BL | M8×1.25×8 | 61 000 | LH30BL | M8×1.25×8 | 46 000 | SH30BL | M8×1.25×8 | 46 000 |
| NH30BN | M8×1.25×10 | 61 000 | LH30BN | M8×1.25×10 | 46 000 | SH30BN | M8×1.25×10 | 46 000 |
| NH30EM | M10×1.5×12(14.5) <8.6> | 47 000 | LH30EL | M10×1.5×18(15) | 35 500 | SH30EL | M10×1.5×18(15) | 35 500 |
| | | | LH30EM | M10×1.5×12(14.5) <8.6> | 35 500 | SH30EM | M10×1.5×12(14.5) <8.6> | 35 500 |
| | | | LH30FL | 9×12(14.5) | 35 500 | SH30FL | 9×12(14.5) | 35 500 |
| NH30GM | M10×1.5×12(14.5) <8.6> | 61 000 | LH30GL | M10×1.5×18(15) | 46 000 | SH30GL | M10×1.5×18(15) | 46 000 |
| | | | LH30GM | M10×1.5×12(14.5) <8.6> | 46 000 | SH30GM | M10×1.5×12(14.5) <8.6> | 46 000 |
| | | | LH30HL | 9×12(14.5) | 46 000 | SH30HL | 9×12(14.5) | 46 000 |
| NH35AL | M8×1.25×8 | 62 500 | LH35AL | M8×1.25×8 | 47 500 | SH35AL | M8×1.25×8 | 47 500 |
| NH35AN | M8×1.25×12 | 62 500 | LH35AN | M8×1.25×12 | 47 500 | SH35AN | M8×1.25×12 | 47 500 |
| NH35BL | M8×1.25×8 | 81 000 | LH35BL | M8×1.25×8 | 61 500 | SH35BL | M8×1.25×8 | 61 500 |
| NH35BN | M8×1.25×12 | 81 000 | LH35BN | M8×1.25×12 | 61 500 | SH35BN | M8×1.25×12 | 61 500 |
| NH35EM | M10×1.5×13 <8.6> | 62 500 | LH35EL | M10×1.5×20 | 47 500 | SH35EL | M10×1.5×20 | 47 500 |
| | | | LH35EM | M10×1.5×13 <8.6> | 47 500 | SH35EM | M10×1.5×13 <8.6> | 47 500 |
| | | | LH35FL | 9×13 | 47 500 | SH35FL | 9×13 | 47 500 |
| NH35GM | M10×1.5×13 <8.6> | 81 000 | LH35GL | M10×1.5×20 | 61 500 | SH35GL | M10×1.5×20 | 61 500 |
| | | | LH35GM | M10×1.5×13 <8.6> | 61 500 | SH35GM | M10×1.5×13 <8.6> | 61 500 |
| | | | LH35HL | 9×13 | 61 500 | SH35HL | 9×13 | 61 500 |
| NH45AL | M10×1.5×10 | 107 000 | LH45AL | M10×1.5×10 | 81 000 | SH45AL | M10×1.5×10 | 76 500 |
| NH45AN | M10×1.5×17 | 107 000 | LH45AN | M10×1.5×17 | 81 000 | SH45AN | M10×1.5×17 | 76 500 |
| NH45BL | M10×1.5×10 | 131 000 | LH45BL | M10×1.5×10 | 99 000 | SH45BL | M10×1.5×10 | 94 500 |
| NH45BN | M10×1.5×17 | 131 000 | LH45BN | M10×1.5×17 | 99 000 | SH45BN | M10×1.5×17 | 94 500 |
| NH45EM | M12×1.75×15 <10.5> | 107 000 | LH45EL | M12×1.75×24 | 81 000 | SH45EL | M12×1.75×24 | 76 500 |
| | | | LH45EM | M12×1.75×15 <10.5> | 81 000 | SH45EM | M12×1.75×15 <10.5> | 76 500 |
| | | | LH45FL | 11×15 | 81 000 | SH45FL | 11×15 | 76 500 |
| NH45GM | M12×1.75×15 <10.5> | 131 000 | LH45GL | M12×1.75×24 | 99 000 | SH45GL | M12×1.75×24 | 94 500 |
| | | | LH45GM | M12×1.75×15 <10.5> | 99 000 | SH45GM | M12×1.75×15 <10.5> | 94 500 |
| | | | LH45HL | 11×15 | 99 000 | SH45HL | 11×15 | 94 500 |
| NH55AL | M12×1.75×13 | 158 000 | LH55AL | M12×1.75×13 | 119 000 | SH55AL | M12×1.75×13 | 113 000 |
| NH55AN | M12×1.75×18 | 158 000 | LH55AN | M12×1.75×18 | 119 000 | SH55AN | M12×1.75×18 | 113 000 |
| NH55BL | M12×1.75×13 | 193 000 | LH55BL | M12×1.75×13 | 146 000 | SH55BL | M12×1.75×13 | 140 000 |
| NH55BN | M12×1.75×18 | 193 000 | LH55BN | M12×1.75×18 | 146 000 | SH55BN | M12×1.75×18 | 140 000 |
| NH55EM | M14×2×18 <12.5> | 158 000 | LH55EL | M14×2×18 | 119 000 | SH55EL | M14×2×18 | 113 000 |
| | | | LH55EM | M14×2×18 <12.5> | 119 000 | SH55EM | M14×2×18 <12.5> | 113 000 |
| | | | LH55FL | 14×18 | 119 000 | SH55FL | 14×18 | 113 000 |
| NH55GM | M14×2×18 <12.5> | 193 000 | LH55GL | M14×2×18 | 146 000 | SH55GL | M14×2×18 | 140 000 |
| | | | LH55GM | M14×2×18 <12.5> | 146 000 | SH55GM | M14×2×18 <12.5> | 140 000 |
| | | | LH55HL | 14×18 | 146 000 | SH55HL | 14×18 | 140 000 |
| NH65AN | M16×2×20 | 239 000 | LH65AN | M16×2×20 | 181 000 | SH65AN | M16×2×20 | 181 000 |
| NH65BN | M16×2×20 | 310 000 | LH65BN | M16×2×20 | 235 000 | SH65BN | M16×2×20 | 235 000 |
| NH65EM | M16×2×24 <14.6> | 239 000 | LH65EL | M16×2×24 | 181 000 | SH65EL | M16×2×24 | 181 000 |
| | | | LH65EM | M16×2×24 <14.6> | 181 000 | SH65EM | M16×2×24 <14.6> | 181 000 |
| | | | LH65FL | 16×24 | 181 000 | SH65FL | 16×24 | 181 000 |
| NH65GM | M16×2×24 <14.6> | 310 000 | LH65GL | M16×2×24 | 235 000 | SH65GL | M16×2×24 | 235 000 |
| | | | LH65GM | M16×2×24 <14.6> | 235 000 | SH65GM | M16×2×24 <14.6> | 235 000 |
| | | | LH65HL | M16×24 | 235 000 | SH65HL | M16×24 | 235 000 |

Notes 1) Parenthesized dimensions are for items made of stainless steel.

2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.

| New Series | | | Former series | | | | | |
|------------|---|---|---------------|---|---|-----------|---|---|
| Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm] | Dynamic load rating C ₅₀ [N] | Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm] | Dynamic load rating C ₅₀ [N] | Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > Q ₁ ×ℓ [mm] | Dynamic load rating C ₅₀ [N] |
| NS15CL | M4×0.7×6 | 7 250 | LS15CL | M4×0.7×6 | 5 400 | SS15CL | M4×0.7×6 | 4 900 |
| NS15AL | M4×0.7×6 | 11 200 | LS15AL | M4×0.7×6 | 8 350 | SS15AL | M4×0.7×6 | 7 900 |
| NS15JM | M5×0.8×7 <4.4> | 7 250 | LS15JM | M5×0.8×8 | 5 400 | SS15JM | M5×0.8×8 | 4 900 |
| | | | LS15JL | M5×0.8×7 <4.4> | 5 400 | SS15JL | M5×0.8×7 <4.4> | 4 900 |
| NS15EM | M5×0.8×7 <4.4> | 11 200 | LS15EL | M5×0.8×8 | 8 350 | SS15EL | M5×0.8×8 | 7 900 |
| | | | LS15EM | M5×0.8×7 <4.4> | 8 350 | SS15EM | M5×0.8×7 <4.4> | 7 900 |
| NS20CL | M5×0.8×7 | 10 600 | LS20CL | 4.5×7 | 8 350 | SS20CL | 4.5×7 | 7 900 |
| NS20AL | M5×0.8×7 | 15 600 | LS20AL | M5×0.8×7 | 11 700 | SS20AL | M5×0.8×7 | 11 100 |
| NS20JM | M6×1.9×(9.5) <5.3> | 10 600 | LS20JM | M6×1×10 | 7 900 | SS20JM | M6×1×10 | 7 250 |
| | | | LS20JL | M6×1×9(9.5) <5.3> | 7 900 | SS20JL | M6×1×9(9.5) <5.3> | 7 250 |
| NS20EM | M6×1.9×(9.5) <5.3> | 15 600 | LS20EL | M6×1×10 | 11 700 | SS20EL | M6×1×10 | 11 100 |
| | | | LS20EM | M6×1×9(9.5) <5.3> | 11 700 | SS20EM | M6×1×9(9.5) <5.3> | 11 100 |
| NS25CL | M6×1×9 | 17 700 | LS25CL | M6×1×9 | 12 700 | SS25CL | M6×1×9 | 12 700 |
| NS25AL | M6×1×9 | 26 100 | LS25AL | M6×1×9 | 18 800 | SS25AL | M6×1×9 | 17 900 |
| NS25JM | M8×1.25×10(11.5) <6.8> | 17 700 | LS25JM | M8×1.25×12 | 12 700 | SS25JM | M8×1.25×12 | 12 700 |
| | | | LS25JL | M8×1.25×10(11.5) <6.8> | 12 700 | SS25JL | M8×1.25×10(11.5) <6.8> | 12 700 |
| NS25EM | M8×1.25×10(11.5) <6.8> | 26 100 | LS25EL | M8×1.25×12 | 18 800 | SS25EL | M8×1.25×12 | 17 900 |
| | | | LS25EM | M8×1.25×10(11.5) <6.8> | 18 800 | SS25EM | M8×1.25×10(11.5) <6.8> | 17 900 |
| NS30CL | M8×1.25×12 | 24 700 | LS30CL | 7×10(11.5) | 18 800 | SS30CL | 7×10(11.5) | 19 700 |
| NS30AL | M8×1.25×12 | 38 000 | LS30AL | M8×1.25×12 | 18 700 | SS30AL | M8×1.25×12 | 18 700 |
| NS30JM | M10×1.5×12(14.5) <8.6> | 24 700 | LS30JM | M10×1.5×18(15) | 28 800 | SS30JM | M8×1.25×12 | 27 300 |
| | | | LS30JL | M10×1.5×12(14.5) <8.6> | 18 700 | SS30JL | M10×1.5×18(15) | 18 700 |
| NS30EM | M10×1.5×12(14.5) <8.6> | 38 000 | LS30EL | M10×1.5×18(15) | 28 800 | SS30EL | M10×1.5×18(15) | 27 300 |
| | | | LS30EM | M10×1.5×12(14.5) <8.6> | 28 800 | SS30EM | M10×1.5×12(14.5) <8.6> | 27 300 |
| NS35CL | M8×1.25×12 | 34 500 | LS35CL | M8×1.25×12 | 26 000 | SS35CL | 9×12(14.5) | 27 300 |
| NS35AL | M8×1.25×12 | 52 500 | LS35AL | M8×1.25×12 | 40 000 | SS35AL | M8×1.25×12 | 26 000 |
| NS35JM | M10×1.5×13(14.5) <8.6> | 34 500 | LS35JM | M10×1.5×20(15) | 26 000 | SS35JM | M10×1.5×20(15) | 26 000 |
| | | | LS35JL | M10×1.5×13(14.5) <8.6> | 26 000 | SS35JL | M10×1.5×13(14.5) <8.6> | 26 000 |
| NS35EM | M10×1.5×13(14.5) <8.6> | 52 500 | LS35EL | M10×1.5×20(15) | 40 000 | SS35EL | M10×1.5×20(15) | 38 000 |
| | | | LS35EM | M10×1.5×13(14.5) <8.6> | 40 000 | SS35EM | M10×1.5×13(14.5) <8.6> | 38 000 |
| | | | LS35FL | 9×13(14.5) | 40 000 | SS35FL | 9×13(14.5) | 38 000 |

- Notes** 1) Parenthesized dimensions are for items made of stainless steel.
2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.

In VH series, the slide types in flange shape are focused.

| After focused | | | Before focused | | |
|---------------|---|---|----------------|---|---|
| Model No. | Ball slide mounting hole dimension M×pitch×ℓ <Q ₂ > [mm] | Dynamic load rating C ₅₀ [N] | Model No. | Ball slide mounting hole dimension M×pitch×ℓ Q ₁ ×ℓ [mm] | Dynamic load rating C ₅₀ [N] |
| VH15EM | M5×0.8×7 <4.4> | 14 200 | VH15EL | M5×0.8×8 | 10 800 |
| VH15EM | M5×0.8×7 <4.4> | 14 200 | VH15FL | 4.5×7 | 10 800 |
| VH15GM | M5×0.8×7 <4.4> | 18 100 | VH15GL | M5×0.8×8 | 14 600 |
| VH15GM | M5×0.8×7 <4.4> | 18 100 | VH15HL | 4.5×7 | 14 600 |
| VH20EM | M6×1.9×5 <5.3> | 23 700 | VH20EL | M6×1×10 | 17 400 |
| VH20EM | M6×1.9×5 <5.3> | 23 700 | VH20FL | 6×9.5 | 17 400 |
| VH20GM | M6×1.9×5 <5.3> | 30 000 | VH20GL | M6×1×10 | 23 500 |
| VH20GM | M6×1.9×5 <5.3> | 30 000 | VH20HL | 6×9.5 | 23 500 |
| VH25EM | M8×1.25×10(11.5) <6.8> | 33 500 | VH25EL | M8×1.25×16(12) | 25 600 |
| VH25EM | M8×1.25×10(11.5) <6.8> | 33 500 | VH25FL | 7×10(11.5) | 25 600 |
| VH25GM | M8×1.25×10(11.5) <6.8> | 45 500 | VH25GL | M8×1.25×16(12) | 34 500 |
| VH25GM | M8×1.25×10(11.5) <6.8> | 45 500 | VH25HL | 7×10(11.5) | 34 500 |
| VH30EM | M8×1.25×12(14.5) <8.6> | 47 000 | VH30EL | M10×1.5×18(15) | 35 500 |
| VH30EM | M8×1.25×12(14.5) <8.6> | 47 000 | VH30FL | 9×12(14.5) | 35 500 |
| VH30GM | M8×1.25×12(14.5) <8.6> | 61 000 | VH30GL | M10×1.5×18(15) | 46 000 |
| VH30GM | M8×1.25×12(14.5) <8.6> | 61 000 | VH30HL | 9×12(14.5) | 46 000 |
| VH35EM | M10×1.5×13 <8.6> | 62 500 | VH35EL | M10×1.5×20 | 47 500 |
| VH35EM | M10×1.5×13 <8.6> | 62 500 | VH35FL | 9×13 | 47 500 |
| VH35GM | M10×1.5×13 <8.6> | 81 000 | VH35GL | M10×1.5×20 | 61 500 |
| VH35GM | M10×1.5×13 <8.6> | 81 000 | VH35HL | 9×13 | 61 500 |
| VH45EM | M12×1.75×15 <10.5> | 107 000 | VH45EL | M12×1.75×24 | 81 000 |
| VH45EM | M12×1.75×15 <10.5> | 107 000 | VH45FL | 11×15 | 81 000 |
| VH45GM | M12×1.75×15 <10.5> | 131 000 | VH45GL | M12×1.75×24 | 99 000 |
| VH45GM | M12×1.75×15 <10.5> | 131 000 | VH45HL | 11×15 | 99 000 |
| VH55EM | M14×2×18 <12.5> | 158 000 | VH55EL | M14×2×28 | 119 000 |
| VH55EM | M14×2×18 <12.5> | 158 000 | VH55FL | 14×18 | 119 000 |
| VH55GM | M14×2×18 <12.5> | 193 000 | VH55GL | M14×2×28 | 146 000 |
| VH55GM | M14×2×18 <12.5> | 193 000 | VH55HL | 14×18 | 146 000 |

- Notes** 1) Parenthesized dimensions are for items made of stainless steel.
2) Basic dynamic load rating is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball slide mounting surface.

A-6 Other Linear Rolling Guide Products

A-6-1 Linear Rolling Bushing

1. Features

(1) Low friction

Low friction owes to its design: Balls come into point contacts with raceway surface: the balls smoothly re-circulate. There is very little stick slip.

(2) Low noise

Noise level is low due to the ball retainer which is made of a synthetic resin.

(3) High precision

Due to NSK's superb quality control, precision is guaranteed.

(4) Dust prevention

Series with seal is available. The seal has small friction, and is highly durable. Highly dust-preventive double-lip system has been adopted.

(5) Superb durability

The material of outer sleeve is vacuum degassed, highly pure, and is heat-treated with good expertise.

2. Models

There are three models

(1) Standard type LB (Fig. 1)

This model is the most commonly used, and is the only model that comes with a seal and in super precision grade.



Fig. 1 Standard type LB

(2) Adjustable clearance type LB-T (Fig. 2)

A part of the outer sleeve is cut open toward the axial direction. Used with a housing which can adjust inside diameter, it makes minute adjustment of the clearance between the linear shaft and the inscribed circle (an imaginary circle that connects the summit of the ball) of linear rolling bushing.



Fig. 2 Adjustable Clearance type LB-T

(3) Open type LB-K (Fig. 3)

A cut is made in the outer sleeve and retainer, to a width equivalent to one row of the retainer, to the axial direction. The opening is used to hold this linear rolling bushing by a support or base to prevent a long linear shaft from bending.



Fig. 3 Open type LB-K

3. Accuracy

(1) Accuracy grades

- > Standard type LB.....High precision grade S, and super precision grade SP are available.
 - > Space adjustment type LB-T.....
 - > Open type LB-K.....
- } High precision grade S is available.

(2) Tolerance of rolling linear bushing, linear shaft and housing

Table 1 Tolerance for inscribed circle of the linear rolling bushing and shaft diameter

Unit: μm

| Nominal dimension/ inscribed circle diameter /shaft diameter (mm) | | Tolerance/inscribed circle diameter ^{*1} | | | | Tolerance/width B | | Tolerance/slot distance of retaining rings Bn | | Recommended tolerance/ shaft diameter | | | |
|---|---------|--|-------|----------------------------------|-------|---|-------|---|-------|--|-------|----------------------------------|-------|
| | | High precision grade S | | Super high precision grade SP | | High precision grade S Super high precision grade SP | | High precision grade S Super high precision grade SP | | High precision grade S | | Super high precision grade SP | |
| over | or less | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower |
| 2.5 | 6 | 0 | -8 | 0 | -5 | 0 | -120 | +240 | -240 | -6 | -14 | -4 | -9 |
| 6 | 10 | 0 | -8 | 0 | -5 | 0 | -120 | +240 | -240 | -6 | -15 | -4 | -10 |
| 10 | 18 | 0 | -8 | 0 | -5 | 0 | -120 | +240 | -240 | -6 | -17 | -4 | -12 |
| 18 | 30 | 0 | -10 | 0 | -6 | 0 | -120 | +240 | -240 | -6 | -19 | -4 | -13 |
| 30 | 50 | 0 | -12 | 0 | -8 | 0 | -120 | +240 | -240 | -7 | -23 | -5 | -16 |

Table 2 Tolerance of linear rolling bush outside diameter, and housing inside diameter


Unit: μm

| Nominal dimension/ inscribed circle diameter /shaft diameter (mm) | | Tolerance/outside diameter D ^{*1} | | | | Eccentricity ^{*2} | Tolerance/housing inside diameter | | | |
|---|---------|--|-------|----------------------------------|-------|----------------------------------|-----------------------------------|-------|----------------------------------|-------|
| | | High precision grade S | | Super high precision grade SP | | Super high precision grade SP | High precision grade S | | Super high precision grade SP | |
| over | or less | upper | lower | upper | lower | Maximum | upper | lower | upper | lower |
| 2.5 | 6 | 0 | -10 | 0 | -7 | 8 | +12 | 0 | +8 | 0 |
| 6 | 10 | 0 | -10 | 0 | -7 | 8 | +15 | 0 | +9 | 0 |
| 10 | 18 | 0 | -10 | 0 | -7 | 8 | +18 | 0 | +11 | 0 |
| 18 | 30 | 0 | -12 | 0 | -8 | 9 | +21 | 0 | +13 | 0 |
| 30 | 50 | 0 | -14 | 0 | -9 | 10 | +25 | 0 | +16 | 0 |

*1) For adjustable clearance type and open type, figures indicate tolerances before the cut is made.

*2) Eccentricity means the run-out of offset between the centers of outer sleeve diameter and inscribed circle diameter.

4. Composition of Reference Number

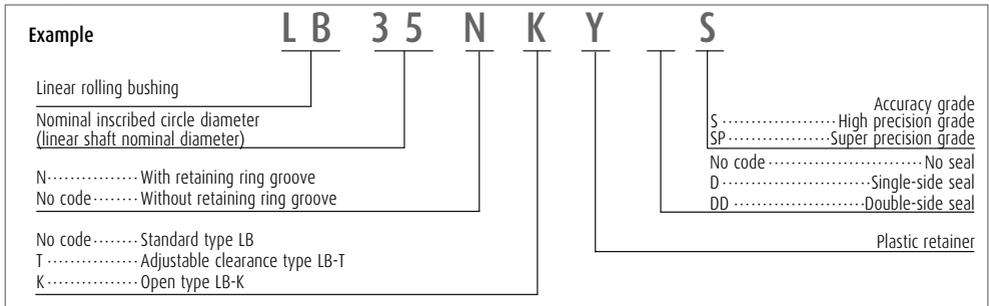

5. Lubrication and Friction

(1) Grease lubrication

① Supply at initial stage

At time of delivery, the linear rolling bushing has a coat of rust preventive agent. Wipe it off with clean kerosene or organic solvent. Dry with an air blower, etc., then apply grease.

Lithium soap based greases with consistency level of 2 are generally used (e.g. NSK Grease LR3, PS2, and AS2).

② Replenishment

- Sealed linear rolling bushing is designed to be a disposal item. Therefore, a replenishing grease is considered to be not required. However, if replenishment becomes necessary due to dirty environment or wear of the seal, remove the linear bushing from the shaft and replenish lubricant in the same manner as the initial lubricating.
- For items without seal, wipe off old grease from the linear shaft, and apply new grease.
- Intervals of replenishments are every 100 km in a dirty environment, 500 km in a slightly dirty environment, 1 000 km or no replenishing for a normal environment.

(2) Oil lubrication

It is not necessary to wash off the rust preventive agent applied before delivery. Use an oil of ISO viscosity grade VG15-100. Drip the oil on the linear shaft by an oil supply system.

Temperature to use

| | |
|---------------|----------------------|
| -30°C to 50°C | Viscosity VG15 - 46 |
| 50°C to 80°C | Viscosity VG46 - 100 |

Lubricant is removed by the seal if the linear ball bearing has a seal. Therefore, the drip method cannot be used except for single-seal types.

(3) Friction coefficient

The linear rolling bushing has a small dynamic friction coefficient. This contributes to low power loss and temperature rise.

According to Fig. 4, dynamic friction coefficient is merely 0.001-0.004. Also, at the speed of under 60 m/min, there is no danger of the temperature rising.

Friction force can be obtained by the following formula.

$$F = \mu \cdot P \dots \dots \dots (1)$$

In this formula:

F : Friction force (N)

P : Load (vertical load to the shaft center line) (N)

μ : Friction coefficient (dynamic or static)

For a seal type, a seal resistance of 0.3 to 2.40 N is added to the above.

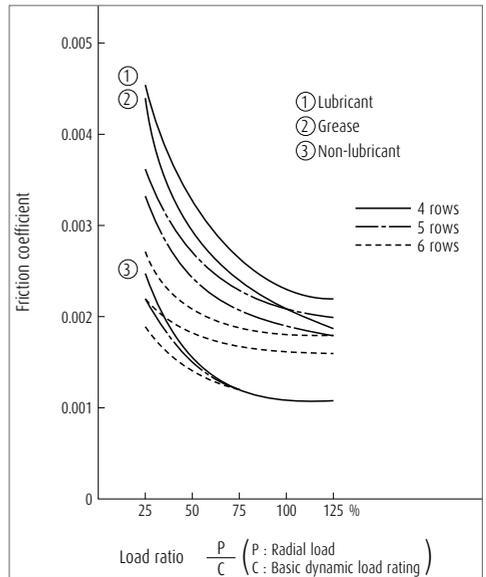


Fig. 4 Dynamic friction coefficient of linear rolling bushing

6. Range of Conditions to Use

Generally, use under the following conditions.
Please consult NSK when values exceed the ranges given below.

Temperature: - 30°C to 80°C

Speed: Up to 120 m/min
(excluding oscillation and short strokes)

7. Preload and Rigidity

The linear rolling bushing is normally used without applying preload. If high positioning accuracy is required, set the clearance between the linear rolling bush and the shaft at the range of 0 to 5 μm. Slight preload is a general rule (1% of basic dynamic load rating C -- see the dimension table). The dimension table shows theoretical rigidity K when clearance with the shaft is zero, and a load of 0.1 C is applied to the summit of the ball.

Rigidity K_N , when load is not 0.1C, is obtained by the following formula.

$$K_N = K (P/0.1C)^{1/3} \dots\dots\dots (2)$$

In this formula:

K : Rigidity value in the dimension table (N/μm)

P : Radial load (N)

When the load is applied between the ball rows, the load becomes 1.122 times for 4 ball rows; 0.959 times for 5 ball rows; 0.98 times for 6 ball rows.

8. Basic Load Rating and Rated Life

(1) Basic dynamic load rating

Basic dynamic load rating C is: A radial load which allows 90% of a group of linear rolling bush to run a distance of 50 km without suffering damage when they are moved individually.

There is a relationship as below between C and the life

$$L = 50 f_L^3 \dots\dots\dots (3)$$

$$f_L = C/P \dots\dots\dots (4)$$

In this formula:

L : Rated life (km)

P : Radial load (N)

f_L : Life factor (Refer to Fig. 5)

This formula is used provided that the shaft hardness is HRC58 or higher. Rated life is shorter if the shaft is softer.

In this case, find the hardness factor f_H from Fig. 6, and multiply the value.

$$f_L = C \cdot f_H / P \dots\dots\dots (5)$$

Or

$$C = P \cdot f_L / f_H \dots\dots\dots (6)$$

Life in time can be obtained by the following formula, substituting for given stroke length, cycle numbers, and running distance:

$$L_h = (L/1.2 \cdot S \cdot n) \times 10^4 \dots\dots\dots (7)$$

In this formula:

L_h : Life hours (h)

L : Rated life (km)

S : Stroke (mm)

n : Cycles per minute (cpm)

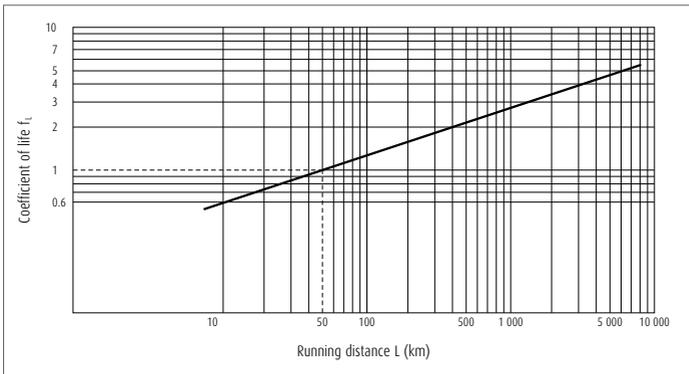


Fig. 5 Relationship between life factor and running distance

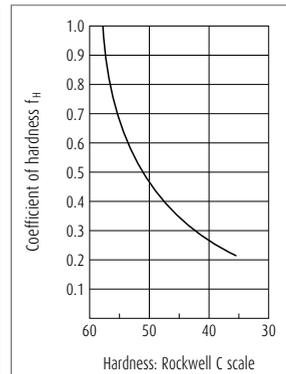


Fig. 6 Hardness factor

(2) Basic static load rating

It is a load that the total permanent deformation of outer sleeve, ball and shaft at the contact point, becomes 0.01% of the ball diameter when this load is applied to the rolling bushing. It is understood in general that this is the applicable load limit which causes this much permanent deformation without hampering operation.

(3) Calculation example

What is the appropriate rolling bushing size if required life is 5 000 hours?

Conditions are:

- Three linear rolling bushings are installed in two parallel shafts, and support a reciprocating table.
- Load 450 N is equally distributed to the three bushings.
- The table is required to reciprocate on the shafts at 200 times per minute at a stroke of 70 mm.
- Hardness of the shaft: HRC 55
 $450/3 = 150 \text{ (N)}$
- Load per linear rolling bushing is:
 From Formula (7), the required life when indicated in distance is:

$$L = 5 \times 10^3 \times 1.2 \times 70 \times 200/10^4 = 8.4 \times 10^3 \text{ (km)}$$

From Fig. 5 and Fig. 6,

Life factor $f_L = 5.6$

Hardness factor $f_H = 0.65$

Therefore, from Formula (6),

$$C = P \times f_L / f_H \\ = 150 \times 5.6 / 0.65 = 1\,292 \text{ (N)}$$

Based on the above, select linear rolling bushing LB30NY with shaft diameter of 30 mm, basic dynamic load rating of 1 400 N.

(4) Compensating load rating by ball row position

Load rating of the linear rolling bushing changes by the position of the ball circuit rows.

Permissible load is larger when it is applied to the middle of the ball circuit rows than when it is applied directly above the ball row (Fig. 7).

(Radial clearance set at zero in this case.)

Load ratings in the dimension table are in case "A" when it is applied directly above the ball circuit row. If used as in case "B," the load rating becomes larger (refer to Fig. 7).

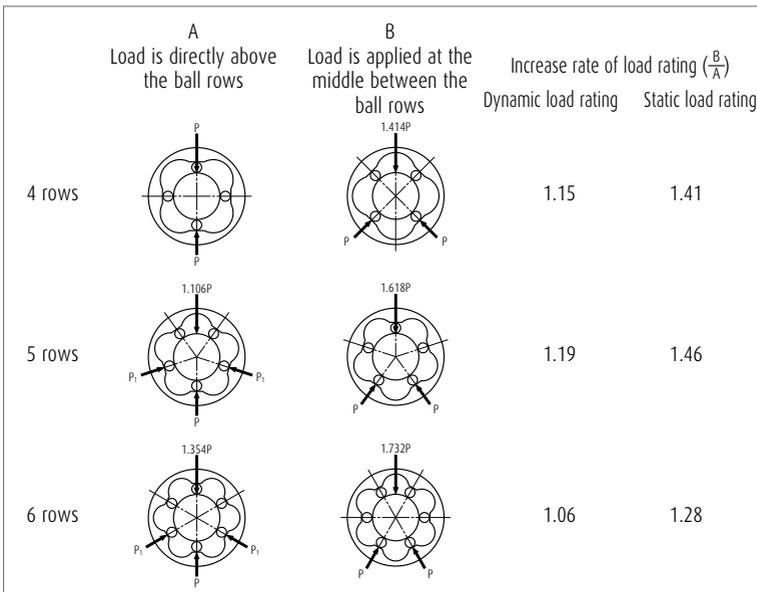


Fig. 7 Increasing rate of load rating by position of ball row (B/A)

9. Shaft Specification

Harden the shaft surface where the balls run with heat treatment to provide the following values.

- Surface hardness: HRC58 or over
- Depth of core hardness at HRC50 or higher
 - Depth for LB3; 0.3 mm or deeper
 - Depth for LB50; 1.2 mm or deeper

Roughness of the surface should be:

- For SP grade, and "the clearance for fit" with the ball bushing less than $5\ \mu\text{m}$ -
 - Less than 0.8 S
- For SP grade with "the clearance" of more than $5\ \mu\text{m}$, and for S grade -
 - Less than 1.2 S

Bending should be:

- LB3 -- $15\ \mu\text{m}/100\ \text{mm}$
- LB50 -- $100\ \mu\text{m}/1\ 000\ \text{mm}$

An appropriate clearance for normal use conditions can be obtained when the tolerance in shaft diameter remains within the recommended range (refer to **Table 1** on page A324). For operations which require particular accuracy, select the shaft diameter which creates a clearance in the range of 0 to 0.005 (mm) for example, when assembled with the rolling bushing.

10. Dust Proof

Select a linear rolling bushing with seals to prevent moisture or foreign matters which are floating in the air from entering.

11. Installation

(1) Combination of shaft and linear rolling bushing

When the linear rolling bushing is installed in a linear motion table for its reciprocating movement, it is necessary to prevent the table from rotating.

In general, for this reason, two shafts installed with two linear rolling bushings on each are used.

Fig. 8 is an installation example.

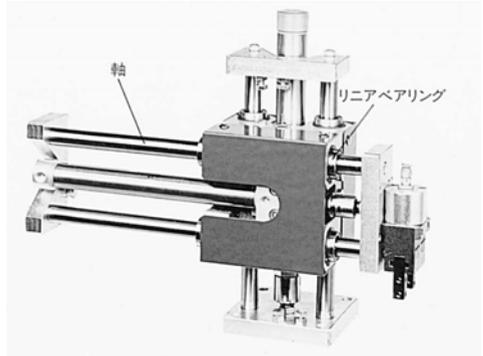


Fig. 8 Installation example

(2) Installation of linear rolling bushing

① Standard type installation

Fig. 9 shows a method using a retainer ring. Linear rolling bushing can also be secured to the housing using a stop plate and/or screw.

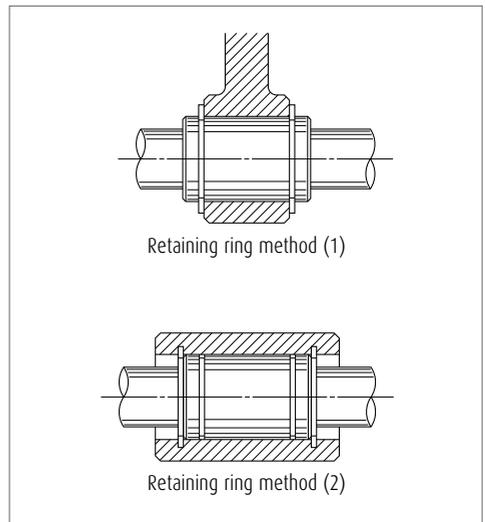


Fig. 9 Installation using retaining rings

- Housing inside diameter should be of a recommended value (**Table 2**, page A324). The entire rolling bushing contracts and gives excessive preload if: the inside diameter is small; the roundness or cylindricity is excessive. This may result in an unexpected failure.
- To install linear rolling bushing, use a tool (**Fig. 10**) and squeeze it in, or use a holder and lightly pound it.

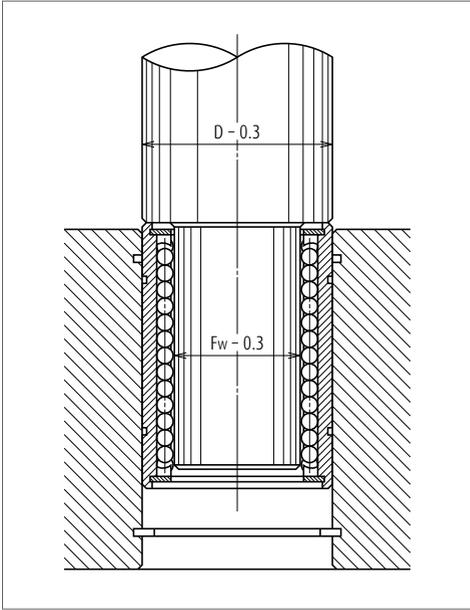


Fig. 10 Tool to install a linear rolling bushing

② Installation of adjustable clearance type

Use a housing which can adjust the inside diameter of the rolling bushing. This way, the clearance between the rolling bushing and the linear shaft can be easily adjusted. Arrange the cut-open section of the rolling bushing at a 90-degree angle to the housing's cut-open section. This is the most effective way to evenly distribute deformation toward circumferential direction.

The tolerance of shaft diameter of the adjustable clearance type should be within the recommended range (refer to **Table 1** on page A324). As a general rule, set the preload at slight or light volume. (Do not provide excessive preload.) Use a dial gauge to measure and adjust clearance. However, here is an easy method to adjust.

First, loosen the housing until shaft turns freely. Then narrow the clearance gradually. Stop at the point when the shaft rotation becomes heavy. This creates a clearance zero or light preload.

③ Installation of open type

Use with clearance or with light preload.

Keep the tolerance in shaft diameter within the recommended range (refer to **Table 1** on page A324), so the preload shall not become excessive.

(Unlike the adjustable clearance type, clearance cannot be narrowed by rotating the shaft because the state of shaft rotation does not indicate how narrow the space has become. Narrowing clearance requires caution for open type.)

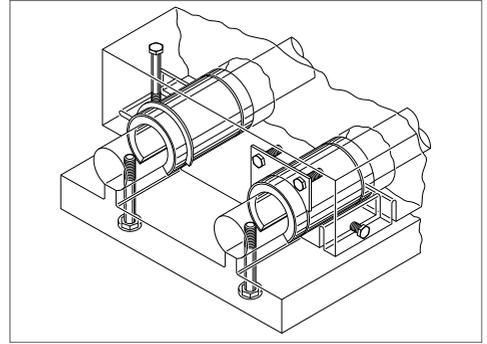



Fig. 11 Installation example of an open type

(3) Precaution for installing a shaft in the linear rolling bushing

- 1) To install two shafts parallel to each other, first install one shaft accurately. Use this as a reference, and install the other parallel to the first shaft. This makes installation easy.
- 2) Do not incline the shaft when inserting it into the linear rolling bushing. Do not force it to enter by twisting. This deforms the retainer, and causes the balls to fall out.
- 3) Do not use the shaft for rotating movement after inserting the shaft to the linear rolling bushing. The balls slip and damage the shaft.
- 4) Do not twist the shaft after it is inserted to the linear rolling bushing. The pressure scars the shaft.

12. Dimension tables

Model LB (standard type), no seal

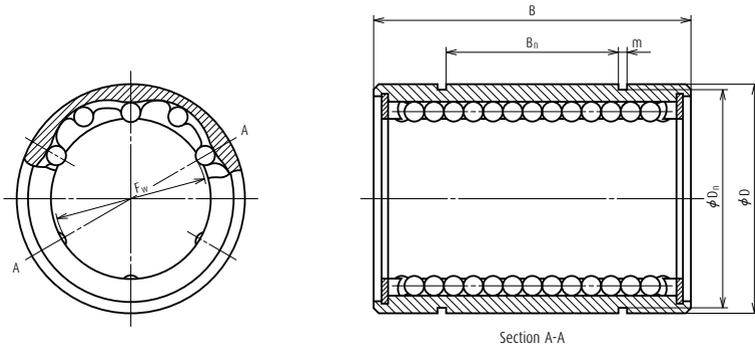


Unit: mm

| Model No. | Inscribed circle diameter F_w | Outside diameter D | Length B | Retaining ring groove | | | Stiffness ^{*1} (N/ μ m) | Number of ball circuit | Weight (kg) (Reference only) | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|----------------------|------------------------------------|-------------------------|---------------|-----------------------|--------------|--------------------------|---|------------------------|---------------------------------|--------------------------------------|---------------------------------------|
| | | | | Distance B_n | Width m | Bottom diameter D_n | | | | | |
| LB3Y | 3 | 7 | 10 | — | — | — | 3 | 4 | 0.0016 | 20 | 39 |
| LB4Y | 4 | 8 | 12 | — | — | — | 4.5 | 4 | 0.0022 | 29 | 59 |
| LB6NY | 6 | 12 | 19 | 11 | 1.15 | 11.5 | 7 | 4 | 0.0074 | 74 | 147 |
| LB8ANY ^{*2} | 8 | 15 | 17 | 09 | 1.15 | 14.3 | 5.5 | 4 | 0.0094 | 78 | 118 |
| LB8NY | 8 | 15 | 24 | 15 | 1.15 | 14.3 | 9.5 | 4 | 0.014 | 118 | 226 |
| LB10NY | 10 | 19 | 29 | 19 | 1.35 | 18.0 | 12 | 4 | 0.025 | 206 | 355 |
| LB12NY | 12 | 21 | 30 | 20 | 1.35 | 20.0 | 13 | 4 | 0.028 | 265 | 500 |
| LB13NY | 13 | 23 | 32 | 20 | 1.35 | 22.0 | 13 | 4 | 0.040 | 294 | 510 |
| LB16NY | 16 | 28 | 37 | 23 | 1.65 | 26.6 | 14 | 4 | 0.063 | 440 | 635 |
| LB20NY | 20 | 32 | 42 | 27 | 1.65 | 30.3 | 19 | 5 | 0.088 | 610 | 1 010 |
| LB25NY | 25 | 40 | 59 | 37 | 1.90 | 38.0 | 35 | 6 | 0.267 | 1 000 | 1 960 |
| LB30NY | 30 | 45 | 64 | 40 | 1.90 | 42.5 | 41 | 6 | 0.305 | 1 400 | 2 500 |
| LB35NY | 35 | 52 | 70 | 45 | 2.20 | 49.0 | 48 | 6 | 0.440 | 1 510 | 2 800 |
| LB40NY | 40 | 60 | 80 | 56 | 2.20 | 57.0 | 54 | 6 | 0.520 | 2 230 | 4 000 |
| LB50NY | 50 | 80 | 100 | 68 | 2.70 | 76.5 | 69 | 6 | 1.770 | 4 100 | 7 100 |

*1) Refer to Section (7).

*2) Semi-standard item of which length B is shorter than standard.

Model LB (standard type), with seal

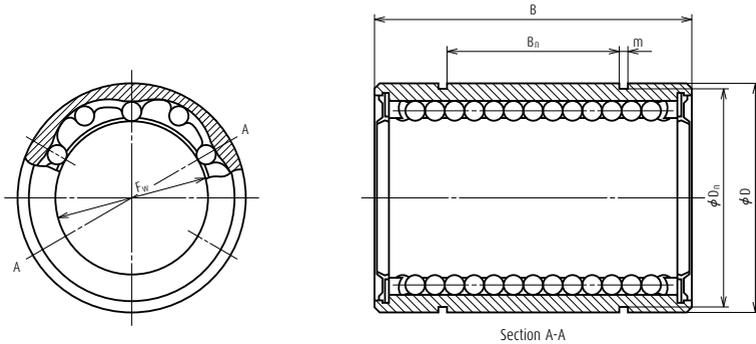


Unit: mm

| *Model No. | Inscribed circle diameter F_w | Outside diameter D | Length B | Retaining ring groove | | | Number of ball circuit | Weight (kg) (Reference only) | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|------------|------------------------------------|-------------------------|---------------|-----------------------|--------------|--------------------------|------------------------|---------------------------------|--------------------------------------|---------------------------------------|
| | | | | Distance B_n | Width m | Bottom diameter D_n | | | | |
| LB6NYDD | 6 | 12 | 19 | 11 | 1.15 | 11.5 | 4 | 0.0074 | 74 | 147 |
| LB8ANYDD | 8 | 15 | 17 | 9 | 1.15 | 14.3 | 4 | 0.0094 | 78 | 118 |
| LB8NYDD | 8 | 15 | 24 | 15 | 1.15 | 14.3 | 4 | 0.014 | 118 | 226 |
| LB10NYDD | 10 | 19 | 29 | 19 | 1.35 | 18 | 4 | 0.025 | 206 | 355 |
| LB12NYDD | 12 | 21 | 30 | 20 | 1.35 | 20 | 4 | 0.028 | 265 | 500 |
| LB13NYDD | 13 | 23 | 32 | 20 | 1.35 | 22 | 4 | 0.040 | 294 | 510 |
| LB16NYDD | 16 | 28 | 37 | 23 | 1.65 | 26.6 | 4 | 0.063 | 440 | 635 |
| LB20NYDD | 20 | 32 | 42 | 27 | 1.65 | 30.3 | 5 | 0.088 | 610 | 1 010 |
| LB25NYDD | 25 | 40 | 59 | 37 | 1.9 | 38 | 6 | 0.267 | 1 000 | 1 960 |
| LB30NYDD | 30 | 45 | 64 | 40 | 1.9 | 42.5 | 6 | 0.305 | 1 400 | 2 500 |
| LB35NYDD | 35 | 52 | 70 | 45 | 2.2 | 49 | 6 | 0.440 | 1 510 | 2 800 |
| LB40NYDD | 40 | 60 | 80 | 56 | 2.2 | 57 | 6 | 0.520 | 2 230 | 4 000 |
| LB50NYDD | 50 | 80 | 100 | 68 | 2.7 | 76.5 | 6 | 1.770 | 4 100 | 7 100 |

*) Single-seal type is indicated as LB-D.


Model LB-T (Adjustable clearance type)

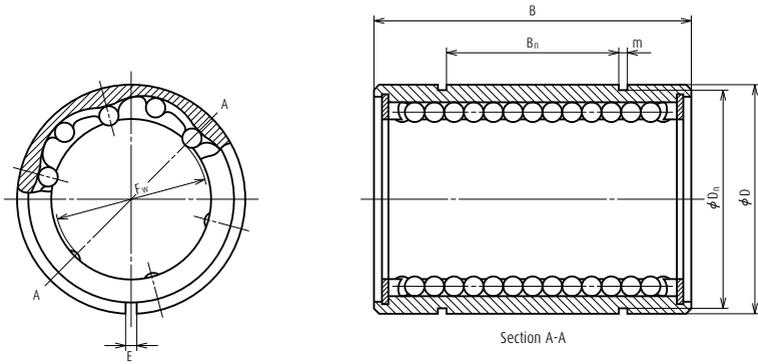

Unit: mm

| Model No. | Inscribed circle diameter F_w | Outside diameter D | Length B | Opening width E | Retaining ring groove | | | Number of ball circuit | Weight (kg) (Reference only) | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|-----------|------------------------------------|-------------------------|---------------|----------------------|-----------------------|--------------|--------------------------|------------------------|---------------------------------|--------------------------------------|---------------------------------------|
| | | | | | Distance B_n | Width m | Bottom diameter D_n | | | | |
| LB6NTY | 6 | 12 | 19 | 0.8 | 11 | 1.15 | 11.5 | 4 | 0.0073 | 74 | 147 |
| LB8ANTY | 8 | 15 | 17 | 1 | 9 | 1.15 | 14.3 | 4 | 0.0093 | 78 | 118 |
| LB8NTY | 8 | 15 | 24 | 1 | 15 | 1.15 | 14.3 | 4 | 0.014 | 118 | 226 |
| LB10NTY | 10 | 19 | 29 | 1.5 | 19 | 1.35 | 18 | 4 | 0.025 | 206 | 355 |
| LB12NTY | 12 | 21 | 30 | 1.5 | 20 | 1.35 | 20 | 4 | 0.028 | 265 | 500 |
| LB13NTY | 13 | 23 | 32 | 1.5 | 20 | 1.35 | 22 | 4 | 0.040 | 294 | 510 |
| LB16NTY | 16 | 28 | 37 | 1.5 | 23 | 1.65 | 26.6 | 4 | 0.062 | 440 | 635 |
| LB20NTY | 20 | 32 | 42 | 2 | 27 | 1.65 | 30.3 | 5 | 0.087 | 610 | 1 010 |
| LB25NTY | 25 | 40 | 59 | 2 | 37 | 1.9 | 38 | 6 | 0.265 | 1 000 | 1 960 |
| LB30NTY | 30 | 45 | 64 | 2 | 40 | 1.9 | 42.5 | 6 | 0.302 | 1 400 | 2 500 |
| LB35NTY | 35 | 52 | 70 | 3 | 45 | 2.2 | 49 | 6 | 0.44 | 1 510 | 2 800 |
| LB40NTY | 40 | 60 | 80 | 3 | 56 | 2.2 | 57 | 6 | 0.52 | 2 230 | 4 000 |
| LB50NTY | 50 | 80 | 100 | 3 | 68 | 2.7 | 76.5 | 6 | 1.75 | 4 100 | 7 100 |

Model LB-K (Open type)

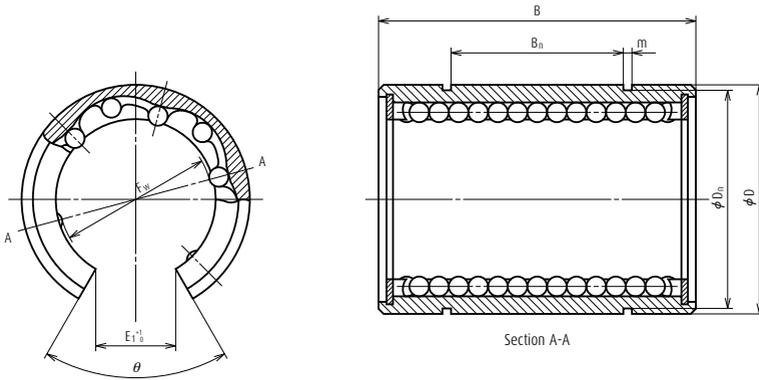

Unit: mm

| Model No. | Inscribed circle diameter F_w | Outside diameter D | Length B | Opening width E_1 | Opening angle θ | Retaining ring groove | | | Number of ball circuit | Weight (kg) (Reference only) | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|-----------|------------------------------------|-------------------------|---------------|------------------------|---------------------------|-----------------------|-------|-----------------|------------------------|------------------------------|-----------------------------------|------------------------------------|
| | | | | | | Distance | Width | Bottom diameter | | | | |
| | | | | | | B_n | m | D_n | | | | |
| LB20NKY | 20 | 32 | 42 | 11 | 60° | 27 | 1.65 | 30.3 | 4 | 0.072 | 610 | 1 010 |
| LB25NKY | 25 | 40 | 59 | 13 | 50° | 37 | 1.9 | 38 | 5 | 0.220 | 1 000 | 1 960 |
| LB30NKY | 30 | 45 | 64 | 15 | 50° | 40 | 1.9 | 42.5 | 5 | 0.260 | 1 400 | 2 500 |
| LB35NKY | 35 | 52 | 70 | 17 | 50° | 45 | 2.2 | 49 | 5 | 0.370 | 1 510 | 2 800 |
| LB40NKY | 40 | 60 | 80 | 20 | 50° | 56 | 2.2 | 57 | 5 | 0.440 | 2 230 | 4 000 |
| LB50NKY | 50 | 80 | 100 | 25 | 50° | 68 | 2.7 | 76.5 | 5 | 1.480 | 4 100 | 7 100 |

A-6-2 Roller Pack

1. Structure

A roller pack comprises a main body which supports load from the guide way block via two rows of rollers; an end cap which changes the direction of the re-circulation of rollers at the end of the main body; a side plate which guides the rollers (**Fig. 1**). Roller pack is one of the linear rolling guides, where rollers are allowed to re-circulate infinitely.

There is a plate spring attached to a side of roller pack to prevent roller pack from falling out when it is turned upside down after assembly.

Other component of the roller pack is spring pin. Spring pin is on the top surface of the roller pack, and makes installation of wedge block and fitting plate easier.

Wedge block is a unit to provide preload (**Fig. 3**) to roller pack; a fitting plate (**Fig. 2**), functioning like a pivot, adjusts misalignment of roller pack automatically. Wedge of wedge block moves up and down to apply preload by turning the adjust screw.

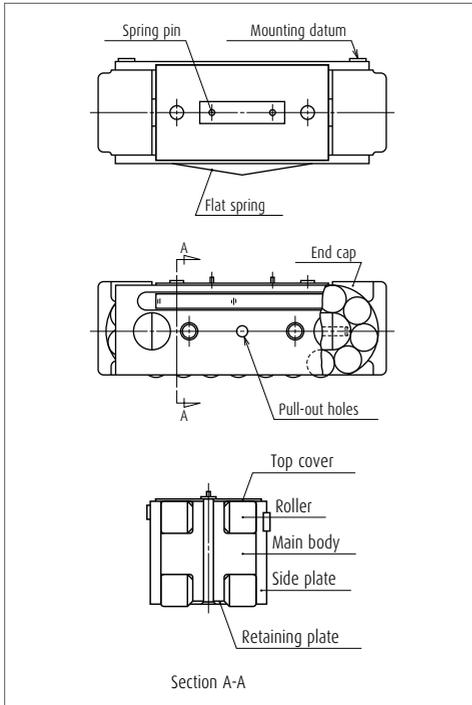


Fig. 1 Roller pack



Photo 1 Roller pack

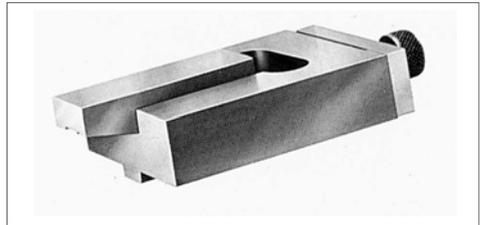


Photo 2 Wedge block

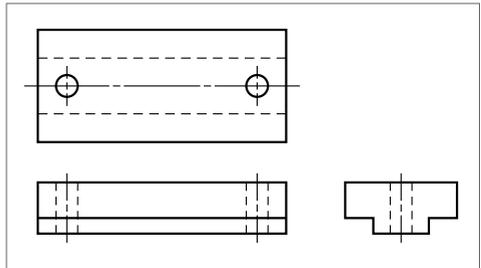


Fig. 2 Fitting plate

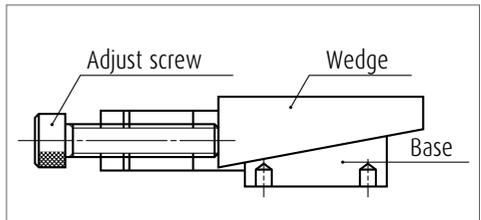


Fig. 3 Wedge block

2. Features

Roller pack has two remarkable characteristics other linear roller guide bearings do not have.

(1) No roller skewing

If the roller is long relative to its diameter, the roller inclines during operation. This phenomenon is called skewing. Skewing causes problems such as sudden rise in friction force. However, a short roller lacks large load carrying capacity. The roller introduced here solved the skewing problem, yet has a large load carrying capacity: short rollers are combined into double rows.

(2) Load is applied equally.

This is due to a "fitting plate," a result of "changed way of conceiving." Installation is quite easy: Merely place the fitting plate through the two holes to spring pins. The stop pins are inserted to holes on the top surface of the roller pack. The contact area between the fitting plate and the main body is made small. This way, the self-alignment is automatically accomplished by elastic contact of both parts.

This distributes an equal load to the rollers, far extending the life, compared to conventional roller linear guides.

Other characteristics include: Easy to provide preload by the wedge block; can be installed to vertical shaft; and reduction in noise level.

3. Accuracy

The height tolerance of roller pack is $10\ \mu\text{m}$. Roller packs are grouped into a size difference of every $2\ \mu\text{m}$ (coded by A to E) before delivery (Table 1).

Table 1 Height Classification

| Category | | | Code |
|----------|---------|----|------|
| over | or less | | |
| +3 | - | +5 | A |
| +1 | - | +3 | B |
| -1 | - | -1 | C |
| -3 | - | -1 | D |
| -5 | - | -3 | E |

Unit: μm

4. Rigidity

Fig. 4 shows the relationship between load and deformation. This includes deformation caused by contact between: the rollers and main body; the rollers and guide way surface; the main body and fitting plate.

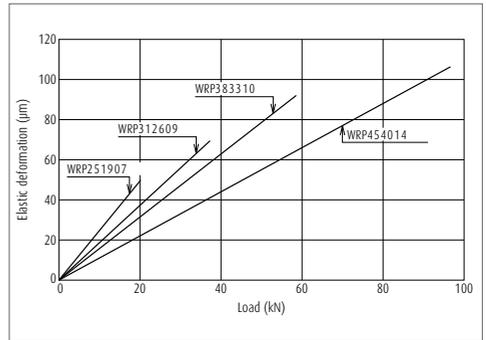


Fig. 4 Elastic deformation of the roller pack

5. Preload

Fig. 5 shows conversions of tightening torque of the wedge block adjust screw into preload volume. Use a dial gauge for accurate measurement.

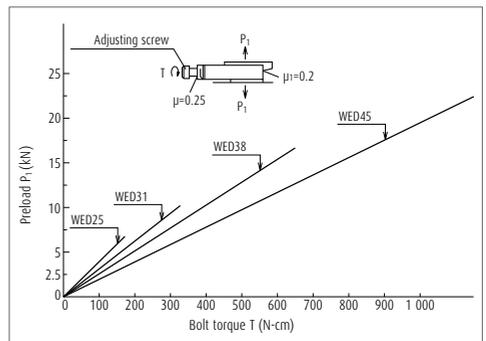


Fig. 5 Tightening torque of the adjust screw, and preload volume

6. Friction and Lubrication

(1) Lubricants and volume

Mineral oils are commonly used. Since roller pack is used under a relatively heavy load, the oil should, ideally, have high viscosity and provide a strong film. Select from JIS viscosity 32-150.

Criteria of oil supply per roller pack Q (cc/h) can be calculated by the following formula.

$$Q \geq S \times 1/4 \dots\dots\dots(1)$$

In this formula, S (stroke) is shown in meters. The oil volume, when the stroke is 1 m, per roller pack is more than 0.25 (cc/h). It is more desirable to supply a small amount of oil at short intervals than supplying a large amount at one time. In case of grease lubrication, use a grease of consistency 2. Albania EP2 is widely used.

(2) Friction coefficient

Starting friction coefficient is significantly small at under 0.005.

(3) Seal

It is necessary to install a wiper seal to the guide way surface to prevent foreign matters (swarf from cutting, and other dust) from entering the roller pack to enjoy the full benefit of the designed life of it. The material of the seal should have strong resistance to oil and wear. Felt and synthetic rubber (acrylonitril butadiene rubber) are some of the suitable materials. Fig. 6 shows a general method to install the seals.

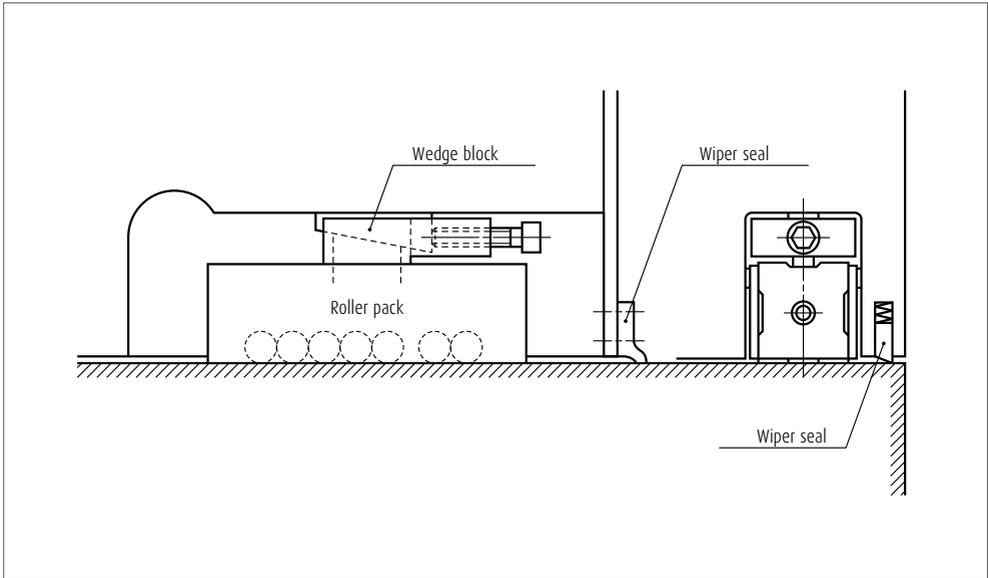


Fig. 6 Installation of seal

7. Installation

(1) Installation and applying preload

As shown in **Fig. 7**, it is basic that a fitting plate is installed on the roller pack which receives load, and a wedge block is installed on the roller pack which receives no load, but is only used for preload. All components should be secured with a stop pin, facing toward the direction of movement. To cut costs for processing, it is recommended to divide the pocket (which contains roller pack) into some blocks and secure them with bolts (**Fig. 7**). Preload is provided by the wedge block. Estimate the actual load beforehand, so the preload shall not be lost when a load is applied. A load variation equivalent to up to two times of the preload volume can be absorbed in this case.

(Take into consideration the rated life in 8. in determining preload volume.)

(2) Accuracy of way block

The following is the ideal accuracy specification and installation accuracy of way block as a guide surface.

Hardness by heat treatment

: More than HRC58 hardened depth
2 mm or more

Surface roughness

: Less than 1.6 S

Parallelism as a single unit: Less than 0.010 mm per meter

Parallelism after installation

: Less than 0.020 mm per meter

Please consult NSK when using cast iron or cast steel guide face.

(3) Pocket accuracy

Accuracy of the pocket in which the roller pack is mounted should satisfy the following conditions.

Pocket width

: Roller pack width + 0.10 to 0.20 mm

Parallelism of the pocket side faces to the guide way face

: Less than 0.010 mm per 100 mm.

Parallelism of the fitting plate (pocket bottom) mounting surface to the guide way face and parallelism of the wedge block mounting surface to the guide way surface :

: Less than 0.040 mm per 100 mm.

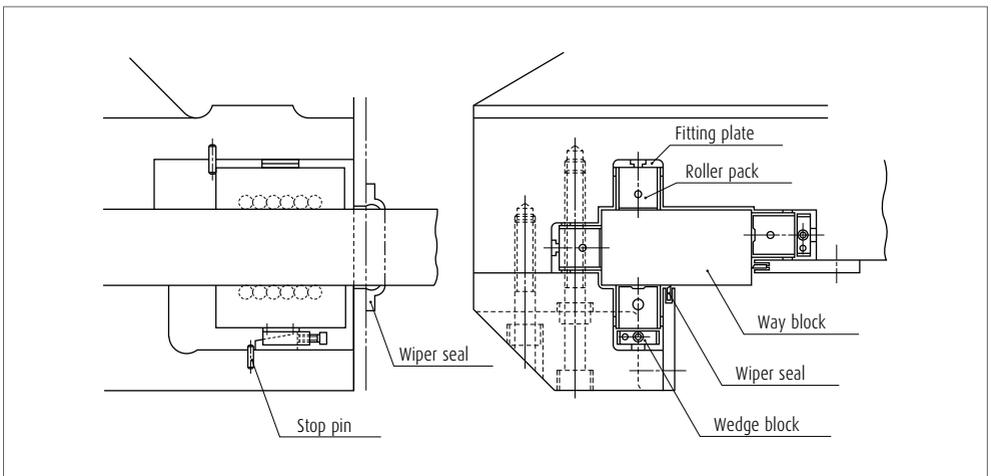


Fig. 7 Design of the roller pack pocket (example)

8. Rated life

(1) Installation and applying preload

Rated life L (km) is shown in the following formula.

In this formula:

$$L = 50 \left(\frac{C}{f_w \cdot F_c} \right)^{\frac{10}{3}} \dots\dots\dots(2)$$

C: Basic dynamic load rating (N)

f_w : Load factors. 1.0 to 1.2 at time of smooth operation

F_c : Calculated load (N) applied to the roller pack


9. Disassembly

Remove the roller pack preloaded by the wedge block in the following manner.

- > Loosen the adjust screw of the wedge block. Lightly tap the wedge. In case of light preload, the wedge loosens, and the roller pack can be pulled out.
- > When pulling, put the bolt in the tap hole at the end of the end cap, and tug the bolt.
- > In case of heavy load, the roller pack could not be pulled out by the above method. Hook a tool to the pull-out hole (**Fig. 1**) on the side plate of the roller pack, and pull out the roller pack.

10. Dimension Table

Roller pack: Model WRP

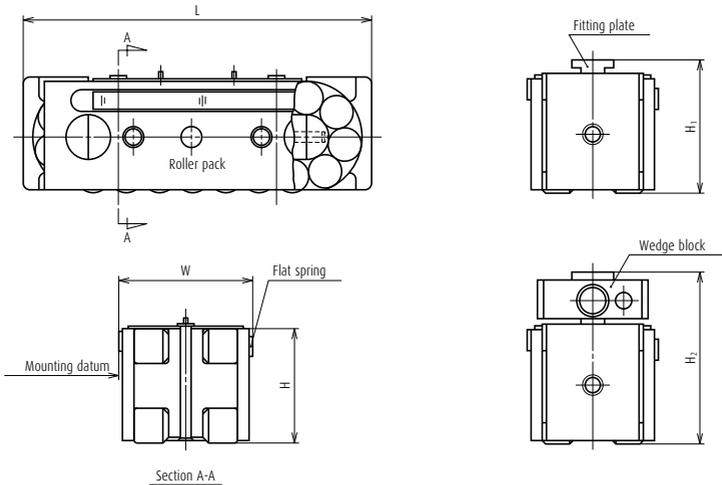


Unit: mm

| Model No. | Width W | Height ± 0.005 H | Length L | Applicable fitting plate reference No. | Assembled height H_1 | Applicable wedge reference No. | Assembled height H_2 | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|------------|------------|----------------------------|-------------|---|------------------------------|--------------------------------------|---------------------------|--|---|
| WRP 251907 | 25 | 19 | 65.5 | WFT 25 | 24 | WED 25 | 31 (30.4 - 31.6) | 31 000 | 40 500 |
| WRP 312609 | 31 | 26 | 85 | WFT 31 | 31 | WED 31 | 40 (39.4 - 40.6) | 57 000 | 73 000 |
| WRP 383310 | 38.1 | 33.31 | 104.4 | WFT 38 | 38.91 | WED 38 | 50.8 (50 - 51.5) | 91 000 | 113 000 |
| WRP 454014 | 45 | 40 | 138 | WFT 45 | 45 | WED 45 | 60 (59.2 - 60.8) | 151 000 | 191 000 |

Note Numbers in the parentheses in column H_2 show the adjustable height range of the wedge block.


Fitting plate: Model WFT

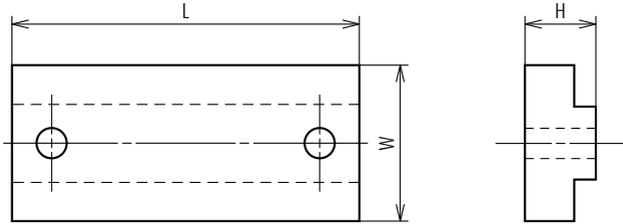

Unit: mm

| Model No. | Width W | Height (± 0.01) H | Length L | Applicable roller pack |
|-----------|------------|-------------------------------|-------------|------------------------|
| WFT 25 | 10 | 5 | 20 | WRP 251907 |
| WFT 31 | 12 | 5 | 26 | WRP 312609 |
| WFT 38 | 12.8 | 5.6 | 29 | WRP 383310 |
| WFT 45 | 16 | 5 | 40 | WRP 454014 |

Wedge block: Model WED

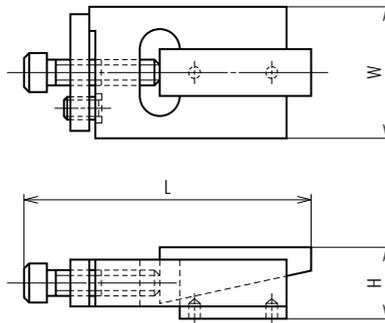

Unit: mm

| Model No. | Width W | Height H | Length L | Applicable roller pack |
|-----------|------------|---------------------|-------------|------------------------|
| WED 25 | 23 | 12 (11.5 - 12.5) | 47 | WRP 251907 |
| WED 31 | 28 | 14 (13.5 - 14.5) | 63 | WRP 312609 |
| WED 38 | 35 | 17.47 (16.9 - 18.1) | 76 | WRP 383310 |
| WED 45 | 40 | 20 (19.2 - 20.8) | 95 | WRP 454014 |

Note Numbers in the parentheses in column H_2 show the adjustable height range of the wedge block.

A-6-4 Linear Roller Bearings

1. Structure

Linear roller bearing comprises: A single row of rollers; the main body which supports load via rollers; the end cap which turns the roller re-circulating direction at the end of the main body from the loaded zone to the unloaded zone; a retaining wire which prevents rollers from falling out (**Fig. 1**). The main body, as the cylindrical roller bearing, has a rib at both sides. The rib guides the rollers to travel correctly, and assists the rollers to circulate infinitely in the bearing in a stable manner. This contributes to the bearing's linear movement without the restriction of travel range. NSK also developed a highly functional preload pad (Photo 2) to provide a slight preload to the bearing.

The preload pad basically comprises parallel plates and sandwiched Belleville springs, having adjusted its spring rate. Preloaded pad can be used in a machine tool in the following manner.

When two bearings are installed with one on the top and the other under the way block (the bearings comprise a set), a preloaded pad is used at the bottom bearing. This provides an equal preload to the top and bottom bearings. This way, to a certain extent, the variation in the load and the uneven thickness of the way block can be absorbed.

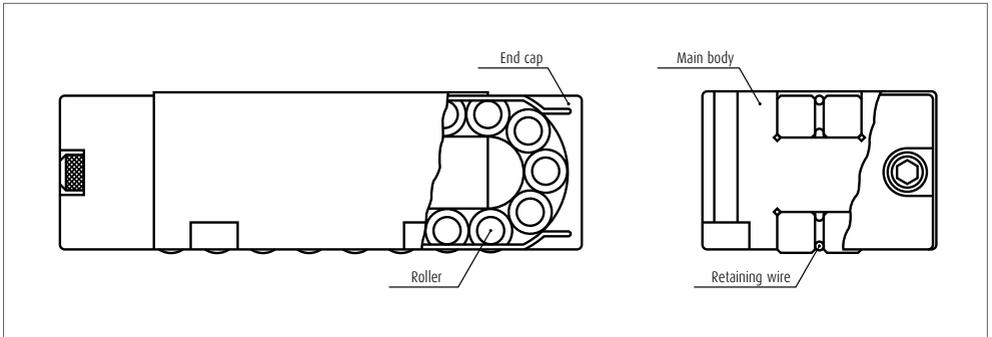


Fig. 1 Linear roller bearing



Photo 1 Linear roller bearing



Photo 2 Preload pad

2. Features

In addition to the general features of a roller bearing guide such as no-stick slip, small friction resistance, and easy maintenance, the linear roller bearing has several more advantages.

(1) No trouble by roller skewing

Skewing is the inclination of the rollers during operation. It causes friction force to suddenly soar. Skewing is apt to occur when the roller is long relative to its diameter.

The proportion of the length and diameter is 1:2 for the products in this series. This is superior to the commonly used 1:3 ratio.

(2) Highly reliable

Retaining the rollers without allowing them to fall out of the bearing is a crucial function of the linear guide bearing. The simple and highly effective retaining wire has solved the problem for this product series.

(3) Compact design

Despite the load carrying capacity, this series is smaller in size than any other models. This contributes to the application which requires compact design.

(4) High rigidity

The contact area between the bearing and the mounting surface is large to increase rigidity.

3. Accuracy

The nominal height difference between bearings is 10 μm. The bearings are grouped into every 2 μm, and are coded before delivery (**Table 1**).

Table 1 Classification of height

| | | | Unit: μm |
|----------|---|---------|----------|
| Category | | | Code |
| over | - | or less | |
| 0 | - | -2 | A |
| -2 | - | -4 | B |
| -4 | - | -6 | C |
| -6 | - | -8 | D |
| -8 | - | -10 | E |

4. Rigidity

Fig. 2 shows elastic deformation.

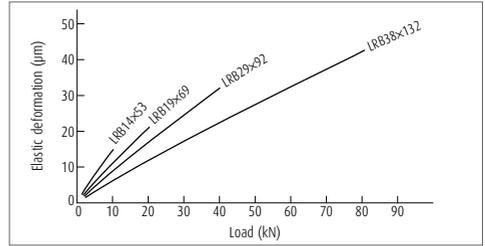


Fig. 2 Elastic deformation

5. Friction and Lubrication

(1) Lubricants and volume

Mineral oils are used in general. The linear roller bearing is used under relatively heavy load. An oil which has high viscosity and creates a strong oil film is ideal for linear roller guides. Select from JIS viscosity 32 to 150.

General oil supply for a linear roller bearing Q (cc/h) can be calculated by the following formula.

$$Q \geq S \times 1/4 \dots \dots \dots (1)$$

In this formula, S (stroke) is shown in meters. Therefore, when the stroke is 1 m, the volume of lubricant per roller bearing is more than 0.25 (cc/h). It is recommended to supply a small amount of oil at short intervals rather than supplying a large amount at one time. In case of grease lubrication, a grease of consistency degree 2, such as Albania EP2, is generally used.

(2) Friction coefficient

Starting friction coefficient is significantly small at under 0.005.

(3) Seal

Install a wiper seal on the way block surface to prevent foreign matters (cutting chip and other contaminant from entering) to realize a full life of the linear roller bearing. The material of the seal should have strong resistance against oil and wear. Felt and synthetic rubber (acrylonitril-butadien rubber) are some of the suitable materials.

6. Installation

Secure the linear roller bearing using four bolts. The bearing main body has four holes for mounting.

Accuracy of way block

The ideal accuracy specification and mounting accuracy of a way block as a guide way surface are as follows.

Hardness by heat treatment

: More than HRC58 hardened depth
2 mm or more

Surface roughness

: Less than 1.6 S

Parallelism as a single unit

: Less than 0.010 mm per 1 m

Parallelism after installation

: Less than 0.020 mm per 1 m

Please consult NSK when using cast iron or cast steel guide way.

7. Rated life

Rated life L (km) is shown in the following formula.

In this formula:

$$L = 50 \left(\frac{C}{f_w \cdot F_c} \right)^{\frac{10}{3}} \dots \dots \dots (2)$$


C : Basic dynamic load rating (N)

f_w : Load factor. 1.0 to 1.2 at time of smooth operation

F_c : Calculated load applied on the bearing (N)

8. Dimension Table

Linear roller bearing Model: LRB

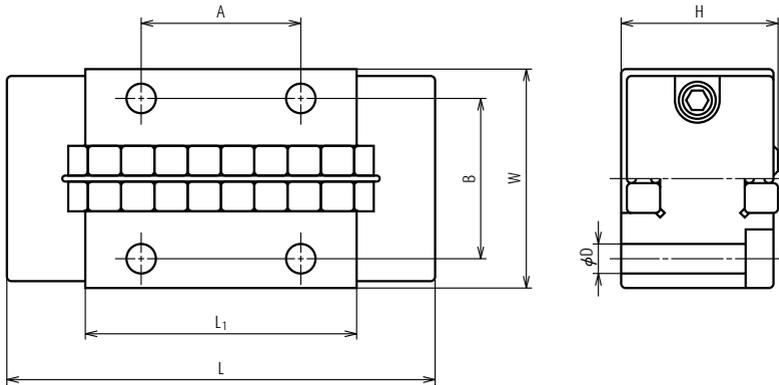


Unit: mm

| Model No. | Width W | Height $H_{-0.010}^0$ | Length L | L_1 | Roller diameter \times length | Mounting bolt hole D | Bolt hole distance | | Basic dynamic load rating C (N) | Basic static load rating C_0 (N) |
|------------|------------|--------------------------|-------------|-------|---------------------------------------|----------------------------|--------------------|------|--|---|
| | | | | | | | A | B | | |
| LRB 14×53 | 26.5 | 14.29 | 52.8 | 32.8 | ϕ 4×8 | 3.4 | 19 | 19.3 | 15 400 | 21 900 |
| LRB 19×69 | 30.5 | 19.05 | 68.6 | 44.6 | ϕ 5×10 | 3.4 | 25.4 | 23.3 | 27 000 | 39 000 |
| LRB 29×92 | 41.5 | 28.58 | 92.0 | 59 | ϕ 7.5×15 | 4.5 | 38.1 | 32.7 | 57 500 | 76 500 |
| LRB 38×132 | 51.4 | 38.10 | 132.0 | 88 | ϕ 10×20 | 5.5 | 50.8 | 41.5 | 119 000 | 159 000 |

Note Bearings are grouped into heights of every 2 μ m before delivery.

Preload pad Model: PRP

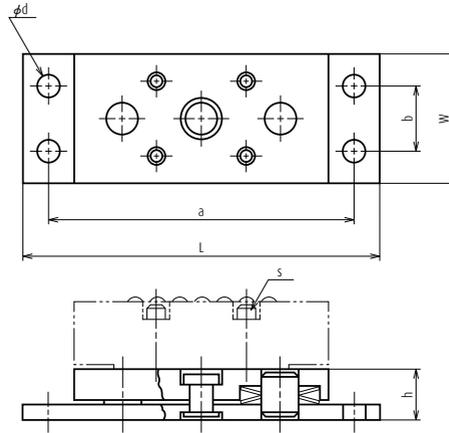

Unit: mm

| Model No. | Applicable linear roller bearing | Height (no-load) h max. | Compressed height h min. | h min. Load when fully compressed (N) | W | L | d | a | b | s Hex. Socket cap screw |
|------------|----------------------------------|-------------------------|--------------------------|---------------------------------------|----|-----|-----|-----|----|----------------------------|
| PRP 14×53 | LRB 14×53 | 10.23 | 9.53 | 1 570 | 26 | 72 | 4.5 | 62 | 14 | M3×16 |
| PRP 19×69 | LRB 19×69 | 11.53 | 11.10 | 2 650 | 30 | 96 | 4.5 | 86 | 18 | M3×19 |
| PRP 29×92 | LRB 29×92 | 13.13 | 12.70 | 6 450 | 41 | 120 | 4.5 | 110 | 27 | M3×25 |
| PRP 38×132 | LRB 38×132 | 16.28 | 15.88 | 12 000 | 51 | 157 | 4.5 | 147 | 35 | M5×38 |



B-1 Selection Guide to NSK Ball Screw

- 1. Features of NSK Ball ScrewsB1
- 2. Structure of a Ball ScrewB3
 - 2.1 Ball Recirculation SystemB4
 - 2.2 Preload System.....B5
- 3. Ball Screw SeriesB7
 - 3.1 Ball Screw ClassificationB7
 - 3.2 Product Externals.....B9
- 4. Procedures to Select Ball Screw B17
 - 4.1 Flow Chart for Selection..... B17
 - 4.2 Accuracy Grades..... B19
 - 4.3 Axial Play..... B20
 - 4.4 Screw Shaft Diameter, Lead, and Stroke B21
 - 4.5 Manufacturing Capability for Screw Shaft B25
 - 4.6 Outside Shapes of Ball Nut B26
 - 4.7 Shaft End Configuration..... B27
- 5. When Placing Orders..... B31
 - 5.1 When Ordering Standard Ball Screws..... B31
 - 5.2 When Ordering Made-to-Order Ball Screws..... B33

B BLOCK

Ball Screw

B-2 Technical Description of Ball Screws

- 1. Accuracy..... B37
 - 1.1 Lead Accuracy..... B37
 - 1.2 Thermal Expansion and Target Value of Specified Travel..... B40
 - 1.3 Mounting Accuracy and Tolerance of Ball Screws B41
 - 1.4 Automatic Lead Accuracy Measuring System of NSK..... B43
- 2. Static Load Limitation B44
 - 2.1 Buckling Load..... B44
 - 2.2 Yield by Tensional/Compressive Stress..... B46
 - 2.3 Permanent Deformation at the Ball Contact Point..... B46
- 3. Permissible Rotational Speed..... B47
 - 3.1 Critical Speed of the Screw Shaft B47
 - 3.2 $d \cdot n$ Value..... B50
- 4. Supporting Conditions for Calculation of Buckling Load and Critical Speed B51
- 5. Life (Dynamic Load Limitation)..... B53
 - 5.1 Life of Ball Screw..... B53
 - 5.2 Fatigue Life..... B53
 - 5.3 Ball Screw and Hardness B55
 - 5.4 Wear Life B55
- 6. Preload and Rigidity..... B56
 - 6.1 Elastic Deformation of Preloaded Ball Screw B56
 - 6.2 Rigidity of the Feed Screw System B57
- 7. Friction Torque and Drive Torque B62
 - 7.1 Friction Torque..... B62
 - 7.2 Drive Torque..... B63
- 8. Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive)..... B65
- 9. Lubrication of Ball Screw B67
- 10. Dust Prevention for Ball Screw..... B68
- 11. Rust Prevention and Surface Treatment of Ball Screws..... B69
- 12. Ball Screw Specifications for Special Environments..... B70

B-3 Ball Screw Dimension Table

| | | | |
|--|-------------|---|-------------|
| 12.1 Clean Environments..... | B70 | 1. Dimension Table and Reference Number of Standard Ball Screws | |
| 12.2 Measures for Use Under Vacuum..... | B70 | 1.1 Compact FA Series | B107 |
| 13. Noise and Vibration | B71 | 1.2 High-Speed SS Series | B147 |
| 13.1 Consideration to Lowering Noise..... | B71 | 1.3 Finished Shaft End | |
| 13.2 Consideration to Operational Characteristics..... | B72 | MA Type, Miniature, Fine Lead.... | B159 |
| 13.3 Consideration to Ball Screw Support System..... | B72 | FA Type for Small Equipment | B181 |
| 14. Installation of Ball Screw..... | B73 | SA Type for Machine Tools | B217 |
| 14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required..... | B74 | 1.4 Finished Shaft End | |
| 14.2 Installation Procedure for General Industrial Machinery..... | B79 | KA Type Stainless Steel Product.. | B273 |
| 15. Precautions for Designing Ball Screw | B83 | 1.5 Blank Shaft End | |
| 15.1 Safety System..... | B83 | MS Type, Miniature, Fine Lead ... | B301 |
| 15.2 Design Cautions to Assembling Ball Screw | B83 | FS Type for Small Equipment..... | B309 |
| 15.3 Effective Stroke of Ball Screw | B85 | SS Type for Machine Tools | B321 |
| 15.4 Matching after Delivery | B85 | 1.6 Ball Screws for Transfer Equipment..... | B349 |
| 15.5 "NSK K1" Lubrication Unit..... | B85 | 1.7 Accessories..... | B389 |
| 16. Shaft End Machining | B86 | 2. Dimension Table and Reference Number of Standard Nut Ball Screws | |
| 17. Ball Screw Selection Exercise..... | B87 | 2.1 End Deflector Type..... | B431 |
| 18. Reference..... | B101 | 2.2 Tube Type | B437 |
| 19. Guide to Technical Services..... | B102 | 2.3 Deflector (bridge) Type..... | B471 |
| 20. Precautions When Handling Ball Screws..... | B103 | 2.4 End Cap Type | B485 |
| | | 3. Dimension Table and Reference Number of Application-Oriented Ball Screws | |
| | | 3.1 HMD Type for High-Speed Machine Tools | B495 |
| | | 3.2 HMS Type for High-Speed Machine Tools | B499 |
| | | 3.3 HMC Type for High-Speed Machine Tools | B503 |
| | | 3.4 BSL Type for Miniature Lathes..... | B509 |
| | | 3.5 For High-Load Drives | |
| | | 3.5.1 HTF-SRC Type..... | B513 |
| | | 3.5.2 HTF-SRD Type | B517 |
| | | 3.5.3 HTF Type..... | B521 |
| | | 3.6 For Contaminated Environments | |
| | | 3.6.1 VSS Type..... | B533 |
| | | 3.6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention | B537 |
| | | 3.7 TW Series for Twin-Drive Systems..... | B541 |
| | | 3.8 For High Precision Machine Tools | |
| | | 3.8.1 Hollow Shaft Ball Screws | B542 |
| | | 3.8.2 Nut Cooling Ball Screws | B547 |
| | | 3.9 ND Series for Nut-Rotatable Drives..... | B551 |
| | | 3.10 Σ Series for Robots | B559 |
| | | 3.11 Ball Screw with L1 Seal designed for Minimal Grease Splatter | B571 |
| | | 3.12 Equipped with "NSK K1" Lubrication Unit | B575 |
| | | 3.13 Special Ball Screws..... | B581 |

B1
-B36

B37
-B104

B105
-B582

B-1 Selection Guide to NSK Ball Screw

B-1-1 Features of NSK Ball Screws

1. Quick delivery

Standard ball screws are for short lead time.

- › Precision ball screws with finished shaft end
Compact FA Series, MA Type, FA Type, SA Type, KA Type
- › Precision ball screws with blank shaft end
MS Type, FS Type, SS Type, HSS Type
- › Ball screws for transfer equipment with finished shaft end
VFA Type, RMA Type
- › Ball screws for transfer equipment with blank shaft end
RMS Type, R Series

2. Competitive prices

NSK reduces cost by well-planned mass production of standardized items. We rank the best in the world production of ordered items. We are able to offer our products at competitive prices by producing similar items in the same production group.

3. Unparalleled accuracy

NSK utilizes its unique grinding technique and measuring equipment for topnotch precision.

4. Superb durability

NSK uses thoroughly purified alloy steel for superb durability.

5. No backlash, and unparalleled rigidity

NSK ball screws use Gothic arch grooves as shown in **Fig. 1.1** to minimize the clearance between the balls and grooves. Further, an application of preload makes no backlash possible. As providing controlled preload is easy, appropriate rigidity is obtained.

As the Gothic arch also minimizes the clearance between the balls and the grooves, the backlash is minimized without applying preload.

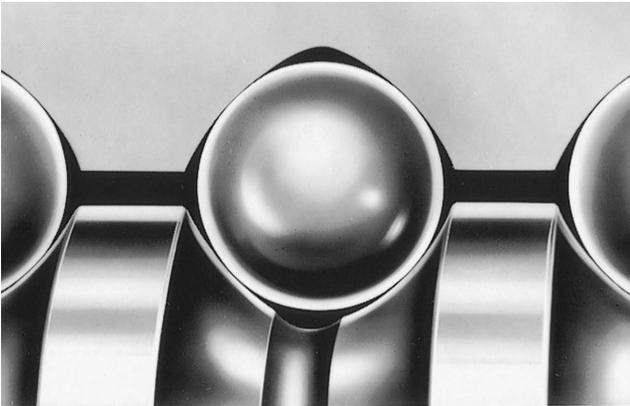


Fig. 1.1 Ball groove profile of NSK ball screw

6. Smooth movement assures high efficiency

When the circular-arc groove is used for the ball screws, balls are wedging into the grooves of ball nut and ball screw shaft. But this phenomenon does not happen in the Gothic arc groove. The Gothic arc groove, along with the low friction that is inherent nature of ball screw, is accountable for a smooth and highly efficient conversion of motion as shown in Fig. 1.2.

7. Optimal units available

Utilizing bearing technology, NSK produces high quality support units (for light load type to be used for small equipment and heavy load type to be used for machine tools) which are exclusive for ball screws. These units are standardized.

NSK also offers quality-assured accessories such as lock nuts to tighten bearings, travel stoppers to prevent overrun, and sealing units to cool hollow shaft ball screws.

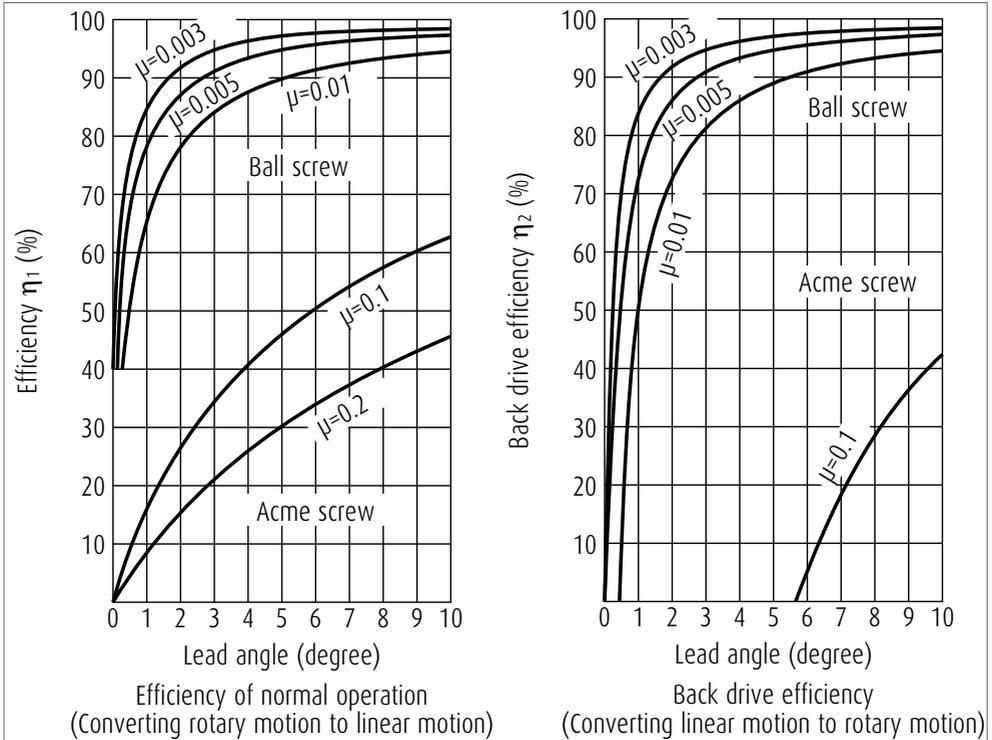




Fig. 1.2 Mechanical efficiency of ball screws

B-1-2 Structure of a Ball Screw

Balls are placed between the screw shaft and nut, and roll. This system is called a "ball screw." To keep the balls recirculating continually, this system requires a screw shaft, a nut, balls, and recirculation components as basic items. A ball screw has the following functions.



1. Converting motion: Changing rotary motion to linear motion (normal operation); Changing linear motion to rotary motion efficiently (back-drive operation).
2. Increasing power: A small torque is converted to a large thrust force.
3. Positioning: Sets accurate position in linear motion.

Table 2.1 Ball screw recirculation system
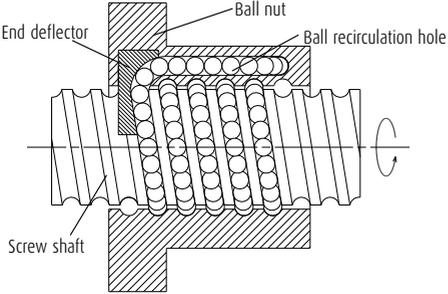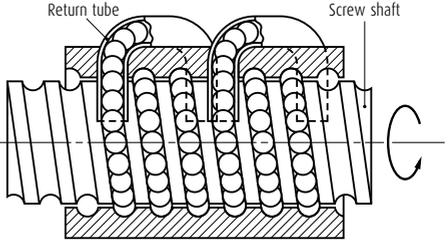
| End deflector type | Ball return tube type |
|--|--|
|  <p>[Structure] Balls are smoothly picked up in the tangential direction at the end of nut, and recirculated via a hole in the nut. If the balls are picked up at the middle of the nut, it is called middle deflector type.</p> <p>[Features] <ul style="list-style-type: none"> > Small nut outside diameter allows compact nut design. > Low noise, high speed. </p> |  <p>[Structure] Balls are recirculating through a pipe (ball return tube) of optimized size, bridging the start and end of recirculation.</p> <p>[Features] <ul style="list-style-type: none"> > Adapt to various specifications. (screw shaft diameter, lead) </p> |

B-1-2.1 Ball Recirculation System

A ball recirculation system is categorically most important, as well as the preload system, to classify the structure of ball screw. As shown in **Table 2.1**, four types of ball recirculation system are used for the NSK ball screws.
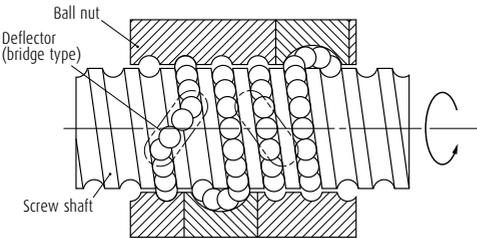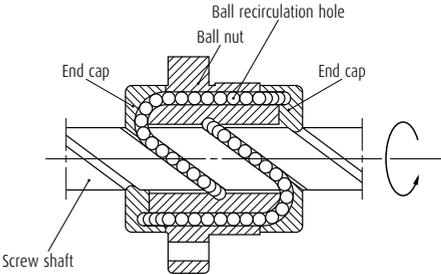
| Deflector (bridge) type | End cap type |
|--|---|
|  <p>[Structure] Balls are recirculated by a horseshoe shaped deflector bridging the adjacent ball thread grooves.</p> <p>[Features] > Suitable for fine lead ball screws. > Small nut outside diameter, allows compact nut design.</p> |  <p>[Structure] Balls are picked up by an end cap placed at both ends of the nut, and recirculated via a hole through the nut.</p> <p>[Features] > Suitable for large lead ball screws. > Not universal due to complex recirculation structure.</p> |

B-1-2 Structure of a Ball Screw




B-1-2.2 Preload system

There are four systems to apply preload to NSK ball screws depending on the application.

Table 2.2 Preload system for ball screws

| Preload system | Double nut preload (D-Preload) | Offset preload (Z-Preload) |
|------------------------|---|--|
| Structure | <p>The diagram shows a side view of a ball screw with two ball nuts, labeled 'Ball nut A' and 'Ball nut B', mounted on it. A 'Spacer' is placed between the two nuts. Arrows indicate the direction of rotation. Below this is a cross-sectional view showing the 'Screw shaft' with two ball nuts. A 'Spacer' is positioned between them, and arrows labeled 'Tension' point outwards from the nuts, indicating the preload force.</p> | <p>The diagram shows a side view of a ball screw with a single 'Ball nut'. Below it is a cross-sectional view of the 'Screw shaft' showing the 'Ball nut' with an offset lead. The lead is labeled as 'Lead' on the left and right, and 'Lead + α' in the center, where α represents the preload offset.</p> |
| Description | <p>Uses two nuts, and inserts a spacer between them to apply the preload. In general, a spacer is thicker (by the deformation equivalent to the preload) than the actual space between two nuts. However, a thin spacer is inserted in some cases.</p> | <p>To apply preload, the lead near the center of the nut is offset by the volume equivalent to preload (α). This method is like to creating a preload system similar to the double nut preload (D-preload) by a single ball nut, thus enabling a compact nut design.</p> |
| Nut length | Long | Medium |
| Torque characteristics | ○ | ○ |
| Rigidity | ◎ | ◎ |

Oversize ball preload (P-Preload)

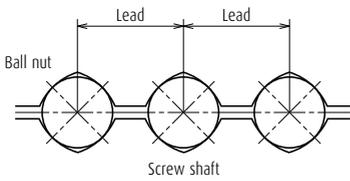
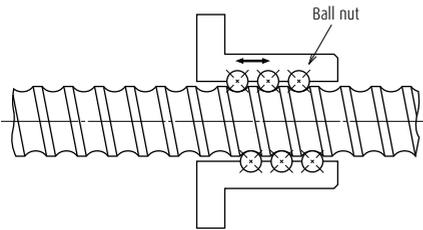


Balls slightly larger than the ball groove space (over-size balls) are inserted to allow them to contact at four points. Provides better torque characteristics in the low torque range.

Short



Spring preloaded double nut (J-Preload)

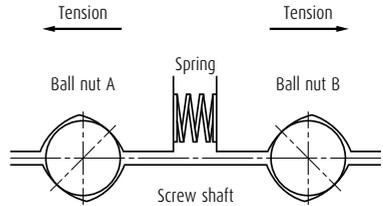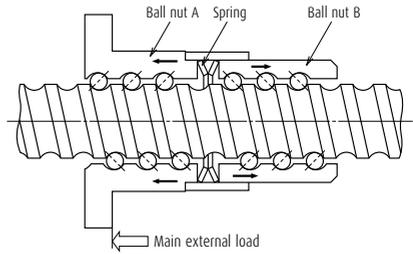


A spring is used as a spacer of D-Preload. Must be used with discretion in its varied rigidity by load direction.


Long



B-1-3 Ball Screw Series

B-1-3.1 Ball Screw Classification

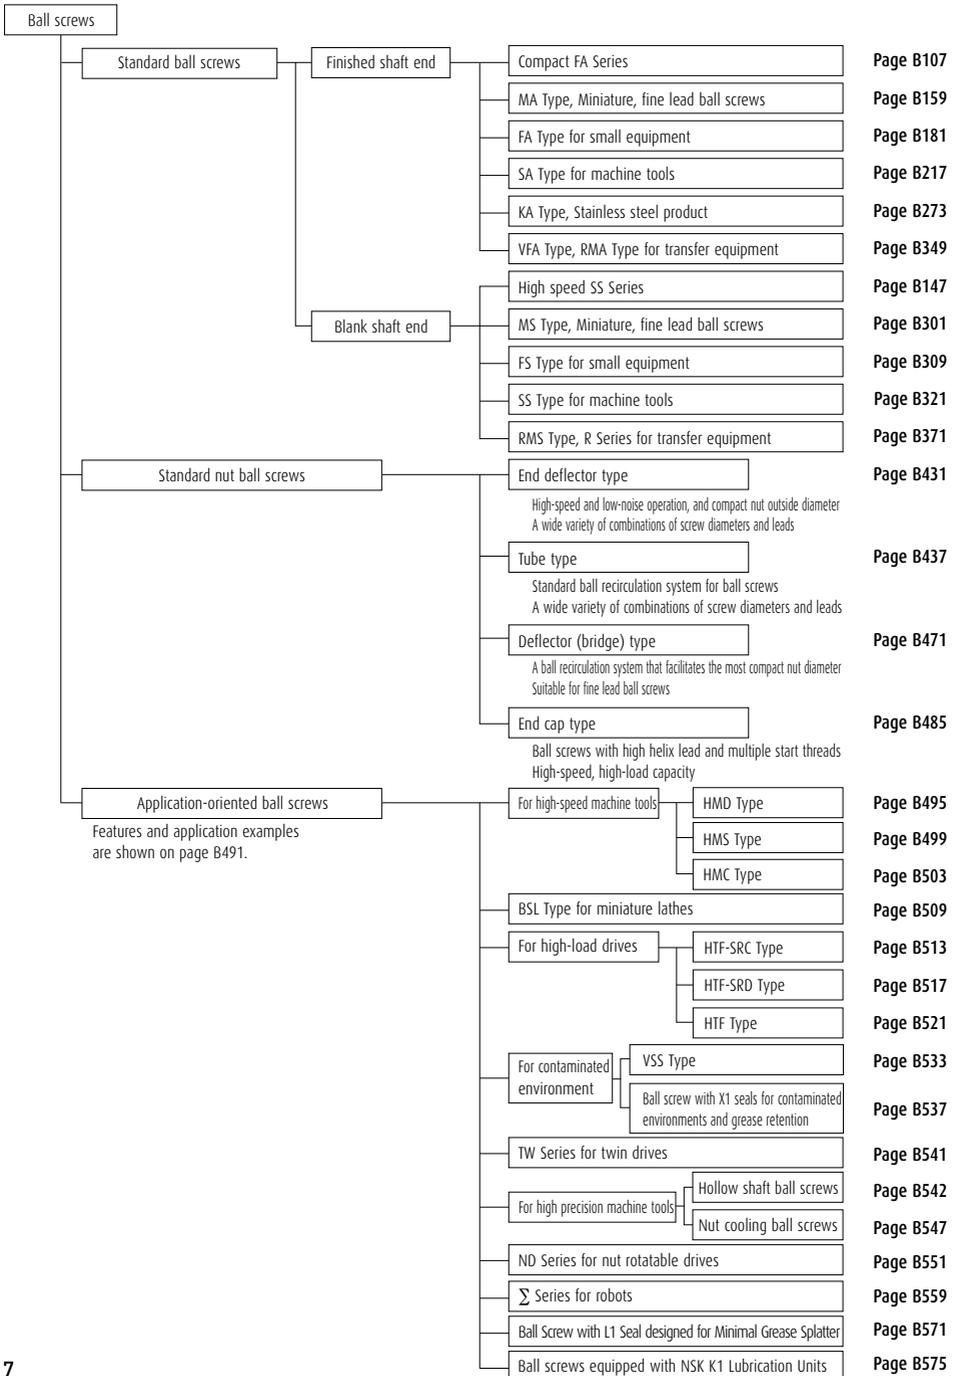

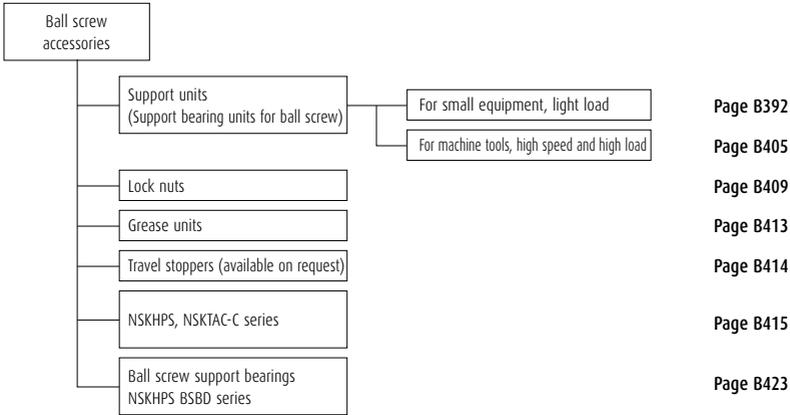

Lead classification

| Classification | Lead ratio $K = \text{lead} / \text{shaft diameter}$ |
|------------------|---|
| Fine | $K < 0.5$ |
| Medium | $0.5 \leq K < 1$ |
| High helix | $1 \leq K < 2$ |
| Ultra high helix | $2 \leq K$ |

B-1-3 Ball Screw Series

B-1-3.2 Product Externals

1. Ball screws

Standard ball screws



Fig. 3.1 Finished shaft end compact FA Series

Page B107



Fig. 3.2 Blank shaft end high-speed SS Series

Page B147



Fig. 3.3 Finished shaft end MA type, FA type and SA type

Page B157

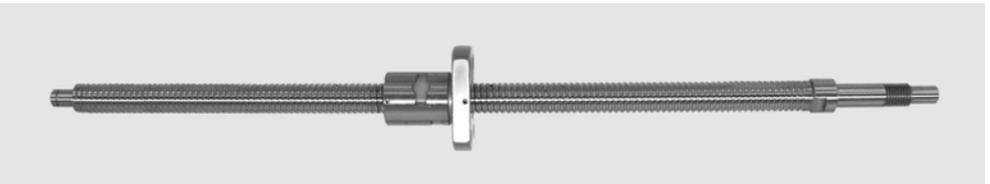


Fig. 3.4 Finished shaft end KA type

Page B273

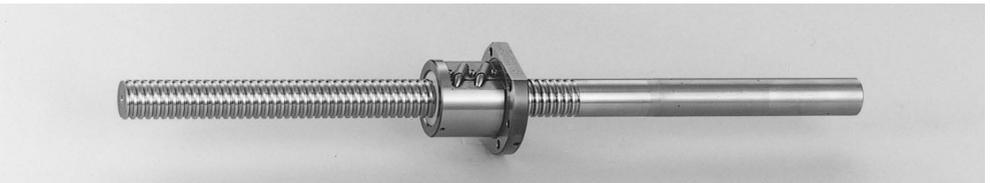


Fig. 3.5 Blank shaft end MS type, FS type and SS type

Page B299

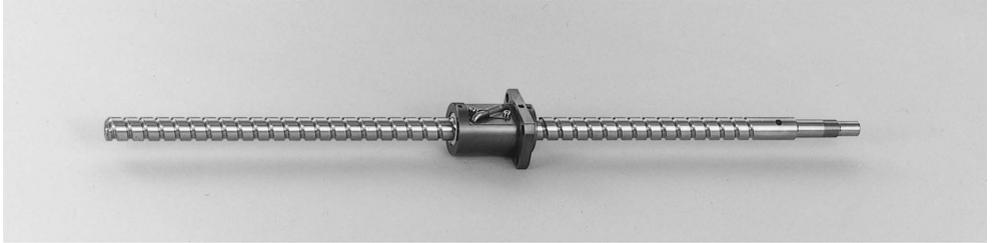


Fig. 3.6 Finished shaft end VFA type for transfer equipment

Page B349

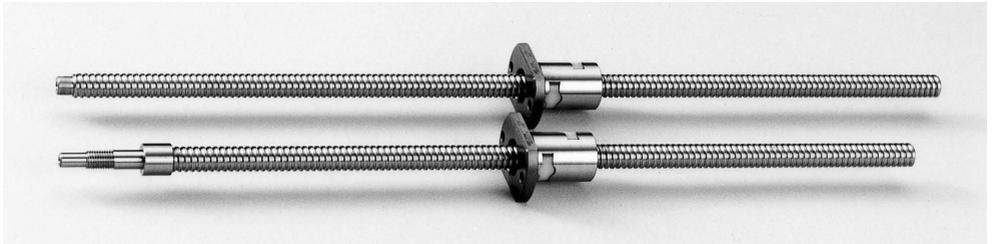


Fig. 3.7 Finished shaft end RMA type and blank shaft end RMS type for transfer equipment

Page B349



Fig. 3.8 Blank shaft end R series for transfer equipment

Page B349



Fig. 3.9 R series nut assembly for transfer equipment

Page B349

B-1-3 Ball Screw Series

Standard nut ball screws



Fig. 3.10 End deflector type

Page B431

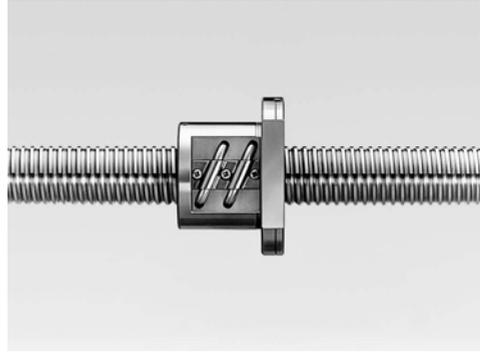


Fig. 3.11 Tube type

Page B437

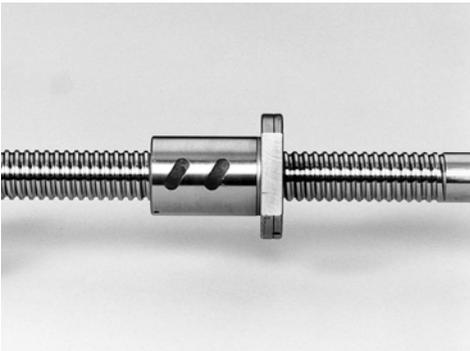


Fig. 3.12 Deflector (bridge) type

Page B471

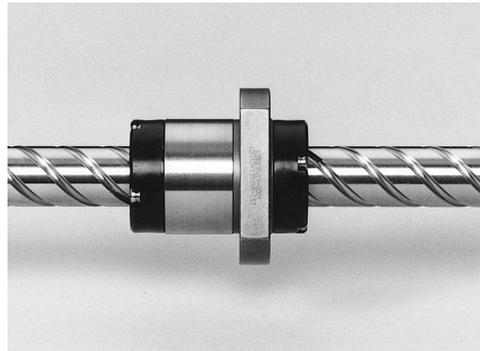


Fig. 3.13 End cap type

Page B485



Fig. 3.14 HMD type for high-speed machine tools

Page B495



Fig. 3.15 HMS type for high-speed machine tools

Page B499

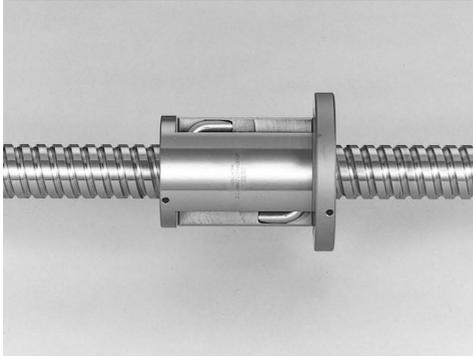


Fig. 3.16 HMC type for high-speed machine tools Page B503



Fig. 3.17 BSL type for miniature lathes Page B509

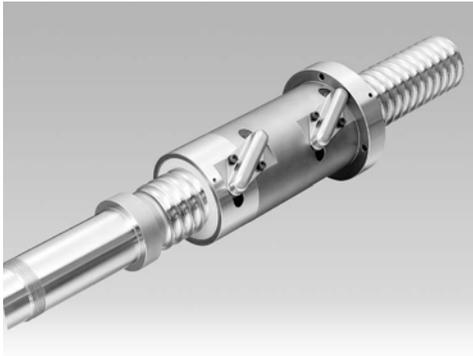


Fig. 3.18 HTF-SRC type for high-load drives Page B513



Fig. 3.19 HTF-SRD type for high-load drives Page B517

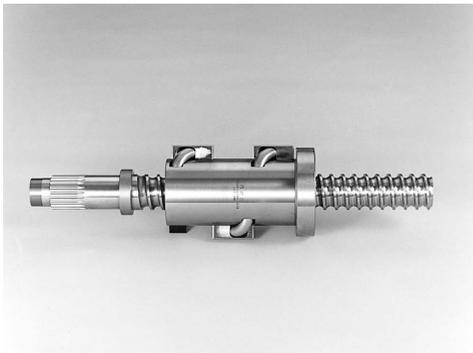


Fig. 3.20 HTF type for high-load drives Page B521

B-1-3 Ball Screw Series



Fig. 3.21 VSS type for contaminated environments Page B533



Fig. 3.22 Ball screw with X1 seals for contaminated environments and grease retention Page B537



Fig. 3.23 TW series for twin-drive systems Page B541



Fig. 3.24 Nut cooling ball screws for high precision machine tools Page B547



Fig. 3.25 Hollow shaft ball screws for high-precision machine tools

Page B542

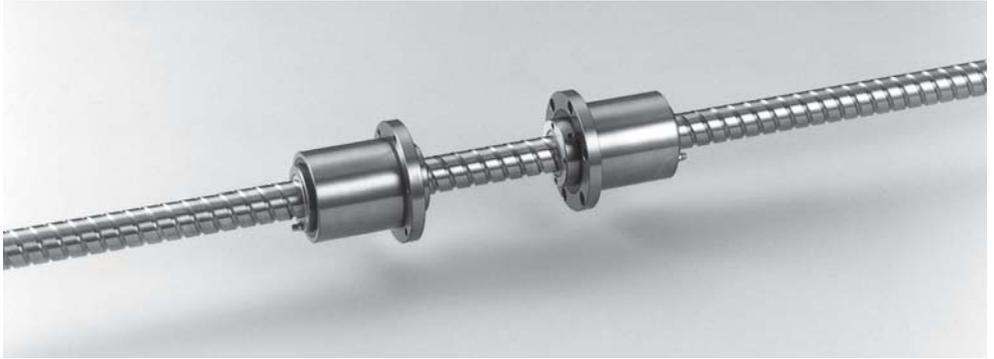


Fig. 3.26 ND series for nut-rotatable drives

Page B551



Fig. 3.27 Σ series for robots

Page B559



Fig. 3.28 Ball Screw with L1 Seal designed for Minimal Grease Splatter

Page B571

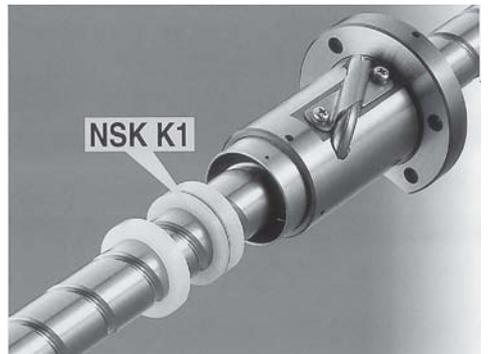


Fig. 3.29 Ball screws equipped with NSK K1 lubrication units

Page B575

B-1-3 Ball Screw Series

2. Standard accessories



Fig. 3.29 Support units (for small equipment, light load) Page B392



Fig. 3.30 Support units (for small equipment, light load, low-profile) Page B392



Fig. 3.31 Support kits for RMA and RMS types Page B401

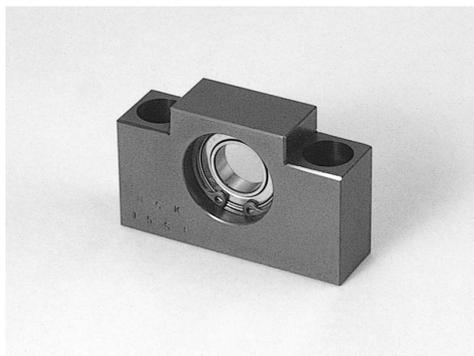


Fig. 3.32 Support unit for VFA type (simple support side) Page B402



Fig. 3.33 Support units (for machine tools, high speed, heavy load) Page B407



Fig. 3.34 Lock nuts for light load Page B409



Fig. 3.35 Lock nuts for high load



Fig. 3.36 NSK hand grease pump unit



Fig. 3.37 NSK grease



Fig. 3.38 Travel stoppers
(by order)



Fig. 3.39 Ball Screw Support Bearings
NSKHPS TAC-C series



Fig. 3.40 NSKHPS BSBD series

B-1-4 Procedures to Select Ball Screw

B-1-4.1 Flow Chart for Selection


When selecting a ball screw, you have to review a variety of use conditions and requirements such as applied loads, speeds, motion strokes, positioning accuracy, required life and operating environment.

You require a multiple inspection because some of these conditions force a ball screw to have conflicting characteristics.

1. Standard ball screw

The chart below is one of the selection procedures. To take advantage of prompt delivery and reasonable prices, this procedure focuses on the standardized ball screws.


NSK offers a ball screw selection program, and also has a service to select appropriate items using data file compiled by our knowledge and experience.

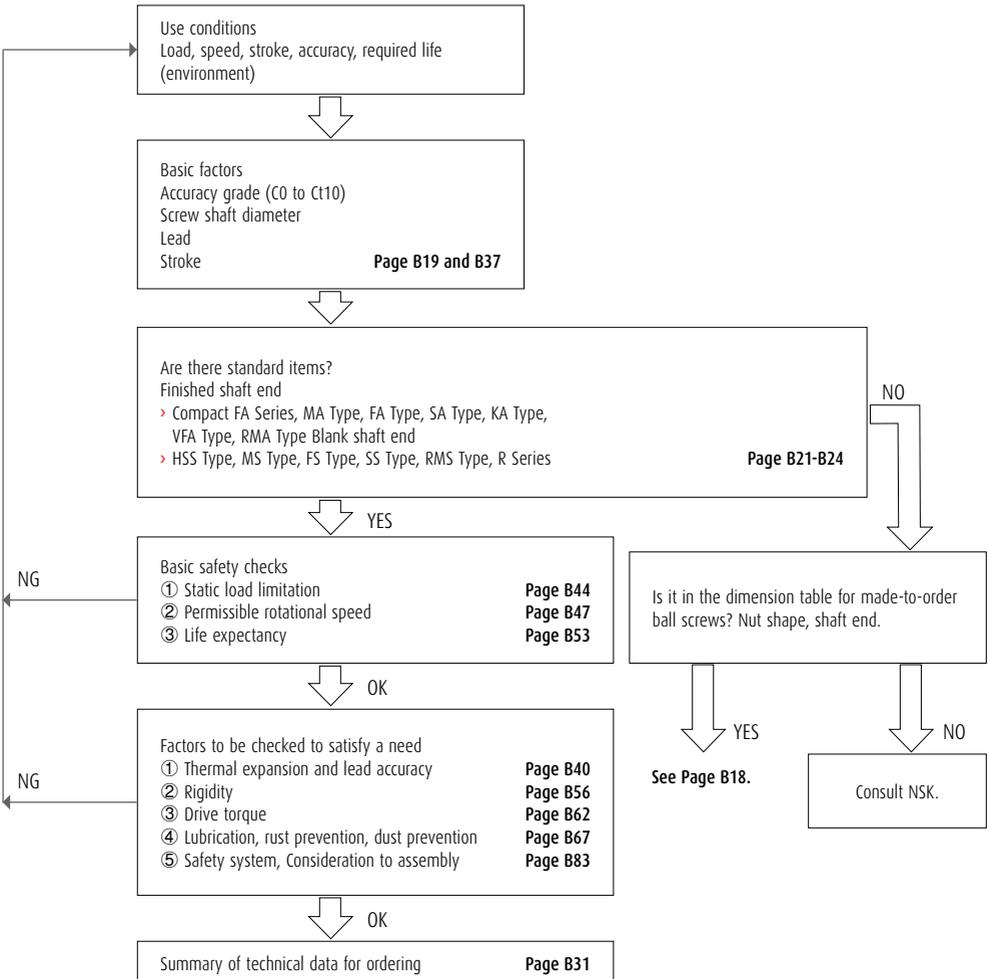

2. Made-to-order ball screws

Dimensions and specifications can be decided individually for the application-oriented ball screws and standard nut ball screws. Procedures are as follows. Refer to the selection exercises on page B87.

Table 4.4 is "Combinations of screw shaft diameter and leads for basic type ball screw." Please consult NSK if you require the types that are not listed in the table.

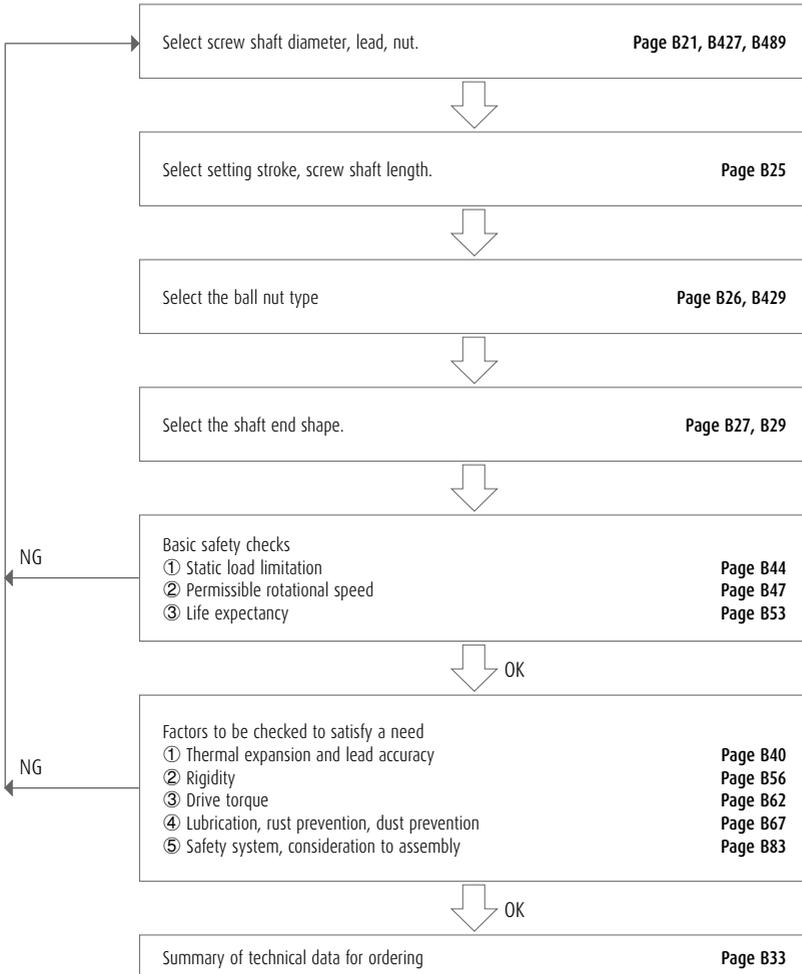

B-1-4 Procedures to Select Ball Screw

B-1-4.2 Accuracy Grades

Table 4.1 shows examples of how to select accuracy grade for a specific use. These practical cases are based on NSK's experience. The circles indicate the range of the accuracy grade in actual use. The double circles indicate accuracy grades most frequently used among the cases marked with

the single circle. These symbols help to select the accuracy grade of ball screws temporarily. To confirm whether a specific ball screw accuracy grade satisfies requirements in positioning accuracy in actual use, refer to "Technical Description" and "Mean travel deviation and travel variation." (page B38)

Table 4.1 Accuracy grades of ball screw and their application

| Application | | NC machine tools | | | | | | | | | | | | | | | | | | |
|----------------|------|------------------|---|-------------------------------------|---|----------------------|---|----------------------|---|------------------------|---|----------|---|-----------------------------------|---|---|---|-------------|---------------------------|-------------------------|
| | | Lathes | | Milling machines Boring machines | | Machining centers | | Drilling machines | | jig boring machines | | Grinders | | Electric discharge machines | | Wire cuttings Electric discharge machines | | Punch press | Laser cutting machines | Woodworking machines |
| Ax | i | Xs | Z | XY | Z | XY | Z | XY | Z | XY | Z | XY | Z | XY | Z | XY | Z | XY | Z | |
| Accuracy grade | C0 | ○ | | | | | | | | ○ | ○ | ○ | | | | | | | | |
| | C1 | ○ | | | | | | | | ◎ | ◎ | ◎ | | | | | | | | |
| | C2 | ○ | | | ○ | ○ | | | | | | ○ | ○ | | | | | | | |
| | C3 | ◎ | ○ | | ◎ | ◎ | | | | | | | | ◎ | ◎ | ◎ | ◎ | | | |
| | C5 | ◎ | ◎ | | ◎ | ◎ | | | ◎ | ◎ | | | | ◎ | ◎ | | ◎ | ◎ | | |
| | C7 | | | | | | | | | ○ | | | | | | | | | | |
| | Ct10 | | | | | | | | | | | | | | | | | | | ○◎ |

| Application | | Semiconductor/associated industry | | | | Industrial robots | | | | Steel mills equipment | | Plastic injection molding machines | | Three-dimensional coordinate measuring machines | | Office machines | | Image processing equipment | | Nuclear power | |
|----------------|------|--|---|-----------------------|-------------------------------|-------------------|---------|------------------------------------|---|-----------------------|----------------|------------------------------------|----------------|---|------------------------------------|---|-----------------|----------------------------|-------------------|---------------------|-----------|
| | | General industrial machines, Machines for specific use | | Lithographic machines | Chemical processing equipment | Wire bonders | Probers | Electric component mounted devices | Printed circuit board drilling machines | Assembly | other purposes | Assembly | other purposes | SCARA type | Plastic injection molding machines | Three-dimensional coordinate measuring machines | Office machines | Image processing equipment | Fuel rod controls | Mechanical snubbers | Aircrafts |
| Accuracy grade | C0 | | | | | | | | | | | | | | | | | | | | |
| | C1 | | ◎ | | | | | | | | | | | | | | ◎ | | | | |
| | C2 | | | | | | | | | | | | | | | | | | | | |
| | C3 | ○ | | | | | | | | | | | | | | | | | | | |
| | C5 | ◎ | | | | | | | | | | | | | | | | | | | |
| | C7 | ◎ | | | | | | | | | | | | | | | | | | | |
| | Ct10 | ○ | | | | | | | | | | | | | | | | | | | |

B-1-4.3 Axial Play

Table 4.2 indicates the combinations of NSK ball screw accuracy grades and axial play. Select an axial play which satisfies the required accuracy in backlash, positioning and repeatability. Ranges of available ball thread effective length in relation to accuracy grade and axial play are shown in

Table 4.3. Please note that if the effective length exceeds the range, the axial play may become partially negative (preloaded condition).

For the axial play of Ct10 grade (ball screws for transfer equipment), refer to the R series dimension tables.

Table 4.2 Combinations of accuracy grades and axial play

| Accuracy grade | Axial play | Z | T | S | N | L |
|----------------|------------|----------------|------------------|------------------|------------------|----------------|
| | | 0 mm (Preload) | 0.005 mm or less | 0.020 mm or less | 0.050 mm or less | 0.3 mm or less |
| C0 | | C0Z | C0T | — | — | — |
| C1 | | C1Z | C1T | — | — | — |
| C2 | | C2Z | C2T | — | — | — |
| C3 | | C3Z | C3T | C3S | — | — |
| C5 | | C5Z | C5T | C5S | C5N | — |
| Ct7 | | — | — | C7S | C7N | — |

Remark The combination codes shown in the table are NSK reference number.

Table 4.3 Maximum effective thread length in combination of accuracy grade and axial play

Unit: mm

| Screw shaft diameter | Effective length of the screw thread (maximum) | | | | |
|----------------------|--|-------|----------------------------------|-------|-------|
| | Axial play T (0.005 mm or under) | | Axial play S (0.020 mm or under) | | |
| | C0 - C3 | C5 | C3 | C5 | Ct7 |
| 4 - 6 | 80 | 100 | 80 | 100 | — |
| 8 - 10 | 250 | 200 | 250 | 300 | — |
| 12 - 16 | 500 | 400 | 500 | 600 | 700 |
| 20 - 25 | 800 | 700 | 1 000 | 1 000 | 1 000 |
| 28 - 40 | 1 000 | 800 | 2 000 | 1 500 | 1 500 |
| 45 - 63 | 1 200 | 1 000 | 2 500 | 2 000 | 2 000 |
| 80 - 125 | — | — | 4 000 | 3 000 | 3 000 |

Note Refer to **Table 4.8** (page B25) for the available length of screw shaft (maximum length). Also, axial play of code N does not become partial negative play if it is within the available range of effective ball thread length.

B-1-4.4 Screw Shaft Diameter, Lead, and Stroke

Choose a screw shaft diameter and stroke based on the allowable space for ball screw installation. A lead should be set based on the required running speed, and should give

some allowance to the maximum rotational speed of the motor.

Table 4.4 Screw shaft diameter, lead and stroke of standard ball screw

| Shaft dia. | Lead | Stroke | | | | | | | | | | | | | |
|------------|------|--------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----|
| | | - 50 | - 100 | - 150 | - 200 | - 250 | - 300 | - 350 | - 400 | - 450 | - 500 | - 550 | - 600 | - 650 | |
| 4 | 1 | ○ | ○△ | | | | | | | | | | | | |
| 6 | 1 | ○ | ○ | ○△■ | ○△ | ■□ | | | | | | | | | |
| 6 | 8 | | ● | | | | | | | | | | | | |
| 6 | 12 | | ● | | | | | | | | | | | | |
| 8 | 1 | | ○△ | ○■ | ○△ | ■□ | | | | | | | | | |
| 8 | 1.5 | | ○△ | ○■ | ○△ | ■□ | | | | | | | | | |
| 8 | 2 | | ○△ | ○■ | ○△ | ■□ | | | | | | | | | |
| 8 | 10 | | ● | | | | | | | | | | | | |
| 8 | 15 | | ● | | | | | | | | | | | | |
| 10 | 2 | | ○ | ○△ | ○■ | ○△ | ■□ | | | | | | | | |
| 10 | 2.5 | | ○ | ○△ | ○ | ○△ | ■□ | | | | | | | | |
| 10 | 4 | | ○ | ○△ | ○ | ○△ | ○ | ○△ | | | | | | | |
| 10 | 5 | | ● | ● | | | | | ● | | | | | | |
| 10 | 10 | | ● | ● | | | | | ● | | | | | | |
| 12 | 2 | | ○ | ○△ | ○△■ | ○△ | ○△■□ | | | | | | | | |
| 12 | 2.5 | | ○ | ○△ | ○△ | ○△ | ○△ | | | | | | | | |
| 12 | 5 | | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ |
| 12 | 10 | | ● | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ |
| 12 | 20 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 12 | 30 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 14 | 5 | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 14 | 8 | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 15 | 5 | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 15 | 10 | | | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ |
| 15 | 20 | | | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ |
| 15 | 30 | | | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ | ●○ |
| 16 | 2 | | ○ | ○ | ○ | ○△ | | ○ | △ | | | | | | |
| 16 | 2.5 | | ○ | ○ | ○ | ○△ | | ○ | △ | | | | | | |
| 16 | 5 | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 16 | 16 | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 16 | 32 | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 20 | 4 | | | | ○ | ○ | △ | | | △ | | | | | |
| 20 | 5 | | | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ |
| 20 | 10 | | | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ |
| 20 | 20 | | | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ |
| 20 | 30 | | | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ | ●○ | ●○△ |
| 20 | 40 | | | | | | | | | | | | | | |
| 20 | 60 | | | | | | | | | | | | | | |
| 25 | 4 | | | ○ | ○ | ○ | △ | | ○ | △ | | ○ | △ | | ○ |
| 25 | 5 | | | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ | ●○△ |
| 25 | 6 | | | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| 25 | 10 | | | | | | ○ | | | | ○ | | ○ | | ○ |
| 25 | 20 | | | | | | | | | | ● | | | | ● |
| 25 | 25 | | | | | | | | | | ● | | | | ● |
| 25 | 30 | | | | | | | | | | ● | | | | ● |
| 25 | 50 | | | | | | | | | | ● | | | | ● |
| 28 | 5 | | | ○ | ○ | ○ | ○ | ○△ | ○ | ○ | ○ | ○△ | ○ | ○△ | ○ |
| 28 | 6 | | | ○ | ○ | ○ | ○ | ○△ | ○ | ○ | ○ | ○△ | ○ | ○△ | ○ |
| 32 | 5 | | | ○ | ○ | ○ | ○ | ○△ | ○ | ○ | ○ | ○△ | ○ | ○△ | ○ |
| 32 | 6 | | | ○ | ○ | ○ | ○ | ○△ | ○ | ○ | ○ | ○△ | ○ | ○△ | ○ |
| 32 | 8 | | | | | | ○ | | | | ○ | | ○ | | ○ |
| 32 | 10 | | | ○ | ○ | ○ | ○ | △ | ○△ | | ○ | △ | ○△ | | ○ |
| 32 | 25 | | | | | | | | | | | | | | |
| 32 | 32 | | | | | | | | | | | | | | |
| 36 | 10 | | | | | ○ | ○ | | ○ | | ○ | △ | ○△ | | ○ |
| 40 | 5 | | | | | ○ | ○ | | ○ | | ○ | △ | ○△ | | ○ |
| 40 | 8 | | | | ○ | | | | | ○ | | △ | ○△ | | ○ |
| 40 | 10 | | | | | ○ | | | ○ | ▲ | | ○ | △ | | ○ |
| 40 | 12 | | | | | | | | | ○ | | ○ | ○ | | |
| 40 | 16 | | | | | | | | | | | | | | |
| 40 | 20 | | | | | | | | | | | | | | |
| 45 | 10 | | | | | | | | | | | | | ○ | ○ |
| 50 | 10 | | | | | | | | | ○ | ○ | | | △ | ○ |
| 50 | 12 | | | | | | | | | | | | | | |

Note: See Table 4.5 for KA Type in stainless steel product.

● mark; PSS type, USS type, FSS type: ○ mark; MA type, FA type, SA type:

B-1-4 Procedures to Select Ball Screw

Table 4.5 Screw shaft diameter, lead and stroke of KA type in stainless steel product

Unit: mm

| Shaft dia. | Lead | Stroke | | | | | | | | |
|------------|------|--------|-------|-------|-------|-------|-------|-------|-------|--------|
| | | - 150 | - 200 | - 250 | - 300 | - 350 | - 450 | - 500 | - 650 | - 1050 |
| 6 | 1 | ● | | | | | | | | |
| 8 | 1 | | ● | | | | | | | |
| 8 | 2 | | ● | | | | | | | |
| 10 | 2 | | | ● | | | | | | |
| 10 | 4 | ● | | | | ● | | | | |
| 12 | 2 | ● | | | ● | | | | | |
| 12 | 5 | | | ● | | | | ● | | |
| 12 | 10 | | | | ● | | | ● | | |
| 15 | 10 | | | | | | ● | | ● | ● |
| 15 | 20 | | | | | | ● | | ● | ● |
| 16 | 2 | ● | | | | ● | | | | |
| 20 | 20 | | | | | | ● | | ● | ● |

Table 4.6 Screw shaft diameter, lead and standard screw shaft length of R Series

Unit: mm

| Screw shaft diameter | Lead | Standard screw shaft length | | | | | | | | | |
|----------------------|------|-----------------------------|-----|-----|------|------|------|------|------|------|------|
| | | 400 | 500 | 800 | 1000 | 1500 | 2000 | 2500 | 3000 | 4000 | 5000 |
| 10 | 3 | ● | | ● | | | | | | | |
| 10 | 6 | ● | | ● | | | | | | | |
| 12 | 8 | ● | | ● | | | | | | | |
| 12 | 12 | ● | | ● | | | | | | | |
| 14 | 4 | | ● | | ● | | | | | | |
| 14 | 5 | | ● | | ● | | | | | | |
| 15 | 20 | | ● | | ● | ● | | | | | |
| 16 | 10 | | ● | | ● | ● | | | | | |
| 16 | 16 | | ● | | ● | ● | | | | | |
| 16 | 32 | | ● | | ● | ● | | | | | |
| 18 | 8 | | ● | | ● | ● | | | | | |
| 20 | 5 | | ● | | ● | | ● | | | | |
| 20 | 10 | | ● | | ● | | ● | | | | |
| 20 | 20 | | ● | | ● | | ● | | | | |
| 20 | 40 | | ● | | ● | ● | | | | | |
| 25 | 5 | | | | ● | | ● | | | | |
| 25 | 10 | | | | ● | | ● | ● | | | |
| 25 | 25 | | | | ● | | ● | ● | | | |
| 25 | 50 | | | | ● | | ● | ● | | | |
| 28 | 6 | | | | ● | | | ● | | | |
| 32 | 10 | | | | ● | | ● | | ● | | |
| 32 | 32 | | | | ● | | ● | | ● | | |
| 32 | 64 | | | | ● | | ● | | ● | ● | |
| 36 | 10 | | | | ● | | ● | | ● | | |
| 40 | 10 | | | | | | ● | | ● | ● | |
| 40 | 40 | | | | | | ● | | ● | ● | |
| 40 | 80 | | | | | | ● | | ● | ● | ● |
| 45 | 12 | | | | | | ● | | ● | ● | |
| 50 | 10 | | | | | | ● | | ● | ● | |
| 50 | 16 | | | | | | ● | | ● | ● | |
| 50 | 50 | | | | | | ● | | ● | ● | |

2. Made-to-order ball screws

Table 4.7 shows the combinations of screw shaft diameter and leads for made-to-order ball screws. For details, refer to the dimension tables from pages B429 and B491.

Table 4.7 Combinations of screw shaft diameter and leads for typical ball screw

Unit: mm

| Screw shaft diameter | Lead | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|------|---|-----|---|-----|---|---|------------|----------|-----|-------------------|------------|----|----|----------|------------|------------|-----|-----------------|----|----------|-----------------|-----|----|-----|-----|---|
| | 0.5 | 1 | 1.5 | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 15 | 16 | 20 | 25 | 30 | 32 | 36 | 40 | 50 | 60 | 64 | 80 | 100 | |
| 4 | D | D | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | D | D | | D | | | | | | S | | S | | | | | | | | | | | | | | | |
| 8 | D | D | D | D | | | | | | | S | | | S | | | | | | | | | | | | | |
| 10 | | D | | D | D | | T | S | | | S | | | | | | | | | | | | | | | | |
| 1 2 | | D | | D | D | D | T | S,T | | | S,T | | | | | S,C | | S | | | | | | | | | |
| 14 | | | | D | | D | | T | | T | | | | | | | | | | | | | | | | | |
| 15 | | | | | | | | S | | | S,T | | | | | S,C | | S | | | | C | | | | | |
| 16 | | | | D | D | | T | T | T | | | | | | T,C | | | C | | | | C | | | | | |
| 20 | | | | D | | | T | S,T D,B | T,D B | T | S,T | | | | T | S,T C | | S | | | S,C | | S,C | | | | |
| 25 | | | | D | | | T | S,T D,B | T,D B | T,B | S,T D,B | | | | T | S,T | S,T C | S | | | | S,C | | | | C | |
| 28 | | | | | | | | T | T | | T | | | | | | | | | | | | | | | | |
| 32 | | | | D | | | T | S,T D | T,D | T,D | S,T D,B V,F | S,T B | | | S,V | S,T V,N | T,N | | S,T C,V N | | | | | | S,C | | |
| 36 | | | | | | | | S,T | T | | S,T F | S,F | | | S,H | S,H | | | | | | | | | | | |
| 40 | | | | D | | | | T,D | T,D | T,D | S,T D,F | S,T F | | | S,T H | S,H | S,T H,N | S,H | T,H N | H | H | S,T C,V N | | | | S | |
| 45 | | | | | | | | | | | S,T F | S,T F | | | S,H | S,H | S,H | S,H | H | H | | | | | | | |
| 50 | | | | | | | | T,D | T,D | T,D | S,T D,F | S,T D,F | F | | S,T F | S,T D,H | S,T H,N | S,H | T,H N | | T,N F | S,T C,V N | | | | | S |
| 55 | | | | | | | | | | | T,F | F | F | | F | H | H | H | H | | | | | | | | |
| 63 | | | | | | | | | D | D | T,D | D,F | F | | F | T,D F | F | F | F | | | T,F | T | | | | |
| 80 | | | | | | | | | | | T,D | T,D | F | | T,F | T,D F | F | | | | | | F | | | | |
| 100 | | | | | | | | | | | D | T,D | | | T,F | T,D F | F | | | | | | | | | | |
| 120 | | | | | | | | | | | | | | | F | F | F | | | | | | | | | | |
| 125 | | | | | | | | | | | | | | | T | T | | | | | | | | | | | |
| 140 | | | | | | | | | | | | | | | | F | F | F | F | | | | | | | | |
| 160 | | | | | | | | | | | | | | | | | F | F | F | F | | | | | | | |
| 200 | | | | | | | | | | | | | | | | | | F | F | F | F | | | | | | |

T: Tube type

D: Deflector (bridge) type

C: End cap type

S: End deflector type

H: HMC type, HMD type

F: HTF-SRC, HTF-SRD, HTF type

N: ND Series

B: BSL type

V: VSS type

B-1-4 Procedures to Select Ball Screw

B-1-4.5 Manufacturing Capability for Screw Shaft

Table 4.8 shows the manufacturing capability for the screw shaft overall length for each accuracy grade. The capability of large ball screw whose shaft diameter exceeds 100 mm is limited due to the weight (indicated by * asterisk in the table). Please consult NSK in such a case.

Also consult NSK if the screw shaft size you desire exceeds the size listed in **Table 4.8**.

Table 4.8 Manufacturing capability of screw shaft

Unit: mm

| Screw shaft diameter | Accuracy grade | | | | | | |
|----------------------|----------------|-------|-------|--------|--------|--------|---------------|
| | C0 | C1 | C2 | C3 | C5 | Ct7 | Ct10 |
| 4 | 90 | 110 | 120 | 140 | 140 | 140 | — |
| 6 | 150 | 180 | 200 | 250 | 250 | 250 | — |
| 8 | 240 | 280 | 340 | 340 | 340 | 340 | — |
| 10 | 350 | 400 | 500 | 500 | 500 | 550 | 800 |
| 12 | 450 | 500 | 650 | 700 | 750 | 800 | 800 |
| 14 | 600 | 650 | 750 | 800 | 1 000 | 1 000 | 1 000 |
| 15 | 600 | 700 | 800 | 900 | 1 250 | 1 250 | 1 500 |
| 16 | 600 | 750 | 900 | 1 000 | 1 500 | 1 500 | 1 500 |
| 18 | — | — | — | — | — | — | 1 500 |
| 20 | 850 | 1 000 | 1 200 | 1 400 | 1 900 | 1 900 | 2 000 |
| 25 | 1 100 | 1 400 | 1 600 | 1 900 | 2 500 | 2 500 | 2 500 |
| 28 | 1 100 | 1 400 | 1 600 | 1 900 | 2 500 | 2 500 | 2 500 |
| 32 | 1 500 | 1 750 | 2 250 | 2 500 | 3 200 | 3 200 | 3 000 (4 000) |
| 36 | 1 500 | 1 750 | 2 250 | 2 500 | 3 200 | 3 500 | 3 000 |
| 40 | 2 000 | 2 400 | 3 000 | 3 400 | 3 800 | 4 300 | 4 000 (5 000) |
| 45 | 2 000 | 2 400 | 3 000 | 3 400 | 4 000 | 4 500 | 4 000 |
| 50 | 2 000 | 3 200 | 4 000 | 4 500 | 5 000 | 5 750 | 4 000 |
| 55 | 2 000 | 4 000 | 5 000 | 5 800 | 6 000 | 6 000 | — |
| 63 | 2 000 | 4 000 | 5 000 | 6 000 | 6 800 | 7 700 | — |
| 80 | — | 4 000 | 6 300 | 8 200 | 9 200 | 10 000 | — |
| 100 | — | 4 000 | 6 300 | 10 000 | 12 500 | 13 500 | — |
| *120 | — | — | — | — | — | 13 500 | — |
| *125 | — | — | — | 10 000 | 13 500 | 13 500 | — |
| *140 | — | — | — | — | — | 10 000 | — |
| *160 | — | — | — | — | — | 8 000 | — |
| *200 | — | — | — | — | — | 5 000 | — |

- Notes**
1. Values in parentheses of Ct10 are applicable to the ultra high helix lead ($l/d \geq 2$). Refer to dimension tables on B385 and following pages for details.
 2. Please note that the range for small leads (3 mm or under) are also limited by the screw length.

B-1-4.6 Outside Shapes of Ball Nut

1. Flange shape

Fig. 4.1 shows the available flange shape. Select the appropriate shape according to the nut installation condition. (Fig. 4.2)

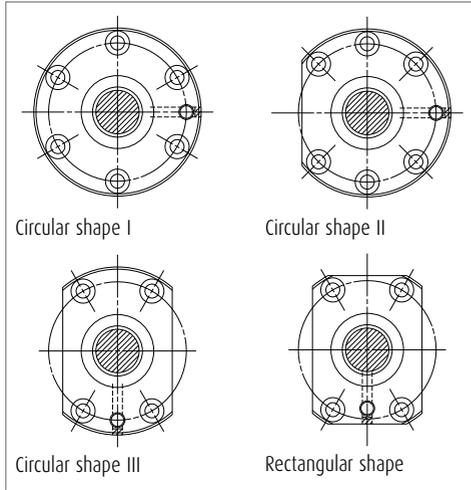


Fig. 4.1 Flange shape

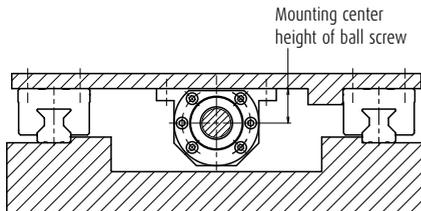


Fig. 4.2 Installation example

2. Shapes of nut cross section

Cross section of nuts are shown in Fig. 4.3. For detailed dimensions, refer to dimension table of nut.

① Circular (round)

The ball recirculation components are contained inside the circumference of the nut. It can be inserted in a round hole.

② Tube-projecting type

This shape is unique to the tube recirculation type. The nut outside diameter is small. However some recess must be given for housing because the ball recirculation tube protrudes from the circumference of the nut.

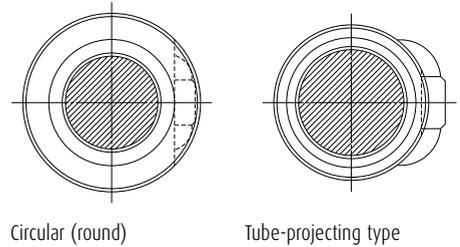


Fig. 4.3 Shape of the cross section of nut

B-1-4 Procedures to Select Ball Screw

B-1-4.7 Shaft End Configuration

1. Standard shaft end dimensions

Tables 4.9 and 4.10 show shaft end types for NSK standard support units.

Refer to the dimension tables below when designing shaft ends of standard ball screw.

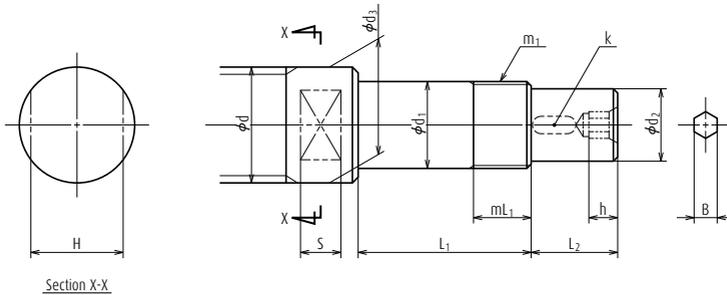


Fig. 4.4 Configuration of standard shaft end (drive side)

Table 4.9 Dimensions of shaft ends (drive side)

Unit: mm

| Screw shaft diameter d | Bearing journal | | Thread | | Drive section | | | Seal section | Hexagon hole | | Wrench flats | | Support unit | |
|-----------------------------|------------------|--------|---------------|--------|------------------|--------|-----------|------------------|--------------------|-------|--------------------|--------|---------------|----------|
| | Outside diameter | Length | Nominal spec. | Length | Outside diameter | Length | Key width | Outside diameter | Width across flats | Depth | Width across flats | Length | | |
| | d_1 | L_1 | m_1 | mL_1 | d_2 | L_2 | k | d_3 | B | h | H | S | Reference No. | |
| 4 | 6 | 22.5 | M6×0.75 | 7 | 4.5 | 7.5 | — | 9.5 | — | — | 8 | 4.5 | WBK06-01A | WBK06-11 |
| 6 | 6 | 22.5 | M6×0.75 | 7 | 4.5 | 7.5 | — | 9.5 | — | — | 8 | 4.5 | WBK06-01A | WBK06-11 |
| 8 | 8 | 27 | M8×1 | 9 | 6 | 10 | — | 11.5 | — | — | 10 | 5.5 | WBK08-01A | WBK08-11 |
| 10 | 8 | 27 | M8×1 | 9 | 6 | 10 | — | 11.5 | — | — | 10 | 5.5 | WBK08-01A | WBK08-11 |
| 12 | 10 | 30 | M10×1 | 10 | 8 | 15 | — | 14 | — | — | 12 | 6.5 | WBK10-01A | WBK10-11 |
| 14 | 12 | 30 | M12×1 | 10 | 10 | 15 | 3 | 15 | 4 | 6 | 12 | 6.5 | WBK12-01A | WBK12-11 |
| 15 | 12 | 30 | M12×1 | 10 | 10 | 15 | 3 | 15 | 4 | 6 | 12 | 6.5 | WBK12-01A | WBK12-11 |
| 16 | 12 | 30 | M12×1 | 10 | 10 | 15 | 3 | 15 | 4 | 6 | 12 | 6.5 | WBK12-01A | WBK12-11 |
| 20 | 15 | 40 | M15×1 | 15 | 12 | 20 | 4 | 19.5 | 5 | 7 | 17 | 8.5 | WBK15-01A | WBK15-11 |
| 20 | 17 | 81 | M17×1 | 23 | 12 | 29 | 4 | 20 | 5 | 7 | 22 | 10 | WBK170F-31H | |
| 25 | 20 | 53 | M20×1 | 16 | 15 | 27 | 5 | 25 | 6 | 8 | 22 | 10 | WBK20-01 | WBK20-11 |
| 25 | 20 | 81 | M20×1 | 23 | 15 | 39 | 5 | 25 | 6 | 8 | 22 | 10 | WBK200F-31H | |
| 28 | 20 | 53 | M20×1 | 16 | 15 | 27 | 5 | 25 | 6 | 8 | 22 | 10 | WBK20-01 | WBK20-11 |
| 28 | 20 | 81 | M20×1 | 23 | 15 | 39 | 5 | 28 | 6 | 8 | 24 | 12 | WBK200F-31H | |
| 32 | 25 | 62 | M25×1.5 | 20 | 20 | 33 | 6 | 32 | 8 | 10 | 27 | 12 | WBK25-01W | WBK25-11 |
| 32 | 25 | 89 | M25×1.5 | 26 | 20 | 51 | 6 | 32 | 8 | 10 | 27 | 12 | WBK250F-31H | |
| 32 | 25 | 104 | M25×1.5 | 26 | 20 | 51 | 6 | 32 | 8 | 10 | 27 | 12 | WBK250FD-31H | |
| 36 | 30 | 89 | M30×1.5 | 26 | 25 | 61 | 8 | 36 | 10 | 12 | 30 | 13 | WBK300F-31H | |
| 36 | 30 | 104 | M30×1.5 | 26 | 25 | 61 | 8 | 36 | 10 | 12 | 30 | 13 | WBK300FD-31H | |
| 40 | 30 | 89 | M30×1.5 | 26 | 25 | 61 | 8 | 40 | 10 | 12 | — | — | WBK300F-31H | |
| 40 | 30 | 104 | M30×1.5 | 26 | 25 | 61 | 8 | 40 | 10 | 12 | — | — | WBK300FD-31H | |
| 45 | 35 | 92 | M35×1.5 | 30 | 30 | 63 | 8 | 45 | 12 | 14 | — | — | WBK350F-31H | |
| 45 | 35 | 107 | M35×1.5 | 30 | 30 | 63 | 8 | 45 | 12 | 14 | — | — | WBK350FD-31H | |
| 50 | 40 | 92 | M40×1.5 | 30 | 35 | 78 | 10 | 50 | 14 | 18 | — | — | WBK400F-31H | |
| 50 | 40 | 107 | M40×1.5 | 30 | 35 | 78 | 10 | 50 | 14 | 18 | — | — | WBK400FD-31H | |

Notes Low-profile support unit is available for compact FA Series.

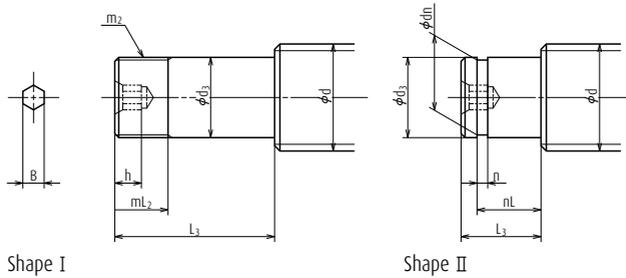


Fig. 4.5 Standard shaft end configuration (opposite to the drive side)

Table 4.10 Dimensions of shaft ends (opposite to the drive side)

Unit: mm

| Screw shaft diameter d | Shape | Bearing journal | | Thread for lock nut | | Retainer ring groove | | | Hexagonal hole | | Support unit Reference No. Numbers in parentheses are bearing reference number. |
|-----------------------------|-------|------------------|--------|---------------------|--------|----------------------|-----------------|-----------------|--------------------|-------|---|
| | | Outside diameter | Length | Nominal spec. | Length | Width | Groove diameter | Groove position | Width across flats | Depth | |
| | | d_3 | L_3 | m_2 | mL_2 | n | dn | nL | B | h | |
| 8 | II | 6 | 9 | — | — | 0.8 | 5.7 | 6.8 | — | — | WBK08S-01 |
| 10 | II | 6 | 9 | — | — | 0.8 | 5.7 | 6.8 | — | — | WBK08S-01 |
| 12 | II | 8 | 10 | — | — | 0.9 | 7.6 | 7.9 | — | — | WBK10S-01 |
| 14 | II | 10 | 22(12) | — | — | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01 |
| 15 | II | 10 | 22(12) | — | — | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01 |
| 16 | II | 10 | 22(12) | — | — | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01 |
| 20 | II | 15 | 25(13) | — | — | 1.15 | 14.3 | 10.15 | 5 | 7 | WBK15S-01 |
| 25 | II | 20 | 19 | — | — | 1.35 | 19 | 15.35 | 6 | 8 | WBK20S-01 |
| 25 | I | 20 | 53 | M20×1 | 16 | — | — | — | 6 | 8 | WBK20-01 WBK20-11 |
| 25 | I | 20 | 81 | M20×1 | 23 | — | — | — | 6 | 8 | WBK20DF-31H |
| 28 | II | 20 | 19 | — | — | 1.35 | 19 | 15.35 | 6 | 8 | WBK20S-01 |
| 28 | I | 20 | 53 | M20×1 | 16 | — | — | — | 6 | 8 | WBK20-01 WBK20-11 |
| 28 | I | 20 | 81 | M20×1 | 23 | — | — | — | 6 | 8 | WBK20DF-31H |
| 32 | II | 25 | 20 | — | — | 1.35 | 23.9 | 16.35 | 8 | 10 | WBK25S-01W |
| 32 | I | 25 | 62 | M25×1.5 | 20 | — | — | — | 8 | 10 | WBK25-01W WBK25-11 |
| 32 | I | 25 | 89 | M25×1.5 | 26 | — | — | — | 8 | 10 | WBK25DF-31H |
| 36 | II | 25 | 20 | — | — | 1.35 | 23.9 | 16.35 | 10 | 12 | (6205) |
| 36 | I | 25 | 89 | M25×1.5 | 26 | — | — | — | 10 | 12 | WBK25DF-31H |
| 40 | II | 30 | 22 | — | — | 1.75 | 28.6 | 17.75 | 10 | 12 | (6206) |
| 40 | I | 30 | 89 | M30×1.5 | 26 | — | — | — | 10 | 12 | WBK30DF-31H |
| 45 | II | 35 | 25 | — | — | 1.75 | 33 | 18.75 | 12 | 14 | (6207) |
| 45 | I | 35 | 92 | M35×1.5 | 30 | — | — | — | 12 | 14 | WBK35DF-31H |
| 50 | II | 40 | 25 | — | — | 1.95 | 38 | 19.95 | 14 | 18 | (6208) |
| 50 | I | 40 | 92 | M40×1.5 | 30 | — | — | — | 14 | 18 | WBK40DF-31H |

B-1-4 Procedures to Select Ball Screw

2. Shaft end configuration of R series ball screws for transfer equipment

Tables 4.11 and 4.12 show shaft end types for R Series.

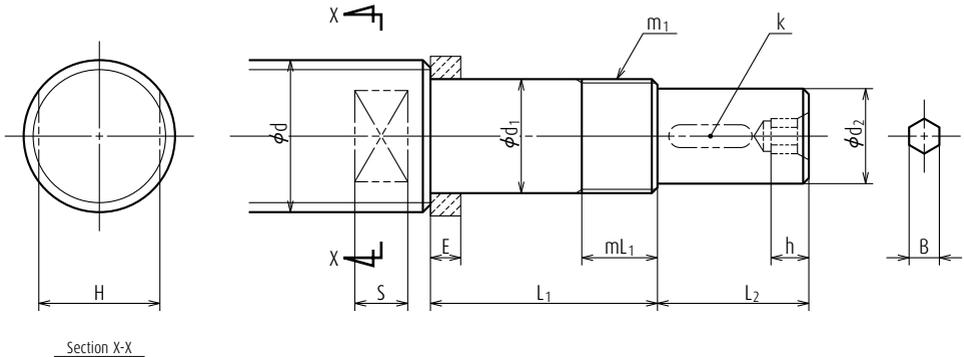


Fig. 4.6 R Series shaft end (drive side)

Table 4.11 Dimensions of R Series shaft ends (drive side)

Unit: mm

| Screw shaft diameter | Bearing journal | | Thread for lock nut | | Spacer | Drive section | | | Hexagon hole | | Wrench flats | | Support unit | |
|----------------------|------------------|----------------|---------------------|----------------|-----------------|------------------|----------------|----------------|--------------------|-------|--------------------|--------|--------------|---------------|
| | Outside diameter | Length | Nominal spec. | Length | Width | Outside diameter | Length | Key width | Width across flats | Depth | Width across flats | Length | | |
| | d | d ₁ | L ₁ | m ₁ | mL ₁ | E | d ₂ | L ₂ | k | B | h | H | S | Reference No. |
| 10 | 6 | 27 | M6×0.75 | 7 | 5.0 | 4.5 | 7.5 | — | — | — | 8 | 4.5 | WBK06-01A | WBK06-11 |
| 12 | 8 | 32 | M8×1 | 9 | 5.5 | 6 | 10 | — | — | — | 10 | 5.5 | WBK08-01A | WBK08-11 |
| 14 | 10 | 35 | M10×1 | 10 | 5.5 | 8 | 15 | — | — | — | 12 | 6.5 | WBK10-01A | WBK10-11 |
| 15 | 10 | 35 | M10×1 | 10 | 5.5 | 8 | 15 | — | — | — | 12 | 6.5 | WBK10-01A | WBK10-11 |
| 16 | 12 | 35 | M12×1 | 10 | 5.6 | 10 | 15 | 3 | 4 | 6 | 12 | 6.5 | WBK12-01A | WBK12-11 |
| 18 | 12 | 35 | M12×1 | 10 | 5.6 | 10 | 15 | 3 | 4 | 6 | 12 | 6.5 | WBK12-01A | WBK12-11 |
| 20 | 15 | 50 | M15×1 | 15 | 10 | 12 | 20 | 4 | 5 | 7 | 17 | 8.5 | WBK15-01A | WBK15-11 |
| 25 | 17 | 53 | M17×1 | 17 | 7 | 15 | 27 | 5 | 6 | 8 | 22 | 10 | WBK17-01A | — |
| 25 | 20 | 64 | M20×1 | 16 | 11 | 15 | 27 | 5 | 6 | 8 | 22 | 10 | WBK20-01 | WBK20-11 |
| 28 | 20 | 64 | M20×1 | 16 | 11 | 15 | 27 | 5 | 6 | 8 | 22 | 10 | WBK20-01 | WBK20-11 |
| 32 | 25 | 76 | M25×1.5 | 20 | 14 | 20 | 33 | 6 | 8 | 10 | 27 | 12 | WBK25-01W | WBK25-11 |
| 36 | 25 | 76 | M25×1.5 | 20 | 14 | 20 | 33 | 6 | 8 | 10 | 27 | 12 | WBK25-01W | WBK25-11 |
| 40 | 30 | 89 | M30×1.5 | 26 | — | 25 | 61 | 8 | 10 | 12 | — | — | WBK30DF-31H | — |
| 45 | 35 | 92 | M35×1.5 | 30 | — | 30 | 63 | 8 | 12 | 14 | — | — | WBK35DF-31H | — |
| 50 | 35 | 92 | M35×1.5 | 30 | — | 30 | 63 | 8 | 12 | 14 | — | — | WBK35DF-31H | — |

Note The dimension d₁ shall be smaller enough than the minor diameter of the ball screw thread to provide sufficient shoulder surface for the spacer.
Refer to "Precautions for Designing Ball Screw (page B83)".

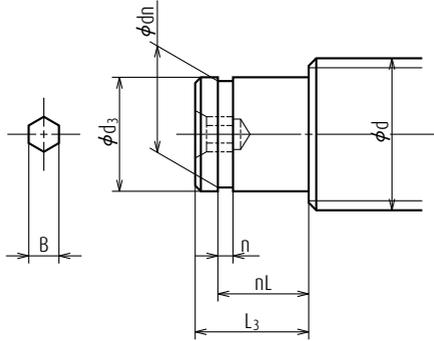


Fig. 4.7 Shaft end configuration of R Series (opposite to the drive side)

Table 4.12 Dimensions of R Series shaft ends (opposite to the drive side)

Unit: mm

| Screw shaft diameter d | Bearing journal | | Retainer ring groove | | | Hexagonal hole | | Support unit Numbers in parentheses are bearing reference numbers. |
|-----------------------------|---------------------------|-----------------|----------------------|-------------------------|-------------------------|---------------------------|--------------|---|
| | Outside diameter d_3 | Length L_3 | Width n | Groove diameter dn | Groove position nL | Width across flats B | Depth h | |
| 10 | 6 | 9 | 0.8 | 5.7 | 6.8 | — | — | WBK08S-01(606) |
| 12 | 8 | 10 | 0.9 | 7.6 | 7.9 | — | — | WBK10S-01(608) |
| 14 | 10 | 12 | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01(6000) |
| 15 | 10 | 12 | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01(6000) |
| 16 | 10 | 12 | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01(6000) |
| 18 | 10 | 12 | 1.15 | 9.6 | 9.15 | 4 | 6 | WBK12S-01(6000) |
| 20 | 15 | 13 | 1.15 | 14.3 | 10.15 | 5 | 7 | WBK15S-01(6002) |
| 25 | 17 | 16 | 1.15 | 16.2 | 13.15 | 6 | 8 | WBK17S-01(6203) |
| 25 | 20 | 19 | 1.35 | 19 | 15.35 | 6 | 8 | WBK20S-01(6204) |
| 28 | 20 | 19 | 1.35 | 19 | 15.35 | 6 | 8 | WBK20S-01(6204) |
| 32 | 25 | 20 | 1.35 | 23.9 | 16.35 | 8 | 10 | WBK25S-01W(6205) |
| 36 | 25 | 20 | 1.35 | 23.9 | 16.35 | 8 | 10 | WBK25S-01W(6205) |
| 40 | 30 | 22 | 1.75 | 28.6 | 17.75 | 10 | 12 | (6206) |
| 45 | 35 | 23 | 1.75 | 33 | 18.75 | 12 | 14 | (6207) |
| 50 | 35 | 23 | 1.75 | 33 | 18.75 | 12 | 14 | (6207) |

B-1-5 When Placing Orders

To avoid confusion, please use "reference number" or "specification number" when inquiring about desired ball screw specifications.

➤ **Reference number:**

Alpha-numeric codes are assigned to each ball screw. When placing order, please use this reference number.

➤ **Specification number:**


Specification factors are identified by alpha-numeric codes. Codes are for easy explanation of your requirements. (If you do not use these numbers, please itemize your requirements.)

B-1-5.1 When Ordering Standard Ball Screws


Find the reference number from the dimension table. Enter the reference number in the "Order Form by Fax" (page B34).

Send the fax to your local NSK agency (branch office, sales office, or your local representative).


The following is the flow chart for ordering standard ball screws.

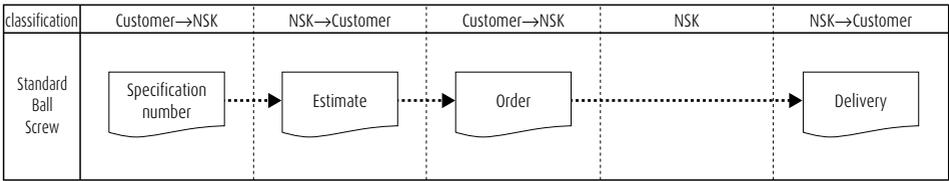


1. Example of reference number for Standard ball screws Compact FA Series and high-speed SS Series

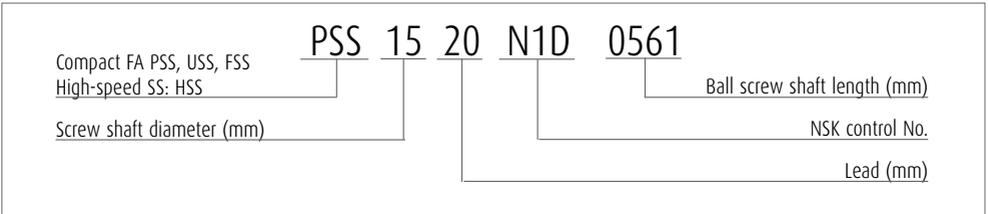


2. Example of reference number of Standard ball screws

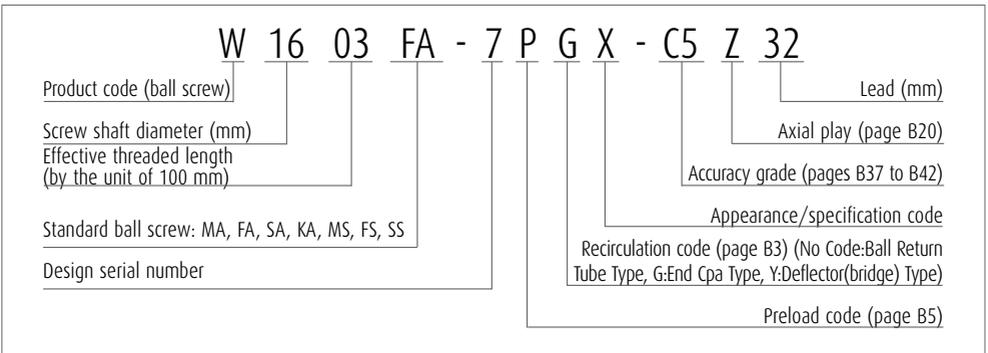

3. Example of reference number of ball screws for transfer equipment with finished shaft end and blank shaft end

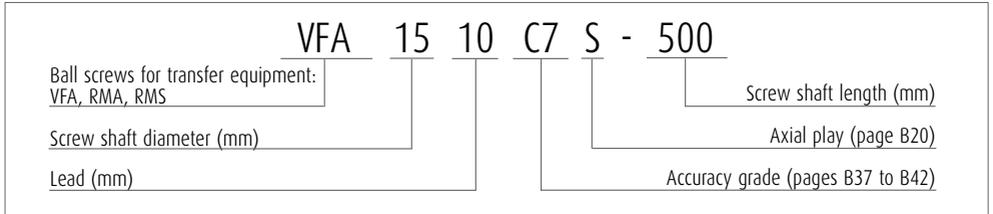

4. Example of reference number of R series ball screws for transfer equipment

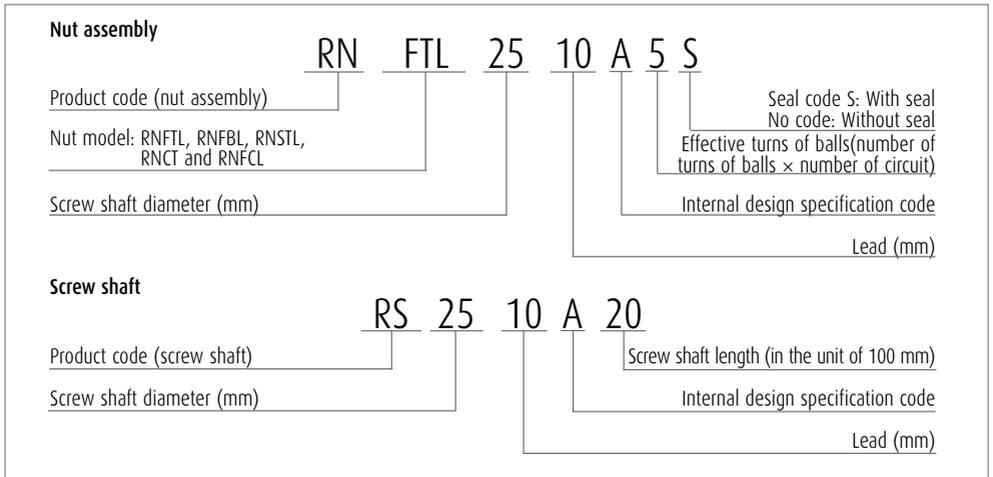


B-1-5 When Placing Orders

B-1-5.2 When Ordering Made-to-Order Ball Screws


If you would like to discuss technical points regarding specifications, use the NSK ball screw technical data sheet as an aid (page B36). For high-load drive ball screws, use the

technical sheet on page B531 for NSK high-load drive ball screw.


The following is the flow chart for ordering made-to-order ball screws.

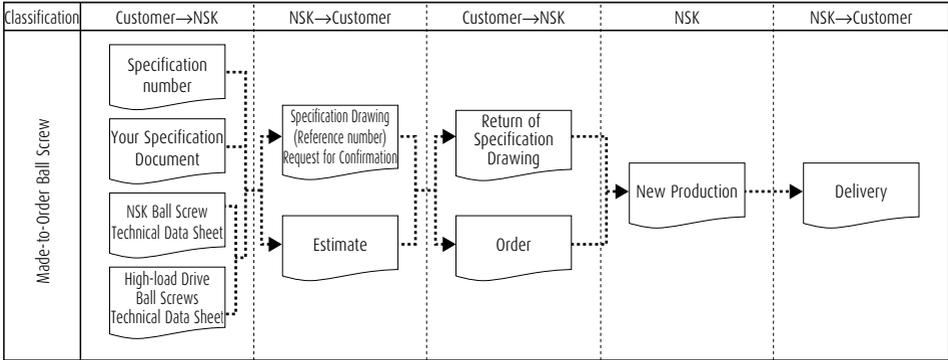

1. Example of specification number of made-to-order ball screw

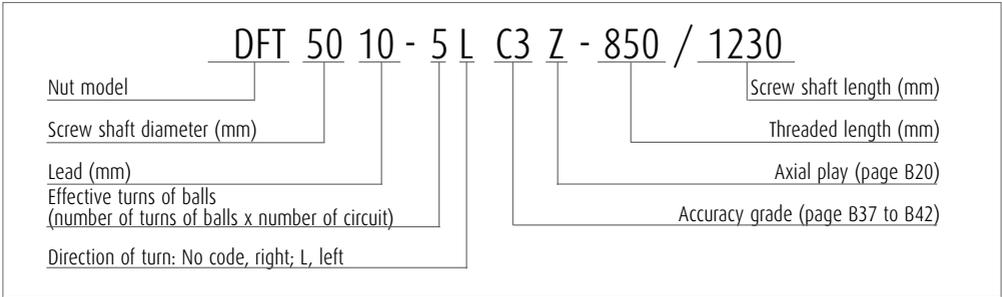

2. Example of reference number of made-to-order ball screw

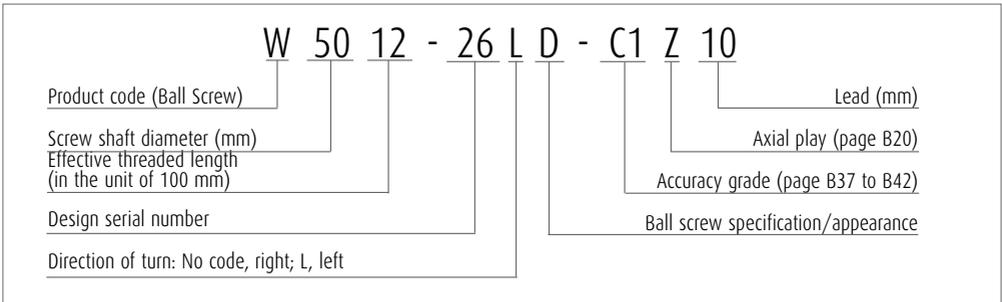

Fax Order Form

(Make copies for future orders)

1. Standard ball screw

Company name: _____

Date: Day Month Year _____

Address: _____

Telephone: _____

Name of person in charge: _____

Section: _____

| Product name | Specification number | Quantity | Desired delivery date |
|---------------------------------|----------------------|----------|-----------------------|
| Precision ball screw | | | |
| R Series ball screw Nut | | | |
| R Series ball screw Screw shaft | | | |
| Support unit | | | |
| Lock nut | | | |
| Grease unit | | | |

Describe the shaft end configuration if processing is required (blank shaft end ball screw). In this case, specify which ball screw in the above list the shaft end shall be processed.

Refer to pages B27 to B30 for shaft end configuration. These pages also show the reference number for support units.

| |
|------------------------|
| Drive side |
| Opposite of drive side |

B-1-5 When Placing Orders

NSK Ball Screw Technical Data Sheet (example)

2. Made-to-order ball screw

Company name _____
 Address _____
 Person in charge _____
 Machine which uses the ball screw Machining center Model MC-
 Drawing/rough sketch attached? Yes No

Date: Day _____ Month _____ Year _____
 Telephone _____
 Section _____
 Application Table left/right movement (X axis)

Use conditions

| | | | | | | | | | |
|------------------------------------|--|--|-----------------|---|---|-----------------------------|-----------------|------------|-----------|
| | Axial load | Rotational speed | Operating hours | Operating conditions | Shaft rotation - Moving nut <u>Normal operation</u> | | | | |
| Maximum load | 9 000 N | 20 min ⁻¹ | 15 % | | Shaft rotation - Moving shaft | Back drive operation | | | |
| Load in normal use | 4 000 N | 360 min ⁻¹ | 60 % | | Nut rotation - Moving nut | Nut rotation - Moving shaft | | | |
| Minimum load | 2 000 N | 1 000 min ⁻¹ | 25 % | Degree of vibration shock | Normal | | | | |
| Maximum rotational speed | 1 000 min ⁻¹ | | | Required life | 20000h | | | | |
| Lubricant | Grease/oil (Brand name: <i>NSK GRS AS2</i>) (Maker: _____) | | | Motor in use | Company A, Model 1 | | | | |
| Seal | Yes | No | | Control system | Company B, Model 2 (resolution: 1µm) | | | | |
| Support bearing | Drive side <i>35TAC62DF</i> | | | Opposite to drive side <i>35TAC62DF</i> | | | | | |
| Guide way | <u>Rolling</u> | Sliding (<i>RA451500GM2-P4Z3-II</i>) | | | | | | | |
| Environment | Temperature (Normal temperature in degrees Celsius) | | | Dust | Humidity | Gas | Liquid (where?) | Clean room | In vacuum |
| Schedule for prototype | Day | Month | Year (approx.) | Quantity used | Piece | | | | |
| Date, going in production/Quantity | /Month | /Year | /Lot | per machine | | | | | |

Specification factors of the ball screw

| | | | | | | | | | |
|----------------------|------------|--------------------------|------------|-----------------|------|--------------------------------------|---------|-----------------|----------|
| Screw shaft diameter | 50 mm | Direction of turn | right | Accuracy grade | C2 | Screw shaft length | 880 mm | Preload | 3000 N |
| Lead | 10 mm | Effective turns of balls | | Axial play | 0 mm | Overall shaft length | 1335 mm | Required torque | |
| Nut model | ZFT5010-10 | Flange type | Circular I | Nut orientation | | Same as shown in the dimension table | | | Opposite |

Supplemental explanation/requests

NSK Ball Screw Technical Data Sheet (example)

2. Made-to-order ball screw

Company name _____
 Address _____
 Person in charge _____
 Machine which uses the ball screw _____
 Drawing/rough sketch attached? Yes No

Date: Day _____ Month _____ Year _____
 Telephone _____
 Section _____
 Application _____

Use conditions

| | | | | | | |
|------------------------------------|---|-------------------|-----------------|---------------------------|-------------------------------|--|
| | Axial load | Rotational speed | Operating hours | Operating conditions | Shaft rotation - Moving nut | Normal operation |
| Maximum load | N | min ⁻¹ | % | | Shaft rotation - Moving shaft | Back drive operation |
| Load in normal use | N | min ⁻¹ | % | | Nut rotation - Moving nut | Oscillation |
| Minimum load | N | min ⁻¹ | % | Degree of vibration shock | | |
| Maximum rotational speed | min ⁻¹ | | | Required life | | |
| Lubricant | Grease/oil (Brand name: _____) (Maker: _____) | | | Motor in use | | |
| Seal | Yes | No | | Control system | (resolution: _____) | |
| Support bearing | Drive side | | | Opposite to drive side | | |
| Guide way | Rolling Sliding (_____) | | | | | |
| Environment | Temperature (Normal temperature in degrees Celsius) | | | Dust | Humidity | Gas Liquid (where?) Clean room In vacuum |
| Schedule for prototype | Day | Month | Year (approx.) | Quantity used | Piece | |
| Date, going in production/Quantity | /Month | /Year | /Lot | per machine | | |

Specification factors of the ball screw

| | | | | |
|----------------------|--------------------------|-----------------|--------------------------------------|-----------------|
| Screw shaft diameter | Direction of turn | Accuracy grade | Screw shaft length | Preload |
| Lead | Effective turns of balls | Axial play | Overall shaft length | Required torque |
| Nut model | Flange type | Nut orientation | Same as shown in the dimension table | |
| | | | Opposite | |

Supplemental explanation/requests

B-2 Technical Description of Ball Screws

B-2-1 Accuracy

B-2-1.1 Lead Accuracy

The lead accuracy of NSK precision ball screws (C0 to C5 grades) conforms to the four characteristics specified in JIS Standards. These characteristics are expressed by codes ep, v_u , v_{300} , and $v_{2\pi}$.

Fig. 1.1 explains the definition of each characteristic, and shows allowable value of each. Leads are classified into two categories: C system for positioning; Ct system for transportation. Tables 1.2, 1.3 and 1.4 show tolerance of each characteristic.

JIS B1192 sets C type and Cp type standards for positioning ball screws. NSK uses the specification of C type only. JIS B1192 specifies Ct1, 3, and 5 grade. NSK standards are integrated by C type only. Refer to Table 1.2 for C type standard tolerance.

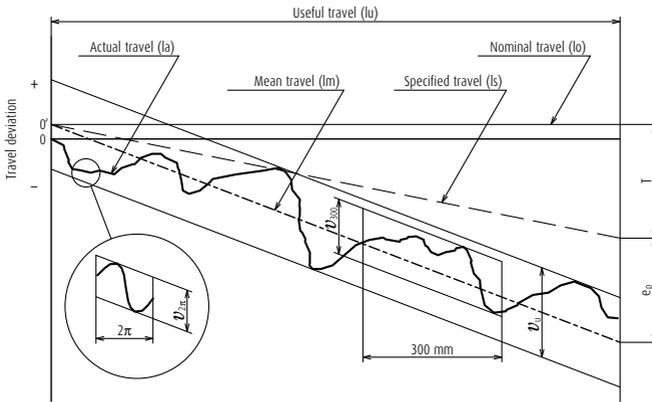


Fig. 1.1 Definition of lead accuracy

Table 1.1 Terminology in lead accuracy

| Term | Code | Description | Tolerance |
|-------------------------------|------------|---|-----------------------------|
| Specified travel | ls | The travel compensates the nominal travel for an elongation caused by an increase of temperature or load. | |
| Travel compensation | T | Value obtained by subtracting the specified travel from the nominal travel based on the useful travel. The value is to compensate for the errors caused by thermal deformation or deformation by load. This value is determined by tests and experience (see page B39). | |
| Actual travel | la | Actually measured travel | |
| Actual mean travel | lm | A straight line that demonstrates the direction of actual travel. This straight line is obtained from the curve that shows actual travel volume by least-squares method or by resembling approximation. | |
| Tolerance on specified travel | ep | Obtained by subtracting the specified travel from the actual mean travel. | Table 1.2 |
| Travel variation | v_u | Maximum range of the actual travel which is between the two straight lines drawn parallel to the actual mean travel. There are three categories as shown below. | Table 1.2 Table 1.3, 1.4 |
| | v_{300} | | |
| | $v_{2\pi}$ | | |

Table 1.2 Tolerance on specified travel ($\pm ep$) and travel variation (v_u) of the positioning (C type) ball screws

Unit: μm

| Accuracy grade | C0 | | C1 | | C2 | | C3 | | C5 | | | |
|----------------|--------|---------|----------|-------|----------|-------|----------|-------|----------|-------|----------|-------|
| | over | or less | $\pm ep$ | v_u |
| - | 100 | | 3 | 3 | 3.5 | 5 | 5 | 7 | 8 | 8 | 18 | 18 |
| 100 | 200 | | 3.5 | 3 | 4.5 | 5 | 7 | 7 | 10 | 8 | 20 | 18 |
| 200 | 315 | | 4 | 3.5 | 6 | 5 | 8 | 7 | 12 | 8 | 23 | 18 |
| 315 | 400 | | 5 | 3.5 | 7 | 5 | 9 | 7 | 13 | 10 | 25 | 20 |
| 400 | 500 | | 6 | 4 | 8 | 5 | 10 | 7 | 15 | 10 | 27 | 20 |
| 500 | 630 | | 6 | 4 | 9 | 6 | 11 | 8 | 16 | 12 | 30 | 23 |
| 630 | 800 | | 7 | 5 | 10 | 7 | 13 | 9 | 18 | 13 | 35 | 25 |
| 800 | 1 000 | | 8 | 6 | 11 | 8 | 15 | 10 | 21 | 15 | 40 | 27 |
| 1 000 | 1 250 | | 9 | 6 | 13 | 9 | 18 | 11 | 24 | 16 | 46 | 30 |
| 1 250 | 1 600 | | 11 | 7 | 15 | 10 | 21 | 13 | 29 | 18 | 54 | 35 |
| 1 600 | 2 000 | | | | 18 | 11 | 25 | 15 | 35 | 21 | 65 | 40 |
| 2 000 | 2 500 | | | | 22 | 13 | 30 | 18 | 41 | 24 | 77 | 46 |
| 2 500 | 3 150 | | | | 26 | 15 | 36 | 21 | 50 | 29 | 93 | 54 |
| 3 150 | 4 000 | | | | 30 | 18 | 44 | 25 | 60 | 35 | 115 | 65 |
| 4 000 | 5 000 | | | | | | 52 | 30 | 72 | 41 | 140 | 77 |
| 5 000 | 6 300 | | | | | | 65 | 36 | 90 | 50 | 170 | 93 |
| 6 300 | 8 000 | | | | | | | | 110 | 60 | 210 | 115 |
| 8 000 | 10 000 | | | | | | | | | | 260 | 140 |
| 10 000 | 12 500 | | | | | | | | | | 320 | 170 |

Table 1.3 Tolerance of travel variation relative to 300 mm (v_{300}) and one revolution ($v_{2\pi}$) of the positioning (C type) ball screws

Unit: μm

| Accuracy grade | C0 | C1 | C2 | C3 | C5 |
|----------------|-----|----|----|----|----|
| v_{300} | 3.5 | 5 | 7 | 8 | 18 |
| $v_{2\pi}$ | 2.5 | 4 | 5 | 6 | 8 |

Note: to JIS B1192 standards. Values in other areas are NSK standards.

Table 1.4 Travel variation (v_{300}) relative to 300 mm of the transportation (Ct type) ball screws

Unit: μm

| Accuracy grade | Ct7 | Ct10 |
|----------------|-----|------|
| v_{300} | 52 | 210 |

Note: Tolerance on specified travel (ep) of the transportation (Ct type) ball screws is calculated as follows.

$$ep = \frac{2 \cdot lu}{300} \cdot v_{300}$$

lu: Effective length of the screw thread

B-2-1 Accuracy

Example of specifying lead accuracy

<Use Conditions>

Nut model: DFT4010-5

Stroke: 1 000 mm

Positioning accuracy: ± 0.035 mm/1 000 mm

<Calculation>

Obtain required lead accuracy of a ball screw under these conditions.

1. Calculate the length of the thread

$$\begin{aligned}\text{Stroke} + \text{nut length} + \text{margin} &= 1\,000 + 193 + 100 \\ &= 1\,293 \text{ (mm)} \rightarrow 1\,300 \text{ mm}\end{aligned}$$

2. Calculate lead accuracy

From **Table 1.2**, obtain the tolerance on specified travel relative to the length of thread (1 300 mm).

C5 ... $\pm 0.054/1\,250 - 1\,600$

C3 ... $\pm 0.029/1\,250 - 1\,600$

3. Determine lead accuracy

Positioning accuracy is: $\pm ep < \pm 0.035/1\,000$ mm

$$\begin{aligned}\text{Accuracy grade: C3 grade } \pm ep &= 0.029/\text{length of thread (1 300 mm)} \\ v_u &= 0.018\end{aligned}$$

B-2-1.2 Thermal Expansion and Target Value of Specified Travel

1. Thermal expansion

Thermal expansion of screw shaft induces the degradation of positioning accuracy of the ball screws. Thermal expansion of a screw shaft is calculated as follows.

$$\Delta L_0 = \rho \cdot \theta \cdot L(\text{mm}) \quad \text{--(I-1)}$$

In this formula:

- ΔL_0 : Thermal expansion (mm)
- ρ : Thermal expansion coefficient ($12.0 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$)
- θ : Average temperature rise of screw shaft (Celsius)
- L : Length of screw shaft (mm)

The above formula indicates that when the temperature rises one degree Celsius, the screw shaft stretches $12 \mu\text{m}$ per meter. Ball screw generates more heat when it is used at high speed. This causes elongation of the screw shaft. Although the ball screw lead is ground into high precision, an elongated screw shaft due to high temperature rise may not satisfy required highly accurate positioning.

2. Countermeasures against temperature rise

Countermeasures against temperature rise of the ball screw are: Hollow shaft cooling or nut cooling ball screws are recommended for operation under high-speed and high-precision conditions.

① Suppress heat generation.

- > Do not apply excessive preload to the ball screw and support bearing.
- > Select appropriate lubricant and use it properly.
- > Use higher helix ball screw lead to lower rotational speed.

② Use forced cooling.

- > Feed liquid coolant into the hollow shaft cooling or nut cooling ball screws. - Refer to the information on hollow shaft ball screw for high accuracy machine tools in the section for application-oriented ball screws (pages B542 to 550).
- > Cool screw shaft surface with lubricant oil or air.

③ Avoid effects of temperature rise on positioning.

- > Warm up the machine by high speed until the temperature rise of ball screw shaft saturates, then maintain it properly.
- > Set pre-tension. (Fig. 1.2)
- > Set the negative (minus) target value of specified travel.
- > Employ the closed loop control system.

3. How to determine specified travel

In general, the specified travel of ball screw is the same as the nominal travel. However, the specified lead of ball screw is sometimes set to negative (minus) or positive (plus) to adjust expansion by temperature rise during operation, or the elongation/contraction of the screw shaft by external load. For such occasion, specify travel compensation (T) when ordering the ball screw.

As an example, **Table 1.5** shows the travel compensation (T) for typical NC machine tools.

Table 1.5 Travel compensation (T) of specified travel for typical NC machine tools

Unit: mm

| Type of machine | Axis | Travel compensation (per 1 m) |
|-------------------|------|-------------------------------|
| NC lathes | X | - 0.02 — - 0.05 |
| | Z | - 0.02 — - 0.03 |
| Machining centers | X, Y | - 0.03 — - 0.04 |
| | Z | Differs by structure |

4. How to determine pre-tension force

In order to absorb thermal expansion, pre-tension can be provided to the screw shaft at the time of installation. In this case, the pre-tension is usually equivalent to the expansion brought about by the temperature rise of 2 to 3°C.

Fig. 1.2 shows the bearing support structure in such occasion.

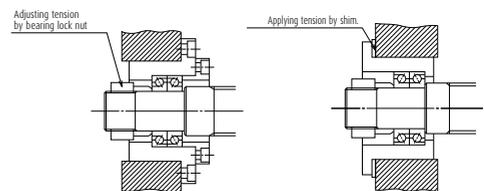


Fig. 1.2 Bearing structure to provide pre-tension

B-2-1 Accuracy

B-2-1.3 Mounting Accuracy and Tolerance of Ball Screws

The accuracy related to mount the ball screws is specified in the following seven characteristics (Fig. 1.3).

The tolerance is indicated in the specification drawing.

Detailed tolerances are specified by JIS B1192. For reference, **Table 1.6** shows standard values of "(7) Total run-out of the screw shaft axis (straightness of the screw shaft)". NSK sets stricter tolerance standards than JIS standards. For accuracy of the ball screw installation, refer to "Installation of Ball Screw (1) Centering of the units" (page B73).

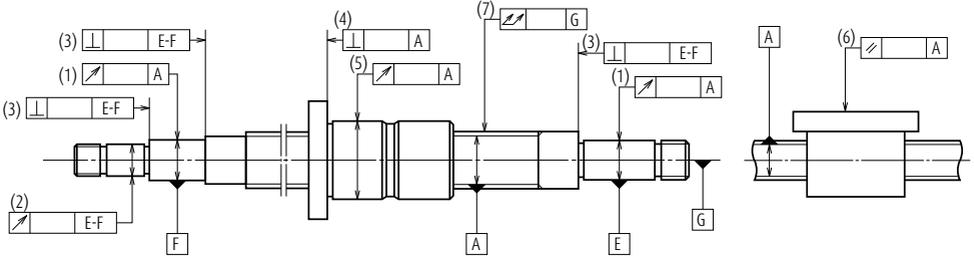


Fig. 1.3 Mounting accuracy of ball screw

1. Radial run-out of the support bearing seat relative to the axis of the ball thread of screw shaft.
2. Radial run-out of the other shaft ends section relative to the axis of the support bearing seat.
3. Perpendicularity of the shoulder of support bearing seat relative to the axis of support bearing seat.
4. Perpendicularity of the nut flange surface, or of the nut end datum surface, relative to the axis of screw shaft.
5. Eccentricity of the nut outside surface (cylindrical shape) to the axis of screw shaft.
6. Parallelism of the nut mounting surface to the screw shaft axis. (in case of flat mounting surface)
7. Total run-out of the screw shaft axis.

Table 1.6 Total run-out of the screw shaft axis

Unit: μm

| Accuracy grade | | C0 | | | | | | | C1 | | | | | | |
|------------------------------------|---------|-------|----|----|-----|----|----|----|----|----|-----|-----|-----|-----|-----|
| Nominal diameter (mm) | over | - | 8 | 12 | 20 | 32 | 50 | - | 8 | 12 | 20 | 32 | 50 | 80 | |
| | or less | 8 | 12 | 20 | 32 | 50 | 80 | 8 | 12 | 20 | 32 | 50 | 80 | 125 | |
| Overall length of screw shaft (mm) | - | 125 | 15 | 15 | 15 | | | | 20 | 20 | 15 | | | | |
| | 125 | 200 | 25 | 20 | 20 | 15 | | | 30 | 25 | 20 | | | | |
| | 200 | 315 | 35 | 25 | 20 | 20 | | | 40 | 30 | 25 | 20 | | | |
| | 315 | 400 | | 35 | 25 | 20 | 15 | | 45 | 40 | 30 | 25 | 20 | | |
| | 400 | 500 | | 45 | 35 | 25 | 20 | | | 50 | 40 | 30 | 25 | | |
| | 500 | 630 | | 50 | 40 | 30 | 20 | 15 | | 60 | 45 | 35 | 25 | 20 | |
| | 630 | 800 | | | 50 | 35 | 25 | 20 | | | 60 | 40 | 30 | 25 | |
| | 800 | 1 000 | | | 65 | 45 | 30 | 25 | | | 75 | 55 | 40 | 30 | 25 |
| | 1 000 | 1 250 | | | 85 | 55 | 40 | 30 | | | 95 | 65 | 45 | 35 | 30 |
| | 1 250 | 1 600 | | | 110 | 70 | 50 | 40 | | | 130 | 85 | 60 | 45 | 35 |
| | 1 600 | 2 000 | | | | 95 | 65 | 45 | | | | 120 | 80 | 55 | 40 |
| | 2 000 | 2 500 | | | | | | | | | | | 100 | 70 | 50 |
| | 2 500 | 3 150 | | | | | | | | | | | | 130 | 90 |
| | 3 150 | 4 000 | | | | | | | | | | | | | 120 |

Unit: μm

| Accuracy grade | | C3 | | | | | | | | C5 | | | | | | |
|------------------------------------|---------|-------|----|----|-----|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|
| Nominal diameter (mm) | over | - | 8 | 12 | 20 | 32 | 50 | 80 | - | 8 | 12 | 20 | 32 | 50 | 80 | |
| | or less | 8 | 12 | 20 | 32 | 50 | 80 | 125 | 8 | 12 | 20 | 32 | 50 | 80 | 125 | |
| Overall length of screw shaft (mm) | - | 125 | 25 | 25 | 20 | | | | | 35 | 35 | 35 | | | | |
| | 125 | 200 | 35 | 35 | 25 | 20 | | | | 50 | 40 | 40 | 35 | | | |
| | 200 | 315 | 50 | 40 | 30 | 30 | | | | 65 | 55 | 45 | 40 | | | |
| | 315 | 400 | 60 | 50 | 40 | 35 | 25 | | | 75 | 65 | 55 | 45 | 35 | | |
| | 400 | 500 | | 65 | 50 | 40 | 30 | | | | 80 | 60 | 50 | 45 | | |
| | 500 | 630 | | 70 | 55 | 45 | 35 | 30 | | | 90 | 75 | 60 | 50 | 40 | |
| | 630 | 800 | | | 70 | 55 | 40 | 35 | | | | 90 | 70 | 55 | 45 | |
| | 800 | 1 000 | | | 95 | 65 | 50 | 40 | 30 | | | 120 | 85 | 65 | 50 | 45 |
| | 1 000 | 1 250 | | | 120 | 85 | 60 | 45 | 35 | | | 150 | 100 | 75 | 60 | 50 |
| | 1 250 | 1 600 | | | 160 | 110 | 75 | 55 | 40 | | | 190 | 130 | 95 | 70 | 55 |
| | 1 600 | 2 000 | | | | 140 | 95 | 70 | 50 | | | | 170 | 120 | 85 | 65 |
| | 2 000 | 2 500 | | | | | 120 | 85 | 60 | | | | | 150 | 110 | 80 |
| | 2 500 | 3 150 | | | | | 160 | 110 | 75 | | | | | 200 | 140 | 95 |
| | 3 150 | 4 000 | | | | | 220 | 150 | 100 | | | | | 260 | 180 | 120 |
| | 4 000 | 5 000 | | | | | | 200 | 130 | | | | | | 240 | 160 |
| | 5 000 | 6 300 | | | | | | | | | | | | | 310 | 210 |
| 6 300 | 8 000 | | | | | | | | | | | | | | 280 | |
| 8 000 | 10 000 | | | | | | | | | | | | | | 370 | |

B-2-1 Accuracy

B-2-1.4 Automatic Lead Accuracy Measuring System of NSK

In response to the demand for high precision in production technology, NSK is the first in the world that developed and uses "Lead Accuracy Measuring System (LAMS)." Lead accuracy is measured by the system that employs a laser interferometer measuring instrument and a personal computer.

Fig. 1.4 shows the lead accuracy measuring system. The inspection date of the ball screw is shown in Fig. 1.5. The laser interferometer measures either ball nut travel accuracy or lead accuracy of the ball thread. The data which are input into a computer are processed into four characteristics readings regarding lead accuracy. (See page B37.)

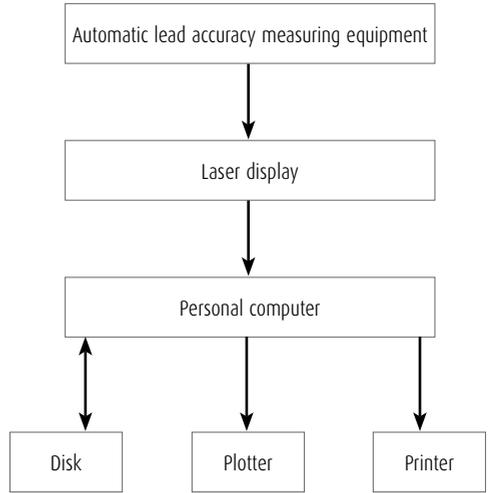


Fig. 1.4 Lead accuracy measuring system



BALL SCREW INSPECTION DATA


NSK REF. NO. _____

CUSTOMER'S PART NO. _____

SERIAL NO. _____


SHAFT NO. _____

MEASURING INSTRUMENT: _____
 TEMPERATURE: 20 ± 0.2°C



Laser beam type automatic lead measuring instrument.

| | | | |
|---|--------------------|-------------------|-----------------|
| Nominal lead | : \bar{L} | | mm |
| Specified travel deviation for compensation | : ΔL | | mm |
| Accuracy | | Permissible value | Measured result |
| Mean travel deviation | (μ) | mm | mm |
| Variation over the travel length | (σ) | mm | mm |
| Variation within 500mm travel | (σ_{500}) | mm | mm |
| Preload drag torque | | Nmm | Nmm |
| Axial play | | mm | mm |

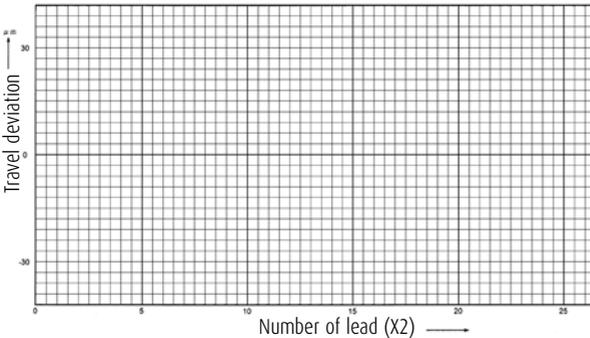

All dimensions are within specifications.

INSPECTOR: _____

DATE: - - _____

NSK Ltd. TOKYO. JAPAN

Fig. 1.5 Ball screw Inspection data

B-2-2 Static Load Limitation

Ball screw, based on its function, will generally receive axial load only. Ball screw shaft in general is long, so it is necessary to consider 3 items below:

- > Buckling load of the screw shaft
- > Yielding of the screw shaft by tensional or compressive stress
- > Permanent deformation at the ball contact points

B-2-2.1 Buckling Load

It is necessary to calculate whether the ball screw shaft is safe against buckling.

Buckling load, i.e. permissible compressive load "P" to axial direction, is calculated as follows.

$$P = \alpha \times \frac{N \cdot \pi^2 \cdot E \cdot I}{L^2} = m \frac{d_r^4}{L^2} \times 10^4 \text{ (N)} \dots\dots 2)$$

In this formula:

α : Safety factor ($\alpha = 0.5$)

E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)

I : Moment of inertia

$$I = \frac{\pi}{64} d_r^4 \text{ (mm}^4) \dots\dots 3)$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

L : Unsupported length (mm) (See **Figs. 4.1** and **4.2** 'Supporting conditions of screw shaft and nut' on page B51.)

m, N : Factors determined by the supporting condition of the ball screw shaft

Table 2.1 Factors of buckling load

| Supporting condition | m | N |
|-------------------------|------|------|
| Fixed - Fixed support | 19.9 | 4 |
| Fixed - Simple support | 10.0 | 2 |
| Fixed support - Free | 1.2 | 0.25 |
| Simple - Simple support | 5.0 | 1 |

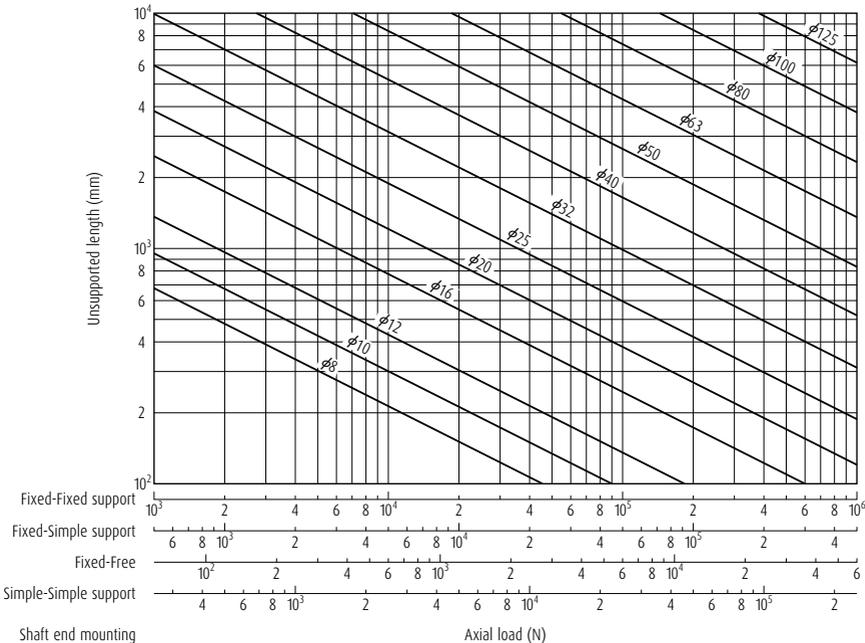


Fig. 2.1 Buckling load

B-2-2 Static Load Limitation

<<Calculation example of buckling load>>

Calculate buckling load under the conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Fixed support (From the supporting condition (ii) in **Fig. 4.1** 'Supporting conditions of screw shaft and nut' on page B51.)

Unsupported length $L = 2\,000$ mm

Screw shaft root diameter $d_r = 34.4$ mm (From the dimension table)

<Calculation>

Support condition is Fixed - Fixed support, from **Table 2.1** on page B44

$N = 4$

$m = 19.9$

By Formula 2) in Page B44

$$P = m \frac{d_r^4}{L^2} \cdot 10^4 = 19.9 \times \frac{34.4^4}{2\,000^2} \times 10^4 = 69\,667 \text{ (N)}$$

Therefore,

Permissible buckling load $P = 69\,600$ N

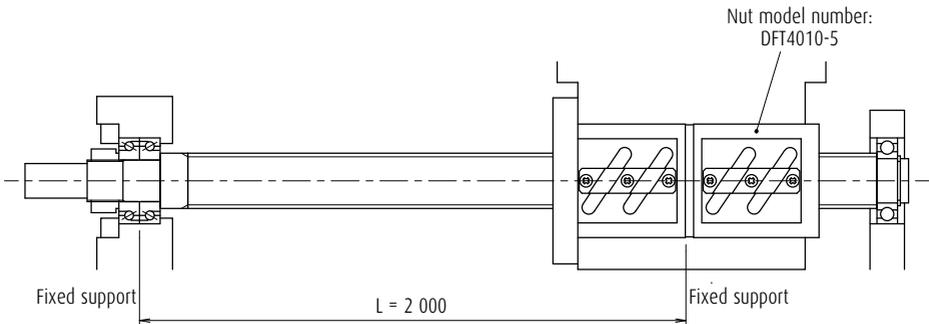


Fig. 2.2 Calculation example of buckling load

B-2-2.2 Yield by Tensional/Compressive Stress

It is necessary to consider permissible load in regards to the yield stress.

Permissible load "P" by tensional or compressive stress to screw shaft is

$$P = \sigma \cdot A = 1.15d_r^2 \times 10^2 \text{ (N)} \quad (\text{II} \cdot 4)$$

In this formula:

σ : Allowable stress (= 147 MPa)

A : Cross section area of a screw shaft using root diameter (mm²)

$$A = \frac{\pi}{4} \cdot d_r^2 \text{ (mm}^2\text{)} \quad (\text{II} \cdot 5)$$

d_r : Screw shaft root diameter (mm)

<<Calculation example of yield load>>

Obtain load in respect to the allowable stress under the conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Screw shaft root diameter $d_r = 34.4$ (mm)

(From the dimension table)

<Calculation>

By formula 4)

$$P = 1.15d_r^2 \times 10^2 = 1.15 \times 34.4^2 \times 10^2 \\ = 136\,086 \text{ (N)}$$

Therefore,

Permissible load $P = 136\,000$ N

B-2-2.3 Permanent Deformation at the Ball Contact Point

Exposed to an excessively heavy load in axial direction, the balls are squashed, and the ball rolling surface is dented. The deformations on these points do not perfectly restore to original shape after the load is removed. They are permanently disfigured. It is necessary to determine the limitation of this disfigurement to containing it within a certain range.

1. Basic static load rating C_{0a}

Basic static load rating C_{0a} is a load to axial direction that results in the combined permanent deformation equal to 0.01% of the ball diameter at the contact points of ball and ball grooves of the screw shaft and nut.

2. Calculation of permissible load by C_{0a}

P_0 (allowable axial direction load to limit the permanent deformation) is calculated using C_{0a} .

$$P_0 = \frac{C_{0a}}{f_s} \text{ (N)} \quad (\text{II} \cdot 6)$$

In this formula, f_s : Static permissible load factor

Table 2.2 Static permissible load factor

| | |
|-----------------------------|---------|
| At time of normal operation | 1 - 2 |
| With vibration impact | 1.5 - 3 |

<<Calculation example of the maximum allowable load>>

Obtain the maximum allowable load to the ball groove section under conditions in **Fig. 2.2**.

<Use conditions>

Nut model: DFT4010-5

Basic static load rating $C_{0a}=137\,000$ (N)

(From the dimension table)

Static permissible load factor $f_s = 2$
(normal operation, no vibration impact)

<Calculation>

By Formula 6), maximum allowable load of the ball groove section

$$P_0 = \frac{C_{0a}}{f_s} = \frac{137\,000}{2} = 68\,500 \text{ (N)}$$

B-2-3 Permissible Rotational Speed

Permissible rotational speed is determined by the feeding speed and ball screw lead. When selecting a ball screw, it is important to know the permissible rotational speed.

It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

The lower of the following two factors, d-n and critical speed, will determine the overall permissible rotational speed of the ball screw.

- > Critical speed which is the resonance vibration of the shaft.
- > d-n value which is involved in damaging the ball recirculation components.

* Please consult NSK if the maximum rotational speed exceeds the criteria of maximum rotational speed on page B50, even both the critical speed of screw shaft rotation and the d-n value are in range of the allowable limit.

B-2-3.1 Critical Speed of the Screw Shaft

Calculate the critical speed which is the matching value of the ball screw rotational speed and the natural frequency of the screw shaft. The 80% of the critical speed is defined as the permissible rotational speed.

Calculate the critical speed of the screw shaft whether you use shaft rotation or nut rotation. Critical speed varies by the nut traveling position. Please consult NSK for detailed calculation.

If using a ball screw exceeding the critical speed, it is necessary to increase the natural frequency by using an intermediate support, etc. If using with nut rotation, it is possible to operate exceeding critical speed by installing a vibration energy absorbing system (optional, vibration control damper: patented by NSK) to the screw shaft. (Refer to "Nut rotatable drive ND Series" on page B541.)

Calculate the permissible rotational speed based on critical speed n_c as follows, taking in account "B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed" on page B51.

Fig. 3.1 shows the permissible rotational speeds against critical speed for each shaft diameter.

$$n_c = \alpha \times \frac{60\lambda^2}{2\pi L^2} \sqrt{\frac{E \cdot I \cdot g}{\gamma \cdot A}}$$

$$= f \frac{d_r}{L^2} \times 10^7 \text{ (min}^{-1}\text{)} \quad (\text{II- 7})$$

In this formula:

α : Safety factor ($\alpha = 0.8$)

E : Elastic modulus ($E = 2.06 \times 10^5$ MPa)

I : Moment of inertia of area of screw shaft

$$I = \frac{\pi}{64} d_r^4 \text{ (mm}^4\text{)} \quad (\text{II- 3})$$

d_r : Screw shaft root diameter (mm) (See the dimension table.)

g : Acceleration of gravity ($= 9.8 \times 10^3$ mm/s²)

γ : Specific weight ($\gamma = 7.65 \times 10^{-5}$ N/mm³)

A : Cross section area of the screw shaft root diameter (mm²)

$$A = \frac{\pi}{4} d_r^2 \text{ (mm}^2\text{)} \quad (\text{II- 5})$$

L : Unsupported length (mm) (See Figs. 4.1, and 4.2 "Supporting conditions of screw shaft and ball nut" on page B51)

f, λ : Factors determined by the supporting condition

Table 3.1 Coefficients of critical speed

| Supporting condition | f | λ |
|-------------------------|------|-----------|
| Fixed - Simple support | 15.1 | 3.927 |
| Fixed - Fixed support | 21.9 | 4.730 |
| Fixed support - Free | 3.4 | 1.875 |
| Simple - Simple support | 9.7 | π |

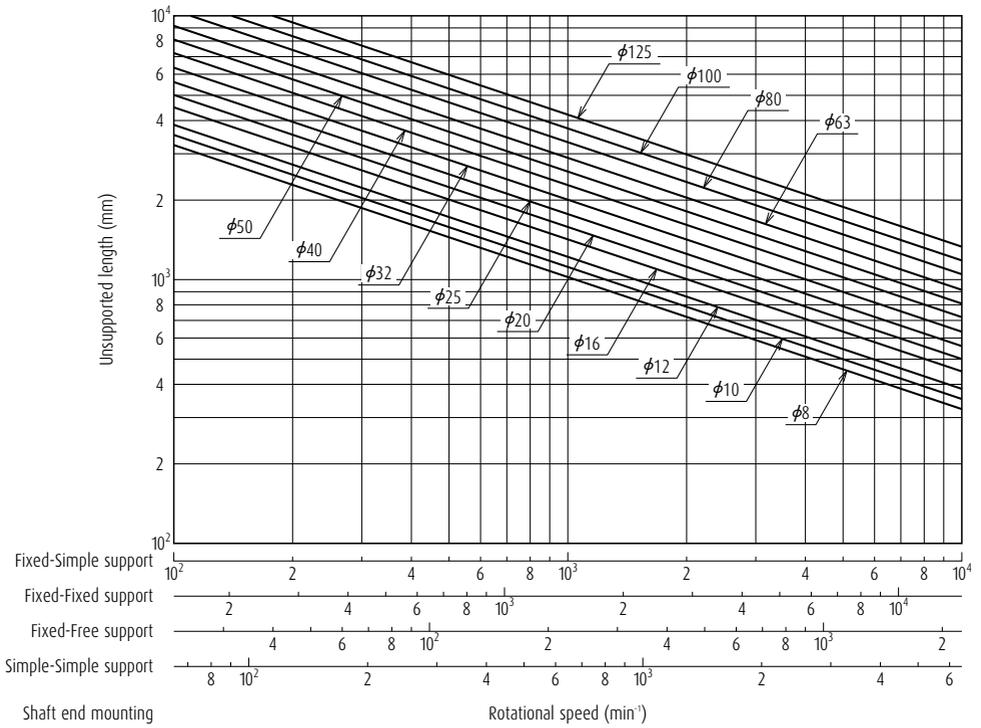


Fig. 3.1 Permissible rotational speeds vs. critical speeds

B-2-2 Static Load Limitation

<<Calculation example of permissible rotational speed to the critical speed>>

Calculate the permissible rotational speed to the critical speed under conditions in **Fig. 3.2**.

<Use conditions>

Nut model: DFT4010-5

Supporting condition is Fixed - Simple support (From the supporting condition (ii) in **Fig. 4.1** "Supporting conditions of screw shaft and ball nut" on page B51.)

Unsupported length $L = 2\,000$ mm

Screw shaft root diameter $d_r = 34.4$ mm (From the dimension table)

<Calculation>

Supporting condition is Fixed-Simple support, from **Table 3.1** on page B47

$\lambda = 3.927$

$f = 15.1$

By Formula (7) on page B47, permissible rotational speed to critical speed is

$$n_c = f \frac{d_r}{L^2} \times 10^7 = 15.1 \times \frac{34.4}{2\,000^2} \times 10^7 = 1298.6 \text{ (min}^{-1}\text{)}$$

$n_c = 1\,290 \text{ min}^{-1}$ or under

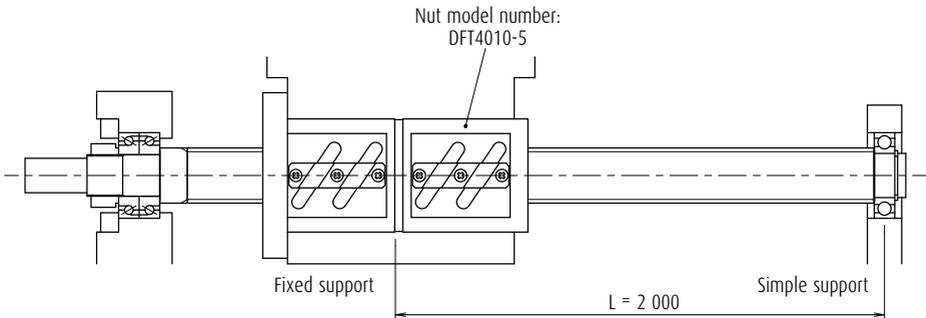


Fig. 3.2 Calculation example of permissible rotational speed to the critical speed

B-2-3.2 d-n Value

An increase of ball orbital speed increases the collision impact of balls to ball recirculation parts, and thus resulting in damage to them. For this reason, the permissible rotational speed is also limited by the d-n value (d, shaft diameter in millimeters; n, rotational speed per minutes). **Table 3.2** shows the allowable d-n value and the maximum rotational speed of ball screws.

- Notes:**
1. Special measure must be taken for high-speed specification products. Please consult NSK.
 2. Please consult NSK if the maximum rotational speed or the d-n value exceed the values on the table below, even both the critical speed of screw shaft and the d-n value are in ranges of the allowable limit.

Table 3.2 Criteria of allowable d-n value and maximum rotational speed

| Ball screw recirculation system, Series/Type | | Allowable d-n value | | Criterion of permissible rotational speed [min ⁻¹] |
|--|--|--|-----------------|--|
| | | Standard | High-speed | |
| Standard ball screw | Ball screw for transfer equipment R series | 50 000 or less | - | 3 000 |
| Standard nut ball screws | End-deflector type | 180 000 or less | - | 5 000 |
| | Return tube type | 70 000 or less | 100 000 or less | 3 000 |
| | Deflector(bridge) type | 84 000 or less | 100 000 or less | 3 000 |
| | End cap type | 80 000 or less | 100 000 or less | 3 000 |
| Application-oriented ball screws | HMD type for high-speed machine tools | 160 000 or less | - | 4 000 |
| | HMS type for high-speed machine tools | 160 000 or less | - | 5 000 |
| | HMC type for high-speed machine tools | 100 000 or less, 135 000 or less ^{*1} | - | 3 750 |
| | BSL type for miniature lathes | (180 000 or less) | - | 4 000 |
| | HTF-SRC type for high-load drives | 140 000 or less, 160 000 or less ^{*1} | - | 3 225 |
| | HTF-SRD type for high-load drives | 120 000 or less | - | 2 400 |
| | HTF type for high-load drives | 50 000 or less, 70 000 or less ^{*1} | 100 000 or less | 3 125 |
| | VSS type for contaminated environment | 150 000 or less | - | 3 000 |
| | ND series nut-rotatable ball screws | 70 000 or less | 100 000 or less | 3 000 |
| | Σseries for robots | 70 000 or less | - | 3 000 |
| | R series for transfer equipment | 50 000 or less | - | 3 000 |

*1) Please refer to the explanation of each ball screw for which two allowable d-n values are listed

- › HMC type for high-speed machine tools: page B503
- › HTF-SRC type for high-load drives: page B513
- › HTF type for high-load drives: page B521

B-2-4 Supporting Conditions for Calculation of Buckling Load and Critical Speed

Figs. 4.1 and 4.2 are typical conditions in supporting ball screws. Use them as reference to calculate the buckling load and the critical speed.

Please consult NSK if it is necessary to scrutinize calculation due to use conditions, or if boundary conditions are not clear due to special installation.

[How to read the tables]

Example ii: A buckling load generates between the nut and the left bearings, indicating that the critical speed appears between the nut and the right bearing. Therefore, set L at the maximum stroke for each side. Calculate by applying support bearing conditions.

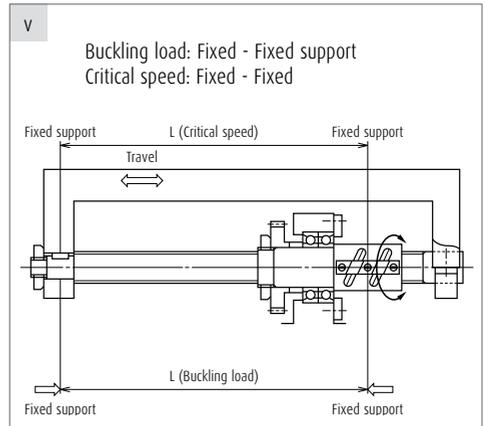
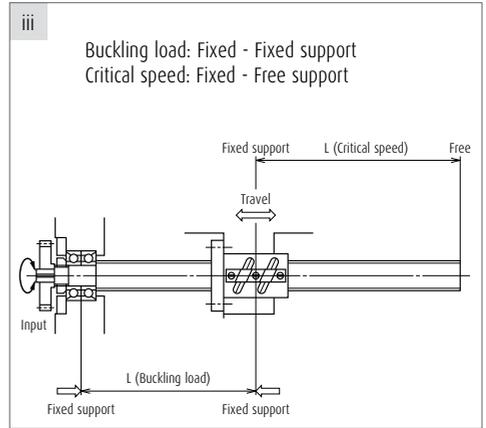
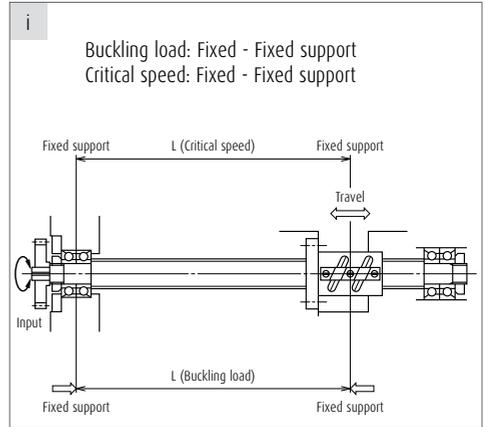
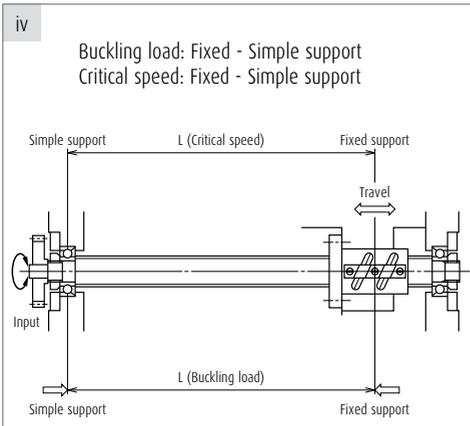
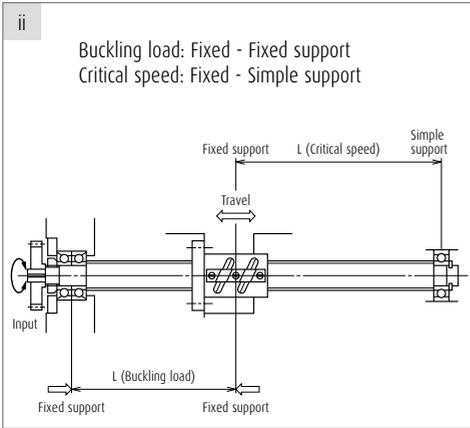


Fig. 4.1 Supporting conditions for screw shaft and ball nut

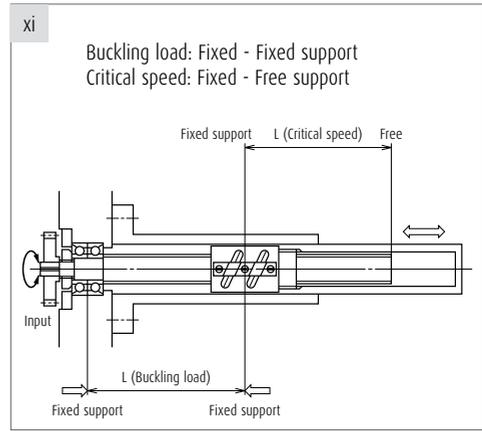
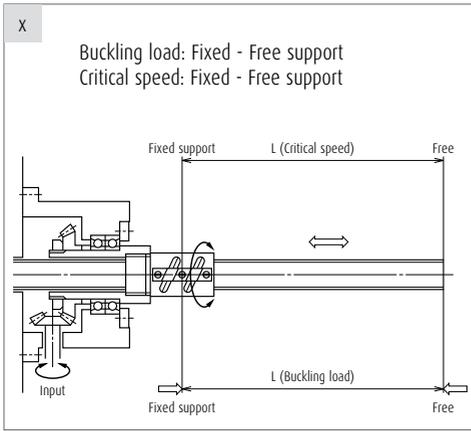
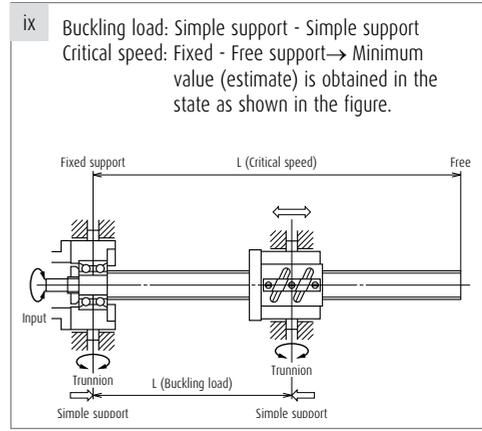
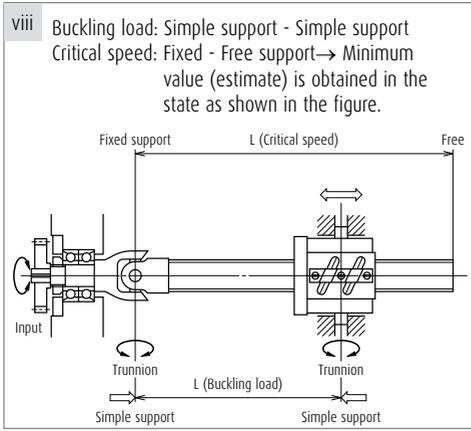
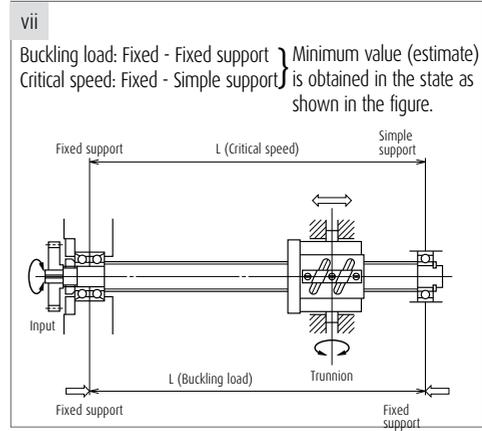
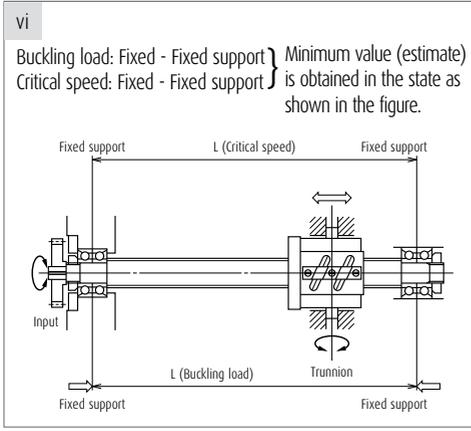


Fig. 4.2 Supporting conditions of screw shaft and ball nut

B-2-5 Life (Dynamic Load Limitation)

B-2-5.1 Life of Ball Screw

Although used in appropriate conditions and is ideally designed, the ball screw deteriorates after a certain operation period, and eventually becomes unusable. The period in this situation is the life of the ball screw. There are two life categories, "fatigue life" caused by flaking, and "life of accuracy" caused by deterioration in precision because of wear.

B-2-5.2 Fatigue Life

Fatigue life of a ball screw can be estimated by basic dynamic load rating (C_a) as is for the rolling bearings.

1. Basic dynamic load rating C_a

Basic dynamic load rating is the axial load that allows a 90% of the group of the same ball screws to rotate 1 million times (10^6 rev) under the same condition without causing flaking by rolling contact fatigue.

2. Fatigue life calculation

Fatigue life is defined as a total rotation number in general. It is sometimes indicated by total rolling hours or total running distance. Fatigue life is obtained by the following formula.

$$L = \left(\frac{C_a}{F_a \cdot f_w} \right)^3 \cdot 10^6 \quad (\text{II- 8})$$

$$L_t = \frac{L}{60n} \quad (\text{II- 9})$$

$$L_s = \frac{L \cdot l}{10^6} = \quad (\text{II- 10})$$

In this formula:

- L : Rating fatigue life (rev)
- L_t : Life in hours (h)
- L_s : Life by running distance (km)
- C_a : Basic dynamic load rating (N)
- F_a : Axial load (N)
- n : Rotational speed (min^{-1})
- l : Lead (mm)
- f_w : Load factor (Coefficient by operating condition)

Load factor f_w for operating conditions is shown in **Table 5.1**.

Table 5.1 Load coefficient f_w

| | |
|---|-----------|
| Smooth operation without impact | 1.0 - 1.2 |
| Normal operation | 1.2 - 1.5 |
| Operation associated with impact or vibration | 1.5 - 3.0 |

Setting too long fatigue life requires larger ball screw, and is not economical. Below are the general target values of operating life for machines. (reference)

Table 5.2 General target values of fatigue life

| | |
|--------------------------|--------------|
| Machine tools | 20 000 hours |
| Industrial machines | 10 000 hours |
| Automatic control system | 15 000 hours |
| Measuring equipment | 15 000 hours |

3. Mean load

If the axial load often varies, calculate life by obtaining the mean load, which gives the equivalent fatigue life under this varying load conditions.

- ① When the load and the rotational speed shift stepwise
Obtain the mean load F_m by the formula below. Obtain mean rotational speed N_m by the formula below as **Table 5.3** and **Fig. 5.1**.

$$F_m = \left(\frac{F_1^3 \cdot n_1 \cdot t_1 + F_2^3 \cdot n_2 \cdot t_2 + \dots + F_n^3 \cdot n_n \cdot t_n}{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n} \right)^{\frac{1}{3}} \quad (\text{II- 11})$$

$$N_m = \frac{n_1 \cdot t_1 + n_2 \cdot t_2 + \dots + n_n \cdot t_n}{t_1 + t_2 + \dots + t_n} \quad (\text{II- 12})$$

Table 5.3 Stepwise operation condition

| Axial load (N) | Rotational speed (min^{-1}) | Hours of use, or ratio of hours of use |
|----------------|--|--|
| F_1 | n_1 | t_1 |
| F_2 | n_2 | t_2 |
| : | : | : |
| F_n | n_n | t_n |




Fig. 5.1 Stepwise load variation

② When the rotational speed is constant, and the load changes linearly, obtain approximate value of the mean load F_m by the formula below.

$$F_m = \frac{1}{3} (F_{\min} + 2F_{\max}) \quad (\text{II- 13})$$




Fig. 5.2 Linear load change

③ When the rotational speed is constant, and the load changes in a sinusoidal pattern, obtain approximate value of the mean load F_m by the formula below.

When the sine curve is Fig. (a)

$$F_m \doteq 0.65 F_{\max} \quad (\text{II- 14})$$

When the sine curve is Fig. (b)

$$F_m \doteq 0.75 F_{\max} \quad (\text{II- 15})$$

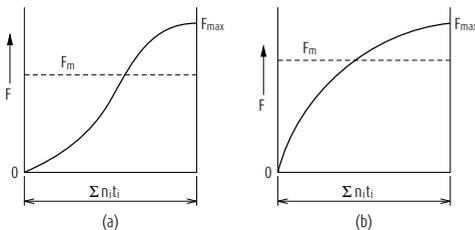


Fig. 5.3 Load changes in sinusoidal pattern

4. Affect of mounting misalignment

If moment load or radial load is applied to the ball screw, it adversely affects ball screw function, and shortens life. Watch for eccentric load that induces moment or radial load.

Fig. 5.4 shows a calculation example of fatigue life when moment load is applied to the ball screw. In this figure, the value of the rigidity of mounting ball screw sections (screw shaft, support bearing, guide, etc.) is set at infinity. In actual use, deformation is absorbing the moment load in various areas, and the moment load that generates between the screw shaft and nut is abated.

In general, the following values are recommended as control values for precision grade.

| | |
|-----------------------------|--------------------------|
| Misalignment in inclination | 1/2 000 or less |
| Eccentricity | 20 μm or less |

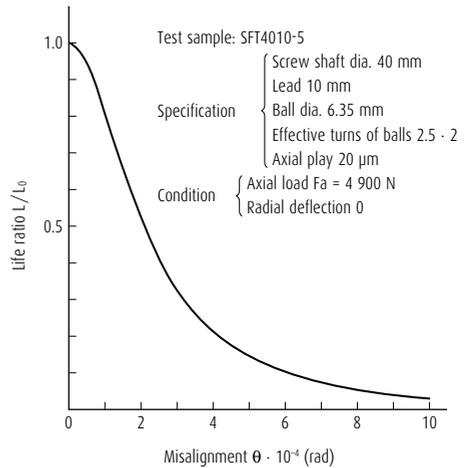


Fig. 5.4 Affects of misalignment

B-2-5 Life (Dynamic Load Limitation)

5. Effects of heavy load and short stroke

If the ball screw is used under heavy load and short strokes, such as for the drive of plastic injection molding machine and of press machines, the fatigue life may become significantly shorter than the rated fatigue life which is calculated in B-2-5.2.

This decreased life occurs because the heavy load generates large stress (surface pressure) in the contact points of balls and ball grooves of the screw shaft and the nut, adversely affecting the life.

The axial load F_{amax}^{*1} during operation and the size of strokes, which affect fatigue life, can be obtained by the following formula.

In such case, the life calculation should take into account the size of the surface pressure as well as the size of the stroke. Please consult with NSK.

$$F_{amax} \geq 0.10C_{0a} \quad (\text{II-16})$$

$$S \leq 4$$

In this formula:

F_{amax} : Maximum load to axial direction during drive (N)

C_{0a} : Basic static load rating (N)

S : Stroke (rev)

$$S = \frac{L_s}{l}$$

L_s : Stroke distance (mm)

l : Lead (mm)

*1) Axial load : The load is applied to the axial direction when screw shaft and the nut of ball screw are rotating relatively each other. The rotational speed is irrelevant.

B-2-5.3 Ball Screw and Hardness

Table 5.4 indicates the hardness of NSK standard ball screw.

Table 5.4 Ball screw materials and their hardness

| Component | Heat treatment method | Hardness (HRC) |
|-------------|-----------------------|----------------|
| Screw shaft | Carburizing | 58 or over |
| Screw shaft | Induction hardening | 58 or over |
| Nut | Carburizing | 58 or over |

Note: NSK manufactures special material ball screws for special environments (stainless steel: SUS440C, SUS630). NSK also furnishes protective surface treatment (refer to page D5). Please consult NSK for such request.

B-2-5.4 Wear Life

Wear of materials, as is the case for other mechanical components, is significantly affected by use conditions, lubrication conditions and other factors. It is difficult to estimate its volume, and measuring requires various tests and field data.

NSK has the data of wear accumulated through abundant experience. Please contact NSK for inquiry pertaining to the wear.

B-2-6 Preload and Rigidity

B-2-6.1 Elastic Deformation of Preloaded Ball Screw

1. Position preload (D, Z, and P preload)

The concept of double nut preload ball screw is shown in **Fig. 6.1**.

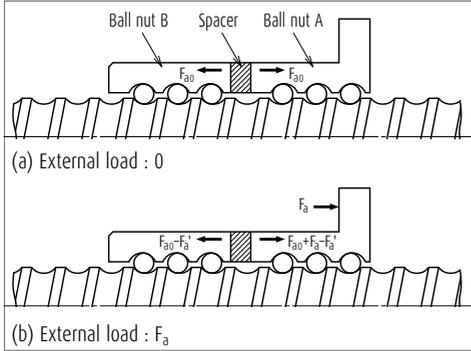


Fig. 6.1 Position preload (double-nut)

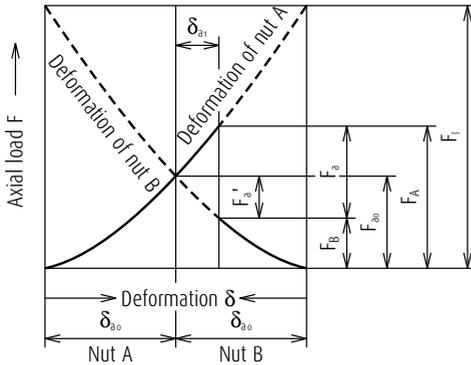


Fig. 6.2 Deformation of A and B nut (position preload)

Elastic deformation of Nut A and B is already given at time of assembly by the amount of δ_{a0} by preload F_{a0} . When the external load F_a is added to Nut A, the elastic deformation δ_a and δ_b of each Nut A and B change as shown in **Fig. 6.2**,

$$\delta_a = \delta_{a0} + \delta_{a1} \quad \delta_b = \delta_{a0} - \delta_{a1}$$

At this time, the load to each Nut A and B are:

$$F_A = F_{a0} + F_a - F_a'$$

$$F_B = F_{a0} - F_a'$$

It shows that the load applied to Nut A is affected by Nut B and reduced by the amount of F_a' . Thereby, the elastic deformation of Nut A becomes smaller. This effect continues until the elastic deformation by the external load becomes δ_{a0} , and the preload by Nut B disappears.

Assuming that the load when the preload is absorbed is F_1 , the relationship between the axial load and the elastic deformation is as follows (refer to **Fig. 6.2**).

$$\delta_{a0} = K \cdot F_{a0}^{2/3} \quad 2\delta_{a0} = K \cdot F_1^{2/3}$$

(K: Invariable number)

$$\left(\frac{F_1}{F_{a0}}\right)^{2/3} = \frac{2\delta_{a0}}{\delta_{a0}} = 2$$

$$F_1 = 2^{3/2} \times F_{a0} \doteq 3F_{a0}$$

For this reason, the preload should be about 1/3 of the maximum axial load. However, please note that if the preload of about 1/3 of the maximum axial load exceeds 10% of C_a , which is the criterion of the maximum preload, the ball screw may adversely increase heat generation and/or may shorten its lifetime.

Fig. 6.3 shows two types of elastic deformation curves: one is by the ball screw with preload, the other without preload. When an axial load which is about three times as large as the preload is applied, the deformation of the preloaded ball screw is 1/2 of the deformation of the ball screw without preload.

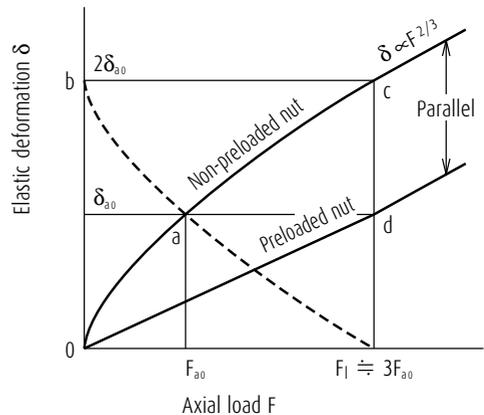


Fig. 6.3 Deformation of preloaded ball nut (position preload)

B-2-6 Preload and Rigidity

2. Constant pressure preload (J preload: preloaded by spring)

Fig. 6.5 shows an elastic deformation of a ball screw which is preloaded with "constant pressure." The rigidity of the preload spring is sufficiently smaller than the nut rigidity. Therefore, the deformation of the spring becomes nearly parallel to the abscissa axis. For this reason, the elastic deformation by the preload with constant pressure changes along the deformation curve by Nut A.

In order to take advantage of the characteristics of the preload with constant pressure, the major external load should be applied in the directions shown by an arrow in Fig. 6.4.

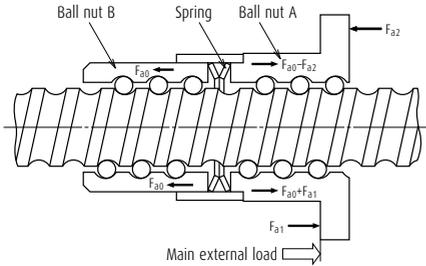


Fig. 6.4 Constant pressure preload (double nut)

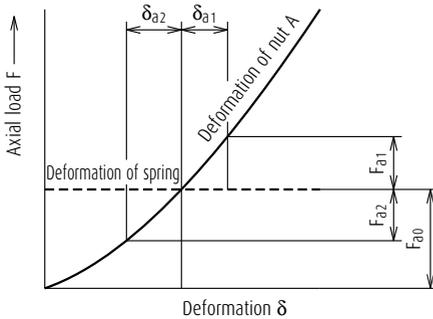


Fig. 6.5 Deformation curve of constant pressure preloaded nut

B-2-6.2 Rigidity of the Feed Screw System

A low rigidity around the feed screw mounting area causes lost motion. To improve the positioning accuracy of precision machines such as NC machine tools, it requires a good balance in axial rigidities of composing parts of the feed screw system.

Also should examine torsional rigidities of the feed screw system.

1. Axial rigidity of the feed screw system K_T

Elastic deformation and rigidity of the feed screw system can be obtained by the following formula.

$$\delta = \frac{F_a}{K_T} \quad (\text{II-17})$$

$$\frac{1}{K_T} = \frac{1}{K_S} + \frac{1}{K_N} + \frac{1}{K_B} + \frac{1}{K_H} \quad (\text{II-18})$$

In this formula:

δ : Volume of axial elastic deformation of the feed screw system (μm)

F_a : Axial load to the feed screw system (N)

K_T : Axial rigidity of the feed system ($\text{N}/\mu\text{m}$)

K_S : Axial rigidity of the screw shaft ($\text{N}/\mu\text{m}$)

K_N : Axial rigidity of the nut ($\text{N}/\mu\text{m}$)

K_B : Axial rigidity of the support bearing ($\text{N}/\mu\text{m}$)

K_H : Axial rigidity of the nut and bearing mounting section ($\text{N}/\mu\text{m}$)

2. Axial rigidity of the screw shaft: K_S

2.1 In case of: Fixed support - Free (axial direction)

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} \quad (\text{II-19})$$

In this formula:

K_S : Axial rigidity of the screw shaft ($\text{N}/\mu\text{m}$)

A : Cross section area of the screw shaft (mm^2)

$$A = \frac{\pi}{4} d_r^2$$

d_r : Screw shaft root diameter (mm)

E : Elastic modulus ($E = 2.06 \times 10^5 \text{ MPa}$)

x : Distance between points of load application (mm)

2.2 In case of: Fixed – Fixed support (axial direction)

$$K_S = \frac{A \cdot E \cdot L}{x(L-x)} \times 10^{-3} \quad (\text{II- 20})$$

In this formula:

K_S : Axial rigidity of the screw shaft (N/ μm)

L : Unsupported length (mm)

x : Axial deformation is maximum at position $x = L/2$.

Axial rigidity of the screw shaft can be obtained by the following formula.

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} \quad (\text{II- 21})$$

<<Calculation example of axial rigidity (1)>>

Obtain axial rigidity of the screw shaft under the condition in **Fig. 6.6**.

<Use conditions>

Nut model: DFT 4010-5

From **Fig. 6.6**: Supporting condition ;

Fixed support --Free (axial direction)

Distance between points of load application

$$x = 1\,200 \text{ mm}$$

Screw shaft root diameter (From the dimension table)

$$d_r = 34.4 \text{ mm}$$

<Calculation>

By Formula **II-19**, axial rigidity K_S is :

$$A = \frac{\pi}{4} d_r^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \text{ (mm}^2\text{)}$$

$$K_S = \frac{A \cdot E}{x} \times 10^{-3} = \frac{929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 159 \text{ (N}/\mu\text{m}\text{)}$$

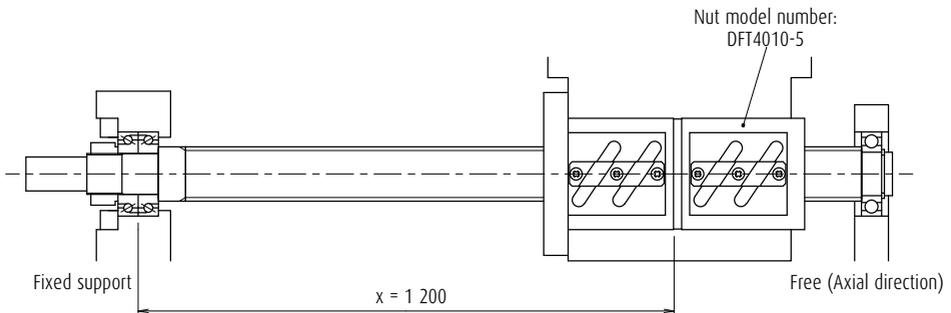


Fig. 6.6 Calculation example of axial rigidity of the screw shaft (1)

B-2-6 Preload and Rigidity

<<Calculation example of axial rigidity (2)>>

Obtain axial rigidity of the screw shaft under the conditions in **Fig. 6.7**.

<Use conditions>

Nut model: DFT 4010-5

From **Fig. 6.7**: Supporting condition:

Fixed - Fixed support (axial direction)

$$L = 1\,200 \text{ mm}$$

Distance between points of load application:

Screw shaft root diameter (From the dimension table)

$$d_r = 34.4 \text{ mm}$$

<Calculation>

By formula **II-21**, axial rigidity K_S is :

$$A = \frac{\pi}{4} d_r^2 = \frac{3.14}{4} \times 34.4^2 = 929.4 \text{ (mm}^2\text{)}$$

$$K_S = \frac{4A \cdot E}{L} \times 10^{-3} = \frac{4 \times 929.4 \times 2.06 \times 10^5}{1\,200} \times 10^{-3} = 638 \text{ (N/}\mu\text{m)}$$

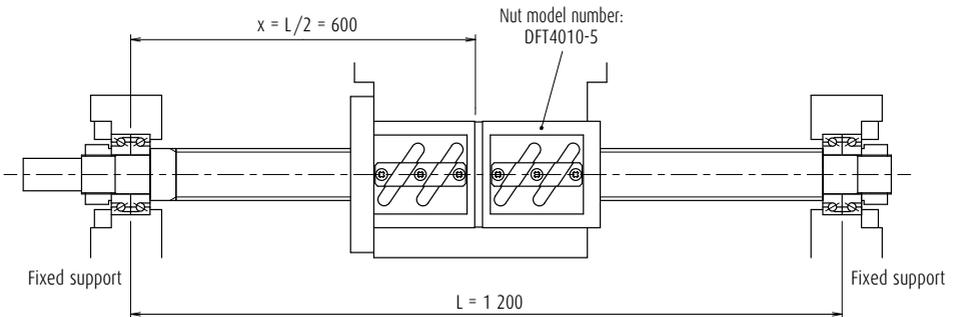


Fig. 6.7 Calculation example of axial rigidity of the screw shaft (2)

3. Axial rigidity of the ball nut : K_N

3.1 Rigidity of the nut with axial load

Theoretical rigidity value K is shown in the dimension table. The value K is obtained from the elastic deformation between screw grooves and balls when an axial load equivalent to 30% of the basic dynamic load rating C_a is applied. The criterion for the ball nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc.

The rigidity value K_N is obtained by the following formula when the axial load " F_a " is not 30% of " C_a ."

$$K_N = 0.8 \times K \left(\frac{F_a}{0.3 C_a} \right)^{1/3} \quad (\text{II- 22})$$

In this formula:

K : Rigidity value in dimension tables ($N/\mu m$)

F_a : Axial load (N)

C_a : Basic dynamic load rating (N)

3.2 Rigidity of preloaded ball nut

Theoretical rigidity K of preloaded ball nut under an axial load is shown in each dimension table. The K is obtained from the elastic deformation of the ball rolling surface and the balls when: a preload which is equivalent to 10% of the basic dynamic load rating C_a (5% in case of the P-preload [single-nut oversize ball preload system]) is applied. The criterion for calculation of nut rigidity is 80% of the value listed in the table taking into consideration of deformation of the ball nut, etc.

Rigidity K_N is obtained by the following formula when preload " F_{a0} " is not 10% (or 5%) of " C_a ".

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{\varepsilon \cdot C_a} \right)^{1/3} \quad (\text{II- 23})$$

In this formula:

K : Rigidity in the dimension tables ($N/\mu m$)

F_{a0} : Preload (N)

ε : Basic factor to calculate rigidity ($\varepsilon = 0.1$. For P-preload use percentage of the preload to basic dynamic load rating. e.g. 0.03 for BSS and 0.015 for VSS.)

<<Calculation example of axial rigidity (3)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model: SFT 4010-5

Axial load: $F_a = 6\,000$ N

F_a = Rigidity at 0.3 C_a $K = 706$ N/ μm
(From the dimension table)

<Calculation>

By formula II-22, axial rigidity K_N is :

$$\begin{aligned} K_N &= 0.8 \times K \left(\frac{F_a}{0.3 \times C_a} \right)^{1/3} \\ &= 0.8 \times 706 \times \left(\frac{6\,000}{0.3 \times 52\,000} \right)^{1/3} \\ &= 410 \text{ (N}/\mu\text{m)} \end{aligned}$$

<<Calculation example of axial rigidity of the screw shaft (4)>>

Obtain axial rigidity of the nut under the following conditions.

<Use conditions>

Nut model : DFT 4010-5

Preload : $F_{a0} = 4\,000$ N

Rigidity K when $F_{a0} = \varepsilon C_a$: $K = 1\,376$ N/ μm
(from the dimension table on page B457)

Basic factor to calculate rigidity when D
Preload: $\varepsilon = 0.1$

<Calculation>

By Formula II-23

$$\begin{aligned} K_N &= 0.8 \times K \left(\frac{F_{a0}}{\varepsilon \times C_a} \right)^{1/3} \\ &= 0.8 \times 1\,376 \times \left(\frac{4\,000}{0.1 \times 52\,000} \right)^{1/3} \\ &= 1\,008 \text{ (N}/\mu\text{m)} \end{aligned}$$

B-2-6 Preload and Rigidity

The criterion of the preload to ball screw

Nut rigidity increases by a larger preload volume. But an excessive preload shortens life, and generates heat. Set the maximum preload about at 0.1 C_a (0.05 for P-Preload). Table 6.1 shows the criteria for preload for different applications.

Table 6.1 Criteria of preload

| Ball screw application | Preload (relative to dynamic load rating C_a) |
|--|--|
| Robots, material handling systems, etc. | Axial play or under 0.01 C_a |
| Semiconductor manufacturing systems, etc. That require highly accurate positioning | 0.01 C_a - 0.04 C_a |
| Medium- high-speed machine tools for cutting | 0.03 C_a - 0.07 C_a |
| Low to medium-speed systems that require especially high rigidity | 0.07 C_a - 0.1 C_a |

4. Axial rigidity of support bearing: K_B

The rigidity (K_B) of the bearing used for ball screw support is shown in the dimension table of bearing. See page B415 for ball screw support bearings, NSK TAC C series and B423 for BSBD series.

$$K_B \doteq \frac{3F_{a0}}{\delta_{a0}} \text{ (N/}\mu\text{m)} \quad (\text{II- 24})$$

In this formula:

K_B : Rigidity of the combined thrust angular contact ball bearings (N/ μ m)

F_{a0} : Preload of the bearings (N)

δ_{a0} : Axial elastic deformation by preload (μ m)

$$\delta_{a0} \doteq \frac{0.44}{\sin \alpha} \left(\frac{Q^2}{D_w} \right)^{1/3} \text{ (}\mu\text{m)} \quad (\text{II- 25})$$

$$Q = \frac{F_{a0}}{Z} \cdot \sin \alpha$$

α : Contact angle

D_w : Ball diameter (mm)

Z : Number of balls

Refer to page B415 for data regarding thrust angular contact ball bearings which support high-precision ball screws (TAC Series).

5. Axial rigidity of the ball nut and bearing mounting section: K_H

As the rigidity of mounting section has a profound effect on positioning accuracy, we recommend incorporating high rigidity of the mounting sections of ball nut and support bearings into the design at the early stage of designing the machine.

a) Torsional rigidity of the feed screw system

Major torsion factors in the rotating system that bring about error in positioning accuracy are given three points below.

- > Torsional deformation of the screw shaft
- > Torsional deformation of the joint section
- > Torsional deformation of the motor

The value of the effect of torsional strain to positioning accuracy is smaller than axial deformation. However, check the effect when designing equipment that requires high positioning accuracy.

b) Suppress thermal error

It is necessary to minimize the thermal error for ever increasing demand for positioning accuracy give three points below.

- > Suppress heat
- > Forced cooling
- > Avoid effect of temperature rise

Refer to "Measures against thermal expansion" on page B40.

B-2-7 Friction Torque and Drive Torque

Operations that use ball screw drives require a motor torque which is equivalent to the total of following two:

- › Friction torque, i.e. the friction of the ball screw itself
- › Drive torque which is required for operation

B-2-7.1 Friction Torque

1. Starting friction torque (Break away torque)

A large torque is necessary to start ball screw. This is called "starting friction torque" or "brakeaway torque." This torque is 2 to 2.5 times larger than preloaded dynamic (friction) torque which is described below. Starting friction torque quickly diminishes once the ball screw begins to move.

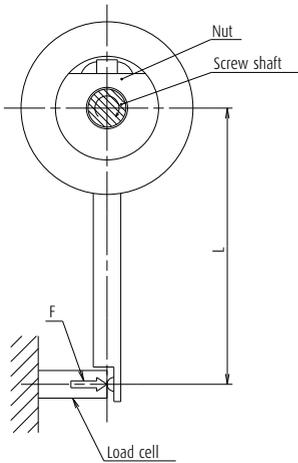


Fig. 7.1 Preload dynamic torque measuring method

2. Dynamic friction torque (dynamic friction torque due to preload)

When a ball screw is moving, two types of torque generate: the dynamic friction torque due to preload and the friction torque associated with ball recirculation. JIS B1192 sets the standard of dynamic friction torque due to preload, which is the total of these two torque types. They are defined in **Fig. 7.2**.

The dynamic friction torque due to preload is calculated by the following formula. When the screw shaft is rotated as **Fig. 7.1** in the following measuring conditions, measure the nut holding power F and then multiple the distance of action line L which is perpendicular to the direction of the power F .

$$T_p = F \cdot L \quad (\text{II-26})$$

- › Measuring rotational speed 100 min⁻¹
- › Viscosity of lubrication is ISO VG 68 as prescribed in JIS K 2009.
- › Remove Seals.

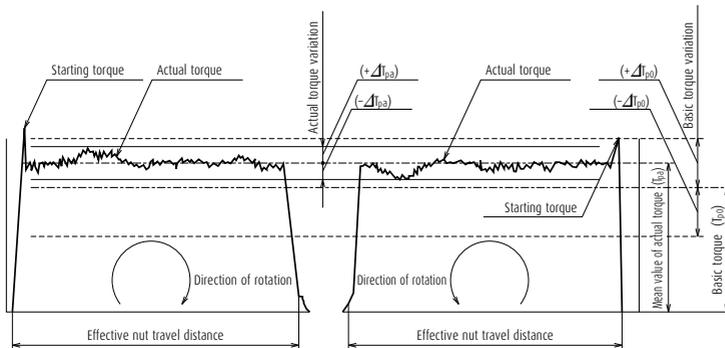


Fig. 7.2 Definitions of dynamic preloaded drag torque

B-2-7 Friction Torque and Drive Torque

3. Calculation of basic torque

The basic torque of preloaded ball screw T_{p0} can be obtained by the following formula.

$$T_{p0} = K \frac{F_{a0} \cdot l}{2\pi} \doteq 0.014F_{a0} \sqrt{d_m \cdot l} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-27})$$

In this formula:

F_{a0} : Preload (N)

l : Lead (cm)

K : Torque coefficient of ball screw

$$K = \frac{0.05}{\sqrt{\tan\beta}}$$

β : Lead angle (deg.)

d_m : Ball pitch circle diameter (cm)

Allowable values of torque variation rate relative to basic torque are regulated as shown in **Table 7.1**.

B-2-7.2 Drive Torque

1. Operating torque of a ball screw

① Normal drive

The torque when converting rotational motion to linear motion (normal operation) is obtained by the following formula.

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-28})$$

In this formula:

T_a : Normal operation torque (N · cm)

F_a : Axial load (N)

l : Lead (cm)

η_1 : Normal efficiency ($\eta_1 = 0.9$ to 0.95)

② Back-drive operation

The torque when converting linear motion to rotational motion (back-drive operation) is obtained by the following formula.

$$T_b = \frac{F_a \cdot l \cdot \eta_2}{2\pi} \quad (\text{N} \cdot \text{cm}) \quad (\text{II-29})$$

In this formula:

T_b : Reverse operation torque (N · cm)

η_2 : Reverse efficiency ($\eta_2 = 0.9$ to 0.95)

③ Dynamic drag torque of the preloaded ball screw

The operation torque of preloaded ball screw can be obtained by Formula II-27.

Table 7.1 Range of allowable values of torque variation rates (Source: JIS B 1192)

| Basic torque (N · cm) | | Effective length of the screw thread (mm) | | | | | | | | | | |
|--------------------------|-------|---|------|-------|------|--|------|-------|------|--------------------------------|-------|------|
| | | 4000 or under | | | | | | | | Over 4 000 and 10 000 or under | | |
| | | Slenderness ratio ⁽¹⁾ : 40 or less | | | | Slenderness ratio ⁽¹⁾ : More than 40 and 60 or less | | | | — | | |
| | | Accuracy grade | | | | Accuracy grade | | | | Accuracy grade | | |
| Over | Incl. | C0 | C1 | C2, 3 | C5 | C0 | C1 | C2, 3 | C5 | C1 | C2, 3 | C5 |
| 20 | 40 | ±30% | ±35% | ±40% | ±50% | ±40% | ±40% | ±50% | ±60% | — | — | — |
| 40 | 60 | ±25% | ±30% | ±35% | ±40% | ±35% | ±35% | ±40% | ±45% | — | — | — |
| 60 | 100 | ±20% | ±25% | ±30% | ±35% | ±30% | ±30% | ±35% | ±40% | — | ±40% | ±45% |
| 100 | 250 | ±15% | ±20% | ±25% | ±30% | ±25% | ±25% | ±30% | ±35% | — | ±35% | ±40% |
| 250 | 630 | ±10% | ±15% | ±20% | ±25% | ±20% | ±20% | ±25% | ±30% | — | ±30% | ±35% |
| 630 | 1 000 | — | ±15% | ±15% | ±20% | — | — | ±20% | ±25% | — | ±25% | ±30% |

Remarks

- Slenderness ratio: The value obtained by dividing the length of the screw thread section of screw shaft (mm) by diameter of the screw shaft (mm).
- NSK independently sets torque standards which are under $20 \text{ N} \cdot \text{cm}$.

2. Drive torque of the motor

2.1 Drive torque at constant speed

The torque which is necessary to drive a ball screw at constant speed resisting to external loads can be obtained by the following formula.

$$T_1 = (T_a + T_{pmax} + T_u) \times \frac{N_1}{N_2} \quad (\text{II-30})$$

In this formula:

T_a : Drive torque at constant speed

$$T_a = \frac{F_a \cdot l}{2\pi \cdot \eta_1} \quad (\text{II-28})$$

F_a : Axial load (N)

The value of F_a in Fig. 7.3 is:

$$F_a = F + \mu \cdot m \cdot g$$

F : Such as cutting force to axial direction (N)

μ : Friction coefficient of the guide way

m : Volume of the traveling section (table mass plus work mass kg)

g : Gravitational acceleration (9.80665 m/s²)

T_{pmax} : Upper limit of the dynamic friction torque of ball screw (N · cm)

T_u : Friction torque of the support bearing (N · cm)

N_1 : Number of teeth in Gear 1

N_2 : Number of teeth in Gear 2

Generally, though it depends on the type of motor, T_1 shall be kept under 30% of the motor rating torque.

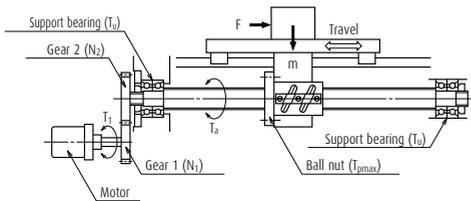


Fig. 7.3 Driving mechanism of ball screw

2.2 Drive torque at acceleration

Accelerating the ball screw resisting axial load requires the maximum torque in an operation. Drive torque necessary for this occasion can be obtained by the following formula.

$$T_2 = T_1 + J \cdot \dot{\omega} \quad (\text{II-31})$$

$$J = J_M + J_{G1} \left(\frac{N_1}{N_2} \right)^2 \left(J_{G2} + J_S + m \left(\frac{l}{2\pi} \right)^2 \right) (\text{kg} \cdot \text{m}^2) \quad (\text{II-32})$$

In this formula:

T_2 : Maximum drive torque at time of acceleration (N · m)

$\dot{\omega}$: Motor's angular acceleration (rad/s²)

J : Moment of inertia applied to the motor (kg · m²)

J_M : Moment of inertia of the motor (kg · m²)

J_{G1} : Moment of inertia of Gear 1 (kg · m²)

J_{G2} : Moment of inertia of Gear 2 (kg · m²)

J_S : Moment of inertia of the screw shaft (kg · m²)

When selecting a motor, it is necessary to examine the maximum torque of the motor relative to the drive torque T_2 at the time of acceleration of ball screw.

For the calculation of the moment of inertia of a cylindrical object (ball screw, gear, etc.), please refer to the formula below.

Formula for the moment of inertia of a cylindrical object

$$J = \frac{\pi \cdot \gamma}{32} D^4 \cdot L (\text{kg} \cdot \text{cm}^2) \quad (\text{II-33})$$

In this formula:

γ : Material density (kg/cm³)

D : Diameter of the cylindrical object (cm)

L : Length of the cylindrical object (cm)









B-2-8 Even Load Distribution in Ball Nut (In Case of Ball Screws for High-Load Drive)

Generally, the distribution of loaded balls in a ball nut is three-dimensionally asymmetric, thus resulting in uneven load distribution to the balls and ball nut. NSK has taken the measures for even load distribution to the balls by an optimal arrangement of the position of ball recirculation circuits.

Additionally, a heavier load results in a measurable axial deformation of the screw shaft and the ball nut, thus further

increasing the unevenness of load distribution. We have lessened the unevenness of load distribution to the balls by arranging the load acting point of the ball nut and the screw shaft opposite to each other. The relation between loading points and load distribution is shown in Fig. 8.1, while Table. 8.1 shows the result of load distribution analysis.

Table. 8.1 The result of equalization of load distribution
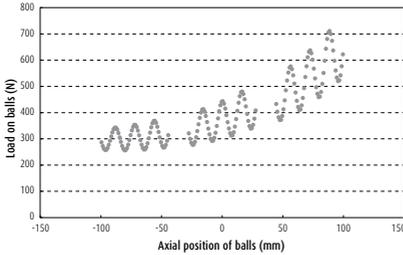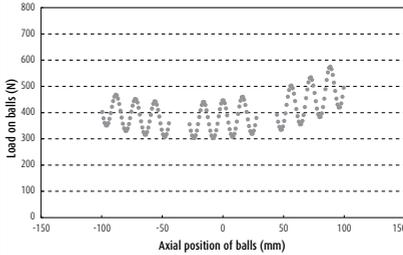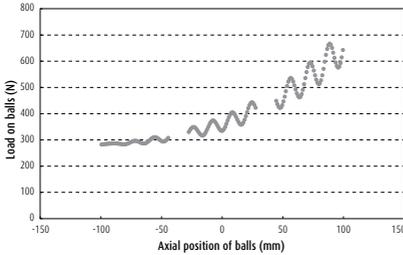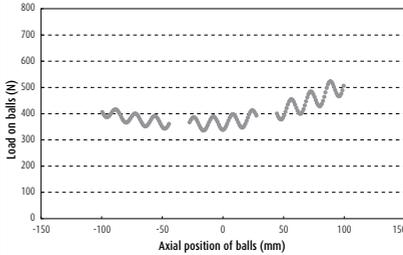
| | NSK recommended mounting direction | Conventional mounting direction |
|---------------------|---|--|
| Conventional design |   |   |
| HTF design |   |   |

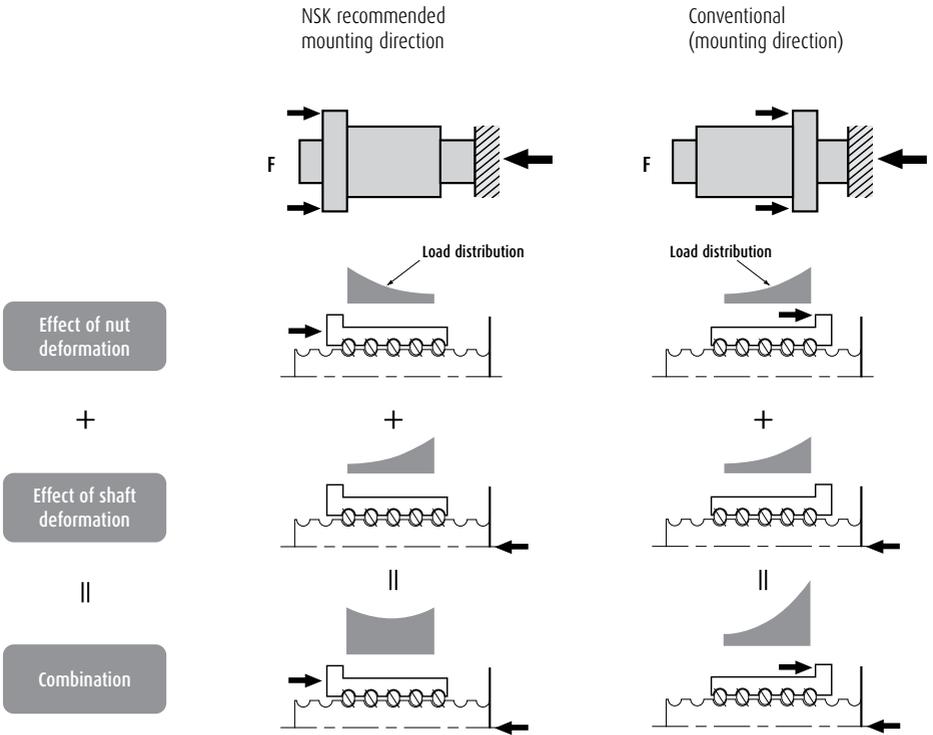


Fig. 8.1 The relationship between acting point of load and load distribution

B-2-9 Lubrication of Ball Screw

Lithium soap-based grease with base oil viscosity of 30 to 140 mm²/s (40°C) is recommended for grease lubrication and oil of ISO VG 32 to 100 for oil lubrication.

In general, a lubricant with low base oil viscosity is recommended where a ball screw is used for high-speed operation, and thus requires reducing thermal elongation of the screw shaft. On the other hand, a lubricant with high base oil viscosity is recommended for a low-speed, high-temperature operation, or a high-load and oscillating operation.

Please consult NSK about greases for high-load drives and high-temperature applications.

NSK markets "NSK Grease Unit" as the standard series products for a variety of applications. NSK Grease Unit for ball screw lubrication includes:

- 1) Various types of grease in the bellows-tube which can be instantly attached to the grease pump
- 2) Hand grease pump which is compact and easy to use
- 3) Nozzles

Table 9.1 shows NSK greases, and names of other ball screw greases.

Table 9.2 explains checking points in lubrication and standard intervals between replenishments. It is important to wipe off old grease from the screw shaft prior to applying new grease. Page D16 also explains in detail concerning the replenishing methods.

Table 9.1 Grease for ball screw

| Product name | Thickener | Base oil | Base oil viscosity mm ² /s (40°C) | Range of temperature for use (°C) | Application |
|----------------|---------------------|---|--|-----------------------------------|------------------------|
| NSK Grease AS2 | Lithium base | Mineral oil | 130 | -10 - 110 | General heavy load |
| NSK Grease PS2 | Lithium base | Synthetic oil combined with Synthetic hydrocarbon oil | 15.9 | -50 - 110 | Light load |
| NSK Grease LR3 | Lithium base | Synthetic oil | 30 | -30 - 130 | High-speed medium load |
| NSK Grease LG2 | Lithium base | Synthetic oil combined with Synthetic hydrocarbon oil | 32 | -20 - 70 | For clean environment |
| NSK Grease NF2 | Urea composite type | Synthetic hydrocarbon oil | 26 | -40 - 100 | Fretting resistant |

*Refer to Page D13 for the nature of NSK greases.

Table 9.2 Checking lubricant and intervals of replenishment

| Lubricating method | Checking intervals | Check points | Replenish/replacing interval |
|-----------------------------------|---------------------------------|---------------------------------|---|
| Intermittent automatic oil supply | Once a week | Remaining volume, contamination | Supply oil when checking (depending on the tank volume) |
| Grease | 2 - 3 months after start of use | Clean, foreign matters | Generally once a year (replenish when necessary) |
| Oil bath | Every day, when start to work | Oil level | Specify according to oil consumption |

B-2-10 Dust Prevention for Ball Screw

If foreign matters enter inside the ball nut, all screw grooves and balls wear rapidly, or the ball screw may malfunction due to the damage of groove and/or ball recirculation system. Use bellows or telescopic pipes (Fig. 10.1) to keep foreign matters from entering into the feed screw system. Install

these items so as to shut foreign matters completely from the ball screw.

Also it is even more effective to add seals on the ball nut as shown in Figs. 10.2 to 10.7. We provide seals in Table 10.1.

Table 10.1 Seal

| | Sealing capability | Torque | Heat | grease retention | Application |
|-----------------------|--------------------|--------|------|------------------|---|
| Thin plastic seal | ○ | ○ | ○ | ○ | End deflector type, HMD type, BSL type |
| Plastic seal | × | ◎ | ◎ | × | Tube type, Deflector (bridge) type (Seal is not put on the lead of 1mm or smaller.) |
| Wiper seal | ○ | × | × | ○ | Tube type, Deflector type (Seal is not put on the lead of 1mm or smaller.) |
| X1 seal | ◎ | ○ | ○ | ◎ | HMS type, HMD type |
| High performance seal | ◎ | ○ | ○ | ○ | VSS type |
| Brush-seal | △ | ○ | ○ | △ | For R Series (Seal for those with the shaft diameter of 14 mm or less is plastic seal.) |

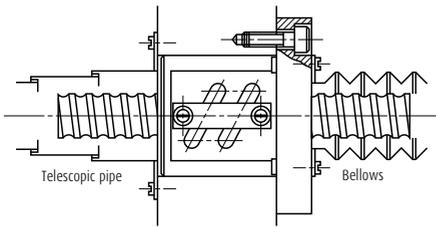


Fig. 10.1 Dust prevention by telescopic pipe and bellows




Fig. 10.2 Thin plastic seal




Fig. 10.3 Plastic seal




Fig. 10.4 Wiper seal

B-2-11 Rust Prevention and Surface Treatment of Ball Screws




Fig. 10.5 X1 seal

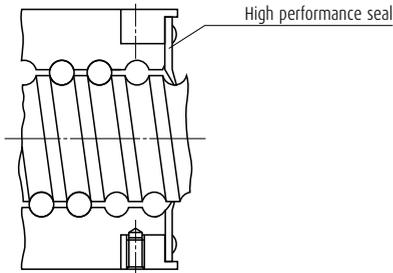


Fig. 10.6 High performance seal




Fig. 10.7 Brush-seal for R Series

1. Stainless steel ball screw

KA type ball screws made of stainless steel are available. Please consult NSK for a custom made stainless steel ball screw.

2. Types of surface treatment

The following are common types of treatment.

Low temperature chrome plating

Used to prevent corrosion and light reflection, and for cosmetic purpose.

Fluoride low temperature chrome plating

Fluoroplastic coating is provided following the low temperature chrome plating.

Resistance to corrosion is higher than low temperature chrome plating.

Hard chrome plating

Very hard coating provides high resistance to both wear and corrosion.

Electroless nickel plating

Creates a film of consistent thickness on complex shaped items.

For corrosion prevention.

3. Recommended surface treatment

Among the surface treatments mentioned above, we recommend "Low temperature chrome plating" and "fluoride low temperature chrome plating" for rust prevention because of the result of humidity chamber test for antirust characteristics.

However, never apply any organic solvent for degreasing because it has adverse effect on antirust characteristics.

Table 11.1 Surface treatment length

| | Applicable length |
|---|-------------------|
| Low temperature chrome plating | 5 m or less |
| Fluoride low temperature chrome plating | 4 m or less |

Refer to "1.3 Rust Prevention and Surface Treatment" (page D5) for the results of humidity chamber test.

B-2-12 Ball Screw Specifications for Special Environments

B-2-12.1 Clean Environments

NSK manufactures NSK Clean Grease "LG2" and "LGU" for NSK linear guides, ball screws, and Monocarriers which are used under normal temperature and pressure in a clean room.

The LG2 and LGU grease are far more superior in stable torque characteristics than the vacuum grease which has been used as a countermeasure against dust generation. The LG2 and LGU also have a sufficient durability and dust prevention capability.

Features of "LG2" and "LGU"

- ① Generates less dust than prevailing vacuum greases and general greases. Cleanliness is enhanced by simply switching the grease to the LG2 or the LGU.
- ② Has extremely low and stable torque characteristics. It is ideal for high-speeds operation.
- ③ Unlike prevailing vacuum greases, the LG2 and LGU have a nature similar to general grease. Its effect is long-lasting, and sufficiently durable. They greatly contribute to minimize the frequency of maintenance.
- ④ They have an equal capability in rust prevention as general grease, and also are reliable.

When using NSK linear guides, ball screws, or Monocarriers in a clean environment, request the LG2 or LGU as a packed lubricant prior to delivery. NSK also makes bellows-tubes which contain 80 grams of the LG2 or LGU. The tube is easy to use, and is ideal for maintenance (refer to pages B413 and D19). Wash to remove adipose substances prior to use.

Refer to page D8 for their detailed nature, functions and characteristics of LG2 and LGU.

B-2-12.2 Measures for Use Under Vacuum

NSK developed MoS₂ / WS₂ spattering and dry-filmed ball screws for equipment to be used in space. NSK also makes soft-metal film (gold and silver) ball screws to be used in a vacuum environment for semiconductor and liquid crystal display processing equipment.

Lubricants widely used for ball screws in a high vacuum are:

- > Vacuum grease which uses base oil of low vapor pressure.
- > Solid lubricants such as MoS₂, WS₂ used mainly for equipment in space.
- > Solid lubricants by soft-metal such as gold, silver, or lead film.

When used for semiconductor and liquid crystal display manufacturing equipment, the oil of the vacuum grease evaporates and causes environmental contamination. Also, it hinders creation of a super high vacuum. MoS₂ in the state of solid lubricant generates a large volume of dust, and Mo is unsuitable for semiconductors and reformed surface. Therefore, it is not suitable for the processing machines for semiconductor and liquid crystal display.

NSK recommends solid lubricant ball screws with a long life. These ball screws are treated with special silver film by NSK's unique processing technology, and can be used in a super-high vacuum. However, because of a solid lubricant, the film may peel off and stick to surface of ball grooves repeatedly, causing the torque to rise momentarily on some occasions. The drive motor should be of large capacity to handle this drastic variation of torque.

Refer to page D7 for the test data of ball screws for vacuum.

For ball screw specifications for special environments, refer to page D2.

B-2-13 Noise and Vibration

B-2-13.1 Consideration to Lowering Noise

As the machine operates at higher speeds, noise levels tend to increase. Covering the nut section is insufficient to lower noise. NSK has abundant data (NSK Motion & Control Technical Journal No.4, etc.), and offers advice to users regarding selecting ball screw.

To lower noise level in general, the following points should be taken into consideration.

- ① Use as a large lead as possible to reduce rotational speed.
- ② Use a ball screw with smaller outer diameter as possible.

(It often requires designing for critical dimensions, mandating special specification. Please consult NSK.)

For reference, noise levels by ball screws alone are plotted below. The formula for calculation is also shown below.

- ① Average value at measuring distance of 400 mm

$$dB(A) = 25.2 \{ \log_{10} (D_w \cdot d_m \cdot n \times 10^{-5}) \} + 63.9 \quad (\text{II-34})$$

- ② Upper limit at measuring distance of 400 mm

Average value + 6 dB (A)

D_w : Ball diameter (mm)

d_m : Ball pitch circle dia. (mm)

n : Rotational speed (min^{-1})

If measuring distance is 1 m, the average noise level is: Various noise levels minus 8 dB (A).

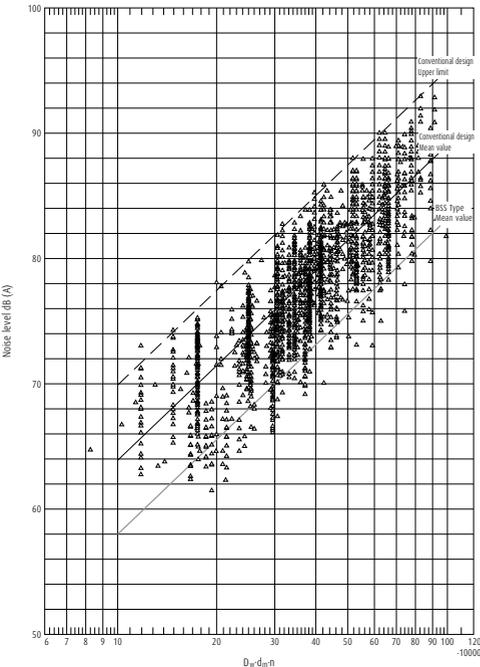


Fig. 13.1 Noise levels of ball screws

<<Example of calculation of noise levels>>

<Use conditions>

Nut model: DFT4010-5

From the dimension table: $D_w = 6.350$

$d_m = 41$

Maximum rotational speed: $2\,000 \text{ min}^{-1}$

<Calculation>

By formula 34):


$$\begin{aligned} dB(A) &= 25.2 \{ \log_{10} (D_w \cdot d_m \cdot n \times 10^{-5}) \} + 63.9 \\ &= 25.2 \{ \log_{10} (6.350 \times 41 \times 2\,000 \times 10^{-5}) \} + 63.9 \\ &= 82 \text{ dB (A)} \end{aligned}$$

The average value of noise level by ball screws alone at maximum rotational speed (measuring distance 400 mm) is 82 dB (A). Upper limit is: 82 dB (A) + 6 dB (A) = 88 dB (A)

If the measuring distance is 1 m, the average value of noise level is 74 dB (A), and upper limit is 80 dB (A).

When installed, the noise of ball screw becomes higher by the noise of the machine and characteristics of machine vibration.

By using NSK S1, the noise is reduced and softened compared to conventional ball screws. The BSS type will furthermore reduce and soften the noise.

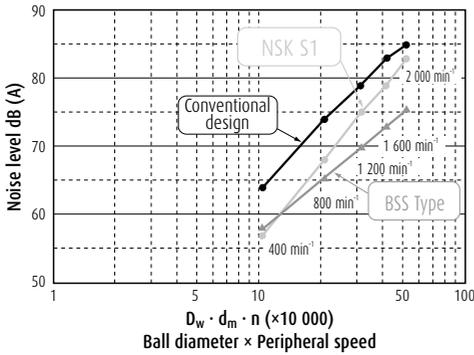

B-2-13.2 Consideration to Operational Characteristics

Smooth motion is achieved by using spacer balls on conventional ball return tube type ball screws. By using NSK S1 the smoothness is further improved. The BSS type will achieve the smoothness equivalent to ball screws with NSK S1.

B-2-13.3 Consideration to Ball Screw Support System

A ball screw has low radial rigidity because its support span is longer compare to its shaft diameter. It has only small damping capacity, requiring as much support rigidity as possible through design.

A simplified support bearing system to cut costs invites noise and vibration problems. Therefore, the necessity of consideration to the ball screw support system of both shaft ends is increasingly becoming important as the speed of machines is ever-increasing.

If one shaft end must be left unfixed without support bearing due to structural reasons, noise and vibration problems may occur. These problems are related to the natural vibration frequency of the screw shaft on the unsecured end. This problem can be averted by installing an impact damper to the shaft end (Fig. 13.2). Please consult NSK for details.


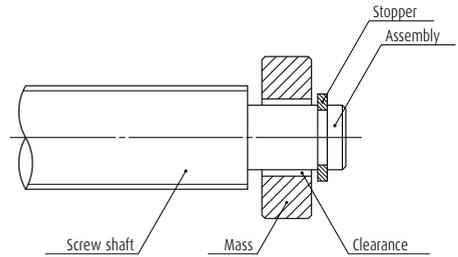



Fig. 13.2 Impact damper (Applied for patent)

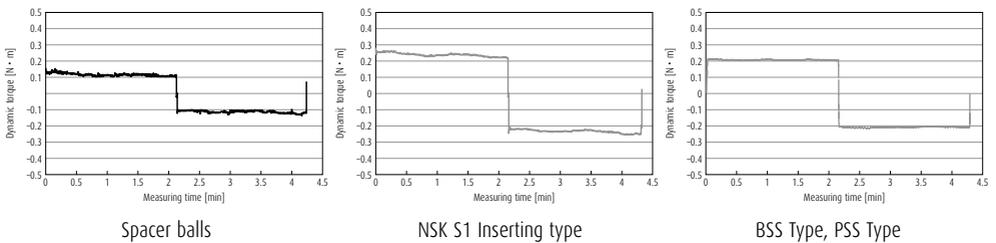

B-2-14 Installation of Ball Screw

B-2-14.1 Installation

The following simplified component drawing shows a representative example of a single-axis table.

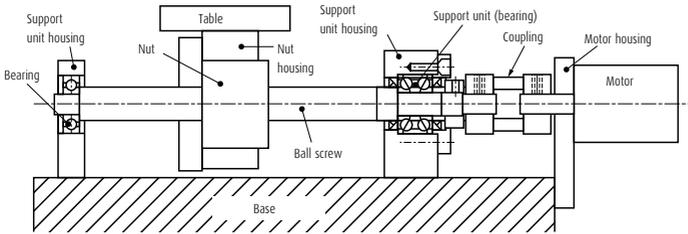

The screw shaft of the ball screw is supported by a nut and bearings, and it is driven by a motor.

It is critically important to complete the centering work to ensure the predetermined operation life, functionality and accuracy of the ball screw. In general, the following accuracy is recommended for precision-class applications.


Inclination of center line: 1/2 000 or less (Target: 1/5 000 or less)

Eccentricity: 0.020 mm or less


The following problems could occur if an installation error negatively affected the ball screw:

- (1) Effects on durability:
 - Lowered flaking life or wearing life.
- (2) Effects on torque characteristics:
 - Increased friction torque or torque variations.
- (3) Effects on feed rate:
 - Decreased accuracy in motion.

<Inclination of center line>




<Eccentricity>



Overall View of Assembled Body


Explanations of the assembling procedure are given below, using the single-axis table as an example:

In this explanation, two different installation procedures are provided: one for machine tools, where high installation accuracy is required, and another for general industrial machinery.

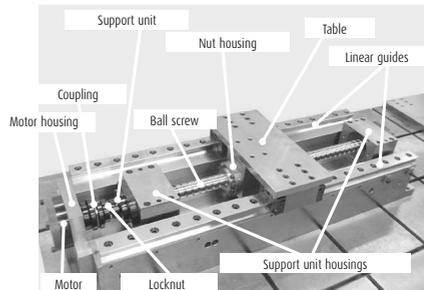

B-2-14.1 Installation Procedure for Machine Tools, Where High Installation Accuracy Is Required

The single-axis table shall be installed according to the following procedure:

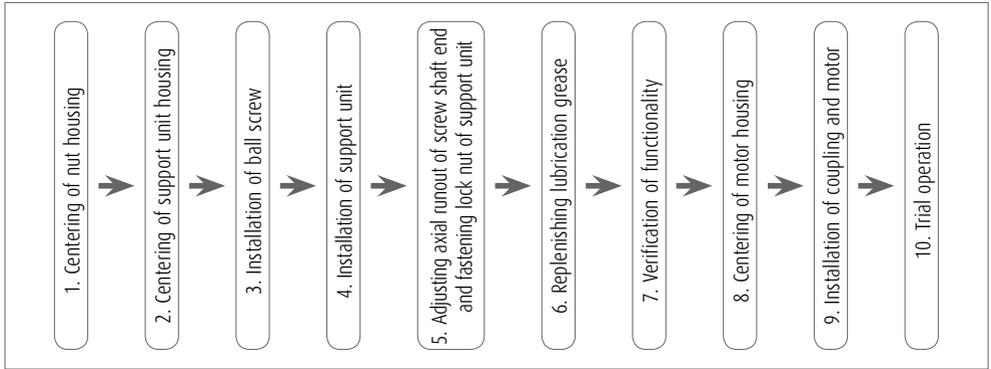


I. Jigs required for installation

Test bars:

(For the nut: one piece; for the support units: two pieces)

⇒ For centering and measurement of axial runout. The portions onto which the housing is installed (marked with the solid line) and the portions subject to measurement (a, b, c and d, marked with the broken line) shall be finished to high precision.

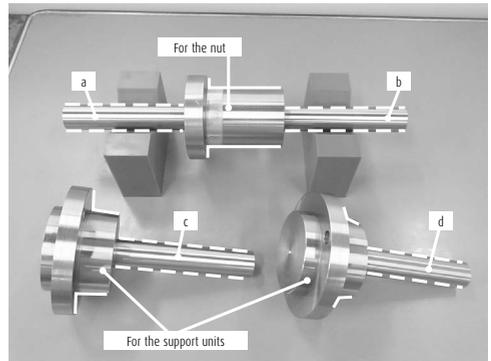

II. Installation of assembled body



1. Centering of nut housing

1-1

Turn the table over and mount the nut housing and test bar for the nut onto it.



Set up a magnet stand with a dial gauge attached, taking the rear side of the table as reference. Measure two spots at the top of the test bar for the nut by moving the magnetic stand around to check the inclination in the vertical direction.

If inclination of center line is observed, adjust the surfaces on which the nut housing is installed.



1-2

Fix the magnetic stand, with the dial gauge attached, onto a block. While pressing the block toward the reference surface of the table, move the magnet stand around. Measure the side surface of the test bar for the nut, check the inclination in the horizontal direction. If inclination of center line is observed, adjust the portion where the nut housing is installed onto the table.




2. Centering of support unit housing

Install the linear guides onto a machine base, and then install the table, which has already been centered. (For installation of linear guides, please refer to A67 of CAT. No. 9008.)

2-1



Install the test bar for the support unit onto the support unit housing.



2-2

Install the magnet stand, with the dial gauge attached, using the table as reference. While moving the table, measure the two spots at the top of the test bar for the motor-side support unit to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surfaces of the support unit housing.

Follow the same procedure for the opposite side of the motor.


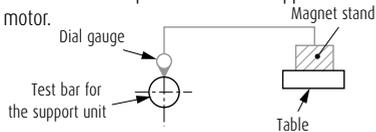


2-3

Fix the magnet stand, with the dial gauge attached, onto a block, and install the block onto the top surface of the linear guide rail. Measure the top points of the test bar for the nut and the support unit to check for eccentricity in the vertical direction.

If eccentricity is observed, adjust the mounting surface of the support unit housing.



Follow the same procedure for the opposite side of the motor.



2-4

Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the top surface of the linear guide rail as reference and moving it, take measurements of the side surfaces of the test bars for the nut and support unit to check for eccentricity in the horizontal direction. If eccentricity is observed, adjust the mounting surface of the support unit housing.

Follow the same procedure for the opposite side of the motor.




3. Installation of ball screw

Remove all test bars from the housing.

Clean the outside diameter surface of the nut and the inside diameter surface of the housing using a cloth, and install the ball screw.


Apply grease to spots with metal-to-metal contact to avoid any scratches or dents. While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction. If the housing must be removed in order to mount the ball screw, use a positioning pin so that the housing can be mounted back in its original position.



4. Installation of support unit

Insert the screw shaft into the support unit housing and mount the support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.


Follow the same procedure for the opposite side of the motor.



5. Adjusting axial runout of screw shaft end and fastening lock nut of support unit

Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.

Follow the same procedure for the opposite side of the motor.



6. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply the grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)


If you use a ball screw already filled with grease, it is not necessary to add more.



7. Verification of functionality

To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.


Confirm (including by touch) that there are no abnormalities.



8. Centering of motor housing


8-1

Install the motor housing, and mount the dial gauge onto the shaft end of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of the end surface of the motor housing is observed, adjust the mounting surface of the motor housing.



8-2


Set up the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check eccentricity, with the stylus touching the inside diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.



9. Installation of coupling and motor

Mount the coupling onto the shaft end of screw, and install motor.

Fasten the bolts of the coupling to connect the shaft end with motor shaft.




10. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-14.2 Installation Procedure for General Industrial Machinery

In this procedure, the ball screw is installed with the accuracy required for the linear guide. The centering of nut and table are adjusted by installing the nut housing appropriately. Since no test bars are required and the inside diameter of the nut housing does not need to be fit with the nut, the ball screw can be installed relatively easily and cheaply.

The installation procedure used for the single-axis table is shown below:

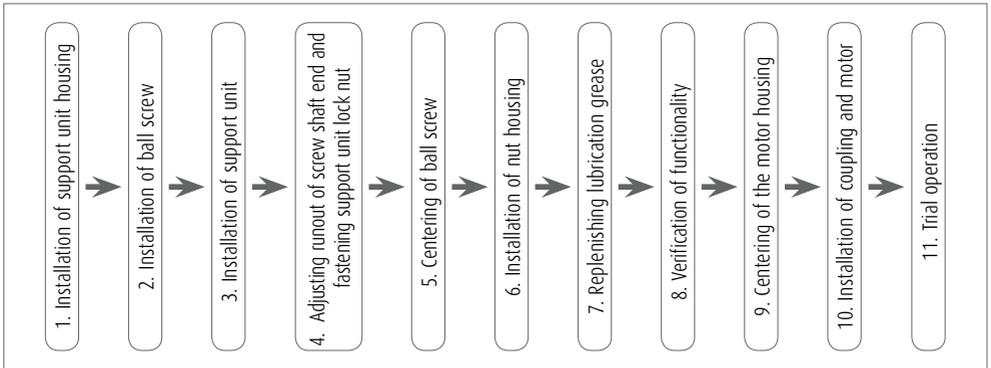


I. Installation of assembled body

1. Installation of support unit housing

Install the linear guide onto the machine base.

(For installation procedure for linear guide, please refer to A67, CAT. No. 9908.)


Place the support unit housing at the predetermined position and fasten it temporarily.



2. Installation of ball screw

While doing this, be careful not to drop the ball screw or hit it with anything, which might cause malfunction.

Conduct this task using a V-block to prevent scratches and dents.



3. Installation of support unit


Insert the screw shaft into support unit housing and mount support units on both shaft ends. Fix the motor-side support unit to the housing. Fasten the locknut temporarily.

Follow the same procedure for the opposite side of the motor.

4. Adjusting runout of screw shaft end and fastening support unit locknut

Bring the dial gauge into contact with the top of the shaft end. Then, while rotating the screw shaft, measure the runout of the shaft end. While adjusting the shaft end runout, fasten the locknut to attain the required fastening torque.


Follow the same procedure for the opposite side of the motor.



5. Centering of ball screw

5-1


Set up a magnet stand with a dial gauge attached, using the ball slide of the linear guide as reference. Measure the top of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the vertical direction. If inclination of center line is observed, adjust the mounting surface of the support unit housing.



5-2

Fix the magnet stand, with the dial gauge attached, onto a block. While pressing the block toward the ball slide of the linear guide, move the block. Measure the side surface of the screw shaft in the vicinity of the support unit housing both on the motor and opposite sides to check the inclination in the horizontal direction. If inclination of center line is observed, adjust by installing support unit housing appropriately.

After the adjustment, fix the support unit housings of the motor side and the opposite side.




6. Installation of nut housing

6-1

Temporarily fasten the nut housing onto the table, and fasten the table, using the ball slide of the linear guide as reference surface.

To minimize the bending of the screw shaft caused by the self-weight of the nut, move the nut toward the support unit housing at the shaft end.




6-2

Move the table toward the nut, and fasten the nut to the nut housing.

Loosen the bolts that fasten the table to the nut housing, and re-fasten them.

Loosen the bolts that fasten the nut housing and the nut, and re-fasten them.



7. Replenishing lubrication grease

Wipe away the antirust oil from the empty ball screw, to which grease has not been applied, and supply grease through the grease hole to fill the inside. (Supply grease while rotating the ball screw in the direction that moves grease toward the inside of the nut. This will lubricate the ball screw evenly.)


If you use a ball screw already filled with grease, it is not necessary to add more.



8. Verification of functionality

To check whether the ball screw has been installed accurately, verify its functionality. Measure the driving torque with a torque meter over the entire movable range of the screw.


Confirm (including by touch) that there are no abnormalities. Follow the same procedure for the opposite side of the motor.



9. Installation of nut housing


9-1

Install the motor housing, and mount the dial gauge onto the end face of the ball screw. Rotate the screw shaft to check the inclination of the motor housing, with the stylus of the dial gauge in contact with the end face of the motor housing. If inclination of center line is observed, adjust the mounting surface of the motor housing.




9-2

Set up the dial gauge onto the end face of the screw shaft. Rotate the screw shaft to check eccentricity, with the stylus touching the inside-diameter surface of the motor housing. If eccentricity is observed, adjust it by installing the motor housing appropriately.



10. Installation of coupling and motor

Mount the coupling onto the shaft end, and install the motor. Fasten the bolts of the coupling to connect the shaft end with the motor shaft.



11. Trial operation

At the beginning, run the assembly at low speed to check for vibrations and noise. Then, run it at moderate speed, and finally at high speed and check for abnormalities. Then run it continuously for approximately two hours, carry out a running-in operation and at the same time check for any abnormalities. During this running-in operation, the excessive grease inside of the nut is pushed out of the nut. Wipe it away.

B-2-15 Precautions for Designing Ball Screw

B-2-15.1 Safety System

As shown in the illustration on page B352, a stopper is installed in some cases to prevent the nut from overrunning due to malfunction of the safety system of the machine itself, or human error during operation.

The travel stopper should be installed at a place where it will not come into contact with the nut when the nut reaches the designed stroke end.

An impact absorbing travel stopper (NSK patent, refer to page B414) is available at NSK.

B-2-15.2 Design Cautions to Assembling Ball Screw

1. Cutting through the thread screw to the end

For some recirculation system, such as the deflector type, end cap type, S1 specification (High-Load drive ball screws etc.) and a part of end deflector type, one end of the thread screw should be cut through to the end of the major diameter. This is necessary to assemble the ball nut to the screw shaft (Fig. 15.1).

In this case, the shaft end diameter, to where this "cut-through thread" is made, should be 0.2 mm or smaller than the ball groove root diameter " d_r ". (See the dimension table.) A similar precaution is required when it is absolutely necessary to remove the nut from the screw shaft in order to install the ball screw to the machine. Also, in case using the cut-through end as the shoulder of the support bearing, make certain that a sufficient amount of the effective flat surface is left from the root diameter. If it is insufficient, the bearing cannot be installed perpendicularly to the bearing seat. (Fig. 15.2)

2. Designing the screw shaft end and the nut mounting area

When installing a ball screw to the machine, avoid a design which makes it necessary to separate the nut from the screw shaft as shown in Fig. 15.3. If separated, the balls may fall out. The separation may also deteriorate the ball screw accuracy, or may damage the ball screw. If separating them is unavoidable, please furnish NSK with the component which is to be installed between the nut and screw shaft. NSK will install the component prior to delivery.

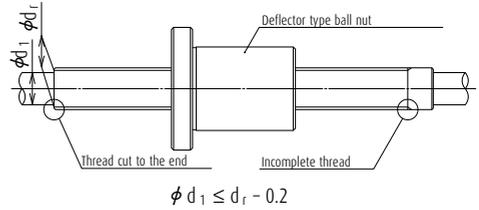


Fig. 15.1 Shaft end of a deflector recirculation system ball screw

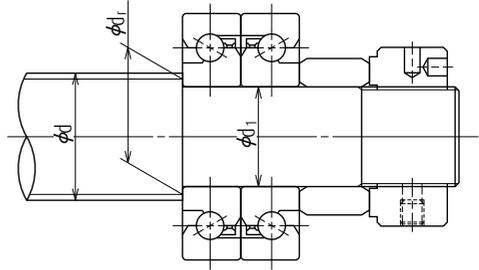


Fig. 15.2 Support bearing and end face (shoulder) for installation

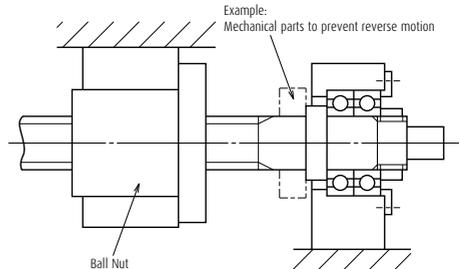


Fig. 15.3 Nut and ball screw are required to be separated when installing in this structure.

3. Removing the nut from the screw shaft at the time of assembly

If it is unavoidable, use an arbor (Fig. 15.4), keeping the balls in the nut. In this case, the outside diameter of the arbor should be approximately 0.2 mm to 0.4 mm smaller than the ball groove root diameter "d_r."

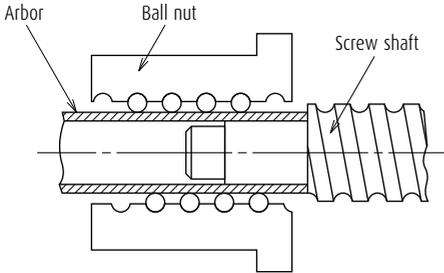


Fig. 15.4 Arbor to install and remove nut

4. Centering of the ball nut when installing

When installing the nut as shown in Fig. 15.5, provide a space between the housing and the nut body diameter, allowing the centering to be performed.

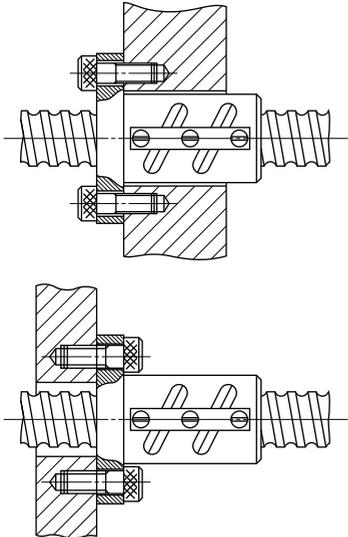


Fig. 15.5 Fixing a ball nut by flange

5. Preventing the thread screw of nut from loosening

When installing and securing the nut to the housing at the thread screw section, as in the case for RNCT type of R Series ball screws, apply an agent which prevents the nut from loosening.




Fig. 15.6 Fixing a ball nut with thread screw

6. Installation of brush-seal to the nut

If a brush-seal is installed at the thread screw side of the nut similar to the RNCT type which comes with a thread screw, the brush-seal should be secured as shown in Fig. 15.7.

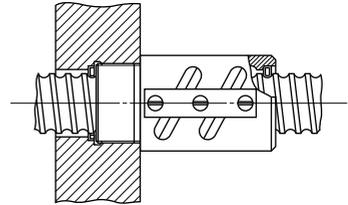


Fig. 15.7 Installation of brush-seal to a ball nut with thread screw

B-2-15.3 Effective Stroke of Ball Screw

When hardened by the induction hardening, the hardness of a ball screw may be slightly low at both ends of the screw section. Consider this low hardness prior to determining the length of effective stroke. Please consult NSK for details.

B-2-15.4 Matching after Delivery

When, after the delivery of a ball screw, you require drill knock pin hole on the screw shaft end, or at the nut mounting area, please inform NSK on the position and size of the hole.

NSK will take a measure and protect designated spots from heat treatment prior to delivery to make subsequent machining easy.

B-2-15.5 "NSK K1" Lubrication Unit

When using the NSK K1 lubrication unit, be aware of the operating temperature and chemicals that come to contact the unit for keeping the K1's best performance.

Temperature range for use:

Maximum temperature; 50°C

Momentary maximum temperature; 80°C

Chemicals that should not come to contact:

Do not leave the K1 unit in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage the K1 unit.

B-2-16 Shaft End Machining

You require to machined shaft ends in the following three occasions.

- * Precision ball screws with blank shaft end.
- * Ball screws in R Series with blank shaft end (see page B349).
- * Additional machining of a completed ball screw.

The following are the summaries of machining of these shaft ends. For details, please contact NSK.

1. Machining of blank shaft ends of precision ball screws

(a) Cutting screw shaft

Use a cutting whetstone or the like to cut the shaft, leaving stock for turning. Keep the nut in the assembled state to the screw shaft, and open only one side of the plastic wrapping bag, expose only the shaft end section to be machined, and then cut the screw shaft. This prevents foreign matters from entering to the ball screw section. Do the same for other machining.

(b) Precautions in cutting shaft end

Outside of the screw shaft is ground with precision (excluding R Series). There is a center hole in the ends. Use them for centering. Do not rotate the shaft quickly or stop it suddenly, or the nut might move along the shaft. We recommend securing the nut with tape. To machine a very long shaft, apply work rests to the screw shaft surface to suppress vibration (especially caused by critical speed).

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spann ring" are installed.

(e) Milling processing

Process keyways and tooth seats for lock washers.

(f) Deburring, washing, and rust prevention

Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.

Note: Contact NSK if nut is accidentally removed.

2. Additional machining of R Series ball screw shaft end

(a) Cutting screw shaft

Carry out the same process as "(1) Machining of blank shaft ends of precision ball screws" above.

(b) Annealing the shaft end

(Heat the section of the shaft end to be machined with an acetylene torch. Then gradually cool it in ambient atmosphere.)

- * The area not machined loses hardness if exposed to heat. This may shorten the ball screw life. Cool with water the areas where should not be heated to avoid heat conduction.

(c) The following process is the same as

"1. Machining of blank shaft ends of precision ball screws" above.

B-2-17 Ball Screw Selection Exercise

Drill 1: High-speed transporting system

1. Design conditions

| | |
|---------------------------------|--|
| Table mass : | $m_1 = 40 \text{ kg}$ |
| Mass of the transporting item : | $m_2 = 20 \text{ kg}$ |
| Maximum stroke : | $S_{\max} = 700 \text{ mm}$ |
| Rapid traverse speed : | $V_{\max} = 1\,000 \text{ mm/sec}$ (60 m/min) |
| Positioning accuracy : | $\pm 0.05/700 \text{ mm}$ (0.005 mm/pulse) |
| Repeatability : | $\pm 0.005 \text{ mm}$ |
| Required life : | $L_t = 25\,000 \text{ h}$ (5 years) |
| Guide way (rolling) : | $\mu = 0.01$ (friction coefficient) |
| Drive motor : | AC servo motor ($N_{\max} = 3\,000 \text{ min}^{-1}$) |

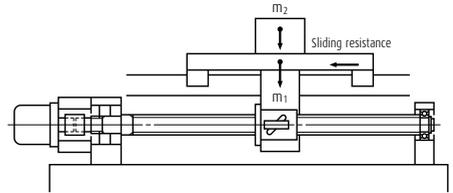


Fig. 16.1 System appearance

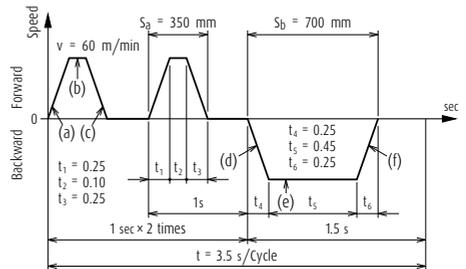


Fig. 16.2 Operating condition

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

According to **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the accuracy grade of ball screws for Cartesian type industrial robots is C5 to Ct10.

From the following conditions in design, the axial play should be 0.005 mm or less.

| | |
|-----------------|--------------------------|
| Repeatability : | $\pm 0.005 \text{ (mm)}$ |
| Resolution : | 0.005 mm/pulse |

According to **Table 4.2** "Combinations of accuracy grades and axial play" on page B20, you will require the accuracy grade C5 to satisfy the axial play of 0.005 mm or less. Therefore select the accuracy grade C5, and the axial play of 0 mm (Z-preload).

2.2 Selection of lead

Calculate the lead l based on maximum speed of AC servo motor and the rapid traverse speed V_{\max} .

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{1\,000 \times 60}{3\,000} = 20 \text{ (mm)}$$

Select a lead l of 20 mm or larger.

2.3 Selection of screw shaft diameter

According to the **Table 4.4** "Shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter d which has a lead l larger than 20 mm should be in the range of 15 mm to 32 mm. Select the smallest 15 mm.

2.4 Selection of stroke

From the **Table 4.4** "Screw shaft diameter, lead, and stroke of standard ball screw" on page B21, a ball screw with shaft diameter (d) of 15 mm and lead (l) of 20 mm meets maximum stroke of 700 mm, therefore it is possible to select from the standard ball screws. The primary selection is as follows:

Primary selection:

| | |
|------------------|----------|
| Shaft diameter : | 15 (mm) |
| Lead : | 20 (mm) |
| Stroke : | 700 (mm) |
| Accuracy grade : | C5 |
| Axial play : | Z |

3. Confirmation of standard ball screw

In consideration of delivery time and price, select from the standard ball screws with finished shaft ends.

Primary candidate: W1507FA-3PG-C5Z20

4. Basic safety check

Let's examine the primary candidate.

4.1 Allowable axial load

4.1.1 Calculation of allowable axial load

From Fig. 16.2: Acceleration α_1 at accelerating/decelerating is:

$$\alpha_1 = \frac{V_{\max}}{t_1} = \frac{1\,000}{0.25} = 4\,000 \text{ (mm/s}^2\text{)} = 4 \text{ (m/s}^2\text{)}$$

Axial load F_1 is:

(At the time of acceleration (a)(d))

$$\begin{aligned} F_1 &= \mu(m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1 \\ &= 0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4 \\ &= 246 \text{ (N)} \end{aligned}$$

(At the time of constant speed (b)(e))

$$F_2 = \mu(m_1 + m_2) \times g = 0.01 \times (40 + 20) \times 9.80665 = 6 \text{ (N)}$$

(At the time of deceleration (c)(f))

$$\begin{aligned} F_3 &= -\mu(m_1 + m_2) \times g + (m_1 + m_2) \times \alpha_1 \\ &= -0.01 \times (40 + 20) \times 9.80665 + (40 + 20) \times 4 \\ &= 234 \text{ (N)} \end{aligned}$$

Thus, the maximum axial load P is 246 N.

4.1.2 Buckling load

W1507FA-3PG-C5Z20 has the support length of 804 mm ("La" as per the dimension table on page B193), and must support maximum axial load (P) of 246 N). The supporting condition of screw shaft is "Fixed - Simple", and the supporting condition of ball nut is "Fixed". Due to the direction of the load, the whole ball screw supporting condition is "Fixed - Fixed" support (Factor $m = 19.9$).

From formula 2) on page B44:

$$d_r \geq \left(\frac{P \times L_a^2}{m} \times 10^{-4} \right)^{1/4} = \left(\frac{246 \times 804^2}{19.9} \times 10^{-4} \right)^{1/4} = 5.3 \text{ (mm)}$$

W1507FA-3PG-C5Z20 has the dimension (d_r) of 12.2 mm as per the dimension chart (page B193) and therefore meets the condition.

Result: Acceptable

4.2. Allowable rotational speed

The permissible rotational speed listed in the dimension table is 3 000 min⁻¹. Since the motor maximum rotational speed is 3 000 min⁻¹, the operation is in the range of permissible rotational speed.

Result: Acceptable

4.3. Checking life expectation

4.3.1 Mean load F_m and mean rotational speed N_m

From the calculation of axial load, rotational speed N_i and the operating time t_i is:

(At the time of acceleration (a)(d))

$$F_1 = 246 \text{ (N)}$$

$$N_1 = \frac{n}{2} = \frac{3\,000}{2} = 1\,500 \text{ (min}^{-1}\text{)}$$

$$t_a = 2 \times t_1 + t_4 = 0.75 \text{ (s)}$$

(At the time of constant speed (b)(e))

$$F_2 = 6 \text{ (N)}$$

$$N_2 = 3\,000 \text{ (min}^{-1}\text{)}$$

$$t_b = 2 \times t_2 + t_5 = 0.65 \text{ (s)}$$

(At the time of deceleration (c)(f))

$$F_3 = 234 \text{ (N)}$$

$$N_3 = 1\,500 \text{ (min}^{-1}\text{)}$$

$$t_c = 2 \times t_3 + t_6 = 0.75 \text{ (s)}$$

Calculation result is shown in Table 16.1

Table 16.1 Axial load and rotational speed

| Operating condition | Axial load (N) | Rotational speed (mean) (min ⁻¹) | Operating time (s) |
|---------------------|----------------|--|--------------------|
| (a) (d) | $F_1 = 246$ | $N_1 = 1\,500$ | $t_a = 0.75$ |
| (b) (e) | $F_2 = 6$ | $N_2 = 3\,000$ | $t_b = 0.65$ |
| (c) (f) | $F_3 = 234$ | $N_3 = 1\,500$ | $t_c = 0.75$ |

From the formulas 11) and 12) on page B53:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3} = 195 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t} = 1\,200 \text{ (min}^{-1}\text{)}$$

4.3.2 Calculation of life expectancy

At the basic dynamic load rating CA ISO of W1507FA-3PG-C5Z20 (Clearance Z) is 4 320 N (as per the dimension table on page B193), from the formulas 8) and 9) on page B53:

$$L_t = \left(\frac{C_a}{F_m \cdot f_w} \right)^3 \times \frac{1}{60N_m} \times 10^6$$

$$= \left(\frac{4\,320N}{195 \times 1.2} \right)^3 \times \frac{1}{60 \times 1\,200} \times 10^6$$

$$\approx 49\,320$$

The ball screw satisfies the required life.

Result: Acceptable

5. Check for other requirements

(1) Accuracy and axial play

As per the dimension table on page B180 and **Table 1.2** for the permissible value of lead accuracy on page B38:

According to **Table 1.2**:

Accuracy grade: C5

$$e_p = \pm 0.035/800 \text{ (mm)}$$

$$v_u = 0.025 \text{ (mm)}$$

This grade satisfies the required positioning accuracy of $\pm 0.05/700$ mm.

The checking of axial play is omitted here since it is explained in "2. Selection of basic factors."

(2) Drive torque

Required specifications are as follows.

Motor rotational speed: 3 000 min⁻¹

Time to reach maximum speed: Less than 0.25 sec

① Load (converted to the motor axis)

Using the formula 32) and 33) on page B64, calculate the moment of inertia whereas γ is the material density of the ball screw.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 1.5^4 \times 80$$

$$= 0.31 \text{ (kg} \cdot \text{cm}^2)$$

(Moving part)

$$J_w = m \times \left(\frac{l}{2\pi} \right)^2 = 60 \times \left(\frac{2}{2\pi} \right)^2$$

$$= 6.1 \text{ (kg} \cdot \text{cm}^2)$$

(Coupling)

$$J_c = 0.25 \text{ (kg} \cdot \text{cm}^2) \dots \text{Temporary}$$

(As a whole)

Moment of inertia of the ball screw J_L is:

$$J_L = J_B + J_w + J_c$$

$$= 0.31 + 6.1 + 0.25$$

$$= 6.7 \times 10^{-4} \text{ (kg} \cdot \text{m}^2)$$

② Driving torque

We assume that WBK12-01 compact light load type is used as recommended for W1507FA-3PG-C5Z20, and the moment of inertia of motor (J_M) is 3.1

$$\text{(kg} \cdot \text{cm}^2) = 3.1 \times 10^{-4} \text{ (kg} \cdot \text{m}^2).$$

(At the time of constant speed)

The torque which is necessary to drive the ball screw at a constant speed resisting to external loads is: per formula 30) on page B64

$$T_1 = T_a + T_{pmax} + T_u$$

In this formula, T_a is the drive torque at constant speed, T_{pmax} is the upper limit of the dynamic friction torque of ball screw, and T_u is the friction torque of the support bearings.

From the chart on pages B193 and B400, (T_{pmax}) is 7.8 (N · cm) and (T_u) is 2.1 (N · cm) respectively.

$$T_a = \frac{F_a \cdot l}{2\pi\eta_1}$$

Using formula 28) on page B63, the drive torque at a constant speed T_1 is:

$$T_1 = \frac{F_a \cdot l}{2\pi \cdot \eta_1} + T_{pmax} + T_u$$

$$= \frac{6 \times 2}{2\pi \times 0.9} + 7.8 + 2.1$$

$$= 12 \text{ (N} \cdot \text{cm)} = 0.12 \text{ (N} \cdot \text{m)}$$

(At the time of acceleration)

The drive torque necessary for accelerating the ball screw resisting axial load can be calculated by the formula 31) on page 64.

$$T_2 = T_1 + J \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= T_1 + (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_1}$$

$$= 0.12 + (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3000}{60 \times 0.25}$$

$$= 1.35 \text{ (N} \cdot \text{m)}$$

(At the time of deceleration)

Similarly at the time of acceleration.

$$\begin{aligned} T_3 &= T_1 - J \cdot \frac{2\pi \cdot n}{60t_3} \\ &= T_1 - (J_L + J_M) \cdot \frac{2\pi \cdot n}{60t_3} \\ &= 0.12 - (6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \frac{2\pi \times 3\,000}{60 \times 0.25} \\ &= -1.11 \text{ (N} \cdot \text{m)} \end{aligned}$$

③ Selection of motor

Selection conditions are as follows.

Maximum rotational speed: $N_M \geq 3\,000 \text{ (min}^{-1}\text{)}$

Motor rating torque: $T_M \geq T_{rms} \text{ (N} \cdot \text{m)}$
(T_{rms} : Effective torque)

Moment of inertia of the motor: $J_M > J_L/3$ or more

From above: select an AC servo motor with the following specifications.

Motor specifications:

Rating power output: $W_M = 300 \text{ (W)}$

Maximum rotational speed:

$$N_M = 3\,000 \text{ (min}^{-1}\text{)}$$

Rating torque: $T_M = 1 \text{ (N} \cdot \text{m)} = 1 \times 10^2 \text{ (N} \cdot \text{cm)}$

Moment of inertia: $J_M = 3.1 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$
 $= 3.1 \text{ (kg} \cdot \text{cm}^2\text{)}$

④ Check on effective torque

Effective torque T_{rms} can be calculated as follows:

$$\begin{aligned} T_{rms} &= \sqrt{\frac{T_2^2 \times t_a + T_1^2 \times t_b + T_3^2 \times t_c}{t}} \\ &= \sqrt{\frac{1.35^2 \times 0.75 + 0.12^2 \times 0.55 + 1.11^2 \times 0.75}{3.5}} \\ &= 0.81 \end{aligned}$$

Thus the condition of " $T_M \geq T_{rms}$ " is cleared.

⑤ Check on time to reach maximum speed

The time required to reach the rapid traverse speed can be calculated as follows.

Whereas $T_M' = 2 \times T_M$:

$$\begin{aligned} t_a &= \frac{(J_L + J_M) \times 2\pi \times n}{(T_M' - T_1)} \times 1.4 \\ &= \frac{(6.7 \times 10^{-4} + 3.1 \times 10^{-4}) \times 2\pi \times 3\,000}{(2 \times 1 - 0.12) \times 60} \times 1.4 \\ &= 0.23 \end{aligned}$$

Thus the ball screw meets the requirement of "0.25 sec or less".

From the above, use W1507FA-3PG-C5Z20

Drill 2: Processing table for special machines

1. Design conditions

| | |
|-----------------------|---|
| Table mass: | $m_1 = 1000 \text{ kg}$ |
| Mass of the work: | $m_2 = 600 \text{ kg}$ |
| Maximum stroke: | $S_{\max} = 1\,000 \text{ mm}$ |
| Maximum speed: | $V_{\max} = 15\,000 \text{ mm/min}$ |
| Positioning accuracy: | $\pm 0.035/1\,000 \text{ mm (no load)}$ |

* Attitude accuracy of the table and thermal displacement are not included in the accuracy requirement of the ball screw.

| | |
|---------------------------|--|
| Repeatability: | $\pm 0.005 \text{ mm (no load)}$ |
| Lost motion: | $0.020 \text{ mm (no load)}$ |
| Required life expectancy: | $L_t = 20\,000 \text{ h}$ ($16 \text{ h} \times 250 \text{ days} \times 10 \text{ years} \times 0.5 \text{ rate of operation}$) |
| Guide way (sliding): | $\mu = 0.15$ (friction coefficient) |

Processing: Milling and drilling

Drive motor: AC servo motor
($N_{\max} = 2\,000 \text{ min}^{-1}$)

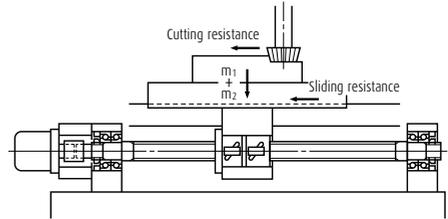


Fig. 16.3 System appearance

Table 16.2 Operating conditions

| Operation | Axial load (N) | | Feed speed (mm/min) | Use time ratio (%) |
|----------------------|--------------------|--------------------|---------------------|--------------------|
| | Cutting resistance | Sliding resistance | | |
| Rapid traverse | 0 | 2 354 | 15 000 | 30 |
| Light/medium cutting | 4 000 | 2 354 | 500 | 50 |
| Heavy cutting | 8 000 | 2 354 | 100 | 20 |

* Sliding resistance: $F_f = \mu (m_1 + m_2) g = 0.15 \times (1\,000 + 600) \times 9.80665 = 2\,354 \text{ (N)}$

* Ignore the inertia force at the time of acceleration/deceleration because their time rate is negligibly short.

2. Selection of basic factors

(1) Selection of accuracy grade and axial play

The proper accuracy grade for machining centers should be in the range from C1 to C5 according to "Table 4.1 Accuracy grades of ball screws and their applications" on page B19. Assuming the nut length is 200 mm and extra stroke is 100 mm, the shaft length L_0 is obtained as follows:

$$L_0 = \text{Maximum stroke} + \text{nut length} + \text{margin} \\ = 1\,000 = (200) + (100) = 1\,300$$

From "Table 1.2 Tolerance on specified travel and travel variation of the positioning ball screws" on page B38, the accuracy which satisfy the required function are:

Accuracy C3 grade

$$e_p = \pm 0.029/1\,600 \text{ (mm)}$$

$$v_u = 0.018 \text{ (mm)}$$

Considering the importance of lost motion, select the Z code (axial play 0 mm and less) for the axial play.

(2) Selection of lead

From the maximum rotational speed of AC servo motor N_{\max} and rapid traverse speed of table V_{\max} , lead l is :

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{15\,000}{2\,000} = 7.5 \text{ (mm)}$$

A larger lead l would be beneficial for a higher feed speed. But from the view of the control system (resolution), the lead l is limited to 8 mm or 10 mm.

(3) Selection of screw shaft diameter

According to **Table 4.4** "Screw shaft diameter, lead and stroke of standard ball screw" on page B21, the screw shaft diameter with the lead of 8 mm or 10 mm are in the range of 10 mm to 50 mm. Placing more importance on rigidity than to the volume of lost motion, select a relatively large size in the range of 32 mm to 50 mm.

(4) Selection of stroke

Select 1 000 mm, the maximum stroke as specified in the design condition.

Primary selection:

Standard ball screw
 Shaft diameter: 32, 36, 40, 45, 50 mm
 Lead: 8, 10 mm
 Stroke: 1 000 mm
 grade: C3
 Axial play code: Z

3. Confirmation of standard ball screw

Giving consideration to delivery time and price, select a standard ball screw.

At the primary selection of C3 grade is not found in the standard ball screws. Let us check for application-oriented ball screws whether there is a C3 grade among ball screw.

4. Confirmation of made-to-order ball screw

Because standard ball screws do not meet the accuracy grade requirement, we will consider made-to-order ball screws which are based on standard ball screws but with accuracy grade of C3.

Second selection:

Made-to-order ball screw
 Shaft diameter : 32, 36, 40, 45, 50 mm
 Lead : 8, 10 mm
 Stroke : 1 000 mm
 Accuracy grade : C3
 Axial play : Z

5. Selection of screw shaft diameter, lead, and nut

(1) Dynamic load rating

Obtain required load carrying capacity for each lead through load conditions. From **Table 16.2** "Operating conditions" on page B91, calculate the rotation speed N_i as shown in **Table 16.3**.

$$N_i \geq \frac{V_i}{l}$$

Table 16.3 Load conditions

| Operating condition | Axial load (N) | Rotations per minute (min^{-1}) | | Use time ratio (%) |
|----------------------|-----------------|--|----------------|--------------------|
| | | $l = 8$ | $l = 10$ | |
| Rapid traverse | $F_1 = 2\,354$ | $N_1 = 1\,875$ | $N_1 = 1\,500$ | $t_1 = 30$ |
| Light/medium cutting | $F_2 = 6\,354$ | $N_2 = 62.5$ | $N_2 = 50$ | $t_2 = 50$ |
| Heavy cutting | $F_3 = 10\,354$ | $N_3 = 12.5$ | $N_3 = 10$ | $t_3 = 20$ |

By using the formulas 11) and 12) on page B53, calculate the mean load F_m and the mean rotational speed N_m as shown below.

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_1 + F_2^3 \cdot N_2 \cdot t_2 + F_3^3 \cdot N_3 \cdot t_3}{N_1 \cdot t_1 + N_2 \cdot t_2 + N_3 \cdot t_3} \right)^{1/3}$$

$$N_m = \frac{N_1 \cdot t_1 + N_2 \cdot t_2 + N_3 \cdot t_3}{t}$$

Table 16.4 Mean load and mean rotational speed

| Lead (mm) | 8 | 10 |
|---|-------|-------|
| Mean load F_m (N) | 3 122 | 3 122 |
| Mean rotational speed N_m (min^{-1}) | 596 | 477 |

Required dynamic load rating C_a is:

Using the formulas 8) and 9) on page B53, calculate the required dynamic load rating.

$$C_a \geq (60N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \text{ (N)}$$

Whereas required life expectancy $L_t = 20\,000$ (h), load coefficient $f_w = 1.2$ (refer to page B53),

$$l = 8 \text{ (mm)} \quad C_a \geq 33\,500 \text{ (N)}$$

$$l = 10 \text{ (mm)} \quad C_a \geq 31\,100 \text{ (N)}$$

(2) Selection of the nut

Due to the requirement on the lost motion, the nut will be selected as follows emphasizing the importance of system rigidity.

Table 16.5 shows the dynamic load rating of each specification.

- Standard nut ball screw, tube type
- Model: ZFT or DFT (pages B439 to B468)
- Number of turns of balls: Select from 2.5 turns 2 circuits or 2.5 turns 3 circuits

From **Table 16.5** select item that meets required dynamic load rating C_a as follows:

Third selection: In the range surrounded by the dotted lines
 in **Table 16.5**

Table 16.5 Dynamic load rating of each specification

| Screw shaft diameter (mm) | Dynamic load rating C_a : (N) | | | |
|---------------------------|---------------------------------|----------------------|----------------------|----------------------|
| | Lead 8 mm | | Lead 10 mm | |
| | 2.5 turns 2 circuits | 2.5 turns 3 circuits | 2.5 turns 2 circuits | 2.5 turns 3 circuits |
| 32 | 31 700 | - | 46 300 | - |
| 36 | - | - | 49 300 | - |
| 40 | 34 900 | - | 52 000 | - |
| 45 | - | - | 54 200 | 76 800 |
| 50 | 38 700 | 54 900 | 57 700 | 81 800 |

(3) Permissible rotational speed

① Critical speed

Check if the rapid traverse speed of 15 000 mm/min (V_{max}) clears the critical speed. Ball screw rotational speed at each lead N is:

$$l = 8 \text{ (mm)} \quad N = 1\,875 \text{ (min}^{-1}\text{)}$$

$$l = 10 \text{ (mm)} \quad N = 1\,500 \text{ (min}^{-1}\text{)}$$

From the formula 7) on page B47, screw shaft root diameter to meet critical speed requirement is:

$$d_r \geq \frac{n \times L_a^2}{f} \times 10^{-7} \text{ (mm)}$$

In this formula, unsupported length L_a is:

$$L_a = \text{Maximum stroke} + \text{nut length}/2 + \text{shaft end extra length}$$

$$= 1\,000 + 100 + 200 = 1\,300 \text{ (mm)}$$

Supporting condition of the screw shaft is Fixed - Fixed support, and that of the ball nut is Fixed. Therefore, supporting condition is Fixed - Fixed support (Factor $f = 21.9$)

$$l = 8 \text{ (mm)} \quad d_r \geq 14.5 \text{ (mm)}$$

$$l = 10 \text{ (mm)} \quad d_r \geq 11.6 \text{ (mm)}$$

② $d \cdot n$ value

From **Table 3.2** on page B50, as the $d \times n$ is 70 000 or less, screw shaft diameters to meet the $d \times n$ are:

$$d \leq \frac{70\,000}{N} \text{ (mm)}$$

$$l = 8 \text{ (mm)} \quad d \leq 37.3 \text{ (mm)}$$

$$l = 10 \text{ (mm)} \quad d \leq 46.7 \text{ (mm)}$$

Based on nut specifications (pages B439 to B468) select an item that meets screw shaft root diameter (d_r) and screw shaft diameter (d).

* Please consult NSK if the $d \times n$ value is necessary to exceed 70 000.

Fourth selection: In the range surrounded by the solid-lines in **Table 16.5**

(4) Rigidity of the ball screw system

Set the lost motion of the ball screw system (screw shaft, nut and support bearings) at 80% of the specified value. Then calculate the system rigidity. The criterion lost motion is:

$$20 \text{ (}\mu\text{m)} \times 0.8 = 16 \text{ (}\mu\text{m)}$$

At this time, the one-way elastic deformation ΔL of the major factors of ball screw system shall be less than the half of above criterion.

$$\Delta L \leq 8 \text{ (}\mu\text{m)}$$

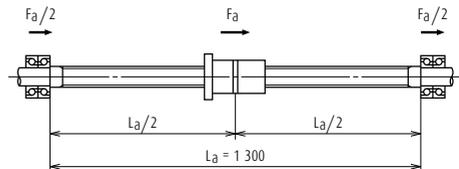


Fig. 16.3 Unsupported length

① Rigidity of the screw shaft K_S

Calculate the rigidity at the center of screw shaft where the axial deformation becomes the largest. Because the supporting condition of screw shaft is Fixed - Fixed support, the rigidity as per the formula 21) on page B58:

$$K_S = \frac{\pi \cdot d_r^2 \cdot E}{L_a} \times 10^{-3} \text{ (N/mm)}$$

At here E is the elastic modulus. From the formula 17) on page B57, the elastic deformation of the screw shaft ΔL_S is

$$\Delta L_S = \frac{F_a}{K_S} = \frac{F_a \cdot L_a}{\pi \cdot d_r^2 \cdot E} \times 10^3 \text{ (\mu m)}$$

The sliding resistance F_a is:

$$F_a = \mu (m_1 + m_2) = 0.15 \times (1\,000 + 600) = 2\,354 \text{ (N)}$$

Table 16.7 shows the rigidity of screw shaft K_S and the elastic deformation ΔL_S .

② Rigidity of the ball nut K_N

Set about 1/3 of the maximum axial load as the preload value F_{a0} .

$$F_{a0} = \frac{F_{\max}}{3} = \frac{10\,354}{3} = 3\,452 \rightarrow 3\,500 \text{ (N)}$$

From the formula 23) on page B60, the rigidity of the ball nut K_N is:

$$K_N = 0.8 \times K \left(\frac{F_{a0}}{e \cdot C_a} \right)^{1/3} = 0.8 \times K \left(\frac{3\,500}{0.1 \cdot C_a} \right)^{1/3} \text{ (N/\mu m)}$$

K : Theoretical rigidity

From the formula 17) on page B58, elastic deformation of the ball nut ΔL_N is

$$\Delta L_N = \frac{F_a}{K_N} = \frac{2\,354}{K_N}$$

Table 16.7 shows the rigidity of ball nut K_N and the elastic deformation ΔL_N .

③ Rigidity of the support bearing K_B

The bearings are Ball screw support bearings NSKAC C series. We specify the model number of support bearing unit for each shaft diameter as shown in **Table 16.6** (refer to page B415).

Table 16.6 Bearing code

| Screw shaft diameter (mm) | Bearing code |
|---------------------------|--------------|
| 32 | 25TAC62CDF |
| 36 | 25TAC62CDF |
| 40 | 30TAC62CDF |
| 45 | 35TAC72CDF |

Refer to page B419 for the rigidity K_B of each bearing unit (axial spring modulus). Elastic deformation of bearing ΔL_B is:

$$\Delta L_B = \frac{F_a}{2K_B}$$

Table 16.7 shows the rigidity of support bearing K_B and the elastic deformation ΔL_B .

Table 16.7 Rigidity and elastic deformation

| Nut model number | Screw shaft | | Nut | | Support bearing | | Total ΔL |
|------------------|-------------|--------------|-------|--------------|-----------------|--------------|------------------|
| | K_S | ΔL_S | K_N | ΔL_N | K_B | ΔL_B | |
| DFT3210-5 | 347 | 6.8 | 839 | 2.8 | 1 000 | 1.2 | 10.8 |
| DFT3610-5 | 460 | 5.1 | 907 | 2.6 | 1 000 | 1.2 | 8.9 |
| DFT4010-5 | 589 | 4.0 | 973 | 2.4 | 1 030 | 1.1 | 7.5 |
| DFT4510-5 | 772 | 3.0 | 1 050 | 2.2 | 1 180 | 1.0 | 6.2 |
| DFT4510-7.5 | 772 | 3.0 | 1 375 | 1.7 | 1 180 | 1.0 | 5.7 |

Choose the most economical ball screw system which meets the requirement of one-way deformation ΔL of 8 μm or less.

The selected ball screw:

Nut model code : DFT4010-5
 Shaft diameter : 40 (mm)
 Lead : 10 (mm)
 Dynamic load rating : 52 000 (N)

6. Decision of screw shaft length

DFT4010 ball nut has the length of 193 mm, and thus the unsupported length of screw shaft L_a should be:

$$L_a = \text{Maximum stroke} + \text{nut length} + \text{margin} = 1\,000 + 193 + 100 = 1\,293 \rightarrow 1\,300 \text{ mm}$$

7. Checking basic safety

(1) Permissible axial load

Calculate the buckling load for conditions shown in Fig. 16.4 with P of 10 354 (N) and L_1 of 1 210 (mm).

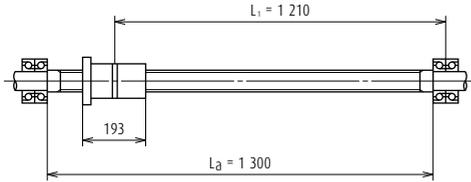


Fig. 16.4 Examination of buckling load

Supporting condition is Fixed - Fixed support, and from the calculation formula 2) on page B44, the screw shaft diameter d_f to prevent buckling is

$$d_f \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4} \right)^{1/4}$$

$$= \left(\frac{10\,354 \times 1\,210^2}{19.9} \times 10^{-4} \right)^{1/4} = 16.6 \text{ (mm)}$$

From the specification of DFT4010-5 ball nut (page B457), the root diameter of screw shaft d_f is 34.4 mm and thus meets the above condition.

Result: Acceptable

(2) Permissible rotational speed

① Critical speed n

From the critical speed calculation formula 7) on page B47:

$$n = f \cdot \frac{d_f}{L_1^2} \times 10^7 = 21.9 \times \frac{34.4}{1\,210^2} \times 10^7$$

$$\approx 5\,140$$

The maximum rotational speed (N_{\max}) of $1\,500 \text{ min}^{-1}$ is less than the critical speed, and thus meets the requirement.

Result: Acceptable

② $d \cdot n$ value

The $d \cdot n$ value is:

$$d \cdot n = 40 \times 1\,500 = 60\,000$$

From Table 3.2 on page B50, the $d \times n$ of tube type ball nut is 70 000 or less, and meets the requirement.

Result: Acceptable

(3) Life L_t

The dynamic load rating C_a is 52 000 N (see dimension table on page B457), and from the formulas 8) and 9) on page B53 the life expectancy is:

$$L_t = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \times \frac{1}{60 \cdot N_m}$$

$$\approx 95\,000$$

The above result satisfies the required life of 20 000 (h).

Result: Acceptable

8. Check whether the following factors satisfy requirements

(1) Checking accuracy

① Positioning accuracy

The positioning accuracy of $\pm 0.035/1\,000 \text{ mm}$, and therefore, from Table 1.2 "Tolerance of specified travel and travel variation" on page B38 the positioning accuracy is:

Accuracy grade : C3

$$e_p = \pm 0.029/1\,600 \text{ (mm)}$$

$$v_u = 0.018 \text{ (mm)}$$

and thus meets the required positioning accuracy.

② Measures against thermal expansion

Provide pre-tension force equivalent to the elongation of 3°C temperature rise, taking in consideration of the load carrying capacity of bearings. Also, adjust the travel compensation for the specified travel equivalent to 3°C temperature rise (refer to page B40).

(a) Thermal elongation : ΔL_0

From the formula 1) on page B40:

$$\Delta L_0 = \rho \cdot \theta \cdot L_3 = 12.0 \times 10^{-6} \times 3 \times 1\,300$$

$$= 0.047 \text{ (mm)}$$

(b) Pre-tension force : F_0

$$F_0 = \Delta L_0 \cdot K_s = \frac{\Delta L_0 \cdot E \cdot \pi \cdot d_f^2}{4L_3}$$

$$= \frac{0.047 \times 2.06 \times 10^5 \times \pi \times 34.4^2}{4 \times 1\,300}$$

$$\approx 6\,922 \rightarrow 6\,900 \text{ (N)}$$

Travel compensation : $-0.047/1\,300 \text{ (mm)}$

Pre-tension force : 6 900 (N)

Tension (elongation) volume : 0.047 (mm)

③ Selection of support bearing

Assuming that the ratio of basic dynamic load rating of support bearing (C_a) and pre-tension force (F_0) is ϵ , select a bearing which generally satisfies the following:

$$\epsilon = F_0/C_a < 0.20$$

Design the bearing supporting configuration to which pre-tension force is applied in such way that the axial load is supported by the duplex combination or a more multiple condition. Please consult NSK when one bearing must sustain the pre-tension load.

Table 16.8 Comparison of dynamic load rating and pre-tension force

| Bearing reference number | C_a (N) | ϵ |
|--------------------------|-----------|------------|
| 30TAC62CDF | 29 200 | 0.23 |
| 30TAC62CDFD | 47 500 | 0.14 |

Selected support bearing: 30TAC62BDFD

(2) Checking drive torque of motor

⟨Required specifications⟩

- Motor rotational speed: 1 500 min⁻¹
- Time to reach maximum speed: 0.16 sec or less
(At the time of rapid traverse)

① Load (converted to the motor load)

Calculate the moment of inertia of ball screw. From the formulas 32) and 33) on page B64, moment of inertia of ball screw parts J are calculated the load as follows, whereas γ is material density and ball screw shaft length L_0 is 1 550 mm.

(Screw shaft)

$$J_B = \frac{\pi \cdot \gamma}{32} D^4 \cdot L_0 = \frac{\pi \times 7.8 \times 10^{-3}}{32} \times 4^4 \times 155$$

$$= 30 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Moving part)

$$J_w = m \times \left(\frac{l}{2\pi}\right)^2 = 1\,600 \times \left(\frac{1}{2\pi}\right)^2$$

$$= 40 \text{ (kg} \cdot \text{cm}^2\text{)}$$

(Coupling)

$$J_c = 10 \text{ (kg} \cdot \text{cm}^2\text{)} \dots \text{assumed}$$

(Total)

$$J_L = J_B + J_w + J_c = 30 + 40 + 10$$

$$= 80 \text{ (kg} \cdot \text{cm}^2\text{)} \rightarrow 80 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$$

② Driving torque

The required torque to drive a ball screw resisting to external loads T_1 can be obtained by the formula 30) on page B64:

$$T_1 = T_A + T_P + T_U$$

In this formula, T_A is drive torque at constant speed, T_P is dynamic friction torque, and, T_U is friction torque of the support bearings. From the formula 26) on page B63 and the formula 27) on page B63, T_A and T_P are:

$$T_A = \frac{F_a \cdot l}{2\pi\eta_1}$$

$$T_P = 0.014F_{a0} \sqrt{d_m \cdot l}$$

$$\eta_1 = 0.9$$

Refer to the starting torque value in **Table 3** on page B419:

T_U is:

$$T_U = 33 + 33 = 66 \text{ (N} \cdot \text{cm)}$$

So, the required drive torque during rapid traverse T_{11} and heavy cutting T_{13} are:

(At the time of rapid traverse)

$$T_{11} = T_{A1} + T_{P1} + T_{U1}$$

$$= \frac{2\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 66$$

$$= 557 \text{ (N} \cdot \text{cm)} \rightarrow 557 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

(At the time of heavy cutting)

$$T_{12} = T_{A2} + T_{P2} + T_{U2}$$

$$= \frac{10\,354 \times 1}{2\pi \times 0.9} + 0.014 \times 3\,500 \sqrt{4.1 \times 1} + 66$$

$$= 1\,972 \text{ (N} \cdot \text{cm)} \rightarrow 1\,972 \times 10^{-2} \text{ (N} \cdot \text{m)}$$

③ Selection of the motor

⟨Selection conditions⟩

Maximum rotational speed: $N_M \geq 1\,500 \text{ (min}^{-1}\text{)}$

Motor rating torque: $T_M > T_1 \text{ (N} \cdot \text{m)}$

Moment of inertia of the motor: $J_M > J_L/3 \text{ (kg} \cdot \text{m}^2\text{)}$

Based on the above, select AC servo motor as follows.

Motor specifications

Rating power output: $W_M = 1.8 \text{ (kW)}$

Maximum rotational speed: $N_M = 1\,500 \text{ (min}^{-1}\text{)}$

Rating torque: $T_M = 22.5 \text{ (N} \cdot \text{m)}$
 $= 22.5 \times 10^2 \text{ (N} \cdot \text{cm)}$

Rotor inertia: $J_M = 190 \times 10^{-4} \text{ (kg} \cdot \text{m}^2\text{)}$
 $= 190 \text{ (kg} \cdot \text{cm}^2\text{)}$

④ **Checking the time to reach maximum speed:**

Required time to reach rapid traverse speed can be calculated as follows (whereas $T_M' = 2 \times T_M$):

$$\begin{aligned}t_a &= \frac{(J_L + J_M) \times 2\pi \times N}{(T_M' - T_i) \times 60} \times 1.4 \\&= \frac{(80 \times 10^{-4} + 190 \times 10^{-4}) \times 2\pi \times 1\,500}{(2 \times 22.5 - 580 \times 10^{-2}) \times 60} \times 1.4 \\&= 0.15 \text{ (sec)}\end{aligned}$$

Thus the time meets the requirement 0.16 sec or less.

Drill 3: Cartesian type robot Z axis (vertical axis)

1. Design conditions

| | |
|------------------------------------|--|
| Mass of the traveling item: | $m = 300 \text{ kg}$ |
| Maximum travel: | $S_{\max} = 1\,500 \text{ mm}$ |
| Rapid traverse speed: | $V_{\max} = 10\,000 \text{ mm/min}$ |
| Repeatability: | 0.3 mm |
| Required life: | $L_t = 24\,000 \text{ h}$ ($16 \text{ hours} \times 300 \text{ days} \times 5 \text{ years}$) |
| Screw shaft supporting condition : | Fixed -- Simple support |
| Nut: | Flanged single nut |
| Guide way (rolling): | $\mu = 0.01$ (friction coefficient) |
| Drive motor: | AC servo motor ($N_{\max} = 1\,000 \text{ min}^{-1}$) |
| Environment: | Slightly dusty |

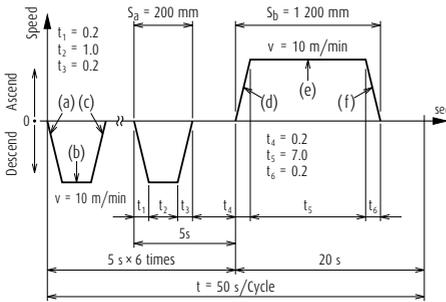


Fig. 16.6 Operating condition

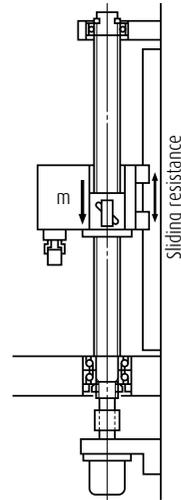


Fig. 16.5 System appearance

2. Selection of basic factors

(1) Selection of accuracy grade

Although this application is not listed in **Table 4.1** "Accuracy grades of ball screw and their application" on page B19, the possibility is to use a ball screw for transfer equipment R series, because the required repeatability is 0.3 mm that is not very high.

(2) Selection of lead

From the maximum rotational speed of AC motor:

$$l \geq \frac{V_{\max}}{N_{\max}} = \frac{10\,000}{1\,000} = 10 \text{ (mm)}$$

Select a lead 10 mm or over.

(3) Selection of screw shaft diameter

According to the **Table 4.6** "Shaft diameter, lead and standard screw length of R Series" on page B23, the shaft diameters whose lead is 10 mm or over are in the range of 12 mm to 50 mm.

(4) Selection of stroke

From the **Table 4.6** "Screw shaft diameter, lead and standard screw shaft length of R series" on page B23, it is possible to select from R series because the diameter d of 15 mm to 50 mm and lead l of 10 mm will meet the required maximum stroke of 1 500 mm.

Primary selection: R Series ball screw for transfer equipment
 Screw shaft diameter : 15 – 50 (mm)
 Lead : 10 (mm)
 Stroke : 1 500 (mm)

3. Confirmation of standard ball screw

Select from a flanged single nuts of R Series ball screws for transfer equipment.

Second selection : R Series ball screw for transfer equipment
 Screw shaft diameter : 16, 20, 25, 32, 36, 40, 45, 50 (mm)
 Lead : 10 (mm)
 Stroke : 1 500 (mm)

4. Decision of screw length

Screw length L_0 is:

$$L_0 = \text{Stroke} + \text{nut length} + \text{margin} + \text{shaft end length} \\ = 1\,500 + 100 + 100 + 200 = 1\,900 \text{ (mm)}$$

Normally, the overall screw shaft length L_0 less than or equal to 70 times of screw shaft diameter d is recommended.

Therefore, screw shaft diameter d is:

$$d \geq \frac{L_0}{70} = \frac{1\,900}{70} = 27.1 \text{ (mm)}$$

Third selection : R Series ball screw for transfer equipment
 Shaft diameter: 32, 36, 40, 45, 50 (mm)
 Lead: 10 (mm)
 Stroke: 1 500 (mm)

5. Checking basic safety

(1) Allowable axial load

① Calculation of allowable axial load

Accelerating/decelerating time is:

$$\alpha = \frac{V}{60 t} = \frac{10 \times 10^3}{60 \times 0.2} = 833 \text{ (mm/s}^2\text{)} \\ = 0.833 \text{ (m/s}^2\text{)} \\ t = t_1 = t_3 = t_4 = t_6$$

$$\begin{aligned} \textcircled{1}, \textcircled{6} \quad \dots\dots F_1 &= mg - m\alpha \\ &= 300 \times 9.80665 - 300 \times 0.833 \\ &= 2\,690 \text{ (N)} \\ \textcircled{2}, \textcircled{5} \quad \dots\dots F_2 &= mg = 2\,940 \text{ (N)} \\ \textcircled{3}, \textcircled{4} \quad \dots\dots F_3 &= mg + m\alpha = 3\,190 \text{ (N)} \end{aligned}$$

② Buckling load

For condition in Fig. 16.7, use values below.

$$P = 3\,190 \text{ N}, L_1 = 1\,600 \text{ mm}$$

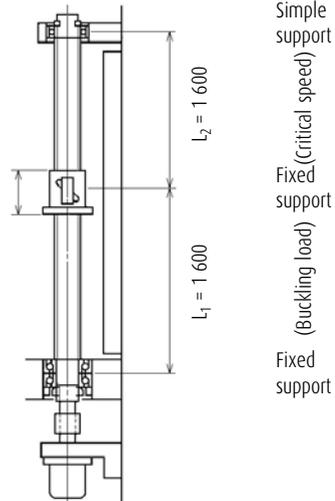


Fig. 16.7 Inspecting for buckling load and critical speed

From the formula 2) on page B44:

$$d_r \geq \left(\frac{P \cdot L_1^2}{m} \times 10^{-4} \right)^{1/4} \\ = \left(\frac{3\,190 \times 1\,600^2}{19.9} \times 10^{-4} \right)^{1/4} = 14.2 \text{ (mm)}$$

(2) Checking permissible rotational speed

① Critical speed

Use values below.

$$n = 1\,000 \text{ (min}^{-1}\text{)}, L_2 = 1\,600 \text{ (mm)}$$

From the formula 7) on page B47:

$$d_r \geq \frac{n \cdot L_2^2}{f} \times 10^{-7} = \frac{1\,000 \times 1\,600^2}{15.1} \times 10^{-7} \\ = 17 \text{ (mm)}$$

② d · n value

From **Table 3.2** on page B50:

$$d \leq \frac{50\,000}{n} = \frac{50\,000}{1\,000}$$

$$= 50 \text{ (mm)}$$

* Please consult NSK when the d · n value exceeds 50 000.

(3) Checking life (dynamic load rating)

Determine the required load carrying capacity from load conditions of **Table 16.9**.

Table 16.9 Load conditions

| Operating condition | Axial load (N) | Rotational speed (mean) (min ⁻¹) | Use time (s) |
|------------------------|------------------------|--|-----------------------|
| (a) × ₆ (f) | F ₁ = 2 690 | N ₁ = 500 | t _a = 1.4 |
| (b) × ₆ (e) | F ₂ = 2 940 | N ₂ = 1 000 | t _b = 13.0 |
| (c) × ₆ (d) | F ₃ = 3 190 | N ₃ = 500 | t _c = 1.4 |

Calculate mean load F_m and mean rotational speed N_m from the formulas 11) and 12) on page B53:

Required load carrying capacity is:

$$F_m = \left(\frac{F_1^3 \cdot N_1 \cdot t_a + F_2^3 \cdot N_2 \cdot t_b + F_3^3 \cdot N_3 \cdot t_c}{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c} \right)^{1/3}$$

$$= 2\,940 \text{ (N)}$$

$$N_m = \frac{N_1 \cdot t_a + N_2 \cdot t_b + N_3 \cdot t_c}{t}$$

$$= 288 \text{ (min}^{-1}\text{)}$$

From the formulas 8) and 9) on page B53:

$$C_a \geq (60N_m \cdot L_t)^{1/3} \cdot F_m \cdot f_w \times 10^{-2} \text{ (N)}$$

$$= (60 \times 288 \times 24\,000)^{1/3} \times 2\,940 \times 1.2 \times 10^{-2}$$

$$= 26\,300 \text{ (N)}$$

(4) Checking static load rating

$$C_{0a} = F_{\max} \times f_s = 3\,190 \times 2$$

$$= 6\,380 \text{ (N)}$$

In consideration of expense, select a ball screw shaft as follows.

Fourth selection : R Series ball screw for transfer equipment

Shaft diameter: 32 (mm)

Lead: 10 (mm)

Stroke:

Turns of balls and circuit number: 2.5 × 2

Screw length: 2 000 (mm)

Basic dynamic load rating: 35 700 (N)

5. Selection of nut

Select a "standard nut with a flange and a built-in brush seals" based on the environmental conditions.

Selected ball screw:

Nut assembly RNFTL3210A5S

Screw shaft RS3210A20

B-2-18 Reference

"NSK Motion & Control (technical journal)" was compiled to introduce NSK products and its technologies. You will find data summaries which are imperative in selecting ball screws in this catalog. If you need detailed technical data, other than described in this catalog, please refer to "NSK Motion & Control" technical journal.

For inquiries and orders, please contact NSK branch offices, sales offices, and representatives assigned at various locations.

Table 17.1 NSK Motion & Control (technical journal) : Issues relating to ball screws (1980-)

| No. | Issued Date | Title |
|-------|-------------|--|
| No.4 | Jun. 1998 | Recent Technical Trends in Ball Screws |
| No.8 | May 2000 | Ball Screw with Rotating Nut and Vibration Damper |
| No.9 | Oct. 2000 | WFA Standard-Stock Ball Screws |
| No.10 | Apr. 2001 | High Performance Seals for Ball Screws |
| No.11 | Oct. 2001 | Development of NSK S1 Series Ball Screws and Linear Guides |
| No.11 | Oct. 2001 | Low Inertia Series of Nut Rotatable Ball Screws |
| No.13 | Oct. 2002 | Development of HTF Series Ball Screws for High Load Drive Application |
| No.13 | Oct. 2002 | High Lead Precision Rolled Ball Screws |
| No.14 | May. 2003 | High Speed and Low Noise Ball Screws HMC-B02 Series |
| No.15 | Dec. 2003 | Clean Support Units for Ball Screws |
| No.16 | Aug. 2004 | Development of High Speed and Low Noise Ball Screws |
| No.18 | Aug. 2005 | S3 Ball Screws: Super Low Noise Ball Screws for Automation Equipment |
| No.19 | Sep. 2006 | High-Speed and Low-Noise Ball Screw for Standard Stock - Compact FA Series |
| No.21 | Dec. 2007 | V1 Series of Ball Screws for Contaminated Environments HTF-SRC Series of Ball Screws for High-Speed and High-Load Applications |
| No.22 | Mar. 2011 | Technological Trends of Ball Screws for Industrial Machinery BSL Series of Ball Screws for Small Lathes HTF-SRD Series of Long-Lead Ball Screws for High-Speed and Heavy-Load Applications |
| No.23 | Jun. 2013 | TW Series of Ball Screws for Twin-Drive Systems HMD Series of Ball Screws for High-Speed Machine Tools |
| No.24 | Dec. 2014 | Ball Screw for Motorcycle Brake Systems |

(1) CAD data

Web page

<http://www.jp.nsk.com/app01/en/ctrg/>

CD-ROM

CAT. No. 7110

(3D data: Intermediate format or native,
2D data: DXF)

Catalog No.7110 (CD-ROM) contains precision machine components and rolling bearings.

Standard Ball Screws

- › Finished shaft end (Compact FA series, MA type, FA type, SA type, KA type, and RMA type)
- › Blank shaft end (MS type, FS type, and SS type)
Standard nut ball screws
- › End deflector type
Standard support units

(2) Telephone consultation with NSK engineers

This catalog contains technical explanation for each section. However, some descriptions and explanations may be insufficient due to page limitation, etc. To amend this shortcoming, NSK offers telephone assistance. NSK engineers are pleased to help you. Our local offices are listed in the last part of this catalog. Call local NSK office or representative in your area.

(3) Additional machining (processing) some part of standard ball screws in stock

NSK processes standard ball screw blank shaft end. NSK also cuts linear guide rails to required length for you. Service is available at NSK processing factories throughout the world. Requests are taken by branch offices and agencies.

B-2-20 Precautions When Handling Ball Screws

Ball screws are precision products. They require careful handling as described below.



Confirm lubrication

Lubrication

1. Confirm the state of lubrication before use. Insufficient lubrication causes loss of ball screw functions in a short period.
2. Do not apply any lubrication if grease is already applied to the ball screws. Remove dust or swarf if they stuck to the greased surface during handling. Wipe the surface with clean white kerosene, and then apply the same type of new lubricant before use. Avoid using different types of grease at the same time.

Consult NSK for special oil lubricant if it is required to your application.

3. Check the grease after two to three months of operation. Wipe off the old grease if it is excessively contaminated, and apply sufficient volume of a fresh coat of grease. After the initial check, check and replenish the grease approximately every year. Check more often if environment requires.

Note: Refer to pages B67 and D13 for lubrication.



Do not disassemble



Do not reassemble



Watch out for falling objects



Handle with care



Do not apply shock

Handling

1. Never disassemble ball screw. It invites dust to enter, and lowers precision, or may cause an accident.
2. User should never reassemble ball screw by himself. Loss of ball screw function is apt to occur if a mistake is made. Please send ball screw to NSK for repair or re-assembly. It will be reworked at the minimum service charge.
3. Ball screw shaft or nut may fall due to its own weight. Watch out for such falling object. If it falls, the ball groove or ball recirculation component may be damaged and the function might have been lost. Make certain to return such item to NSK for check. There will be the minimum charge for this service.
4. If the recirculation component, the shaft outside, or the ball groove is scratched or damaged by impact, recirculation operation becomes deficient, and may cause a loss of function.

Note: Refer to page B73 for assembling components.



Prevent dust



Rotational speed limitation



Do not overrun



Temperature limitation

Precautions in use

1. Ball screws should be used in a clean environment. Use a dust cover to keep dust and swarf from entering into the system. Insufficient dust protection causes not only the ball screw function to deteriorate but also brings about damage to the recirculation components if dust plugs the system. This may result in more serious accident such as a fall of the table.
2. For rotational speed in operation, refer to the applicable section in this catalog which describes permissible rotational speeds, or to specification drawing furnished by NSK. Exceeding permissible rotational speed damages recirculation components, and may cause the table to fall. A precaution system such as a safety nut is recommended in vertical use of ball screw. Please consult NSK for safety system.
3. Overrunning ball nut (removed from the ball thread) causes the balls to fall out, damages recirculation components, and dent ball groove, resulting in insufficient operation. Continued use under such conditions may cause premature wear, and damages recirculation components. For these reasons, avoid overrun by all means. If overrun occurs, please request NSK to check. There will be a minimum charge for this service.
4. Ball screws are designed to be used at a temperature of less than 80°C. Do not operate at temperatures higher than this limit. Use at a higher temperature may damage recirculation and seal components. Please consult NSK if it is necessary to use at a temperature higher than the limit.
When using NSK K1 lubrication unit, the operating temperature should be 50°C or less. (Momentary maximum temperature in use: 80°C)

Note: Please read page B83 before designing.



Store in the correct position

Storage

1. Store in the original NSK package. Do not unwrap or tear the inner wrapping if it is not necessary. This allows dust to enter and rust to set in, and may deteriorate functions.
2. The following position is recommended when storing ball screws.
 - 2.1 Keep in the NSK original package, and place it flat.
 - 2.2 Place flatly on supports; store in a clean area.
 - 2.3 Hang vertically in a clean place.

B-3 Ball Screw Dimension Table

B-3-1 Dimension Table and Reference Number of Standard Ball Screws

| | Page |
|---|------|
| Compact FA Series..... | B107 |
| High-Speed SS Series..... | B147 |
| Finished Shaft End..... | B157 |
| MA Type, Miniature, Fine Lead..... | B159 |
| FA Type for Small Equipment..... | B181 |
| SA Type for Machine Tools..... | B217 |
| Finished Shaft End KA Type Stainless Steel Product..... | B273 |
| Blank Shaft End..... | B299 |
| MS Type, Miniature, Fine Lead..... | B301 |
| FS Type for Small Equipment..... | B309 |
| SS Type for Machine Tools..... | B321 |
| Ball Screws for Transfer Equipment..... | B349 |
| Accessories..... | B389 |


B-3-1.1 Compact FA Series PSS Type, USS Type, and FSS Type

1. Features

In order to respond quickly to a wide range of needs, NSK keeps end-deflector recirculation system ball screws, which offer high-speed and low-noise operation and compact design, in standard inventories as the Compact FA Series. The exceptionally high performance ball screws are ready for use in a variety of fields such as semiconductor manufacturing equipment, LCD manufacturing equipment, chip mounting equipment, measuring apparatus, food and medical equipment, and automotive manufacturing equipment.

> Quieter sound

The operating noise level of ball screws has been reduced by 6 dB, about half of what is sensed by the ear.

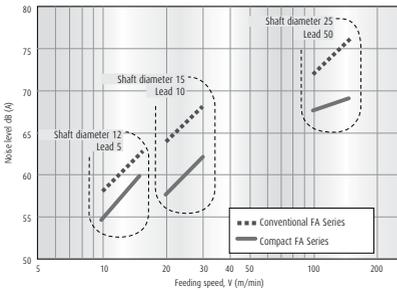

(Microphone was positioned at a distance of 400 mm for all noise levels)

Fig. 1 Comparison of noise level

> Compact

The outside diameter of the ball nut is as much as 30% smaller than those of existing NSK products. This contributes to more compact design of all sorts of equipment and devices such as low-profile positioning stages.

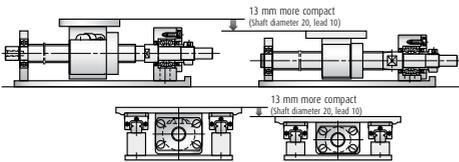


Fig. 2 Comparison of FA Type and Compact FA Series PSS Type

> High speed

The permissible rotational speed up to 5 000 min⁻¹. This capability dramatically expands the range of service conditions. Please refer to the dimension tables for details of the permissible rotational speed.

> A grease fitting is provided as a standard equipment

The new ball screw type is equipped with a grease fitting (M5 × 0.8) as a standard equipment. Two lubrication ports are provided to facilitate easy maintenance.

> Storage seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

> Low-profile design

The low-profile support units especially compatible with the compact FA Series are available for a superb space-saving design.

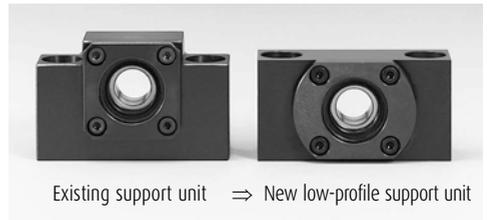


Fig. 3 Comparison of support units

> Low dust generation LG2 grease (USS Type)

The dust count is approximately 1/100 that of the existing FA series. It is suitable for applications in clean environments.

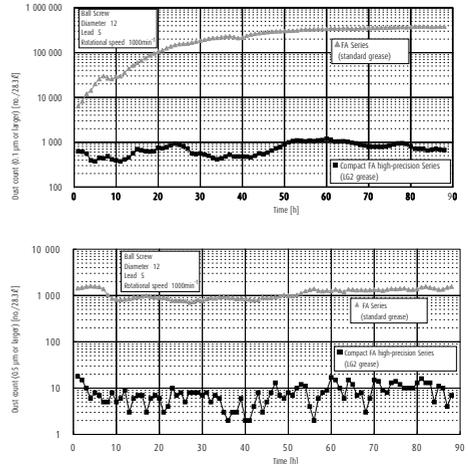


Fig. 4 Comparison of dust count

› Easy stroke setting (FSS Type)

Flexible stroke setting with fixed-simple support by means of mounting support unit (simple support side) directly onto ball screw thread outside diameter. Proprietary support unit (simple support side) is available from NSK.

2. Order of the dimension table

For each type, it is arranged in order from small diameter to large.

3. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

› Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move.
The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

› Lead accuracy

PSS Type, C5 grade; USS Type, C3 grade; FSS Type, C17 grade

T : Travel compensation

e_p : Tolerance on specified travel

v_d : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.



Fig. 5 Flexible stroke setting

› Permissible rotational speed (FSS Type)

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the $d \cdot n$ and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

4. Other

The seal of the ball screw and end deflector are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil.

The NSK K1 cannot be mounted to the compact FA Series.


For special environments, see pages B70 and D2. For lubrications, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

Table 1 Combinations of screw shaft diameter and lead

| Screw shaft diameter \ Lead | Lead | | | | | | | | | | | |
|-----------------------------|--------------|------|--------------|------|------|--------------|--------------|------|------|------|------|--|
| | 5 | 8 | 10 | 12 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | |
| 4 | | B109 | | B109 | | | | | | | | |
| 8 | | | B111 | | B111 | | | | | | | |
| 10 | B113 B133 | | B113 | | | | | | | | | |
| 12 | B115 B135 | | B115 B139 | | | B115 | | B115 | | | | |
| 15 | B117 B137 | | B117 B141 | | | B119 B141 | | B119 | | | | |
| 20 | B121 | | B121 B143 | | | B123 B143 | | B123 | B125 | | B125 | |
| 25 | B127 | | B127 B145 | | | B129 B145 | B129 B145 | B131 | | B131 | | |

Compact FA PSS Type

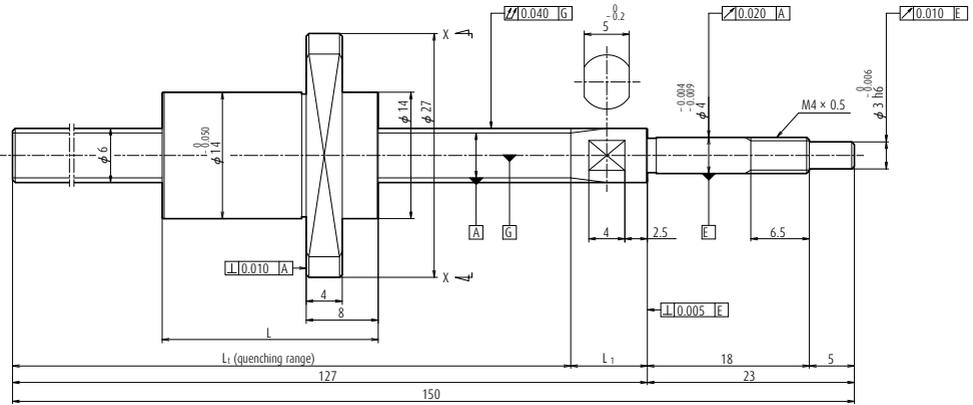


| Ball screw No. | Screw shaft diameter d | Lead l | Effective turns of balls | Basic load ratings (N) | | Maximum stroke | Nut length L | Screw shaft dimensions | |
|----------------|---------------------------|-----------|--------------------------|------------------------|---------------|----------------|-----------------|------------------------|-----|
| | | | | Dynamic Ca | Static Coa | | | Lt | L1 |
| PSS0608NAD0150 | 6 | 8 | 2 | 620 | 725 | 97.5 | 16 | 118.5 | 8.5 |
| PSS0608NBD0150 | 6 | 8 | 4 | 1 330 | 1 750 | 89.5 | 24 | 118.5 | 8.5 |
| PSS0612NAD0150 | 6 | 12 | 2 | 600 | 720 | 92 | 20 | 117 | 10 |
| PSS0612NBD0150 | 6 | 12 | 4 | 1 280 | 1 770 | 80 | 32 | 117 | 10 |

Note 1. Contact NSK if permissible rotational speed is to be exceeded.

Screw shaft $\phi 6$ Lead 8, 12

Unit: mm

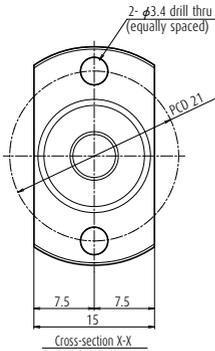

| Ball screw specification | |
|---|--------------------|
| Ball diameter/screw shaft root diameter | 1.2 / 4.9 |
| Ball circle dia. | 6.2 |
| Accuracy grade/axial play | C5 / 0.005 or less |
| Factory-packed grease | NSK grease PS2 |

Recommended


| For drive side (Fixed) |
|---------------------------|
| WBK04-01M (square) |
| WBK04-11M (round) |

Unit: mm

| Lead accuracy | | | Dynamic preload torque (N·cm) | Mass (kg) | Permissible rotational speed (min ⁻¹) ⁻¹ | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--|--------------|---|---|--|
| Target value T | Error e _p | Variation v _u | | | | | |
| 0 | 0.020 | 18 | ~0.5 | 0.06 | 5 000 | 0.2 | 0.1 |
| 0 | 0.020 | 18 | ~0.5 | 0.06 | 5 000 | 0.3 | 0.2 |
| 0 | 0.020 | 18 | ~0.5 | 0.06 | 5 000 | 0.2 | 0.1 |
| 0 | 0.020 | 18 | ~0.5 | 0.07 | 5 000 | 0.3 | 0.2 |

- Service temperature range is 0 to 80°C.
- Use of NSK support unit is recommended. Refer to page B389 for details.

Compact FA PSS Type

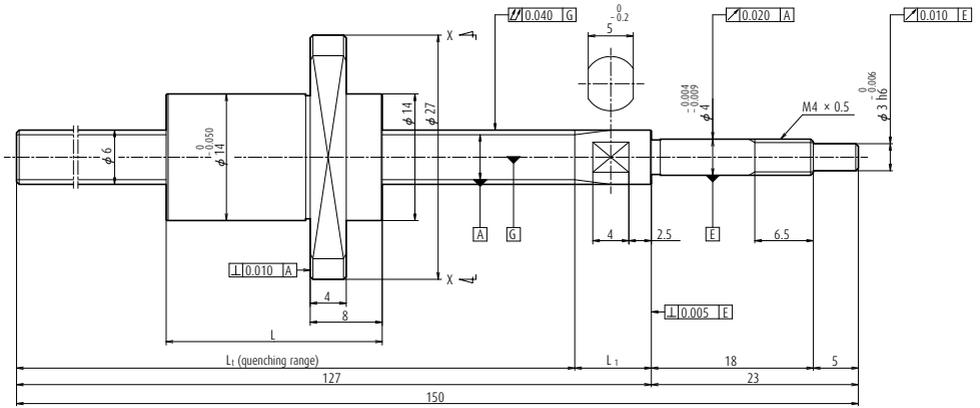


| Ball screw No. | Screw shaft diameter d | Lead l | Effective turns of balls | Basic load ratings (N) | | Maximum stroke | Nut length L | Screw shaft dimensions | |
|----------------|---------------------------|-----------|--------------------------|------------------------|--------------------|----------------|-----------------|------------------------|-------|
| | | | | Dynamic C_a | Static C_{0a} | | | L_t | L_1 |
| PSS0810NAD0150 | 8 | 10 | 2 | 1 040 | 1 280 | 86.5 | 18 | 109.5 | 10.5 |
| PSS0810NBD0150 | 8 | 10 | 4 | 2 220 | 3 090 | 76.5 | 28 | 109.5 | 10.5 |
| PSS0815NAD0150 | 8 | 15 | 2 | 1 010 | 1 290 | 80 | 22 | 107 | 13 |
| PSS0815NBD0150 | 8 | 15 | 4 | 2 170 | 3 170 | 65 | 37 | 107 | 13 |

Note 1. Contact NSK if permissible rotational speed is to be exceeded.

Screw shaft $\phi 8$ Lead 10, 15

Unit: mm

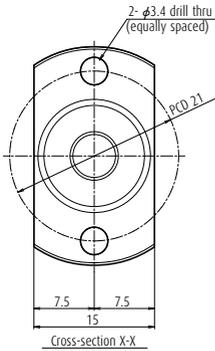

| Ball screw specification | |
|---|--------------------|
| Ball diameter/screw shaft root diameter | 1.588 / 6.6 |
| Ball circle dia. | 8.3 |
| Accuracy grade/axial play | C5 / 0.005 or less |
| Factory-packed grease | NSK grease PS2 |

Recommended

| For drive side (Fixed) |
|---------------------------|
| WBK06-01M (square) |
| WBK06-11M (round) |

Unit: mm


| Lead accuracy | | | Dynamic preload torque | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing |
|---------------|-------|-----------|------------------------------|------|-------------------------------------|-----------------------------------|--|
| Target value | Error | Variation | | | | | |
| T | e_p | v_u | (N-cm) | (kg) | (min^{-1}) ²⁰ | (cm^3) | (cm^3) |
| 0 | 0.020 | 18 | ~0.5 | 0.09 | 5 000 | 0.4 | 0.2 |
| 0 | 0.020 | 18 | ~0.5 | 0.11 | 5 000 | 0.5 | 0.3 |
| 0 | 0.020 | 18 | ~0.5 | 0.1 | 5 000 | 0.4 | 0.2 |
| 0 | 0.020 | 18 | ~0.5 | 0.12 | 5 000 | 0.6 | 0.3 |

2. Service temperature range is 0 to 80°C.
3. Use of NSK support unit is recommended. Refer to page B389 for details.

Nut model: BSS

Screw shaft ϕ 10
Lead 5, 10

Unit: mm



Ball screw specification

| | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.000 / 8.2 |
| Ball circle dia. | 10.3 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease PS2 |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|---------------------------------|-------------------------------------|
| WBK08-01B (low-profile, square) | WBK08S-01B (low-profile, square) |
| WBK08-11B (round, high load) | |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) ^{*1} | Mass (kg) | Permissible rotational speed (min ⁻¹) ^{*2} | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--------------------|--|--------------|--|--|--|
| Target value T | Error e _p | Variation v _u | | | | | | |
| 0 | 0.020 | 0.018 | 0.030 | 0.7 - 3.3 | 0.3 | 5 000 | 0.8 | 0.4 |
| 0 | 0.020 | 0.018 | 0.045 | 0.7 - 3.3 | 0.3 | 5 000 | 0.8 | 0.4 |
| 0 | 0.023 | 0.018 | 0.060 | 0.6 - 4.3 | 0.3 | 5 000 | 0.8 | 0.4 |
| 0 | 0.025 | 0.020 | 0.070 | 0.6 - 4.3 | 0.4 | 5 000 | 0.8 | 0.4 |
| 0 | 0.027 | 0.020 | 0.085 | 0.4 - 4.9 | 0.5 | 5 000 | 0.8 | 0.4 |
| 0 | 0.020 | 0.018 | 0.045 | 0.7 - 3.3 | 0.3 | 5 000 | 0.7 | 0.4 |
| 0 | 0.023 | 0.018 | 0.060 | 0.6 - 4.3 | 0.4 | 5 000 | 0.7 | 0.4 |
| 0 | 0.025 | 0.020 | 0.070 | 0.6 - 4.3 | 0.4 | 5 000 | 0.7 | 0.4 |
| 0 | 0.027 | 0.020 | 0.085 | 0.4 - 4.9 | 0.5 | 5 000 | 0.7 | 0.4 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

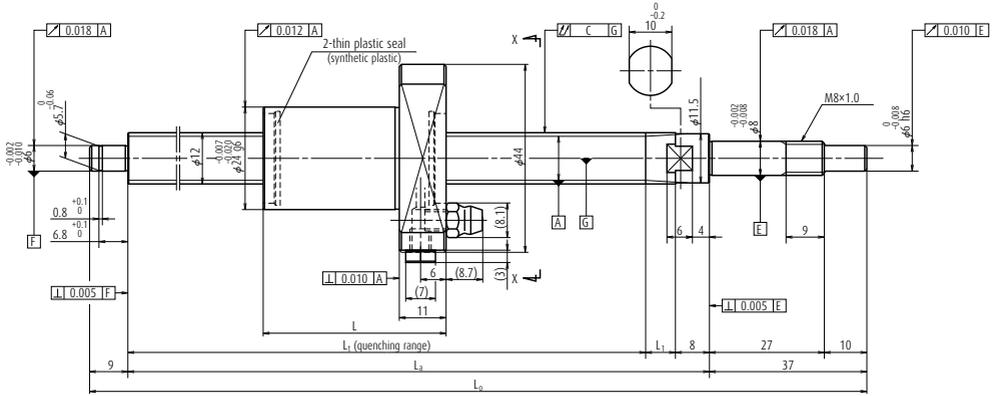

| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Nut length L | Screw shaft dimensions | | | |
|----------------|---------------------------|-----------|---------------------------|---------------------------|---------|------|-----------------|------------------------|----------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | MAX. | | L _t | L _a | L ₀ | L ₁ |
| | | | | | | | | | | | |
| PSS1205N1D0171 | 12 | 5 | 3 750 | 5 810 | 50 | 75 | 30 | 110 | 125 | 171 | 7 |
| PSS1205N1D0221 | 12 | 5 | 3 750 | 5 810 | 100 | 125 | 30 | 160 | 175 | 221 | 7 |
| PSS1205N1D0321 | 12 | 5 | 3 750 | 5 810 | 200 | 225 | 30 | 260 | 275 | 321 | 7 |
| PSS1205N1D0421 | 12 | 5 | 3 750 | 5 810 | 300 | 325 | 30 | 360 | 375 | 421 | 7 |
| PSS1205N1D0521 | 12 | 5 | 3 750 | 5 810 | 400 | 425 | 30 | 460 | 475 | 521 | 7 |
| PSS1205N1D0621 | 12 | 10 | 3 750 | 5 810 | 500 | 525 | 30 | 560 | 575 | 621 | 7 |
| PSS1210N1D0221 | 12 | 10 | 3 760 | 5 780 | 100 | 112 | 43 | 160 | 175 | 221 | 7 |
| PSS1210N1D0321 | 12 | 10 | 3 760 | 5 780 | 200 | 212 | 43 | 260 | 275 | 321 | 7 |
| PSS1210N1D0421 | 12 | 10 | 3 760 | 5 780 | 300 | 312 | 43 | 360 | 375 | 421 | 7 |
| PSS1210N1D0521 | 12 | 10 | 3 760 | 5 780 | 400 | 412 | 43 | 460 | 475 | 521 | 7 |
| PSS1210N1D0621 | 12 | 10 | 3 760 | 5 780 | 500 | 512 | 43 | 560 | 575 | 621 | 7 |
| PSS1220N1D0271 | 12 | 20 | 2 330 | 3 600 | 100 | 153 | 50 | 208 | 225 | 271 | 9 |
| PSS1220N1D0371 | 12 | 20 | 2 330 | 3 600 | 200 | 253 | 50 | 308 | 325 | 371 | 9 |
| PSS1220N1D0471 | 12 | 20 | 2 330 | 3 600 | 300 | 353 | 50 | 408 | 425 | 471 | 9 |
| PSS1220N1D0571 | 12 | 20 | 2 330 | 3 600 | 400 | 453 | 50 | 508 | 525 | 571 | 9 |
| PSS1220N1D0671 | 12 | 20 | 2 330 | 3 600 | 500 | 553 | 50 | 608 | 625 | 671 | 9 |
| PSS1230N1D0271 | 12 | 30 | 2 190 | 3 650 | 100 | 128 | 70 | 203 | 225 | 271 | 14 |
| PSS1230N1D0371 | 12 | 30 | 2 190 | 3 650 | 200 | 228 | 70 | 303 | 325 | 371 | 14 |
| PSS1230N1D0471 | 12 | 30 | 2 190 | 3 650 | 300 | 328 | 70 | 403 | 425 | 471 | 14 |
| PSS1230N1D0571 | 12 | 30 | 2 190 | 3 650 | 400 | 428 | 70 | 503 | 525 | 571 | 14 |
| PSS1230N1D0671 | 12 | 30 | 2 190 | 3 650 | 500 | 528 | 70 | 603 | 625 | 671 | 14 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

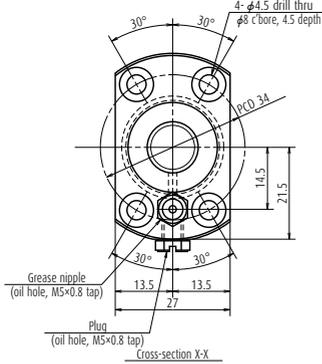

Screw shaft ϕ 12
Lead 5, 10, 20, 30

Unit: mm

| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.000 / 10.2 |
| Ball circle dia. | 12.3 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease PS2 |


| Recommended support unit | |
|---------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side (Simple) |
| WBK08-01B (low-profile, square) | WBK08S-01B (low-profile, square) |
| WBK08-11B (round, high load) | |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--------------------|-------------------------------------|--------------|---|--|--|
| Target value T | Error e _p | Variation v _u | | | | | | |
| 0 | 0.020 | 0.018 | 0.030 | 0.7 - 3.3 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.020 | 0.018 | 0.045 | 0.7 - 3.3 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.023 | 0.018 | 0.060 | 0.6 - 4.3 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.025 | 0.020 | 0.070 | 0.6 - 4.3 | 0.4 | 5 000 | 1.0 | 0.5 |
| 0 | 0.027 | 0.020 | 0.085 | 0.6 - 4.3 | 0.5 | 5 000 | 1.0 | 0.5 |
| 0 | 0.030 | 0.023 | 0.085 | 0.4 - 4.9 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.020 | 0.018 | 0.045 | 0.7 - 3.3 | 0.4 | 5 000 | 1.0 | 0.5 |
| 0 | 0.023 | 0.020 | 0.060 | 0.6 - 4.3 | 0.5 | 5 000 | 1.0 | 0.5 |
| 0 | 0.025 | 0.020 | 0.070 | 0.6 - 4.3 | 0.5 | 5 000 | 1.0 | 0.5 |
| 0 | 0.027 | 0.020 | 0.085 | 0.6 - 4.3 | 0.6 | 5 000 | 1.0 | 0.5 |
| 0 | 0.030 | 0.023 | 0.085 | 0.4 - 4.9 | 0.7 | 5 000 | 1.0 | 0.5 |
| 0 | 0.023 | 0.018 | 0.045 | 1.4 - 4.5 | 0.4 | 5 000 | 1.2 | 0.6 |
| 0 | 0.023 | 0.018 | 0.060 | 0.9 - 4.9 | 0.5 | 5 000 | 1.2 | 0.6 |
| 0 | 0.027 | 0.020 | 0.070 | 0.9 - 4.9 | 0.6 | 5 000 | 1.2 | 0.6 |
| 0 | 0.030 | 0.023 | 0.085 | 0.6 - 5.9 | 0.7 | 5 000 | 1.2 | 0.6 |
| 0 | 0.030 | 0.023 | 0.110 | 0.6 - 5.9 | 0.8 | 4 480 | 1.2 | 0.6 |
| 0 | 0.023 | 0.018 | 0.045 | 1.4 - 4.5 | 0.5 | 5 000 | 1.5 | 0.8 |
| 0 | 0.023 | 0.018 | 0.060 | 0.9 - 4.9 | 0.6 | 5 000 | 1.5 | 0.8 |
| 0 | 0.027 | 0.020 | 0.070 | 0.9 - 4.9 | 0.7 | 5 000 | 1.5 | 0.8 |
| 0 | 0.030 | 0.023 | 0.085 | 0.6 - 5.9 | 0.7 | 5 000 | 1.5 | 0.8 |
| 0 | 0.030 | 0.023 | 0.110 | 0.6 - 5.9 | 0.8 | 4 720 | 1.5 | 0.8 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

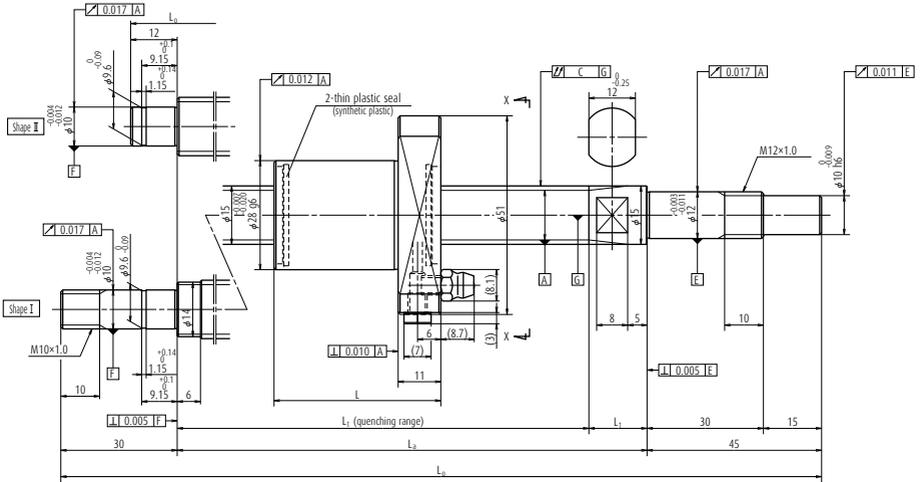


| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Nut length L | Screw shaft dimensions | | | |
|----------------|------------------------|--------|------------------------|-----------------|---------|-------|--------------|------------------------|-------|-------|-------|
| | | | Dynamic C_a | Static C_{0a} | Nominal | MAX. | | L_t | L_a | L_0 | L_1 |
| | | | | | | | | | | | |
| PSS1505N1D0211 | 15 | 5 | 6 410 | 10 100 | 50 | 103 | 30 | 139 | 154 | 211 | 15 |
| PSS1505N1D0261 | 15 | 5 | 6 410 | 10 100 | 100 | 153 | 30 | 189 | 204 | 261 | 15 |
| PSS1505N1D0361 | 15 | 5 | 6 410 | 10 100 | 200 | 253 | 30 | 289 | 304 | 361 | 15 |
| PSS1505N1D0461 | 15 | 5 | 6 410 | 10 100 | 300 | 353 | 30 | 389 | 404 | 461 | 15 |
| PSS1505N1D0561 | 15 | 5 | 6 410 | 10 100 | 400 | 453 | 30 | 489 | 504 | 561 | 15 |
| PSS1505N1D0661 | 15 | 5 | 6 410 | 10 100 | 500 | 553 | 30 | 589 | 604 | 661 | 15 |
| PSS1505N1D0761 | 15 | 5 | 6 410 | 10 100 | 600 | 653 | 30 | 689 | 704 | 761 | 15 |
| PSS1510N1D0261 | 15 | 10 | 6 530 | 10 200 | 100 | 140 | 43 | 189 | 204 | 261 | 15 |
| PSS1510N1D0361 | 15 | 10 | 6 530 | 10 200 | 200 | 240 | 43 | 289 | 304 | 361 | 15 |
| PSS1510N1D0461 | 15 | 10 | 6 530 | 10 200 | 300 | 340 | 43 | 389 | 404 | 461 | 15 |
| PSS1510N1D0561 | 15 | 10 | 6 530 | 10 200 | 400 | 440 | 43 | 489 | 504 | 561 | 15 |
| PSS1510N1D0661 | 15 | 10 | 6 530 | 10 200 | 500 | 540 | 43 | 589 | 604 | 661 | 15 |
| PSS1510N1D0761 | 15 | 10 | 6 530 | 10 200 | 600 | 640 | 43 | 689 | 704 | 761 | 15 |
| PSS1510N1D0879 | 15 | 10 | 6 530 | 10 200 | 700 | 740 | 43 | 789 | 804 | 879 | 15 |
| PSS1510N1D0979 | 15 | 10 | 6 530 | 10 200 | 800 | 846 | 43 | 889 | 904 | 979 | 15 |
| PSS1510N1D1179 | 15 | 10 | 6 530 | 10 200 | 1 000 | 1 040 | 43 | 1 089 | 1 104 | 1 179 | 15 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 15$
Lead 5, 10

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.778 / 12.6 |
| Ball circle dia. | 15.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | | |
|------------------------------------|------------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side | |
| | (Fixed) | (Simple) |
| WBK12-01B (low-profile, square) | WBK10-01B (low-profile, square) | WBK12S-01B (low-profile, square) |
| WBK12-11B (round) | WBK10-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.020 | 0.018 | 0.035 | 0.2 - 6.9 | 0.5 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.020 | 0.018 | 0.035 | 0.2 - 6.9 | 0.5 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.023 | 0.018 | 0.045 | 0.2 - 6.9 | 0.6 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.025 | 0.020 | 0.050 | 0.4 - 9.8 | 0.8 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.4 - 9.8 | 0.9 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.4 - 9.8 | 1.0 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.035 | 0.025 | 0.075 | 0.4 - 11.8 | 1.1 | 4 130 | - | 2.0 | 1.0 |
| II | 0 | 0.020 | 0.018 | 0.035 | 0.6 - 7.4 | 0.6 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.023 | 0.018 | 0.045 | 0.6 - 7.4 | 0.7 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.025 | 0.020 | 0.050 | 0.4 - 9.8 | 0.8 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.4 - 9.8 | 1.0 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.4 - 9.8 | 1.1 | 5 000 | - | 2.0 | 1.0 |
| II | 0 | 0.035 | 0.025 | 0.075 | 0.4 - 11.8 | 1.2 | 4 210 | - | 2.0 | 1.0 |
| I | 0 | 0.035 | 0.025 | 0.095 | 0.4 - 11.8 | 1.4 | 3 190 | 4 410 | 2.0 | 1.0 |
| I | 0 | 0.040 | 0.027 | 0.095 | 0.4 - 11.8 | 1.5 | 2 500 | 3 470 | 2.0 | 1.0 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.4 - 11.8 | 1.7 | 1 650 | 2 320 | 2.0 | 1.0 |


4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft $\phi 15$
Lead 20, 30

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 12.2 |
| Ball circle dia. | 15.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | | |
|------------------------------------|------------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side | |
| | (Fixed) | (Simple) |
| WBK12-01B (low-profile, square) | WBK10-01B (low-profile, square) | WBK12S-01B (low-profile, square) |
| WBK12-11 (round) | WBK10-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.020 | 0.018 | 0.035 | 0.8 - 8.8 | 0.7 | 5 000 | — | 2.8 | 1.4 |
| II | 0 | 0.023 | 0.018 | 0.045 | 0.8 - 8.8 | 0.8 | 5 000 | — | 2.8 | 1.4 |
| II | 0 | 0.025 | 0.020 | 0.050 | 0.8 - 10.8 | 0.9 | 5 000 | — | 2.8 | 1.4 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.8 - 10.8 | 1.1 | 5 000 | — | 2.8 | 1.4 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.8 - 10.8 | 1.2 | 5 000 | — | 2.8 | 1.4 |
| II | 0 | 0.035 | 0.025 | 0.075 | 0.8 - 13.8 | 1.3 | 4 170 | — | 2.8 | 1.4 |
| I | 0 | 0.035 | 0.025 | 0.095 | 0.8 - 13.8 | 1.5 | 3 150 | 4 310 | 2.8 | 1.4 |
| I | 0 | 0.040 | 0.027 | 0.095 | 0.8 - 13.8 | 1.6 | 2 460 | 3 390 | 2.8 | 1.4 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.8 - 13.8 | 1.9 | 1 620 | 2 260 | 2.8 | 1.4 |
| II | 0 | 0.023 | 0.018 | 0.035 | 1.2 - 9.3 | 0.8 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.025 | 0.020 | 0.050 | 0.8 - 10.8 | 1.0 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.8 - 10.8 | 1.1 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.030 | 0.023 | 0.060 | 0.8 - 10.8 | 1.2 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.8 - 13.8 | 1.4 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.035 | 0.025 | 0.095 | 0.8 - 13.8 | 1.5 | 3 770 | — | 3.4 | 1.7 |
| I | 0 | 0.040 | 0.027 | 0.095 | 0.8 - 13.8 | 1.6 | 2 880 | 3 910 | 3.4 | 1.7 |
| I | 0 | 0.040 | 0.027 | 0.120 | 0.8 - 13.8 | 1.8 | 2 310 | 3 110 | 3.4 | 1.7 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.8 - 13.8 | 2.0 | 1 540 | 2 100 | 3.4 | 1.7 |


4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft $\phi 20$
Lead 5, 10

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 17.2 |
| Ball circle dia. | 20.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| For drive side (Fixed) | For opposite to drive side | |
|------------------------------------|------------------------------------|-------------------------------------|
| | (Fixed) | (Simple) |
| WBK15-01B (low-profile, square) | WBK15-01B (low-profile, square) | WBK15S-01B (low-profile, square) |
| WBK15-11 (round) | WBK15-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.023 | 0.018 | 0.045 | 0.6 - 7.4 | 1.0 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.023 | 0.018 | 0.045 | 0.6 - 7.4 | 1.1 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.025 | 0.020 | 0.050 | 0.6 - 7.4 | 1.3 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.4 - 9.8 | 1.5 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.4 - 9.8 | 1.7 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.035 | 0.025 | 0.075 | 0.4 - 9.8 | 1.9 | 5 000 | — | 3.4 | 1.7 |
| II | 0 | 0.035 | 0.025 | 0.095 | 0.4 - 9.8 | 2.2 | 4 410 | — | 3.4 | 1.7 |
| I | 0 | 0.040 | 0.027 | 0.095 | 0.4 - 11.8 | 2.4 | 3 450 | 4 710 | 3.4 | 1.7 |
| II | 0 | 0.023 | 0.018 | 0.045 | 1.2 - 9.3 | 1.2 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.025 | 0.020 | 0.050 | 1.2 - 9.3 | 1.4 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.027 | 0.020 | 0.060 | 0.8 - 10.8 | 1.7 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.030 | 0.023 | 0.075 | 0.8 - 10.8 | 1.9 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.035 | 0.025 | 0.075 | 0.8 - 10.8 | 2.1 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.035 | 0.025 | 0.095 | 0.8 - 10.8 | 2.4 | 4 330 | — | 3.2 | 1.6 |
| I | 0 | 0.040 | 0.027 | 0.120 | 0.8 - 13.8 | 2.6 | 3 400 | 4 640 | 3.2 | 1.6 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.8 - 13.8 | 3.1 | 2 250 | 3 110 | 3.2 | 1.6 |
| I | 0 | 0.054 | 0.035 | 0.160 | 0.8 - 13.8 | 3.6 | 1 600 | 2 220 | 3.2 | 1.6 |


4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft $\phi 20$
Lead 20, 30

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 17.2 |
| Ball circle dia. | 20.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| For drive side (Fixed) | For opposite to drive side | |
|------------------------------------|------------------------------------|-------------------------------------|
| | (Fixed) | (Simple) |
| WBK15-01B (low-profile, square) | WBK15-01B (low-profile, square) | WBK15S-01B (low-profile, square) |
| WBK15-11 (round) | WBK15-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|-------------------|-------------------------|-----------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.030 | 0.023 | 0.060 | 1.4 - 11.8 | 1.8 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.030 | 0.023 | 0.075 | 1.4 - 11.8 | 2.0 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.035 | 0.025 | 0.095 | 1.4 - 11.8 | 2.3 | 5 000 | — | 3.2 | 1.6 |
| II | 0 | 0.040 | 0.027 | 0.095 | 0.8 - 13.8 | 2.5 | 4 150 | — | 3.2 | 1.6 |
| I | 0 | 0.040 | 0.027 | 0.120 | 0.8 - 13.8 | 2.8 | 3 270 | 4 470 | 3.2 | 1.6 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.8 - 13.8 | 3.3 | 2 180 | 3 010 | 3.2 | 1.6 |
| I | 0 | 0.054 | 0.035 | 0.160 | 0.8 - 13.8 | 3.8 | 1 550 | 2 170 | 3.2 | 1.6 |
| I | 0 | 0.065 | 0.040 | 0.200 | 0.8 - 13.8 | 4.7 | 900 | 1 270 | 3.2 | 1.6 |
| II | 0 | 0.023 | 0.018 | 0.050 | 1.6 - 9.8 | 1.4 | 5 000 | — | 4.6 | 2.3 |
| II | 0 | 0.027 | 0.020 | 0.060 | 1.4 - 11.8 | 1.7 | 5 000 | — | 4.6 | 2.3 |
| II | 0 | 0.030 | 0.023 | 0.060 | 1.4 - 11.8 | 1.9 | 5 000 | — | 4.6 | 2.3 |
| II | 0 | 0.030 | 0.023 | 0.075 | 1.4 - 11.8 | 2.1 | 5 000 | — | 4.6 | 2.3 |
| II | 0 | 0.035 | 0.025 | 0.095 | 1.4 - 11.8 | 2.4 | 5 000 | — | 4.6 | 2.3 |
| II | 0 | 0.040 | 0.027 | 0.095 | 0.8 - 13.8 | 2.6 | 4 310 | — | 4.6 | 2.3 |
| I | 0 | 0.040 | 0.027 | 0.120 | 0.8 - 13.8 | 2.9 | 3 380 | 4 570 | 4.6 | 2.3 |
| I | 0 | 0.046 | 0.030 | 0.120 | 0.8 - 13.8 | 3.4 | 2 240 | 3 070 | 4.6 | 2.3 |
| I | 0 | 0.054 | 0.035 | 0.160 | 0.8 - 13.8 | 3.9 | 1 590 | 2 200 | 4.6 | 2.3 |


4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut model: BSS

Screw shaft ϕ 20
Lead 40, 60

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 17.2 |
| Ball circle dia. | 20.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |


| For drive side (Fixed) | Recommended support unit | |
|------------------------------------|---------------------------------------|-------------------------------------|
| | For opposite to drive side (Fixed) | (Simple) |
| WBK15-01B (low-profile, square) | WBK15-01B (low-profile, square) | WBK15S-01B (low-profile, square) |
| WBK15-11 (round) | WBK15-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N \cdot cm) ^{*1} | Mass (kg) | Permissible rotational speed (min ⁻¹) ^{*2} | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|-------------------|-------------------------|-----------------------------|--------------------|--|--------------|--|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.035 | 0.025 | 0.075 | 2.2 - 12.8 | 2.4 | 5 000 | — | 5.3 | 2.7 |
| II | 0 | 0.035 | 0.025 | 0.095 | 2.2 - 12.8 | 2.6 | 5 000 | — | 5.3 | 2.7 |
| II | 0 | 0.040 | 0.027 | 0.095 | 1.8 - 14.8 | 2.8 | 3 940 | — | 5.3 | 2.7 |
| I | 0 | 0.040 | 0.027 | 0.120 | 1.8 - 14.8 | 3.1 | 3 120 | 4 190 | 5.3 | 2.7 |
| I | 0 | 0.046 | 0.030 | 0.160 | 1.8 - 14.8 | 3.6 | 2 100 | 2 850 | 5.3 | 2.7 |
| I | 0 | 0.054 | 0.035 | 0.160 | 1.8 - 14.8 | 4.1 | 1 500 | 2 070 | 5.3 | 2.7 |
| I | 0 | 0.065 | 0.040 | 0.200 | 1.8 - 14.8 | 5.1 | 880 | 1 230 | 5.3 | 2.7 |
| I | 0 | 0.077 | 0.046 | 0.240 | 1.8 - 14.8 | 6.0 | 580 | 810 | 5.3 | 2.7 |
| II | 0 | 0.030 | 0.023 | 0.075 | 2.7 - 13.8 | 2.4 | 5 000 | — | 7.0 | 3.5 |
| II | 0 | 0.035 | 0.025 | 0.095 | 2.7 - 13.8 | 2.6 | 5 000 | — | 7.0 | 3.5 |
| II | 0 | 0.035 | 0.025 | 0.095 | 2.7 - 13.8 | 2.9 | 4 830 | — | 7.0 | 3.5 |
| II | 0 | 0.040 | 0.027 | 0.120 | 1.8 - 14.8 | 3.1 | 3 740 | — | 7.0 | 3.5 |
| I | 0 | 0.040 | 0.027 | 0.120 | 1.8 - 14.8 | 3.4 | 2 980 | 3 920 | 7.0 | 3.5 |
| I | 0 | 0.046 | 0.030 | 0.160 | 1.8 - 14.8 | 3.9 | 2 020 | 2 700 | 7.0 | 3.5 |
| I | 0 | 0.054 | 0.035 | 0.160 | 1.8 - 14.8 | 4.4 | 1 460 | 1 970 | 7.0 | 3.5 |
| I | 0 | 0.065 | 0.040 | 0.200 | 1.8 - 14.8 | 5.4 | 860 | 1 180 | 7.0 | 3.5 |
| I | 0 | 0.077 | 0.046 | 0.240 | 1.8 - 14.8 | 6.3 | 570 | 790 | 7.0 | 3.5 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

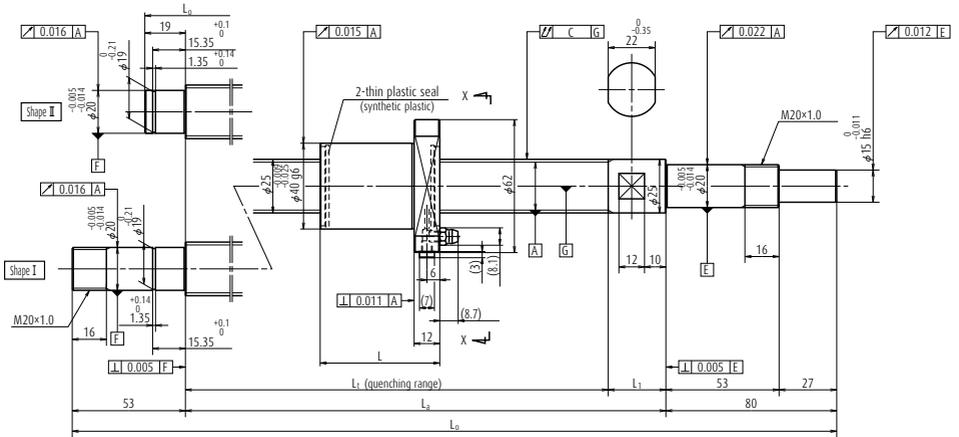

| Ball screw No. | Screw shaft diameter d | Lead I | Basic load ratings (N) | | Stroke | | Nut length L | Screw shaft dimensions | | | |
|----------------|------------------------|--------|------------------------|------------------------|---------|-------|--------------|------------------------|----------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | MAX. | | L _t | L _a | L ₀ | L ₁ |
| | | | | | | | | | | | |
| PSS2505N1D0349 | 25 | 5 | 11 500 | 23 500 | 150 | 185 | 32 | 223 | 250 | 658 | 27 |
| PSS2505N1D0399 | 25 | 5 | 11 500 | 23 500 | 200 | 235 | 32 | 273 | 300 | 758 | 27 |
| PSS2505N1D0499 | 25 | 5 | 11 500 | 23 500 | 300 | 335 | 32 | 373 | 400 | 858 | 27 |
| PSS2505N1D0599 | 25 | 5 | 11 500 | 23 500 | 400 | 435 | 32 | 473 | 500 | 958 | 27 |
| PSS2505N1D0699 | 25 | 5 | 11 500 | 23 500 | 500 | 535 | 32 | 573 | 600 | 1 085 | 27 |
| PSS2505N1D0899 | 25 | 5 | 11 500 | 23 500 | 700 | 735 | 32 | 773 | 800 | 1 285 | 27 |
| PSS2505N1D0999 | 25 | 5 | 11 500 | 23 500 | 800 | 835 | 32 | 873 | 900 | 1 485 | 27 |
| PSS2505N1D1233 | 25 | 5 | 11 500 | 23 500 | 1 000 | 1 027 | 32 | 1 073 | 1 100 | 1 885 | 27 |
| PSS2510N1D0549 | 25 | 10 | 15 000 | 32 400 | 300 | 361 | 56 | 423 | 450 | 2 285 | 27 |
| PSS2510N1D0649 | 25 | 10 | 15 000 | 32 400 | 400 | 461 | 56 | 523 | 550 | 708 | 27 |
| PSS2510N1D0749 | 25 | 10 | 15 000 | 32 400 | 500 | 561 | 56 | 623 | 650 | 808 | 27 |
| PSS2510N1D0849 | 25 | 10 | 15 000 | 32 400 | 600 | 661 | 56 | 723 | 750 | 908 | 27 |
| PSS2510N1D0949 | 25 | 10 | 15 000 | 32 400 | 700 | 761 | 56 | 823 | 850 | 1 008 | 27 |
| PSS2510N1D1049 | 25 | 10 | 15 000 | 32 400 | 800 | 861 | 56 | 923 | 950 | 1 135 | 27 |
| PSS2510N1D1283 | 25 | 10 | 15 000 | 32 400 | 1 000 | 1 053 | 56 | 1 123 | 1 150 | 1 335 | 27 |
| PSS2510N1D1883 | 25 | 10 | 15 000 | 32 400 | 1 600 | 1 653 | 56 | 1 723 | 1 750 | 1 535 | 27 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 22.2 |
| Ball circle dia. | 25.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |


| Recommended support unit | | |
|---------------------------|----------------------------|-----------------------|
| For drive side (Fixed) | For opposite to drive side | |
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.023 | 0.018 | 0.035 | 1.2 - 9.3 | 1.5 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.023 | 0.018 | 0.035 | 1.2 - 9.3 | 1.6 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.025 | 0.020 | 0.040 | 1.2 - 9.3 | 2.0 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.027 | 0.020 | 0.045 | 1.2 - 9.3 | 2.3 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.030 | 0.023 | 0.055 | 0.8 - 10.8 | 2.7 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.035 | 0.025 | 0.065 | 0.8 - 10.8 | 3.4 | 5 000 | — | 4.4 | 2.2 |
| II | 0 | 0.040 | 0.027 | 0.065 | 0.8 - 10.8 | 3.7 | 4 490 | — | 4.4 | 2.2 |
| I | 0 | 0.046 | 0.030 | 0.080 | 0.8 - 13.8 | 4.5 | 2 960 | 4 060 | 4.4 | 2.2 |
| II | 0 | 0.027 | 0.020 | 0.045 | 3.1 - 11.8 | 2.4 | 5 000 | — | 4.7 | 2.4 |
| II | 0 | 0.030 | 0.023 | 0.055 | 2.2 - 12.8 | 2.7 | 5 000 | — | 4.7 | 2.4 |
| II | 0 | 0.030 | 0.023 | 0.055 | 2.2 - 12.8 | 3.1 | 5 000 | — | 4.7 | 2.4 |
| II | 0 | 0.035 | 0.025 | 0.065 | 2.2 - 12.8 | 3.5 | 5 000 | — | 4.7 | 2.4 |
| II | 0 | 0.040 | 0.027 | 0.065 | 2.2 - 12.8 | 3.8 | 5 000 | — | 4.7 | 2.4 |
| I | 0 | 0.040 | 0.027 | 0.080 | 2.2 - 12.8 | 4.2 | 4 120 | — | 4.7 | 2.4 |
| I | 0 | 0.046 | 0.030 | 0.100 | 1.8 - 14.8 | 5.0 | 2 760 | 3 790 | 4.7 | 2.4 |
| I | 0 | 0.065 | 0.040 | 0.130 | 1.8 - 14.8 | 7.2 | 1 150 | 1 620 | 4.7 | 2.4 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.


5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

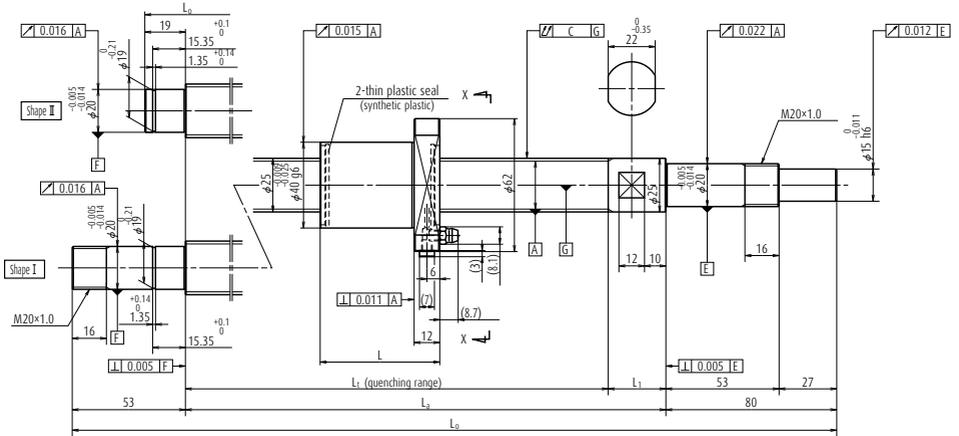

| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Nut length L | Screw shaft dimensions | | | |
|----------------|------------------------|--------|------------------------|------------------------|---------|-------|--------------|------------------------|----------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | MAX. | | L ₁ | L _a | L ₀ | L ₁ |
| | | | | | | | | | | | |
| PSS2520N1D0729 | 25 | 20 | 7 650 | 14 800 | 500 | 544 | 54 | 604 | 630 | 729 | 26 |
| PSS2520N1D0829 | 25 | 20 | 7 650 | 14 800 | 600 | 644 | 54 | 704 | 730 | 829 | 26 |
| PSS2520N1D0929 | 25 | 20 | 7 650 | 14 800 | 700 | 744 | 54 | 804 | 830 | 929 | 26 |
| PSS2520N1D1029 | 25 | 20 | 7 650 | 14 800 | 800 | 844 | 54 | 904 | 930 | 1 029 | 26 |
| PSS2520N1D1263 | 25 | 20 | 7 650 | 14 800 | 1 000 | 1 036 | 54 | 1 104 | 1 130 | 1 263 | 26 |
| PSS2520N1D1463 | 25 | 20 | 7 650 | 14 800 | 1 200 | 1 236 | 54 | 1 304 | 1 330 | 1 463 | 26 |
| PSS2520N1D1863 | 25 | 20 | 7 650 | 14 800 | 1 600 | 1 636 | 54 | 1 704 | 1 730 | 1 863 | 26 |
| PSS2520N1D2263 | 25 | 20 | 7 650 | 14 800 | 2 000 | 2 036 | 54 | 2 104 | 2 130 | 2 263 | 26 |
| PSS2525N1D0779 | 25 | 25 | 7 490 | 14 600 | 500 | 581 | 63 | 650 | 680 | 779 | 30 |
| PSS2525N1D0879 | 25 | 25 | 7 490 | 14 600 | 600 | 681 | 63 | 750 | 780 | 879 | 30 |
| PSS2525N1D0979 | 25 | 25 | 7 490 | 14 600 | 700 | 781 | 63 | 850 | 880 | 979 | 30 |
| PSS2525N1D1079 | 25 | 25 | 7 490 | 14 600 | 800 | 887 | 63 | 950 | 890 | 1 079 | 30 |
| PSS2525N1D1313 | 25 | 25 | 7 490 | 14 600 | 1 000 | 1 073 | 63 | 1 150 | 1 180 | 1 313 | 30 |
| PSS2525N1D1513 | 25 | 25 | 7 490 | 14 600 | 1 200 | 1 273 | 63 | 1 350 | 1 380 | 1 513 | 30 |
| PSS2525N1D1913 | 25 | 25 | 7 490 | 14 600 | 1 600 | 1 673 | 63 | 1 750 | 1 780 | 1 913 | 30 |
| PSS2525N1D2313 | 25 | 25 | 7 490 | 14 600 | 2 000 | 2 073 | 63 | 2 150 | 2 180 | 2 313 | 30 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 22.2 |
| Ball circle dia. | 25.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | | |
|---------------------------|----------------------------|-----------------------|
| For drive side (Fixed) | For opposite to drive side | |
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |


Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.030 | 0.023 | 0.055 | 2.2 - 12.8 | 3.1 | 5 000 | — | 3.9 | 2.0 |
| II | 0 | 0.035 | 0.025 | 0.065 | 2.2 - 12.8 | 3.4 | 5 000 | — | 3.9 | 2.0 |
| II | 0 | 0.040 | 0.027 | 0.065 | 2.2 - 12.8 | 3.8 | 5 000 | — | 3.9 | 2.0 |
| II | 0 | 0.040 | 0.027 | 0.080 | 2.2 - 12.8 | 4.2 | 4 280 | — | 3.9 | 2.0 |
| I | 0 | 0.046 | 0.030 | 0.100 | 1.8 - 14.8 | 5.0 | 2 850 | 3 920 | 3.9 | 2.0 |
| I | 0 | 0.054 | 0.035 | 0.100 | 1.8 - 14.8 | 5.8 | 2 030 | 2 820 | 3.9 | 2.0 |
| I | 0 | 0.065 | 0.040 | 0.130 | 1.8 - 14.8 | 7.3 | 1 180 | 1 650 | 3.9 | 2.0 |
| I | 0 | 0.077 | 0.046 | 0.170 | 1.8 - 14.8 | 8.8 | 770 | 1 080 | 3.9 | 2.0 |
| II | 0 | 0.035 | 0.025 | 0.055 | 2.7 - 13.8 | 3.3 | 5 000 | — | 4.3 | 2.2 |
| II | 0 | 0.035 | 0.025 | 0.065 | 2.7 - 13.8 | 3.7 | 5 000 | — | 4.3 | 2.2 |
| II | 0 | 0.040 | 0.027 | 0.065 | 2.7 - 13.8 | 4.1 | 4 910 | — | 4.3 | 2.2 |
| II | 0 | 0.040 | 0.027 | 0.080 | 2.7 - 13.8 | 4.4 | 3 910 | — | 4.3 | 2.2 |
| I | 0 | 0.046 | 0.030 | 0.100 | 1.8 - 14.8 | 5.3 | 2 640 | 3 620 | 4.3 | 2.2 |
| I | 0 | 0.054 | 0.035 | 0.100 | 1.8 - 14.8 | 6.0 | 1 900 | 2 630 | 4.3 | 2.2 |
| I | 0 | 0.065 | 0.040 | 0.130 | 1.8 - 14.8 | 7.5 | 1 120 | 1 570 | 4.3 | 2.2 |
| I | 0 | 0.077 | 0.046 | 0.170 | 1.8 - 14.8 | 9.1 | 740 | 1 040 | 4.3 | 2.2 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Unit: mm



| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 3.175 / 22.2 |
| Ball circle dia. | 25.5 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |


| Recommended support unit | | |
|---------------------------|----------------------------|-----------------------|
| For drive side (Fixed) | For opposite to drive side | |
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left shaft end (opposite driven side) | Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--|----------------|----------------------|--------------------------|--------------------|-------------------------------------|--------------|---|-------------|--|--|
| | Target value T | Error e _p | Variation v _u | | | | Fixed-Simple | Fixed-Fixed | | |
| | | | | | | | | | | |
| II | 0 | 0.035 | 0.025 | 0.055 | 2.7 - 13.8 | 3.4 | 5 000 | — | 5.5 | 2.8 |
| II | 0 | 0.035 | 0.025 | 0.065 | 2.7 - 13.8 | 3.7 | 5 000 | — | 5.5 | 2.8 |
| II | 0 | 0.040 | 0.027 | 0.065 | 2.7 - 13.8 | 4.1 | 4 980 | — | 5.5 | 2.8 |
| II | 0 | 0.040 | 0.027 | 0.080 | 2.7 - 13.8 | 4.5 | 3 960 | — | 5.5 | 2.8 |
| I | 0 | 0.046 | 0.030 | 0.100 | 1.8 - 14.8 | 5.3 | 2 670 | 3 650 | 5.5 | 2.8 |
| I | 0 | 0.054 | 0.035 | 0.100 | 1.8 - 14.8 | 6.1 | 1 920 | 2 650 | 5.5 | 2.8 |
| I | 0 | 0.065 | 0.040 | 0.130 | 1.8 - 14.8 | 7.6 | 1 130 | 1 580 | 5.5 | 2.8 |
| I | 0 | 0.077 | 0.046 | 0.170 | 1.8 - 14.8 | 9.1 | 740 | 1 040 | 5.5 | 2.8 |
| II | 0 | 0.035 | 0.025 | 0.065 | 5.4 - 17.6 | 3.8 | 5 000 | — | 7.7 | 3.9 |
| II | 0 | 0.035 | 0.025 | 0.065 | 5.4 - 17.6 | 4.1 | 5 000 | — | 7.7 | 3.9 |
| II | 0 | 0.040 | 0.027 | 0.080 | 5.4 - 17.6 | 4.5 | 4 750 | — | 7.7 | 3.9 |
| II | 0 | 0.040 | 0.027 | 0.080 | 5.4 - 17.6 | 4.9 | 3 790 | — | 7.7 | 3.9 |
| I | 0 | 0.046 | 0.030 | 0.100 | 4.1 - 19.6 | 5.8 | 2 570 | 3 470 | 7.7 | 3.9 |
| I | 0 | 0.054 | 0.035 | 0.100 | 4.1 - 19.6 | 6.5 | 1 860 | 2 540 | 7.7 | 3.9 |
| I | 0 | 0.065 | 0.040 | 0.130 | 4.1 - 19.6 | 8.0 | 1 100 | 1 520 | 7.7 | 3.9 |
| I | 0 | 0.077 | 0.046 | 0.170 | 4.1 - 19.6 | 9.6 | 730 | 1 020 | 7.7 | 3.9 |


4. Use of NSK support unit is recommended. Refer to page B389 for details.

5. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

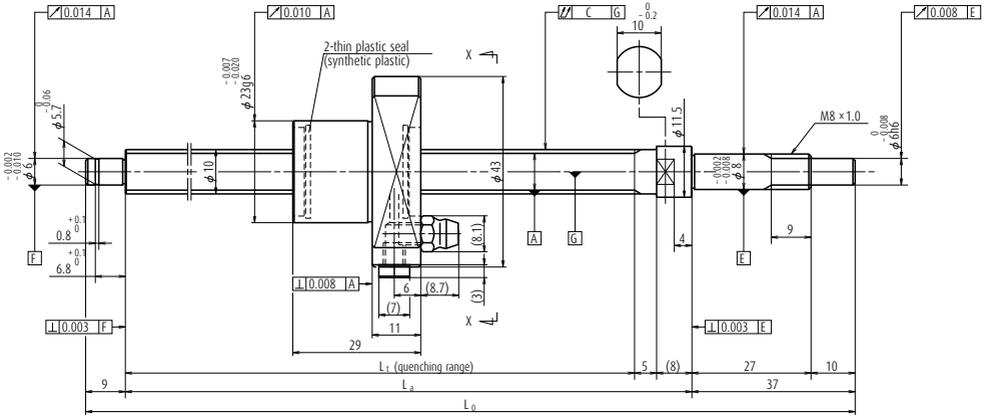

| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Screw shaft dimensions | | |
|----------------|---------------------------|-----------|---------------------------|---------------------------|---------|------|------------------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | MAX. | L _t | L _a | L _o |
| | | | | | | | | | |
| USS1005N1D0221 | 10 | 5 | 3 420 | 4 840 | 100 | 133 | 162 | 175 | 221 |
| USS1005N1D0321 | 10 | 5 | 3 420 | 4 840 | 200 | 233 | 262 | 275 | 321 |
| USS1005N1D0521 | 10 | 5 | 3 420 | 4 840 | 400 | 433 | 462 | 475 | 521 |

- Notes**
1. Indicates ball screw preload control value. Approximately 0.5 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

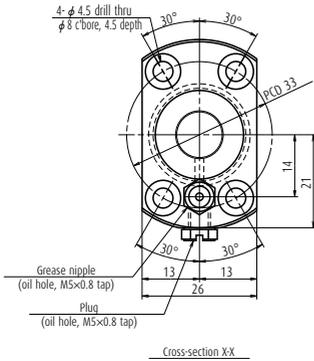


| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.000 / 8.2 |
| Ball circle dia. | 10.3 |
| Accuracy grade/axial play | C5 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | |
|--------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side (Simple) |
| WBK08-01 (low-profile, square) | WBK08S-01B (low-profile, square) |
| WBK08-11 (round) | WBK08S-01C (square, clean) |
| WBK08-01C (square, clean) | |
| WBK08-11C (round, clean) | |

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--------------------|-------------------------------------|--------------|---|--|--|
| Target value T | Error e _p | Variation V _u | | | | | | |
| 0 | 0.010 | 0.008 | 0.035 | 0.2 - 1.8 | 0.3 | 5 000 | 0.8 | 0.4 |
| 0 | 0.012 | 0.008 | 0.045 | 0.2 - 2.0 | 0.3 | 5 000 | 0.8 | 0.4 |
| 0 | 0.015 | 0.010 | 0.070 | 0.2 - 3.0 | 0.5 | 4 300 | 0.8 | 0.4 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.

Unit: mm

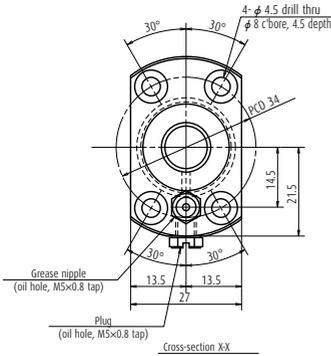


| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.000 / 10.2 |
| Ball circle dia. | 12.3 |
| Accuracy grade/axial play | C3 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | |
|--------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side (Simple) |
| WBK08-01 (low-profile, square) | WBK08S-01B (low-profile, square) |
| WBK08-11 (round) | WBK08S-01C (square, clean) |
| WBK08-01C (square, clean) | |
| WBK08-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N-cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--------------------|-------------------------------------|--------------|---|--|--|
| Target value T | Error e _p | Variation V _u | | | | | | |
| 0 | 0.010 | 0.008 | 0.035 | 0.2 - 1.8 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.012 | 0.008 | 0.045 | 0.2 - 2.0 | 0.3 | 5 000 | 1.0 | 0.5 |
| 0 | 0.016 | 0.012 | 0.070 | 0.2 - 3.0 | 0.7 | 5 000 | 1.0 | 0.5 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.

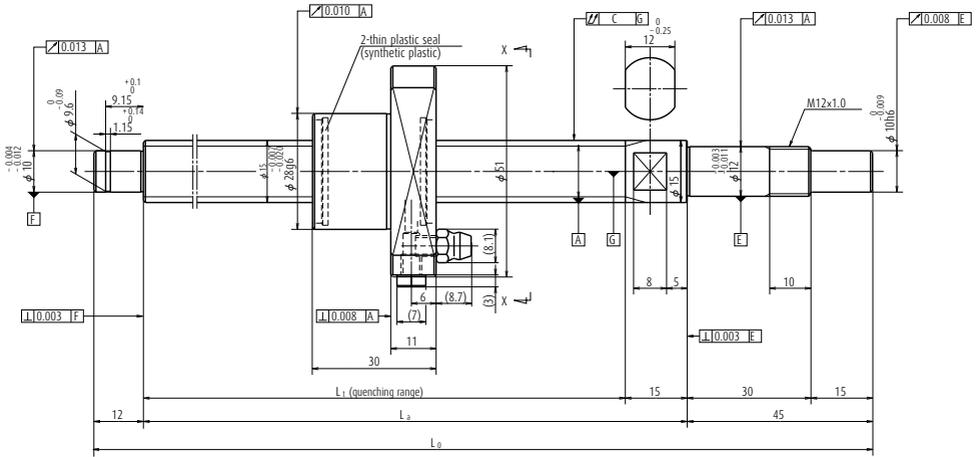

| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Screw shaft dimensions | | |
|----------------|------------------------|--------|------------------------|------------------------|---------|------|------------------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | MAX. | L _t | L _a | L _o |
| | | | | | | | | | |
| USS1505N1D0261 | 15 | 5 | 6 410 | 10 100 | 100 | 159 | 189 | 204 | 261 |
| USS1505N1D0361 | 15 | 5 | 6 410 | 10 100 | 200 | 259 | 289 | 304 | 361 |
| USS1505N1D0561 | 15 | 5 | 6 410 | 10 100 | 400 | 459 | 489 | 504 | 561 |
| USS1505N1D0761 | 15 | 5 | 6 410 | 10 100 | 600 | 659 | 689 | 704 | 761 |


- Notes**
1. Indicates ball screw preload control value. Approximately 0.5 N-cm of torque is added due to thin plastic seals.
 2. Contact NSK if permissible rotational speed is to be exceeded.
 3. Service temperature range is 0 to 80°C.

Nut model: BSS

Screw shaft $\phi 15$

Lead 5

Unit: mm

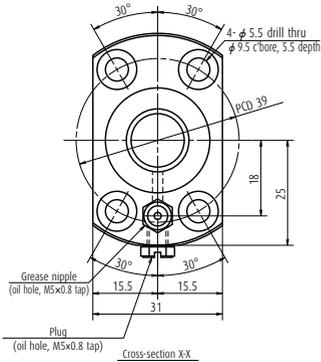


| Ball screw specification | |
|---|-----------------------------------|
| Preload type | Oversize ball preload (P-preload) |
| Ball diameter/screw shaft root diameter | 2.778 / 12.6 |
| Ball circle dia. | 15.5 |
| Accuracy grade/axial play | C3 / 0 |
| Factory-packed grease | NSK grease LR3 |

| Recommended support unit | |
|--------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side (Simple) |
| WBK12-01 (low-profile, square) | WBK12S-01B (low-profile, square) |
| WBK12-11 (round) | WBK12S-01C (square, clean) |
| WBK12-01C (square, clean) | |
| WBK12-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N-cm) *1 | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-----------------------------|--------------------|-------------------------------------|--------------|--|--|--|
| Target value T | Error e _p | Variation V _u | | | | Fixed-Simple | | |
| 0 | 0.010 | 0.008 | 0.025 | 0.2 - 5.0 | 0.5 | 5 000 | 2.0 | 1.0 |
| 0 | 0.012 | 0.008 | 0.035 | 0.2 - 5.0 | 0.6 | 5 000 | 2.0 | 1.0 |
| 0 | 0.015 | 0.010 | 0.045 | 0.2 - 6.0 | 0.9 | 5 000 | 2.0 | 1.0 |
| 0 | 0.018 | 0.013 | 0.060 | 0.2 - 8.0 | 1.1 | 4 130 | 2.0 | 1.0 |

4. Use of NSK support unit is recommended. Refer to page B389 for details.

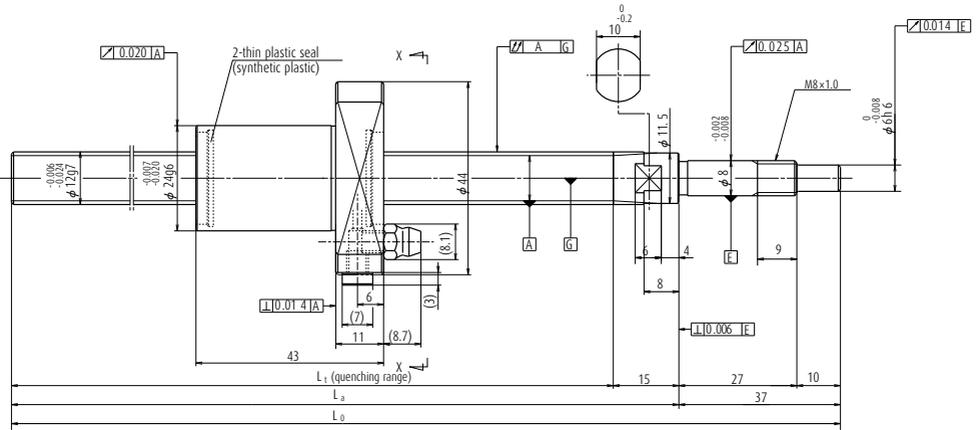


| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Nut length | Screw shaft dimensions | | | |
|----------------|------------------------|--------|------------------------|------------------------|---------|------|------------|------------------------|----------------|----------------|----------------|
| | | | Dynamic C _a | Static C _{0a} | Nominal | Max. | L | L _t | L ₂ | L ₀ | L ₁ |
| FSS1210N1D0400 | 12 | 10 | 3 760 | 5 780 | 250 | 287 | 43 | 348 | 363 | 400 | 15 |
| FSS1210N1D0600 | 12 | 10 | 3 760 | 5 780 | 450 | 487 | 43 | 548 | 563 | 600 | 15 |
| FSS1210N1D0900 | 12 | 10 | 3 760 | 5 780 | 750 | 787 | 43 | 848 | 863 | 900 | 15 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Service temperature range is 0 to 80°C.
 3. Use of NSK support unit is recommended. Refer to page B389 for details.

Screw shaft ϕ 12

Lead 10

Unit: mm

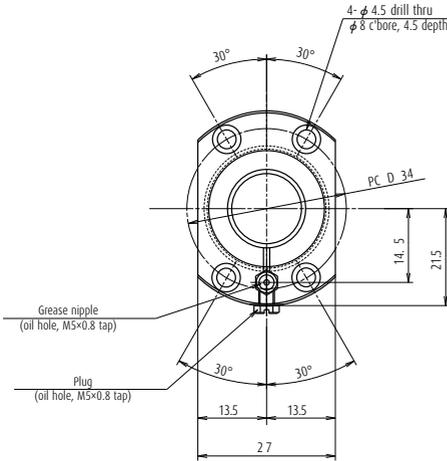

Ball screw specification

| | |
|---|---------------------|
| Ball diameter/ screw shaft root diameter | 2.000 / 10.2 |
| Accuracy grade/axial play | CT7 / 0.010 or less |
| Factory-packed grease | NSK grease LR3 |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|---------------------------------|--|
| WBK08-01B (low-profile, square) | WBK12SF-01B (low-profile, square) |

Unit: mm


| Lead accuracy | | | Shaft run-out A | Dynamic preload torque (N·cm) | Mass (kg) | Permissible rotational speed (min ⁻¹) ^② Fixed-Simple | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-------------------|-------------------------|-------------------------------|--------------------|--|--------------|--|---|---|
| Target value T | Error e _p | Variation V ₃₀₀ | | | | | | |
| 0 | 0.120 | 0.052 | 0.080 | — | 0.5 | 5 000 | 1.0 | 0.5 |
| 0 | 0.195 | 0.052 | 0.120 | — | 0.7 | 5 000 | 1.0 | 0.5 |
| 0 | 0.310 | 0.052 | 0.180 | — | 1.0 | 2 300 | 1.0 | 0.5 |

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

^①Critical speed which is the resonance vibration of the shaft (page B47).

^②Maximum rotational speed 5 000 min⁻¹

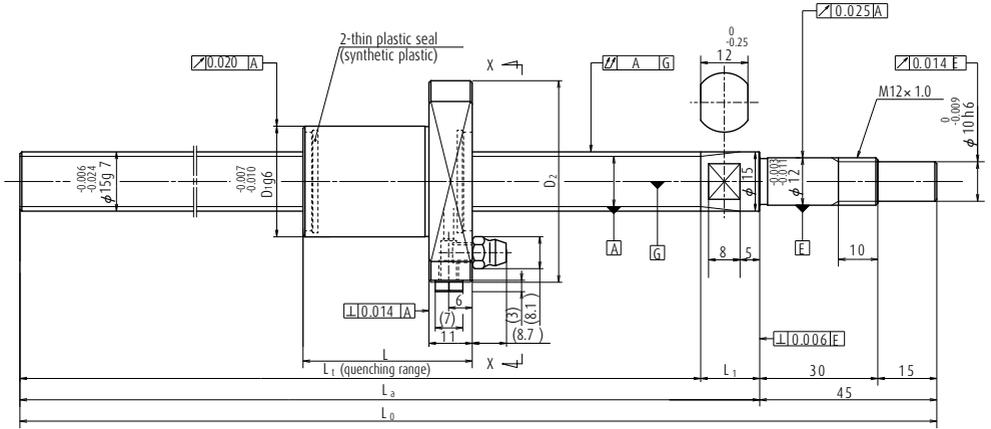


| Ball screw No. | Screw shaft diameter d | Lead l | Basic load ratings (N) | | Stroke | | Screw shaft dimensions | | | Lead accuracy | | | |
|----------------|------------------------|--------|------------------------|-----------------|---------|-------|------------------------|-------|-------|---------------|------------------|-------------|---------------------|
| | | | Dynamic C_a | Static C_{0a} | Nominal | Max. | L_1 | L_a | L_0 | L_1 | Target value T | Error e_p | Variation V_{300} |
| FSS1510N1D0500 | 15 | 10 | 6 530 | 10 200 | 440 | 379 | 440 | 455 | 500 | 15 | 0 | 0.155 | 0.052 |
| FSS1510N1D1000 | 15 | 10 | 6 530 | 10 200 | 850 | 879 | 940 | 955 | 1 000 | 15 | 0 | 0.310 | 0.052 |
| FSS1510N1D1450 | 15 | 10 | 6 530 | 10 200 | 1 300 | 1 390 | 1 390 | 1 405 | 1 450 | 15 | 0 | 0.490 | 0.052 |
| FSS1520N1D0500 | 15 | 20 | 5 660 | 8 700 | 350 | 437 | 437 | 455 | 500 | 18 | 0 | 0.155 | 0.052 |
| FSS1520N1D1000 | 15 | 20 | 5 660 | 8 700 | 850 | 937 | 937 | 955 | 1 000 | 18 | 0 | 0.310 | 0.052 |
| FSS1520N1D1450 | 15 | 20 | 5 660 | 8 700 | 1 300 | 1 387 | 1 387 | 1 405 | 1 450 | 18 | 0 | 0.490 | 0.052 |

- Notes**
1. Indicates ball screw preload control value. Approximately 2.0 N-cm of torque is added due to thin plastic seals.
 2. Service temperature range is 0 to 80°C.
 3. Use of NSK support unit is recommended. Refer to page B389 for details.

Nut model: BSS

Screw shaft $\phi 15$
Lead 10, 20

Unit: mm

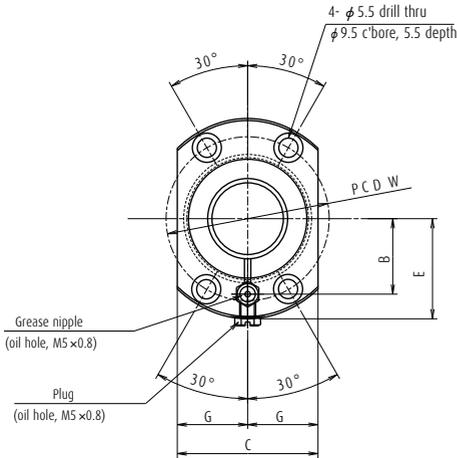

| Ball screw specification | | |
|---|--------------------|--------------|
| Lead | 10 | 20 |
| Ball diameter/ screw shaft root diameter | 2.778 / 12.6 | 3.175 / 12.2 |
| Accuracy grade/axial play | C7 / 0.010 or less | |
| Factory-packed grease | NSK grease LR3 | |

| Recommended support unit | |
|---------------------------------|-------------------------------------|
| For drive side (Fixed) | For opposite to drive side (Simple) |
| WBK12-01B (low-profile, square) | WBK15SF-01B (low-profile, square) |

Unit: mm

| Nut dimensions | | | | | | | | Shaft run-out | Dynamic preload torque | Mass | Permissible rotational speed (min ⁻¹) ^{*2} | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|----------------|----------------|----------------|----|----|----|----|------|---------------|------------------------|------|---|---|---|
| L | D ₁ | D ₂ | W | B | C | E | G | | | | C | | |
| 43 | 28 | 51 | 39 | 18 | 31 | 25 | 15.5 | 0.070 | — | 0.9 | 5 000 | 2.0 | 1.0 |
| 43 | 28 | 51 | 39 | 18 | 31 | 25 | 15.5 | 0.125 | — | 1.7 | 2 300 | 2.0 | 1.0 |
| 43 | 28 | 51 | 39 | 18 | 31 | 25 | 15.5 | 0.200 | — | 2.3 | 1 020 | 2.0 | 1.0 |
| 51 | 32 | 55 | 43 | 20 | 33 | 27 | 16.5 | 0.070 | — | 1.0 | 5 000 | 2.8 | 1.4 |
| 51 | 32 | 55 | 43 | 20 | 33 | 27 | 16.5 | 0.125 | — | 1.7 | 2 260 | 2.8 | 1.4 |
| 51 | 32 | 55 | 43 | 20 | 33 | 27 | 16.5 | 0.200 | — | 2.3 | 1 000 | 2.8 | 1.4 |

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.


*Critical speed which is the resonance vibration of the shaft (page B47).

**Maximum rotational speed 5 000 min⁻¹

Nut model: BSS

Screw shaft $\phi 20$ Lead 10, 20

Unit: mm

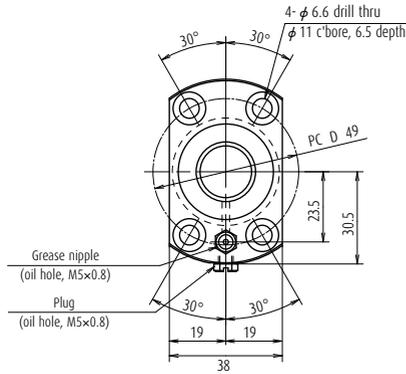

Ball screw specification

| | |
|---|---------------------|
| Ball diameter/ screw shaft root diameter | 3.175 / 17.2 |
| Accuracy grade/axial play | Ct7 / 0.010 or less |
| Factory-packed grease | NSK grease LR3 |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|---------------------------------|--|
| WBK15-01B (low-profile, square) | WBK20SF-01B (low-profile, square) |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N-cm) | Mass (kg) | Permissible rotational speed (min ⁻¹) *2 | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|----------------------|-------------------------|-------------------------------|-----------------------|-------------------------------------|--------------|---|--|--|
| Target value T | Error e _p | Variation V ₃₀₀ | | | | Fixed-Simple | | |
| 0 | 0.195 | 0.052 | 0.085 | — | 1.7 | 5 000 | 3.2 | 1.6 |
| 0 | 0.310 | 0.052 | 0.125 | — | 2.6 | 3 310 | 3.2 | 1.6 |
| 0 | 0.490 | 0.052 | 0.200 | — | 3.6 | 1 450 | 3.2 | 1.6 |
| 0 | 0.195 | 0.052 | 0.085 | — | 1.8 | 5 000 | 3.2 | 1.6 |
| 0 | 0.310 | 0.052 | 0.125 | — | 2.7 | 3 350 | 3.2 | 1.6 |
| 0 | 0.490 | 0.052 | 0.200 | — | 3.8 | 1 460 | 3.2 | 1.6 |

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.


5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

*Critical speed which is the resonance vibration of the shaft (page B47).

**Maximum rotational speed 5 000 min⁻¹

Screw shaft $\phi 25$ Lead 10, 20, 25

Unit: mm

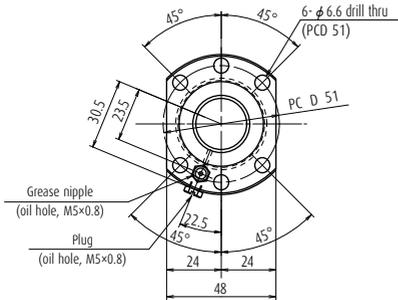

Ball screw specification

| | |
|---|--------------------|
| Ball diameter/ screw shaft root diameter | 3.175 / 22.2 |
| Accuracy grade/axial play | C7 / 0.010 or less |
| Factory-packed grease | NSK grease LR3 |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|---------------------------|--|
| WBK20-01 (square) | WBK25SF-01 (square) |

Unit: mm

| Lead accuracy | | | Shaft run-out C | Dynamic preload torque (N·cm) | Mass (kg) | Permissible rotational speed (min ⁻¹) ^{*2} | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|----------------------|-------------------------|-------------------------------|-----------------------|--|--------------|---|---|--|
| Target value T | Error e _p | Variation V ₃₀₀ | | | | | | |
| 0 | 0.155 | 0.052 | 0.065 | — | 2.6 | 5 000 | 4.7 | 2.4 |
| 0 | 0.310 | 0.052 | 0.090 | — | 4.0 | 4 590 | 4.7 | 2.4 |
| 0 | 0.490 | 0.052 | 0.130 | — | 5.8 | 1 970 | 4.7 | 2.4 |
| 0 | 0.155 | 0.052 | 0.065 | — | 2.6 | 5 000 | 3.9 | 2.0 |
| 0 | 0.310 | 0.052 | 0.090 | — | 4.0 | 4 570 | 3.9 | 2.0 |
| 0 | 0.490 | 0.052 | 0.130 | — | 5.8 | 1 960 | 3.9 | 2.0 |
| 0 | 0.155 | 0.052 | 0.065 | — | 2.6 | 5 000 | 4.3 | 2.2 |
| 0 | 0.310 | 0.052 | 0.090 | — | 4.1 | 4 660 | 4.3 | 2.2 |
| 0 | 0.490 | 0.052 | 0.130 | — | 5.8 | 1 990 | 4.3 | 2.2 |

4. The stroke and permissible rotational speed shown in the table are the values when the support unit recommended by NSK is used and Fixed-Supported (ball screw mounting method) is selected.

5. Permissible rotational speed varies when using cut screw shaft. It is necessary to calculate two items below, and whichever smaller is the permissible rotational speed.

^{*}Critical speed which is the resonance vibration of the shaft (page B47).

^{**}Maximum rotational speed 5 000 min⁻¹

B-3-1.2 High Speed SS Series HSS Type

1. Features

The HMS and HMD series, originally developed for machine tools, are an addition to NSK's lineup of standard ball screws. They have a wide range of applications, from general machines to high performance machines such as those requiring high speed and precision.

> High speed

The new recirculation system that utilizes NSK's high speed and low noise technology more than doubles the $d \cdot n$ value from 70 000 to 160 000.

To extend the range of the lead to 20 mm, high speed operation of over 60 m/min. is possible.

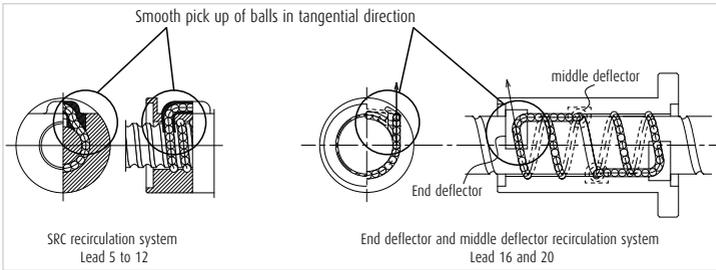


Fig. 1 Ball recirculation system

Table 1 Combinations of screw shaft diameter and lead

| Screw shaft diameter (mm) \ Lead (mm) | 5 | 10 | 12 | 16 | 20 |
|---------------------------------------|---------|---------|---------|---------|---------|
| 32 | 25m/min | 50m/min | | | |
| 40 | | 40m/min | 48m/min | 64m/min | 80m/min |
| 45 | | 35m/min | | | |
| 50 | | 32m/min | 38m/min | | |

* Allowable speed needs to be calculated. See the permissible rotational speed in the dimensions table.

> Low noise and vibrations

Compared to our conventional products, the average noise level has been reduced by more than 6dB, reducing the number of colliding balls and recirculation parts thanks to high speed, low noise technology. The vibration level of the nut has also been reduced drastically.

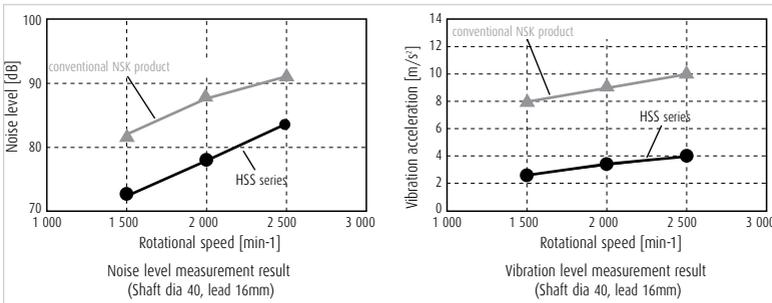


Table 2

> Installation

Installation dimension are the same as those of a conventional SS series.

> Compact

Achieved high-level stiffness and high load capacity equivalent to that of double nut preload by changing the double nut preload to the offset preload of a single nut, and compact sized nut. Adopted thin seals axially and shorten nut length.

> Blank shaft ends

The blank shaft ends can be customized according to customers' requests. See page B27 in NSK's recommended design when drawing up plans for a shaft end. The support units available on page B389 in the case of NSK's recommended design. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.

> Oil supply

2 oil holes, M6×1.0, are provided in the nut flange periphery are the end of the nut flange. A plug is standardly screwed into the periphery of the nut flange.

2. Specifications

> Accuracy grade and axial play

The available standard accuracy grade and axial play are show in **Table 2**.

Table 2 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C5 |
| Axial play | 0 mm (preloaded) |

> Dimension tables


Shape dimensions and specifications are listed for every shaft diameter and lead. See Table 3, the "List of pages".

3. Other

The seal of the ball screw and recirculation parts are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil. For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.



Table 3 Combinations of screw shaft diameter and lead

| Lead (mm) \ Screw shaft diameter (mm) | 5 | 10 | 12 | 16 | 20 |
|---------------------------------------|------|------|------|------|------|
| 32 | B149 | B149 | | | |
| 40 | | B151 | B151 | B153 | B153 |
| 45 | | B155 | | | |
| 50 | | B155 | B155 | | |

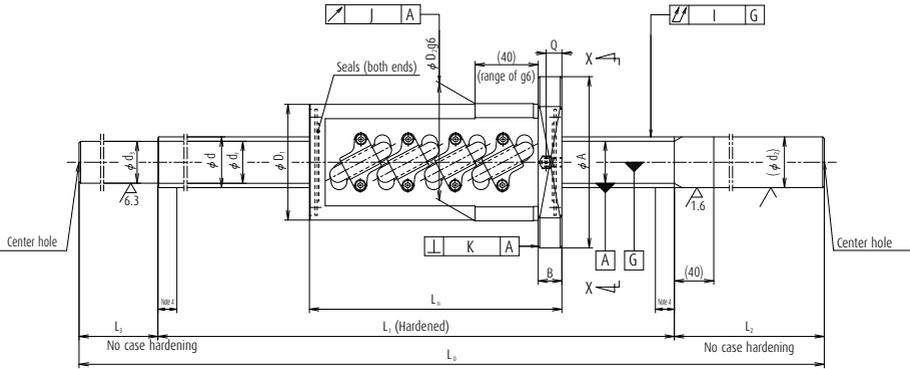


| Reference No. | Screw shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N·cm) | Ball nut dimensions | | | | | | | |
|----------------|--------------------|--------|--------------------------|---------------------------------|--------------------------|-----------------------|------------------------|------------------------|-------------|--|---------------------|----|--------|----|------|----------------|-----|----|
| | | | | | | | Dynamic C _a | Static C _{0a} | | | Diamete | | Flange | | | Overall length | | |
| | | | | | | D ₁ | | | | | D ₂ | A | G | H | B | L _n | W | |
| | | | | | | Turns × Circuits | | | | | | | | | | | | |
| HSS3205N1D0650 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 920 | 17.0 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 |
| HSS3205N1D0950 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 920 | 17.0 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 |
| HSS3205N1D1250 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 920 | 17.0 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 |
| HSS3205N1D1550 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 920 | 17.0 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 |
| HSS3205N1D1850 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 920 | 17.0 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 |
| HSS3210N1D0850 | 32 | 10 | 6.350 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 2 310 | 59.5 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 |
| HSS3210N1D1050 | 32 | 10 | 6.350 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 2 310 | 59.5 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 |
| HSS3210N1D1450 | 32 | 10 | 6.350 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 2 310 | 59.5 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 |
| HSS3210N1D1850 | 32 | 10 | 6.350 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 2 310 | 59.5 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 |
| HSS3210N1D2250 | 32 | 10 | 6.350 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 2 310 | 59.5 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 |

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B389 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

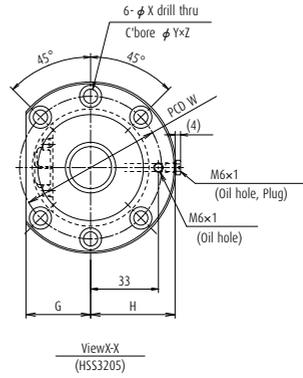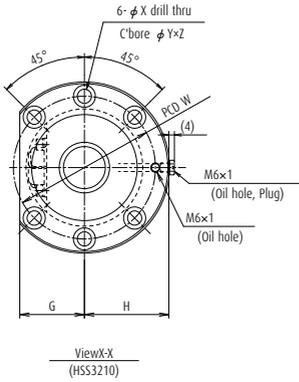

Unit: mm

| Bolt hole | | Screw shaft dimension | | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed (min ⁻¹) | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-----------|----|-----------------------|-----------------|-----------------|----------------|----------------|----------------|----------------|---------------------|---------------|----------------|--------------------|-----------------------|-------------------------|--------------|------|---|---------------------|---|---|
| | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | Installation | | | | | |
| X | Y | Z | Q | L _n | d ₂ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | U _u | I | J | K | (kg) | Fixed-Free support | Fixed-Fixed support | | |
| 6.6 | 11 | 6.5 | 8 | 400 | 32 | 200 | 29.2 | 50 | 650 | -0.010 | 0.025 | 0.020 | 0.055 | 0.019 | 0.013 | 5.2 | 5 000 | 5 000 | 10 | 5 |
| 6.6 | 11 | 6.5 | 8 | 600 | 32 | 250 | 29.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.065 | 0.019 | 0.013 | 7.0 | 5 000 | 5 000 | 10 | 5 |
| 6.6 | 11 | 6.5 | 8 | 900 | 32 | 250 | 29.2 | 100 | 1250 | -0.022 | 0.040 | 0.027 | 0.080 | 0.019 | 0.013 | 8.7 | 5 000 | 5 000 | 10 | 5 |
| 6.6 | 11 | 6.5 | 8 | 1150 | 32 | 300 | 29.2 | 100 | 1550 | -0.028 | 0.046 | 0.030 | 0.100 | 0.019 | 0.013 | 10.5 | 3 500 | 4 700 | 10 | 5 |
| 6.6 | 11 | 6.5 | 8 | 1450 | 32 | 300 | 29.2 | 100 | 1850 | -0.035 | 0.054 | 0.035 | 0.130 | 0.019 | 0.013 | 12.2 | 2 200 | 2 900 | 10 | 5 |
| 9 | 14 | 8.5 | 10 | 500 | 32 | 250 | 26.4 | 100 | 850 | -0.012 | 0.027 | 0.020 | 0.065 | 0.019 | 0.013 | 8.9 | 5 000 | 5 000 | 43 | 22 |
| 9 | 14 | 8.5 | 10 | 700 | 32 | 250 | 26.4 | 100 | 1050 | -0.017 | 0.035 | 0.025 | 0.080 | 0.019 | 0.013 | 10.0 | 5 000 | 5 000 | 43 | 22 |
| 9 | 14 | 8.5 | 10 | 1 050 | 32 | 300 | 26.4 | 100 | 1450 | -0.025 | 0.046 | 0.030 | 0.100 | 0.019 | 0.013 | 12.2 | 4 100 | 5 000 | 43 | 22 |
| 9 | 14 | 8.5 | 10 | 1 450 | 32 | 300 | 26.4 | 100 | 1850 | -0.035 | 0.054 | 0.035 | 0.130 | 0.019 | 0.013 | 14.3 | 2 100 | 2 800 | 43 | 22 |
| 9 | 14 | 8.5 | 10 | 1 850 | 32 | 300 | 26.4 | 100 | 2250 | -0.045 | 0.065 | 0.040 | 0.170 | 0.019 | 0.013 | 16.5 | 1 200 | 1 700 | 43 | 22 |

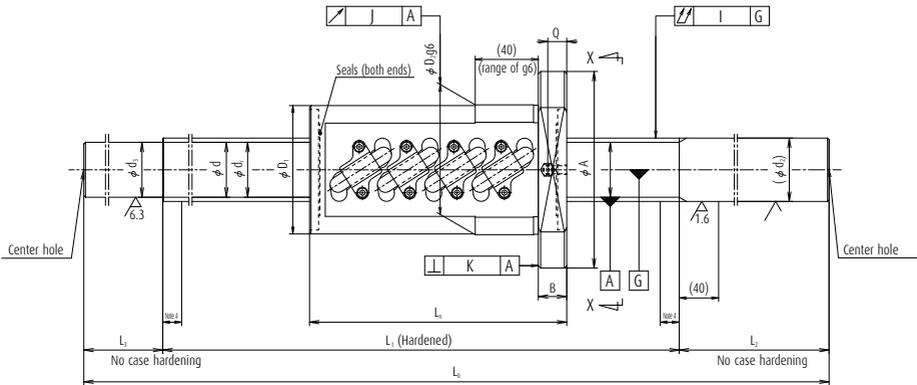


| Reference No. | Screw shaft dia. d | Lead I | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N·cm) | Ball nut dimensions | | | | | | | |
|----------------|--------------------|--------|--------------------------|---------------------------------|--------------------------|----------------------------------|------------------------|------------------------|-------------|--|---------------------|----------------|--------|----|------|----|----------------|-----|
| | | | | | | | Dynamic C _a | Static C _{0a} | | | Diamete | | Flange | | | | Overall length | |
| | | | | | | | | | | | D ₁ | D ₂ | A | G | H | B | L _n | W |
| | | | | | | | | | | | | | | | | | | |
| HSS4010N1D0950 | 40 | 10 | 6.350 | 41.0 | 34.4 | 2.5×2 | 61 200 | 137 000 | 2 600 | 74.5 | 81 | 82 | 124 | 47 | 61.5 | 18 | 163 | 102 |
| HSS4010N1D1450 | 40 | 10 | 6.350 | 41.0 | 34.4 | 2.5×2 | 61 200 | 137 000 | 2 600 | 74.5 | 81 | 82 | 124 | 47 | 61.5 | 18 | 163 | 102 |
| HSS4010N1D2100 | 40 | 10 | 6.350 | 41.0 | 34.4 | 2.5×2 | 61 200 | 137 000 | 2 600 | 74.5 | 81 | 82 | 124 | 47 | 61.5 | 18 | 163 | 102 |
| HSS4010N1D2900 | 40 | 10 | 6.350 | 41.0 | 34.4 | 2.5×2 | 61 200 | 137 000 | 2 600 | 74.5 | 81 | 82 | 124 | 47 | 61.5 | 18 | 163 | 102 |
| HSS4012N1D1450 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 3 050 | 96.0 | 85 | 86 | 128 | 48 | 61.5 | 18 | 187 | 106 |
| HSS4012N1D2100 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 3 050 | 96.0 | 85 | 86 | 128 | 48 | 63.5 | 18 | 187 | 106 |
| HSS4012N1D2900 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 3 050 | 96.0 | 85 | 86 | 128 | 48 | 63.5 | 18 | 187 | 106 |

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B389 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.


Nut models: ZFRC

Screw shaft $\phi 40$
Lead 10, 12

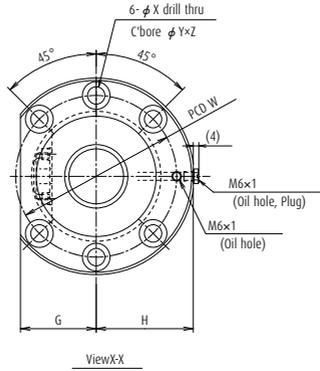


Unit: mm

| Bolt hole | | | | Screw shaft dimension | | | | | | | Lead accuracy | | | Run-out | | | Permissible rotational speed (min ⁻¹) | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-----------|------|----|----|-----------------------|-----------------|-----------------|----------------|----------------|----------------|--------|----------------|----------------|---------------------|-----------|-----------|--------------------|---|-------------------------|---|---|
| | | | | Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | |
| X | Y | Z | Q | L _n | d ₂ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | (kg) | Fixed-Free support | Fixed-Fixed support | | |
| 11 | 17.5 | 11 | 12 | 600 | 40 | 250 | 34.4 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.050 | 0.025 | 0.015 | 13.5 | 4 000 | 4 000 | 52 | 26 |
| 11 | 17.5 | 11 | 12 | 1 050 | 40 | 300 | 34.4 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 17.9 | 4 000 | 4 000 | 52 | 26 |
| 11 | 17.5 | 11 | 12 | 1 600 | 40 | 350 | 34.4 | 150 | 2 100 | -0.039 | 0.054 | 0.035 | 0.110 | 0.025 | 0.015 | 23.5 | 2 200 | 3 000 | 52 | 26 |
| 11 | 17.5 | 11 | 12 | 2 400 | 40 | 350 | 34.4 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 30.5 | 900 | 1 300 | 52 | 26 |
| 11 | 17.5 | 11 | 12 | 1 050 | 40 | 300 | 34.1 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 19.1 | 4 000 | 4 000 | 67 | 34 |
| 11 | 17.5 | 11 | 12 | 1 600 | 40 | 350 | 34.1 | 150 | 2 100 | -0.039 | 0.054 | 0.035 | 0.110 | 0.025 | 0.015 | 24.8 | 2 200 | 3 000 | 67 | 34 |
| 11 | 17.5 | 11 | 12 | 2 400 | 40 | 350 | 34.1 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 31.8 | 900 | 1 300 | 67 | 34 |

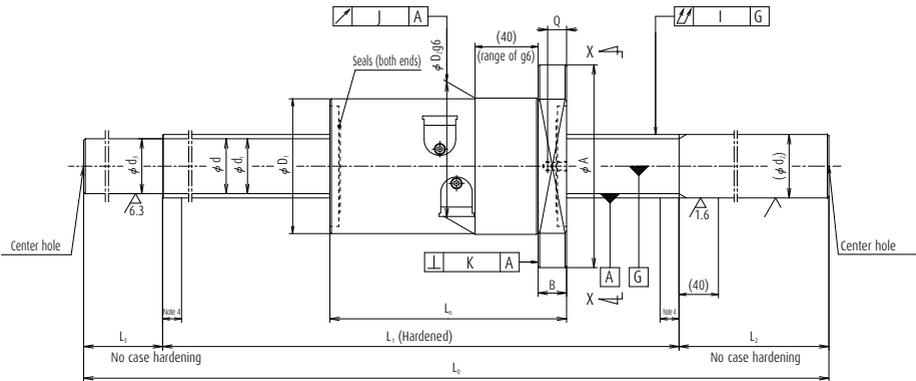


| Reference No. | Screw shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N·cm) | Ball nut dimensions | | | | | | | |
|----------------|--------------------|--------|--------------------------|---------------------------------|--------------------------|----------------------------------|------------------------|------------------------|-------------|--|---------------------|----------------|--------|----|------|----|----------------|-----|
| | | | | | | | Dynamic C _a | Static C _{0a} | | | Diamete | | Flange | | | | Overall length | |
| | | | | | | | | | | | D ₁ | D ₂ | A | G | H | B | L _n | W |
| HSS4016N1D1450 | 40 | 16 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 104.0 | 85 | 86 | 128 | 48 | 63.5 | 18 | 160 | 106 |
| HSS4016N1D2100 | 40 | 16 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 104.0 | 85 | 86 | 128 | 48 | 63.5 | 18 | 160 | 106 |
| HSS4016N1D2900 | 40 | 16 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 104.0 | 85 | 86 | 128 | 48 | 63.5 | 18 | 160 | 106 |
| HSS4020N1D1450 | 40 | 20 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 116.5 | 85 | 86 | 128 | 48 | 63.5 | 18 | 192 | 106 |
| HSS4020N1D2100 | 40 | 20 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 116.5 | 85 | 86 | 128 | 48 | 63.5 | 18 | 192 | 106 |
| HSS4020N1D2900 | 40 | 20 | 7.144 | 41.5 | 34.1 | 3.7×1 | 66 900 | 131 000 | 2 850 | 116.5 | 85 | 86 | 128 | 48 | 63.5 | 18 | 192 | 106 |

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B389 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

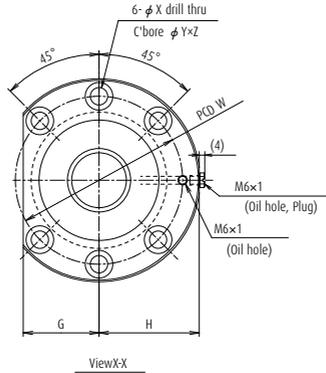


Unit: mm

| | | | | Screw shaft dimension | | | | | | Lead accuracy | | | Run-out | | | Permissible rotational speed (min ⁻¹) | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | |
|-----------|------|----------|-----------------|-----------------------|----------------|----------------|----------------|----------------|---------------------|---------------|----------------|--------------------|-----------------------|-------------------------|-----------|---|--------------------|---|---|---------------------|
| Bolt hole | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | Mass (kg) | Installation | | | | |
| X | Y | Z | Q | L _n | d ₂ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | υ _u | I | J | | K | Fixed-Free support | | | Fixed-Fixed support |
| 11 | 17.5 | 11 | 11 | 1 050 | 40 | 300 | 34.1 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 19.2 | 4 000 | 4 000 | 40 | 20 |
| 11 | 17.5 | 11 | 11 | 1 600 | 40 | 350 | 34.1 | 150 | 2 100 | -0.039 | 0.054 | 0.035 | 0.110 | 0.025 | 0.015 | 25.0 | 2 200 | 3 000 | 40 | 20 |
| 11 | 17.5 | 11 | 11 | 2 400 | 40 | 350 | 34.1 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 32.2 | 900 | 1 300 | 40 | 20 |
| 11 | 17.5 | 11 | 11 | 1 050 | 40 | 300 | 34.1 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 20.3 | 4 000 | 4 000 | 57 | 24 |
| 11 | 17.5 | 11 | 11 | 1 600 | 40 | 350 | 34.1 | 150 | 2 100 | -0.039 | 0.054 | 0.035 | 0.110 | 0.025 | 0.015 | 26.8 | 2 200 | 3 000 | 57 | 24 |
| 11 | 17.5 | 11 | 11 | 2 400 | 40 | 350 | 34.1 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 33.5 | 900 | 1 300 | 57 | 24 |

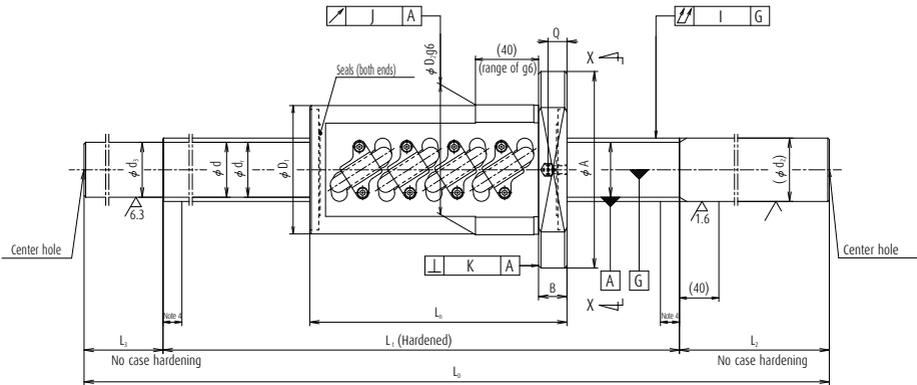

| Reference No. | Screw shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N·cm) | Ball nut dimensions | | | | | | | |
|----------------|--------------------|--------|--------------------------|---------------------------------|--------------------------|----------------------------------|------------------------|------------------------|-------------|--|---------------------|----------------|--------|----|------|----|----------------|-----|
| | | | | | | | Dynamic C _a | Static C _{0a} | | | Diamete | | Flange | | | | Overall length | |
| | | | | | | | | | | | D ₁ | D ₂ | A | G | H | B | L _n | W |
| | | | | | | | | | | | | | | | | | | |
| HSS4510N1D1450 | 45 | 10 | 6.350 | 46.0 | 39.4 | 2.5×2 | 65 800 | 157 000 | 2 710 | 82.0 | 87 | 88 | 132 | 50 | 65.5 | 18 | 163 | 110 |
| HSS4510N1D2100 | 45 | 10 | 6.350 | 46.0 | 39.4 | 2.5×2 | 65 800 | 157 000 | 2 710 | 82.0 | 87 | 88 | 132 | 50 | 65.5 | 18 | 163 | 110 |
| HSS4510N1D2900 | 45 | 10 | 6.350 | 46.0 | 39.4 | 2.5×2 | 65 800 | 157 000 | 2 710 | 82.0 | 87 | 88 | 132 | 50 | 65.5 | 18 | 163 | 110 |
| HSS5010N1D1450 | 50 | 10 | 6.350 | 51.0 | 44.4 | 2.5×2 | 68 100 | 174 000 | 2 880 | 92.0 | 92 | 93 | 135 | 51 | 67 | 18 | 163 | 113 |
| HSS5010N1D1850 | 50 | 10 | 6.350 | 51.0 | 44.4 | 2.5×2 | 68 100 | 174 000 | 2 880 | 92.0 | 92 | 93 | 135 | 51 | 67 | 18 | 163 | 113 |
| HSS5010N1D2350 | 50 | 10 | 6.350 | 51.0 | 44.4 | 2.5×2 | 68 100 | 174 000 | 2 880 | 92.0 | 92 | 93 | 135 | 51 | 67 | 18 | 163 | 113 |
| HSS5010N1D2900 | 50 | 10 | 6.350 | 51.0 | 44.4 | 2.5×2 | 68 100 | 174 000 | 2 880 | 92.0 | 92 | 93 | 135 | 51 | 67 | 18 | 163 | 113 |
| HSS5012N1D1450 | 50 | 12 | 7.938 | 51.5 | 43.2 | 2.5×2 | 91 500 | 218 000 | 3 880 | 136.5 | 99 | 100 | 146 | 55 | 72.5 | 22 | 193 | 122 |
| HSS5012N1D2100 | 50 | 12 | 7.938 | 51.5 | 43.2 | 2.5×2 | 91 500 | 218 000 | 3 880 | 136.5 | 99 | 100 | 146 | 55 | 72.5 | 22 | 193 | 122 |
| HSS5012N1D2900 | 50 | 12 | 7.938 | 51.5 | 43.2 | 2.5×2 | 91 500 | 218 000 | 3 880 | 136.5 | 99 | 100 | 146 | 55 | 72.5 | 22 | 193 | 122 |

- Notes**
1. Service temperature range is 0 to 60°C.
 2. Use of NSK support unit is recommended. See page B389 for details.
 3. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 4. Imperfect hardened areas for one lead exists on both ends of a screw. Exercise care when stroke setting.
 5. Permissible rotational speed: Calculated values obtained from the critical speed between the threaded length and NSK's recommended shaft end design. See page B27.

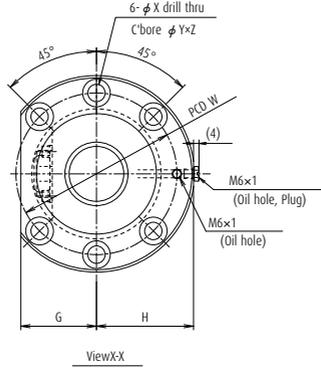

Unit: mm

| Bolt hole | | Screw shaft dimension | | | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed (min ⁻¹) | | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|-----------|------|-----------------------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------|----------------|-----------|--------------------|-----------------------|-------------------------|--------------------|---|----|---|---|
| | | Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | Installation | | | |
| X | Y | Z | Q | L _n | d ₂ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | Fixed-Free support | Fixed-Fixed support | | | |
| 11 | 17.5 | 11 | 12 | 1 050 | 45 | 300 | 39.4 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 22.0 | 3 500 | 3 500 | 58 | 29 | |
| 11 | 17.5 | 11 | 12 | 1 600 | 45 | 350 | 39.4 | 150 | 2 100 | -0.039 | 0.054 | 0.035 | 0.110 | 0.025 | 0.015 | 29.2 | 2 500 | 3 400 | 58 | 29 | |
| 11 | 17.5 | 11 | 12 | 2 400 | 45 | 350 | 39.4 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 38.2 | 1 100 | 1 500 | 58 | 29 | |
| 11 | 17.5 | 11 | 12 | 1 050 | 50 | 300 | 44.4 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 26.3 | 3 200 | 3 200 | 64 | 32 | |
| 11 | 17.5 | 11 | 12 | 1 450 | 50 | 300 | 44.4 | 100 | 1 850 | -0.035 | 0.054 | 0.035 | 0.090 | 0.025 | 0.015 | 31.9 | 3 200 | 3 200 | 64 | 32 | |
| 11 | 17.5 | 11 | 12 | 1 850 | 50 | 350 | 44.4 | 150 | 2 350 | -0.045 | 0.065 | 0.040 | 0.110 | 0.025 | 0.015 | 38.8 | 2 100 | 2 900 | 64 | 32 | |
| 11 | 17.5 | 11 | 12 | 2 400 | 50 | 350 | 44.4 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 46.5 | 1 200 | 1 700 | 64 | 32 | |
| 14 | 20 | 13 | 12 | 1 050 | 50 | 300 | 43.2 | 100 | 1 450 | -0.025 | 0.046 | 0.030 | 0.070 | 0.025 | 0.015 | 28.5 | 3 200 | 3 200 | 99 | 50 | |
| 14 | 20 | 13 | 12 | 1 600 | 50 | 350 | 43.2 | 150 | 2 100 | -0.039 | 0.035 | 0.035 | 0.110 | 0.025 | 0.015 | 37.3 | 2 800 | 3 200 | 99 | 50 | |
| 14 | 20 | 13 | 12 | 2 400 | 50 | 350 | 43.2 | 150 | 2 900 | -0.058 | 0.077 | 0.046 | 0.140 | 0.025 | 0.015 | 48.2 | 1 200 | 1 600 | 99 | 50 | |

B-3-1.3 Finished Shaft End MA type, FA type, SA type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter of each MA, FA, and SA type ball screws, and proceeds to the larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in **Table 1**.

2. Dimension tables

Dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

> Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The limit stroke that the nut can move.
The figure is obtained by subtracting the nut length from the effective threaded length (L_1).

> Lead accuracy

Lead accuracy is either C3 or C5 grades.

T: Travel compensation

e_p : Tolerance on specified travel

ψ_U : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

Table 1 Combinations of screw shaft diameter and lead

| Screw shaft diameter (mm) \ Lead (mm) | Lead (mm) | | | | | | | |
|---------------------------------------|-----------|------|------|------|------|--------------|--------------|--|
| | 1 | 1.5 | 2 | 2.5 | 4 | 5 | 6 | |
| 4 | B159 | | | | | | | |
| 6 | B161 | | | | | | | |
| 8 | B163 | B165 | B167 | | | | | |
| 10 | | | B169 | B171 | B181 | | | |
| 12 | | | B173 | B175 | | B183 | | |
| 14 | | | | | | B187 | | |
| 15 | | | | | | | | |
| 16 | | | B177 | B179 | | B195 | | |
| 20 | | | | | B217 | B219 | | |
| 25 | | | | | B221 | B223 | B225 | |
| 28 | | | | | | B229 B239 | B233 B235 | |
| 32 | | | | | | B237 B239 | B241 B243 | |
| 36 | | | | | | | | |
| 40 | | | | | | B255 | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |

► Permissible rotational speed

- d • n: Limited by the relative peripheral speed between the screw shaft and the nut.
- Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.


The lower of the two criteria, the d-n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Other

The seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil. For special environments, see pages B70 and D2. For lubricants, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

| | 8 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 |
|------|---|--------------|--------------|------|------|------|------|------|------|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | B185 | | | | | | | |
| B189 | | B191 | | | B193 | | | | |
| | | | | B197 | | | B199 | | |
| | | B201 | | | B203 | | | B205 | |
| | | B227 | | | B207 | B209 | | | B211 |
| | | | | | | B213 | | | |
| B245 | | B247 B249 | | | | | B215 | | |
| | | B251 B253 | | | | | | | |
| B257 | | B259 B261 | B263 B265 | | | | | | |
| | | B267 | | | | | | | |
| | | B269 B271 | | | | | | | |

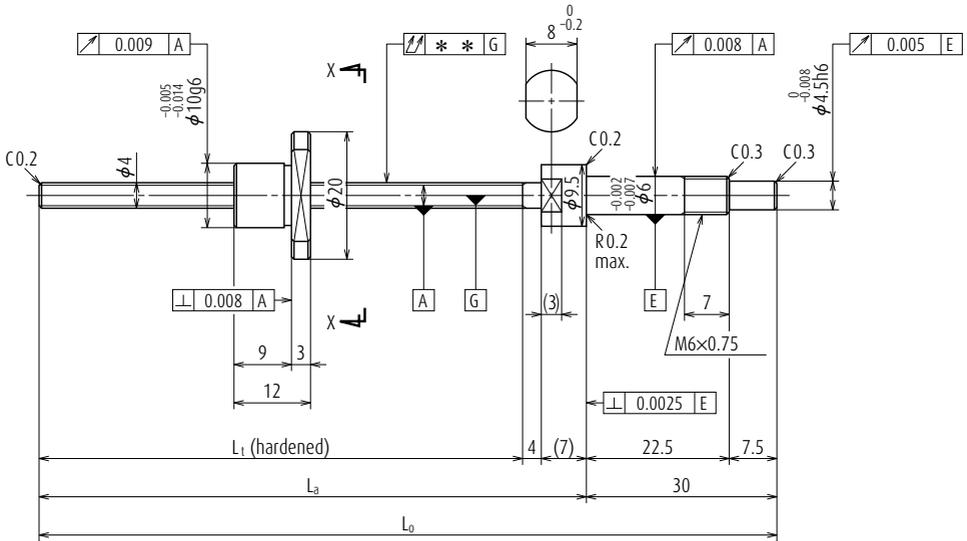


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W0400MA-1PY-C3Z1 | W0400MA-2Y-C3T1 | 20 | 32 |
| W0400MA-3PY-C3Z1 | W0400MA-4Y-C3T1 | 40 | 52 |
| W0401MA-1PY-C3Z1 | W0401MA-2Y-C3T1 | 70 | 82 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

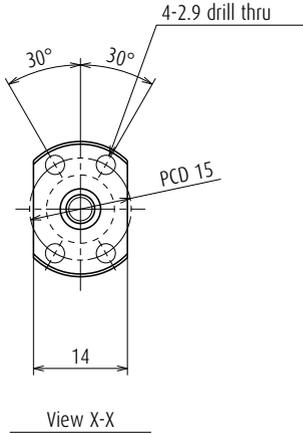

Screw shaft ϕ 4

Lead 1

Unit: mm

| Ball screw specifications | | |
|--|-------------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 4 \times 1 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge type) | |
| Ball dia. / Ball circle dia. | 0.800 / 4.2 | |
| Screw shaft root diameter | 3.2 | |
| Effective turns of balls | 1 \times 2 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 370 |
| | Static C_{0a} | 370 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 19.6 | - |
| Dynamic friction torque, (N-cm) | 1.0 or less | 0.3 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |


Recommended support unit

| For drive side (Fixed) |
|------------------------|
| WBK06-01A (square) |
| WBK06-11 (round) |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|---|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Free |
| 44 | 55 | 85 | 0 | 0.008 | 0.008 | 0.015 | 0.024 | 3 000 |
| 64 | 75 | 105 | 0 | 0.008 | 0.008 | 0.020 | 0.026 | 3 000 |
| 94 | 105 | 135 | 0 | 0.008 | 0.008 | 0.025 | 0.028 | 3 000 |

Nut models: MPFD, MSFD

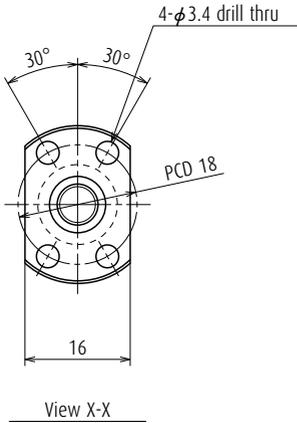

Screw shaft ϕ 6

Lead 1

Unit: mm

| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 6 \times 1 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 6.2 | |
| Screw shaft root diameter | 5.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 680 |
| | Static C_{0a} | 920 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 24.5 | - |
| Dynamic friction torque, (N-cm) | 1.3 or less | 0.3 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |


Recommended support unit

| For drive side (Fixed) |
|------------------------|
| WBK06-01A (square) |
| WBK06-11 (round) |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|------------------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Free |
| 65 | 75 | 105 | 0 | 0.008 | 0.008 | 0.015 | 0.039 | 3 000 |
| 95 | 105 | 135 | 0 | 0.008 | 0.008 | 0.020 | 0.045 | 3 000 |
| 125 | 135 | 165 | 0 | 0.010 | 0.008 | 0.025 | 0.051 | 3 000 |

Nut models: MPFD, MSFD

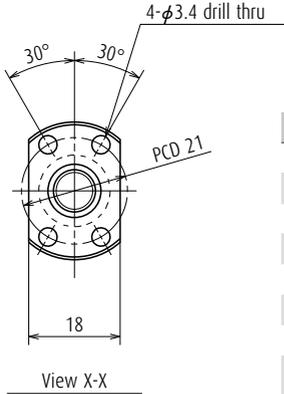

Screw shaft ϕ 8

Lead 1

Unit: mm


| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 8 \times 1 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 8.2 | |
| Screw shaft root diameter | 7.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 790 |
| | Static C_{0a} | 1 290 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 29.4 | - |
| Dynamic friction torque, (N-cm) | 1.8 or less | 0.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK08-01A (square) | WBK08S-01 (square) |
| WBK08-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|---|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 80 | 92 | 138 | 0 | 0.008 | 0.008 | 0.025 | 0.073 | 3 000 |
| 110 | 122 | 168 | 0 | 0.010 | 0.008 | 0.030 | 0.084 | 3 000 |
| 140 | 152 | 198 | 0 | 0.010 | 0.008 | 0.030 | 0.095 | 3 000 |
| 190 | 202 | 248 | 0 | 0.010 | 0.008 | 0.035 | 0.11 | 3 000 |

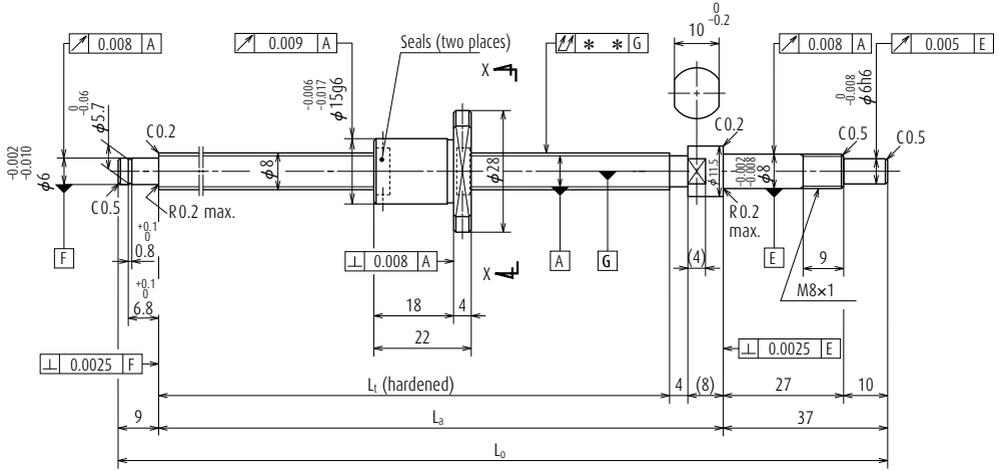


| Ball screw No. | | Stroke | |
|--------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W0800MA-3PY-C3Z1.5 | W0800MA-4Y-C3T1.5 | 40 | 53 |
| W0801MA-5PY-C3Z1.5 | W0801MA-6Y-C3T1.5 | 70 | 83 |
| W0801MA-7PY-C3Z1.5 | W0801MA-8Y-C3T1.5 | 100 | 113 |
| W0802MA-3PY-C3Z1.5 | W0802MA-4Y-C3T1.5 | 150 | 163 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

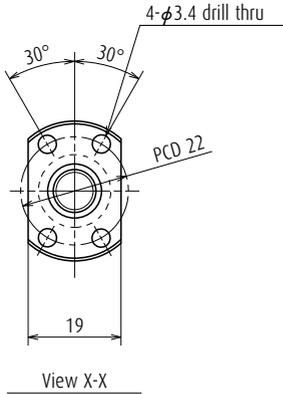

Screw shaft ϕ 8

Lead 1.5

Unit: mm

| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 8 \times 1.5 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.000 / 8.3 | |
| Screw shaft root diameter | 7.0 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 1 270 |
| | Static C_{0a} | 1 970 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 49.0 | - |
| Dynamic friction torque, (N-cm) | 2.0 or less | 0.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK08-01A (square) | WBK08S-01 (square) |
| WBK08-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|------------------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 80 | 92 | 138 | 0 | 0.008 | 0.008 | 0.025 | 0.082 | 3 000 |
| 110 | 122 | 168 | 0 | 0.010 | 0.008 | 0.030 | 0.093 | 3 000 |
| 140 | 152 | 198 | 0 | 0.010 | 0.008 | 0.030 | 0.10 | 3 000 |
| 190 | 202 | 248 | 0 | 0.010 | 0.008 | 0.035 | 0.12 | 3 000 |

Nut models: MPFD, MSFD

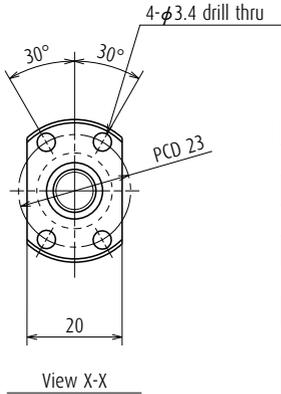

Screw shaft ϕ 8

Lead 2

Unit: mm


| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 8 \times 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 8.3 | |
| Screw shaft root diameter | 6.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 1 560 |
| | Static C_{0a} | 2 200 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 49.0 | - |
| Dynamic friction torque, (N-cm) | 2.0 or less | 0.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK08-01A (square) | WBK08S-01 (square) |
| WBK08-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|------------------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 80 | 92 | 138 | 0 | 0.008 | 0.008 | 0.025 | 0.09 | 3 000 |
| 110 | 122 | 168 | 0 | 0.010 | 0.008 | 0.030 | 0.10 | 3 000 |
| 140 | 152 | 198 | 0 | 0.010 | 0.008 | 0.030 | 0.11 | 3 000 |
| 190 | 202 | 248 | 0 | 0.010 | 0.008 | 0.035 | 0.13 | 3 000 |

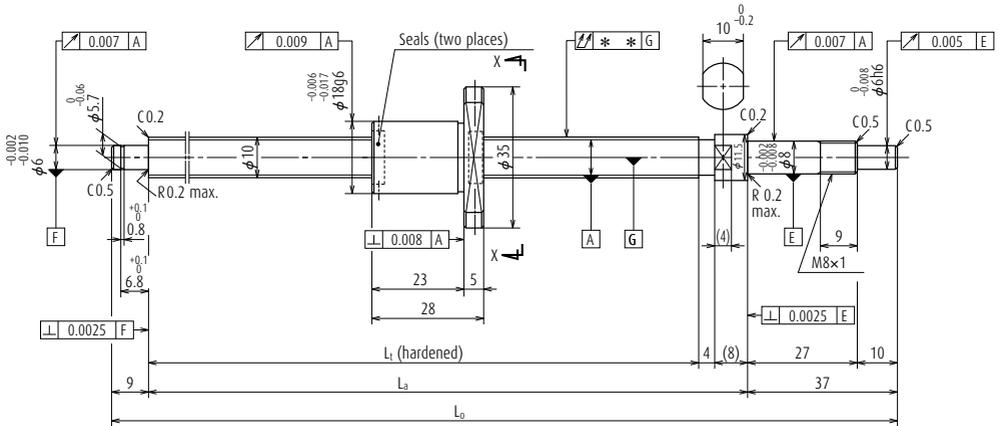


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W1001MA-1PY-C3Z2 | W1001MA-2Y-C3T2 | 50 | 67 |
| W1001MA-3PY-C3Z2 | W1001MA-4Y-C3T2 | 100 | 117 |
| W1002MA-1PY-C3Z2 | W1002MA-2Y-C3T2 | 150 | 167 |
| W1002MA-3PY-C3Z2 | W1002MA-4Y-C3T2 | 200 | 217 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

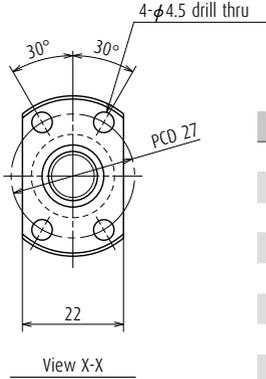

Screw shaft ϕ 10

Lead 2

Unit: mm

| Ball screw specifications | | |
|---------------------------------------|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 10 × 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 10.3 | |
| Screw shaft root diameter | 8.9 | |
| Effective turns of balls | 1 × 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 1 800 |
| | Static C_{0a} | 2 970 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 58.8 | - |
| Dynamic friction torque, (N-cm) | 0.1 - 2.4 | 0.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK08-01A (square) | WBK08S-01 (square) |
| WBK08-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ↗ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|-----------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 100 | 112 | 158 | 0 | 0.008 | 0.008 | 0.020 | 0.13 | 3 000 |
| 150 | 162 | 208 | 0 | 0.010 | 0.008 | 0.030 | 0.16 | 3 000 |
| 200 | 212 | 258 | 0 | 0.010 | 0.008 | 0.030 | 0.19 | 3 000 |
| 250 | 262 | 308 | 0 | 0.012 | 0.008 | 0.035 | 0.22 | 3 000 |

Nut models: MPFD, MSFD

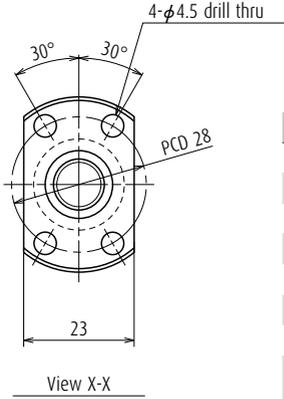

Screw shaft ϕ 10

Lead 2.5

Unit: mm


| Ball screw specifications | | |
|---------------------------------------|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 10 × 2.5 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.588 / 10.4 | |
| Screw shaft root diameter | 8.6 | |
| Effective turns of balls | 1 × 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 2 500 |
| | Static C_{0a} | 3 630 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 98.1 | - |
| Dynamic friction torque, (N-cm) | 0.2 - 2.9 | 0.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK08-01A (square) | WBK08S-01 (square) |
| WBK08-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|---|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 100 | 112 | 158 | 0 | 0.008 | 0.008 | 0.020 | 0.14 | 3 000 |
| 150 | 162 | 208 | 0 | 0.010 | 0.008 | 0.030 | 0.17 | 3 000 |
| 200 | 212 | 258 | 0 | 0.010 | 0.008 | 0.030 | 0.20 | 3 000 |
| 250 | 262 | 308 | 0 | 0.012 | 0.008 | 0.030 | 0.23 | 3 000 |

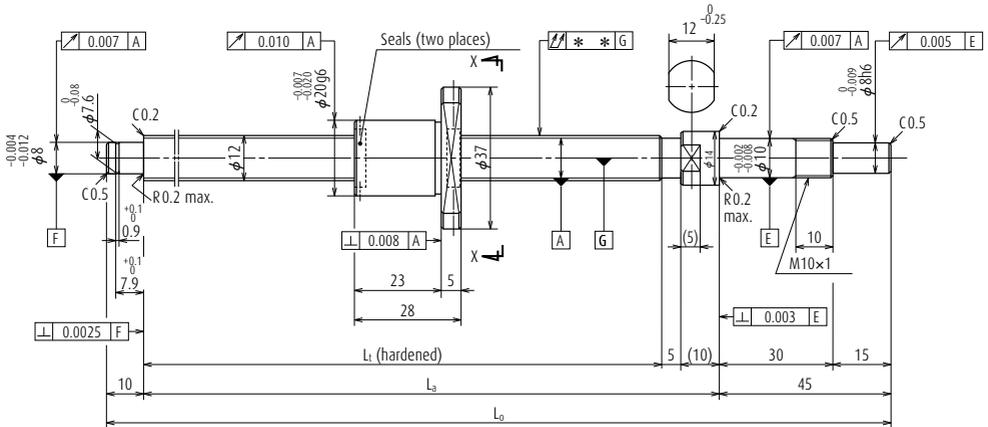


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W1201MA-1PY-C3Z2 | W1201MA-2Y-C3T2 | 50 | 75 |
| W1201MA-3PY-C3Z2 | W1201MA-4Y-C3T2 | 100 | 125 |
| W1202MA-1PY-C3Z2 | W1202MA-2Y-C3T2 | 150 | 175 |
| W1202MA-3PY-C3Z2 | W1202MA-4Y-C3T2 | 200 | 225 |
| W1203MA-1PY-C3Z2 | W1203MA-2Y-C3T2 | 250 | 275 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

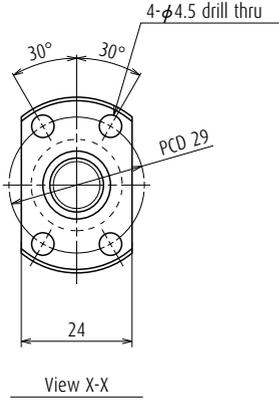

Screw shaft ϕ 12

Lead 2

Unit: mm


| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 12 \times 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 12.3 | |
| Screw shaft root diameter | 10.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 1 960 |
| | Static C_{0a} | 3 620 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 98.1 | - |
| Dynamic friction torque, (N-cm) | 0.4 - 3.4 | 1.0 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK10-01A (square) | WBK10S-01 (square) |
| WBK10-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|---|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 110 | 125 | 180 | 0 | 0.010 | 0.008 | 0.020 | 0.20 | 3 000 |
| 160 | 175 | 230 | 0 | 0.010 | 0.008 | 0.030 | 0.24 | 3 000 |
| 210 | 225 | 280 | 0 | 0.012 | 0.008 | 0.030 | 0.28 | 3 000 |
| 260 | 275 | 330 | 0 | 0.012 | 0.008 | 0.040 | 0.32 | 3 000 |
| 310 | 325 | 380 | 0 | 0.012 | 0.008 | 0.040 | 0.36 | 3 000 |

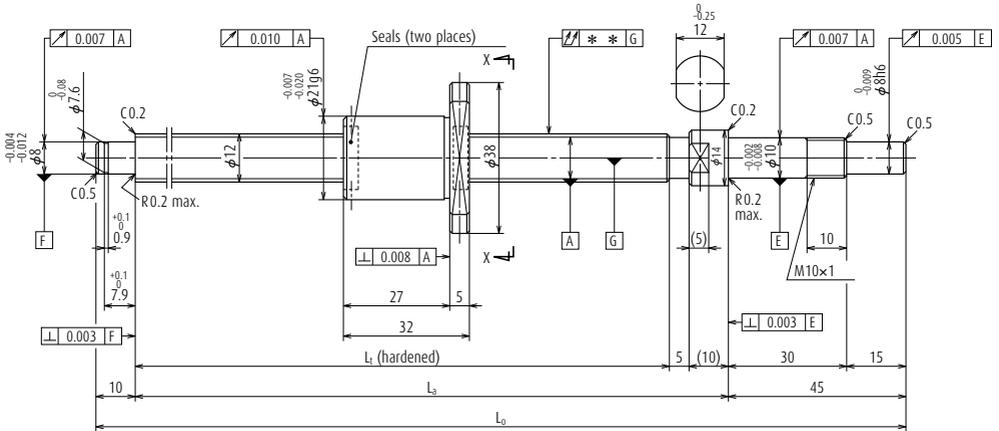


| Ball screw No. | | Stroke | |
|--------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W1201MA-5PY-C3Z2.5 | W1201MA-6Y-C3T2.5 | 50 | 71 |
| W1201MA-7PY-C3Z2.5 | W1201MA-8Y-C3T2.5 | 100 | 121 |
| W1202MA-5PY-C3Z2.5 | W1202MA-6Y-C3T2.5 | 150 | 171 |
| W1202MA-7PY-C3Z2.5 | W1202MA-8Y-C3T2.5 | 200 | 221 |
| W1203MA-3PY-C3Z2.5 | W1203MA-4Y-C3T2.5 | 250 | 271 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Apply to screw shaft surface when replenishing. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: MPFD, MSFD

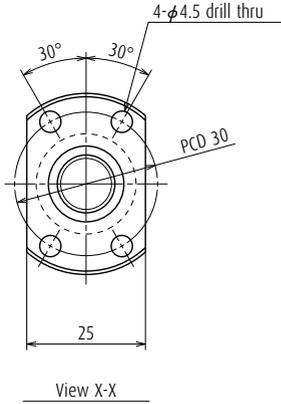

Screw shaft ϕ 12
Lead 2.5

Unit: mm

| Ball screw specifications | | |
|--|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 12 \times 2.5 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.588 / 12.4 | |
| Screw shaft root diameter | 10.6 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 2 790 |
| | Static C_{0a} | 4 530 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 98.1 | - |
| Dynamic friction torque, (N-cm) | 0.4 - 3.4 | 1.0 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK10-01A (square) | WBK10S-01 (square) |
| WBK10-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|---|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 110 | 125 | 180 | 0 | 0.010 | 0.008 | 0.020 | 0.21 | 3 000 |
| 160 | 175 | 230 | 0 | 0.010 | 0.008 | 0.030 | 0.25 | 3 000 |
| 210 | 225 | 280 | 0 | 0.012 | 0.008 | 0.030 | 0.29 | 3 000 |
| 260 | 275 | 330 | 0 | 0.012 | 0.008 | 0.040 | 0.33 | 3 000 |
| 310 | 325 | 380 | 0 | 0.012 | 0.008 | 0.040 | 0.37 | 3 000 |

Nut models: MPFD, MSFD

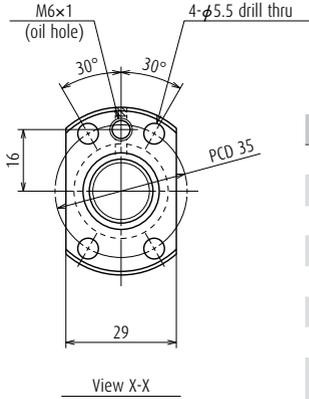

Screw shaft $\phi 16$

Lead 2

Unit: mm


| Ball screw specifications | | |
|---|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 16 \times 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.588 / 16.4 | |
| Screw shaft root diameter | 14.6 | |
| Effective turns of balls | 1 \times 4 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 4 150 |
| | Static C_{0a} | 8 450 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 147 | - |
| Dynamic friction torque, (N-cm) | 0.5 - 4.9 | 1.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |
| Internal spatial volume of nut (cm ³) | 1.6 | |
| Standard volume of grease replenishing (cm ³) | 0.8 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 139 | 154 | 221 | 0 | 0.010 | 0.008 | 0.020 | 0.41 | 3 000 | 3 000 |
| 189 | 204 | 271 | 0 | 0.010 | 0.008 | 0.030 | 0.48 | 3 000 | 3 000 |
| 239 | 254 | 321 | 0 | 0.012 | 0.008 | 0.030 | 0.55 | 3 000 | 3 000 |
| 289 | 304 | 371 | 0 | 0.012 | 0.008 | 0.030 | 0.62 | 3 000 | 3 000 |
| 389 | 404 | 471 | 0 | 0.013 | 0.010 | 0.035 | 0.77 | 3 000 | 3 000 |

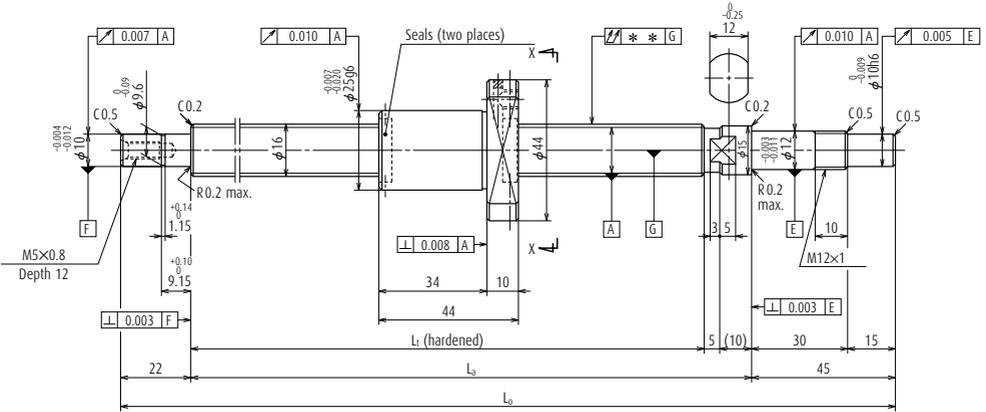


| Ball screw No. | | Stroke | |
|--------------------|--------------------------|---------|---------|
| Preloaded (MPFD) | Precise clearance (MSFD) | Nominal | Maximum |
| W1601MA-5PY-C3Z2.5 | W1601MA-6Y-C3T2.5 | 50 | 89 |
| W1601MA-7PY-C3Z2.5 | W1601MA-8Y-C3T2.5 | 100 | 139 |
| W1602MA-5PY-C3Z2.5 | W1602MA-6Y-C3T2.5 | 150 | 189 |
| W1602MA-7PY-C3Z2.5 | W1602MA-8Y-C3T2.5 | 200 | 239 |
| W1603MA-3PY-C3Z2.5 | W1603MA-4Y-C3T2.5 | 300 | 339 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut models: MPFD, MSFD

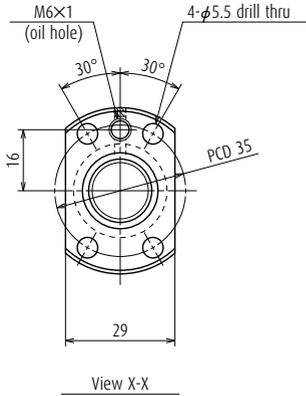

Screw shaft ϕ 16
Lead 2.5

Unit: mm

| Ball screw specifications | | |
|---|--------------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 16 × 2.5 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.588 / 16.4 | |
| Screw shaft root diameter | 14.6 | |
| Effective turns of balls | 1 × 4 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 4 150 |
| | Static C_{0a} | 8 440 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 147 | - |
| Dynamic friction torque, (N-cm) | 0.5 - 4.9 | 1.5 or less |
| Spacer ball | None | |
| Factory-packed grease | NSK grease PS2 | |
| Internal spatial volume of nut (cm ³) | 1.6 | |
| Standard volume of grease replenishing (cm ³) | 0.8 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 139 | 154 | 221 | 0 | 0.010 | 0.008 | 0.020 | 0.42 | 3 000 | 3 000 |
| 189 | 204 | 271 | 0 | 0.010 | 0.008 | 0.020 | 0.49 | 3 000 | 3 000 |
| 239 | 254 | 321 | 0 | 0.012 | 0.008 | 0.030 | 0.57 | 3 000 | 3 000 |
| 289 | 304 | 371 | 0 | 0.012 | 0.008 | 0.030 | 0.64 | 3 000 | 3 000 |
| 389 | 404 | 471 | 0 | 0.013 | 0.010 | 0.035 | 0.79 | 3 000 | 3 000 |

Nut models: PFT, SFT

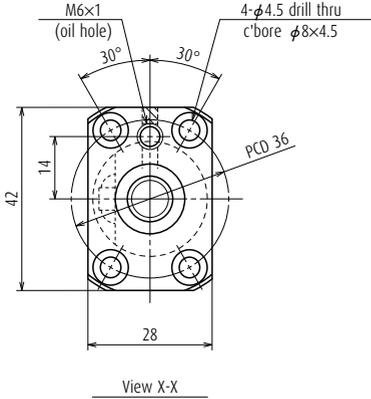

Screw shaft $\phi 10$

Lead 4

Unit: mm

| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 10 × 4 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.000 / 10.3 | |
| Screw shaft root diameter | 8.2 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 2 020 |
| | Static C_{0a} | 2 210 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 98.1 | - |
| Dynamic friction torque, (N-cm) | 0.5 - 3.9 | 1.0 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease PS2 | |
| Internal spatial volume of nut (cm ³) | 0.8 | |
| Standard volume of grease replenishing (cm ³) | 0.4 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK10-01A (square) | WBK10S-01 (square) |
| WBK10-11 (round) | |

Unit: mm


| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 110 | 125 | 180 | 0 | 0.010 | 0.008 | 0.020 | 0.26 | 3 000 |
| 160 | 175 | 230 | 0 | 0.010 | 0.008 | 0.030 | 0.28 | 3 000 |
| 210 | 225 | 280 | 0 | 0.012 | 0.008 | 0.030 | 0.31 | 3 000 |
| 260 | 275 | 330 | 0 | 0.012 | 0.008 | 0.040 | 0.34 | 3 000 |
| 310 | 325 | 380 | 0 | 0.012 | 0.008 | 0.040 | 0.37 | 3 000 |
| 360 | 375 | 430 | 0 | 0.013 | 0.010 | 0.050 | 0.39 | 3 000 |

Nut models: PFT, SFT

Screw shaft $\phi 12$

Lead 5

Unit: mm

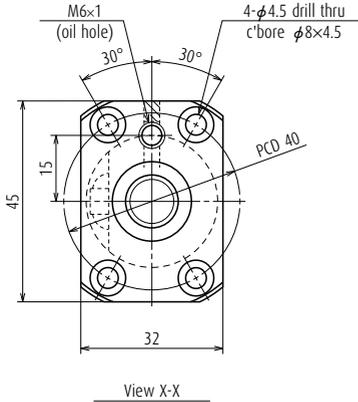

Ball screw specifications


| Product classification | | Preloaded | Precise clearance |
|---|------------------------|-------------------------|-------------------|
| Shaft dia. × Lead / Direction of turn | | 12 × 5 / Right | |
| Preload / Ball recirculation | | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | | 2.381 / 12.3 | |
| Screw shaft root diameter | | 9.8 | |
| Effective turns of balls | | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C _a | 2 770 | 4 390 |
| | Static C _{0a} | 3 130 | 6 260 |
| Axial play | | 0 | 0.005 or less |
| Preload (N) | | 98.1 | - |
| Dynamic friction torque, (N·cm) | | 1.0 - 4.4 | 1.0 or less |
| Spacer ball | | Yes | None |
| Factory-packed grease | | NSK grease PS2 | |
| Internal spatial volume of nut (cm ³) | | 1.2 | |
| Standard volume of grease replenishing (cm ³) | | 0.6 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK10-01A (square) | WBK10S-01 (square) |
| WBK10-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|----------------|----------------|---------------|----------------|----------------|------------------|-----------|---|
| L _t | L _a | L ₀ | T | e _p | v _u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 110 | 125 | 180 | 0 | 0.010 | 0.008 | 0.020 | 0.35 | 3 000 |
| 160 | 175 | 230 | 0 | 0.010 | 0.008 | 0.030 | 0.38 | 3 000 |
| 210 | 225 | 280 | 0 | 0.012 | 0.008 | 0.030 | 0.42 | 3 000 |
| 260 | 275 | 330 | 0 | 0.012 | 0.008 | 0.040 | 0.46 | 3 000 |
| 310 | 325 | 380 | 0 | 0.012 | 0.008 | 0.040 | 0.50 | 3 000 |
| 410 | 425 | 480 | 0 | 0.015 | 0.010 | 0.050 | 0.58 | 3 000 |
| 510 | 525 | 580 | 0 | 0.016 | 0.012 | 0.065 | 0.66 | 3 000 |

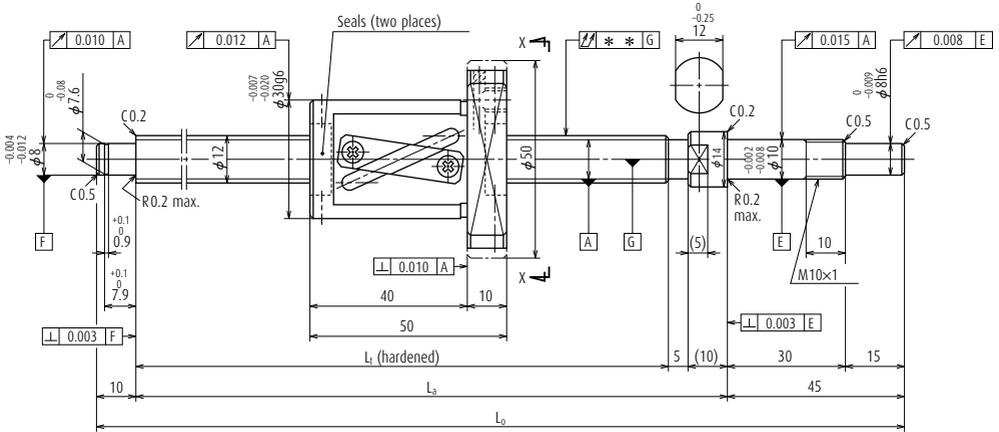


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W1201FA-5P-C5Z10 | W1201FA-6-C5T10 | 100 | 103 |
| W1202FA-5P-C5Z10 | W1202FA-6-C5T10 | 150 | 153 |
| W1203FA-3P-C5Z10 | W1203FA-4-C5T10 | 250 | 253 |
| W1204FA-3P-C5Z10 | W1204FA-4-C5T10 | 350 | 353 |
| W1205FA-3P-C5Z10 | W1205FA-4-C5T10 | 450 | 453 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

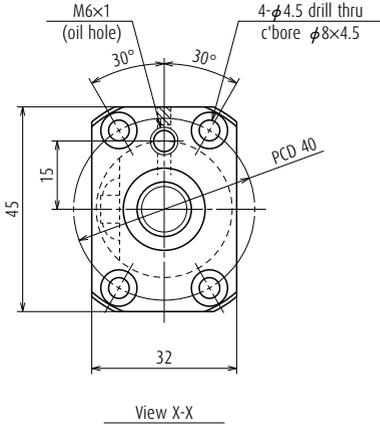

Screw shaft $\phi 12$

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 12 × 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 12.5 | |
| Screw shaft root diameter | 10.0 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 2 790 |
| | Static C_{0a} | 3 220 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 98.1 | - |
| Dynamic friction torque, (N-cm) | 1.0 - 4.9 | 1.5 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 1.4 | |
| Standard volume of grease replenishing (cm ³) | 0.7 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK10-01A (square) | WBK10S-01 (square) |
| WBK10-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition |
| | | | | | | | | Fixed - Simple support |
| 160 | 175 | 230 | 0 | 0.020 | 0.018 | 0.035 | 0.43 | 3 000 |
| 210 | 225 | 280 | 0 | 0.023 | 0.018 | 0.035 | 0.47 | 3 000 |
| 310 | 325 | 380 | 0 | 0.023 | 0.018 | 0.050 | 0.56 | 3 000 |
| 410 | 425 | 480 | 0 | 0.027 | 0.020 | 0.060 | 0.64 | 3 000 |
| 510 | 525 | 580 | 0 | 0.030 | 0.023 | 0.075 | 0.72 | 3 000 |

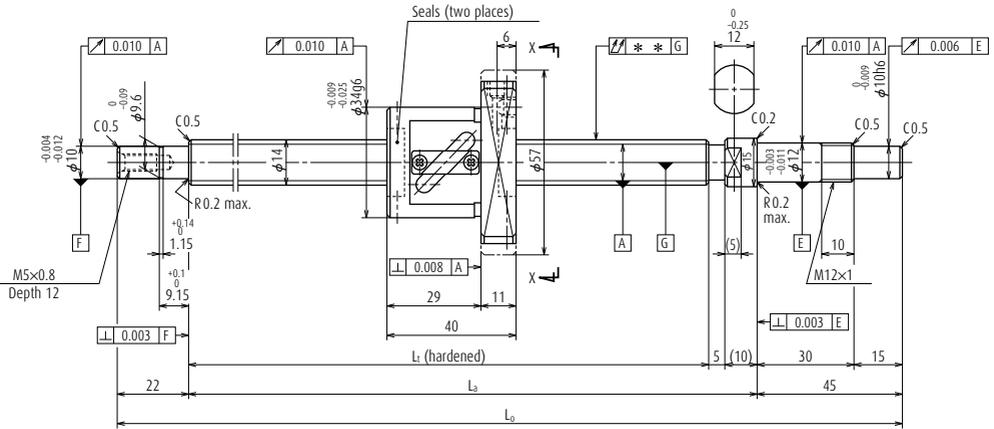


| Ball screw No. | | Stroke | |
|-----------------|-------------------------|---------|---------|
| Preloaded (PFT) | Precise clearance (SFT) | Nominal | Maximum |
| W1401FA-1P-C3Z5 | W1401FA-2-C3T5 | 100 | 143 |
| W1402FA-1P-C3Z5 | W1402FA-2-C3T5 | 150 | 193 |
| W1403FA-1P-C3Z5 | W1403FA-2-C3T5 | 250 | 293 |
| W1404FA-1P-C3Z5 | W1404FA-2-C3T5 | 350 | 393 |
| W1405FA-1P-C3Z5 | W1405FA-2-C3T5 | 450 | 493 |
| W1406FA-1P-C3Z5 | W1406FA-2-C3T5 | 600 | 643 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease PS2 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: PFT, SFT

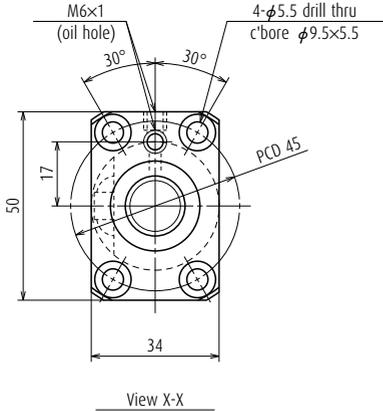

Screw shaft $\phi 14$

Lead 5

Unit: mm

| Ball screw specifications | | | |
|---|-------------------------|-------------------|--------|
| Product classification | Preloaded | Precise clearance | |
| Shaft dia. × Lead / Direction of turn | 14 × 5 / Right | | |
| Preload / Ball recirculation | P-preload / Return tube | | |
| Ball dia. / Ball circle dia. | 3.175 / 14.5 | | |
| Screw shaft root diameter | 11.2 | | |
| Effective turns of balls | 2.5 × 1 | | |
| Accuracy grade / Preload / Axial play | C3 / Z | C3 / T | |
| Basic load rating (N) | Dynamic C_a | 5 020 | 7 970 |
| | Static C_{0a} | 5 970 | 11 900 |
| Axial play | 0 | 0.005 or less | |
| Preload (N) | 147 | - | |
| Dynamic friction torque, (N-cm) | 1.5 - 6.9 | 2.0 or less | |
| Spacer ball | Yes | None | |
| Factory-packed grease | NSK grease LR3 | | |
| Internal spatial volume of nut (cm ³) | 2.2 | | |
| Standard volume of grease replenishing (cm ³) | 1.1 | | |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 189 | 204 | 271 | 0 | 0.010 | 0.008 | 0.020 | 0.52 | 3 000 | 3 000 |
| 239 | 254 | 321 | 0 | 0.012 | 0.008 | 0.030 | 0.57 | 3 000 | 3 000 |
| 339 | 354 | 421 | 0 | 0.013 | 0.010 | 0.035 | 0.67 | 3 000 | 3 000 |
| 439 | 454 | 521 | 0 | 0.015 | 0.010 | 0.045 | 0.77 | 3 000 | 3 000 |
| 539 | 554 | 621 | 0 | 0.016 | 0.012 | 0.045 | 0.87 | 3 000 | 3 000 |
| 689 | 704 | 771 | 0 | 0.018 | 0.013 | 0.055 | 1.0 | 3 000 | 3 000 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

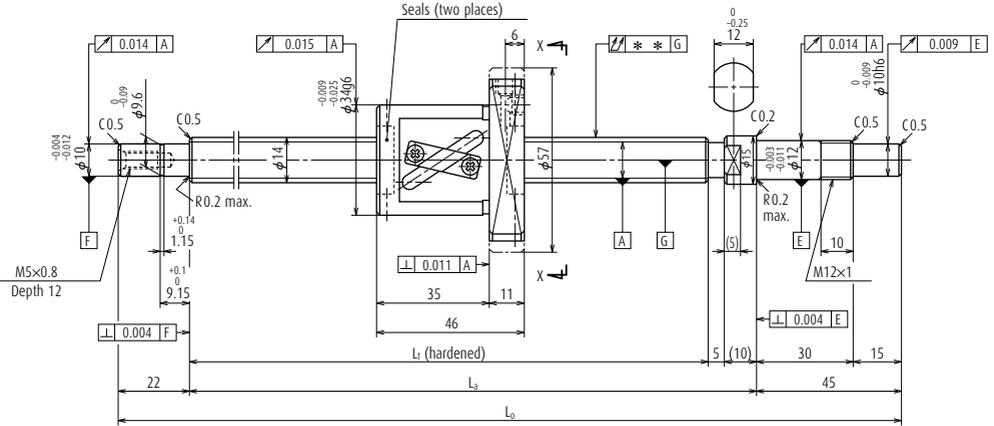


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W1401FA-3P-C5Z8 | W1401FA-4-C5T8 | 100 | 137 |
| W1402FA-3P-C5Z8 | W1402FA-4-C5T8 | 150 | 187 |
| W1402FA-5P-C5Z8 | W1402FA-6-C5T8 | 200 | 237 |
| W1403FA-3P-C5Z8 | W1403FA-4-C5T8 | 250 | 287 |
| W1403FA-5P-C5Z8 | W1403FA-6-C5T8 | 300 | 337 |
| W1404FA-3P-C5Z8 | W1404FA-4-C5T8 | 350 | 387 |
| W1404FA-5P-C5Z8 | W1404FA-6-C5T8 | 400 | 437 |
| W1405FA-3P-C5Z8 | W1405FA-4-C5T8 | 450 | 487 |
| W1405FA-5P-C5Z8 | W1405FA-6-C5T8 | 500 | 537 |
| W1406FA-3P-C5Z8 | W1406FA-4-C5T8 | 550 | 587 |
| W1406FA-5P-C5Z8 | W1406FA-6-C5T8 | 600 | 637 |
| W1407FA-1P-C5Z8 | W1407FA-2-C5T8 | 700 | 737 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

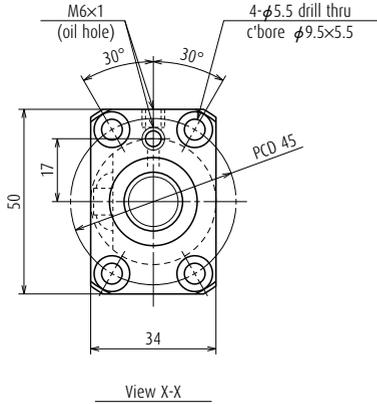

Screw shaft ϕ 14

Lead 8

Unit: mm

Ball screw specifications

| Product classification | | Preloaded | Precise clearance |
|---|-----------------|-------------------------|-------------------|
| Shaft dia. \times Lead / Direction of turn | | 14 \times 8 / Right | |
| Preload / Ball recirculation | | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | | 3.175 / 14.5 | |
| Screw shaft root diameter | | 11.2 | |
| Effective turns of balls | | 2.5 \times 1 | |
| Accuracy grade / Preload / Axial play | | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 4 960 | 7 780 |
| | Static C_{0a} | 5 920 | 11 800 |
| Axial play | | 0 | 0.005 or less |
| Preload (N) | | 147 | - |
| Dynamic friction torque, (N·cm) | | 1.5 - 7.8 | 2.4 or less |
| Spacer ball | | Yes | None |
| Factory-packed grease | | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | | 2.1 | |
| Standard volume of grease replenishing (cm ³) | | 1.1 | |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 189 | 204 | 271 | 0 | 0.020 | 0.018 | 0.025 | 0.56 | 3 000 | 3 000 |
| 239 | 254 | 321 | 0 | 0.023 | 0.018 | 0.035 | 0.61 | 3 000 | 3 000 |
| 289 | 304 | 371 | 0 | 0.023 | 0.018 | 0.035 | 0.67 | 3 000 | 3 000 |
| 339 | 354 | 421 | 0 | 0.025 | 0.020 | 0.040 | 0.72 | 3 000 | 3 000 |
| 389 | 404 | 471 | 0 | 0.025 | 0.020 | 0.040 | 0.78 | 3 000 | 3 000 |
| 439 | 454 | 521 | 0 | 0.027 | 0.020 | 0.050 | 0.83 | 3 000 | 3 000 |
| 489 | 504 | 571 | 0 | 0.027 | 0.020 | 0.050 | 0.88 | 3 000 | 3 000 |
| 539 | 554 | 621 | 0 | 0.030 | 0.023 | 0.050 | 0.94 | 3 000 | 3 000 |
| 589 | 604 | 671 | 0 | 0.030 | 0.023 | 0.065 | 0.99 | 3 000 | 3 000 |
| 639 | 654 | 721 | 0 | 0.035 | 0.025 | 0.065 | 1.0 | 3 000 | 3 000 |
| 689 | 704 | 771 | 0 | 0.035 | 0.025 | 0.065 | 1.1 | 3 000 | 3 000 |
| 789 | 804 | 871 | 0 | 0.035 | 0.025 | 0.085 | 1.2 | 2 830 | 3 000 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

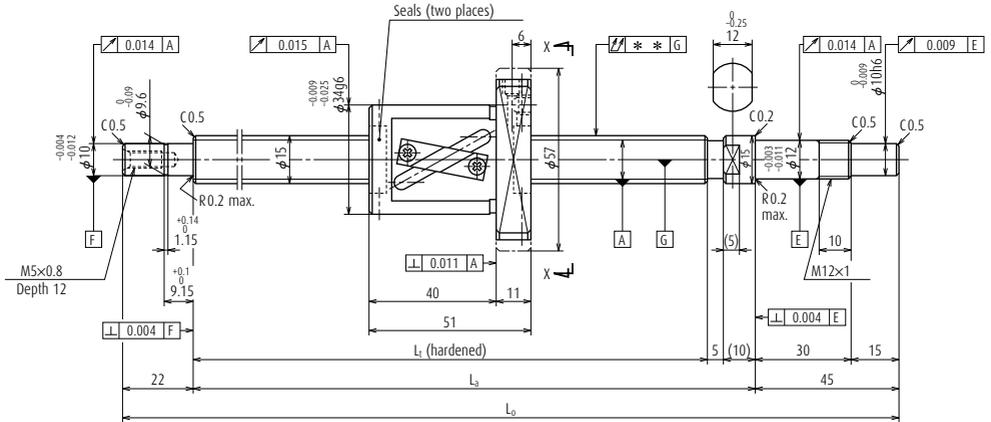

| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W1501FA-1P-CSZ10 | W1501FA-2-CST10 | 100 | 132 |
| W1502FA-1P-CSZ10 | W1502FA-2-CST10 | 150 | 182 |
| W1502FA-3P-CSZ10 | W1502FA-4-CST10 | 200 | 232 |
| W1503FA-1P-CSZ10 | W1503FA-2-CST10 | 250 | 282 |
| W1503FA-3P-CSZ10 | W1503FA-4-CST10 | 300 | 332 |
| W1504FA-1P-CSZ10 | W1504FA-2-CST10 | 350 | 382 |
| W1504FA-3P-CSZ10 | W1504FA-4-CST10 | 400 | 432 |
| W1505FA-1P-CSZ10 | W1505FA-2-CST10 | 450 | 482 |
| W1505FA-3P-CSZ10 | W1505FA-4-CST10 | 500 | 532 |
| W1506FA-1P-CSZ10 | W1506FA-2-CST10 | 550 | 582 |
| W1506FA-3P-CSZ10 | W1506FA-4-CST10 | 600 | 632 |
| W1507FA-1P-CSZ10 | W1507FA-2-CST10 | 700 | 732 |
| W1508FA-1P-CSZ10 | W1508FA-2-CST10 | 800 | 832 |
| W1510FA-1P-CSZ10 | W1510FA-2-CST10 | 1 000 | 1 032 |

Notes


1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft ϕ 15

Lead 10

Unit: mm

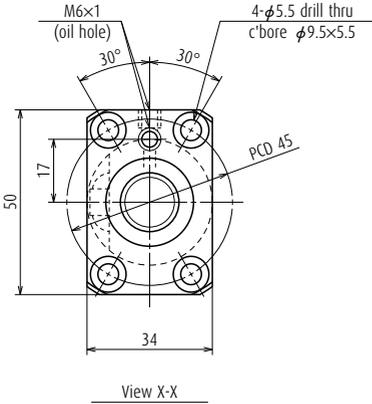

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 15 × 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 15.5 | |
| Screw shaft root diameter | 12.2 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 5 130 |
| | Static C_{0a} | 6 420 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 147 | - |
| Dynamic friction torque, (N·cm) | 1.5 - 7.8 | 2.4 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 2.3 | |
| Standard volume of grease replenishing (cm ³) | 1.2 | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_0 | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 189 | 204 | 271 | 0 | 0.020 | 0.018 | 0.025 | 0.61 | 3 000 | 3 000 |
| 239 | 254 | 321 | 0 | 0.023 | 0.018 | 0.035 | 0.67 | 3 000 | 3 000 |
| 289 | 304 | 371 | 0 | 0.023 | 0.018 | 0.035 | 0.74 | 3 000 | 3 000 |
| 339 | 354 | 421 | 0 | 0.025 | 0.020 | 0.040 | 0.80 | 3 000 | 3 000 |
| 389 | 404 | 471 | 0 | 0.025 | 0.020 | 0.040 | 0.86 | 3 000 | 3 000 |
| 439 | 454 | 521 | 0 | 0.027 | 0.020 | 0.050 | 0.93 | 3 000 | 3 000 |
| 489 | 504 | 571 | 0 | 0.027 | 0.020 | 0.050 | 1.0 | 3 000 | 3 000 |
| 539 | 554 | 621 | 0 | 0.030 | 0.023 | 0.050 | 1.1 | 3 000 | 3 000 |
| 589 | 604 | 671 | 0 | 0.030 | 0.023 | 0.065 | 1.1 | 3 000 | 3 000 |
| 639 | 654 | 721 | 0 | 0.035 | 0.025 | 0.065 | 1.2 | 3 000 | 3 000 |
| 689 | 704 | 771 | 0 | 0.035 | 0.025 | 0.065 | 1.2 | 3 000 | 3 000 |
| 789 | 804 | 871 | 0 | 0.035 | 0.025 | 0.085 | 1.4 | 3 000 | 3 000 |
| 889 | 904 | 971 | 0 | 0.040 | 0.027 | 0.085 | 1.5 | 2 430 | 3 000 |
| 1 089 | 1 104 | 1 171 | 0 | 0.046 | 0.030 | 0.110 | 1.8 | 1 600 | 2 250 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

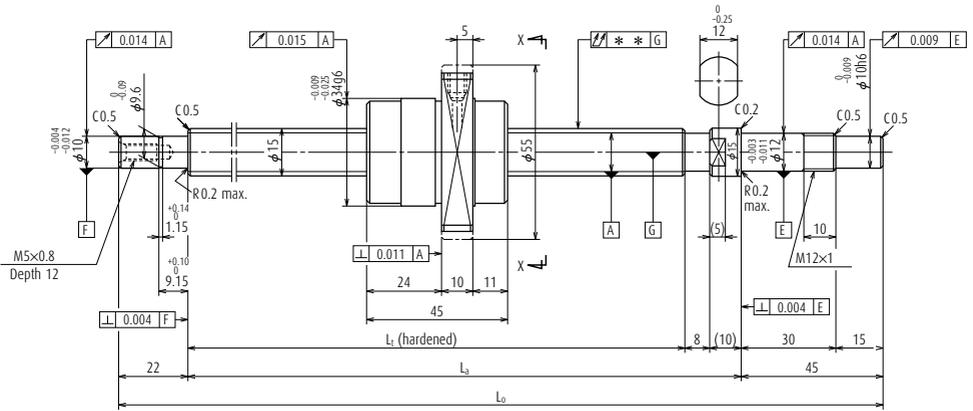


| Ball screw No. | | Stroke | |
|-------------------|--------------------------|---------|---------|
| Preloaded (UPFC) | Precise clearance (USFC) | Nominal | Maximum |
| W1501FA-3PG-C5Z20 | W1501FA-4G-C5T20 | 100 | 135 |
| W1502FA-5PG-C5Z20 | W1502FA-6G-C5T20 | 150 | 185 |
| W1502FA-7PG-C5Z20 | W1502FA-8G-C5T20 | 200 | 235 |
| W1503FA-5PG-C5Z20 | W1503FA-6G-C5T20 | 250 | 285 |
| W1503FA-7PG-C5Z20 | W1503FA-8G-C5T20 | 300 | 335 |
| W1504FA-5PG-C5Z20 | W1504FA-6G-C5T20 | 350 | 385 |
| W1504FA-7PG-C5Z20 | W1504FA-8G-C5T20 | 400 | 435 |
| W1505FA-5PG-C5Z20 | W1505FA-6G-C5T20 | 450 | 485 |
| W1505FA-7PG-C5Z20 | W1505FA-8G-C5T20 | 500 | 535 |
| W1506FA-5PG-C5Z20 | W1506FA-6G-C5T20 | 550 | 585 |
| W1506FA-7PG-C5Z20 | W1506FA-8G-C5T20 | 600 | 635 |
| W1507FA-3PG-C5Z20 | W1507FA-4G-C5T20 | 700 | 735 |
| W1508FA-3PG-C5Z20 | W1508FA-4G-C5T20 | 800 | 835 |
| W1510FA-3PG-C5Z20 | W1510FA-4G-C5T20 | 1 000 | 1 035 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

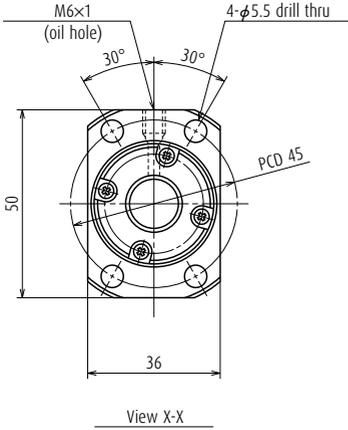

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Screw shaft ϕ 15

Lead 20

Unit: mm

Ball screw specifications

| Product classification | | Preloaded | Precise clearance |
|---|-----------------|-------------------------|-------------------|
| Shaft dia. × Lead / Direction of turn | | 15 × 20 / Right | |
| Preload / Ball recirculation | | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | | 3.175 / 15.5 | |
| Screw shaft root diameter | | 12.2 | |
| Effective turns of balls | | 1.7 × 1 | |
| Accuracy grade / Preload / Axial play | | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 4 320 | 5 660 |
| | Static C_{0a} | 5 800 | 8 700 |
| Axial play | | 0 | 0.005 or less |
| Preload (N) | | 147 | - |
| Dynamic friction torque, (N·cm) | | 1.5 - 7.8 | 2.4 or less |
| Spacer ball | | Yes | None |
| Factory-packed grease | | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | | 1.9 | |
| Standard volume of grease replenishing (cm ³) | | 1.0 | |


Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_0 | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 186 | 204 | 271 | 0 | 0.020 | 0.018 | 0.025 | 0.61 | 3 000 | 3 000 |
| 236 | 254 | 321 | 0 | 0.023 | 0.018 | 0.035 | 0.68 | 3 000 | 3 000 |
| 286 | 304 | 371 | 0 | 0.023 | 0.018 | 0.035 | 0.75 | 3 000 | 3 000 |
| 336 | 354 | 421 | 0 | 0.025 | 0.020 | 0.040 | 0.81 | 3 000 | 3 000 |
| 386 | 404 | 471 | 0 | 0.025 | 0.020 | 0.040 | 0.88 | 3 000 | 3 000 |
| 436 | 454 | 521 | 0 | 0.027 | 0.020 | 0.050 | 0.95 | 3 000 | 3 000 |
| 486 | 504 | 571 | 0 | 0.027 | 0.020 | 0.050 | 1.0 | 3 000 | 3 000 |
| 536 | 554 | 621 | 0 | 0.030 | 0.023 | 0.050 | 1.1 | 3 000 | 3 000 |
| 586 | 604 | 671 | 0 | 0.030 | 0.023 | 0.065 | 1.1 | 3 000 | 3 000 |
| 636 | 654 | 721 | 0 | 0.035 | 0.025 | 0.065 | 1.2 | 3 000 | 3 000 |
| 686 | 704 | 771 | 0 | 0.035 | 0.025 | 0.065 | 1.3 | 3 000 | 3 000 |
| 786 | 804 | 871 | 0 | 0.035 | 0.025 | 0.085 | 1.4 | 3 000 | 3 000 |
| 886 | 904 | 971 | 0 | 0.040 | 0.027 | 0.085 | 1.5 | 2 440 | 3 000 |
| 1 086 | 1 104 | 1 171 | 0 | 0.046 | 0.030 | 0.110 | 1.8 | 1 610 | 2 240 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut models: PFT, SFT

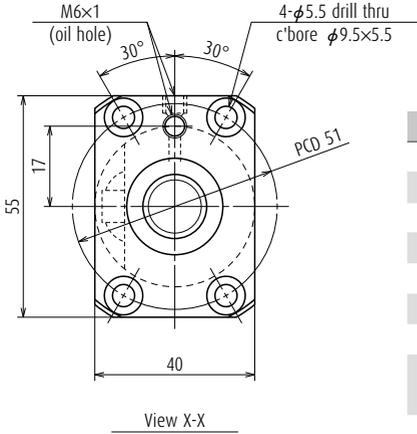

Screw shaft $\phi 16$

Lead 5

Unit: mm

| Ball screw specifications | | | |
|---|-----------------|-------------------------|-------------------|
| Product classification | | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | | 16 \times 5 / Right | |
| Preload / Ball recirculation | | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | | 3.175 / 16.5 | |
| Screw shaft root diameter | | 13.2 | |
| Effective turns of balls | | 2.5 \times 1 | |
| Accuracy grade / Preload / Axial play | | C3 / Z | C3 / T |
| Basic load rating (N) | Dynamic C_a | 5 430 | 8 620 |
| | Static C_{0a} | 6 890 | 13 800 |
| Axial play | | 0 | 0.005 or less |
| Preload (N) | | 147 | - |
| Dynamic friction torque, (N-cm) | | 1.5 - 7.8 | 2.0 or less |
| Spacer ball | | Yes | None |
| Factory-packed grease | | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | | 2.6 | |
| Standard volume of grease replenishing (cm ³) | | 1.3 | |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 189 | 204 | 271 | 0 | 0.010 | 0.008 | 0.020 | 0.70 | 3 000 | 3 000 |
| 289 | 304 | 371 | 0 | 0.012 | 0.008 | 0.030 | 0.83 | 3 000 | 3 000 |
| 389 | 404 | 471 | 0 | 0.013 | 0.010 | 0.035 | 0.97 | 3 000 | 3 000 |
| 489 | 504 | 571 | 0 | 0.015 | 0.010 | 0.045 | 1.1 | 3 000 | 3 000 |
| 689 | 704 | 771 | 0 | 0.018 | 0.013 | 0.055 | 1.4 | 3 000 | 3 000 |
| 889 | 904 | 971 | 0 | 0.021 | 0.015 | 0.075 | 1.6 | 2 570 | 3 000 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

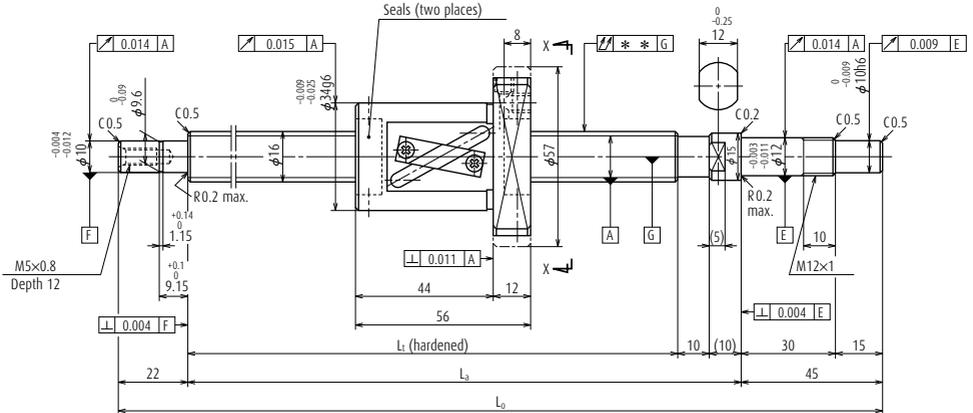


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W1601FA-3P-C5Z16 | W1601FA-4-C5T16 | 100 | 122 |
| W1602FA-3P-C5Z16 | W1602FA-4-C5T16 | 150 | 172 |
| W1602FA-5P-C5Z16 | W1602FA-6-C5T16 | 200 | 222 |
| W1603FA-3P-C5Z16 | W1603FA-4-C5T16 | 250 | 272 |
| W1603FA-5P-C5Z16 | W1603FA-6-C5T16 | 300 | 322 |
| W1604FA-3P-C5Z16 | W1604FA-4-C5T16 | 350 | 372 |
| W1604FA-5P-C5Z16 | W1604FA-6-C5T16 | 400 | 422 |
| W1605FA-1P-C5Z16 | W1605FA-2-C5T16 | 450 | 472 |
| W1605FA-3P-C5Z16 | W1605FA-4-C5T16 | 500 | 522 |
| W1606FA-3P-C5Z16 | W1606FA-4-C5T16 | 550 | 572 |
| W1606FA-5P-C5Z16 | W1606FA-6-C5T16 | 600 | 622 |
| W1607FA-1P-C5Z16 | W1607FA-2-C5T16 | 700 | 722 |
| W1608FA-3P-C5Z16 | W1608FA-4-C5T16 | 800 | 822 |
| W1610FA-1P-C5Z16 | W1610FA-2-C5T16 | 1 000 | 1 022 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Nut models: LPFT, LSFT

Screw shaft $\phi 16$ Lead 16

Unit: mm

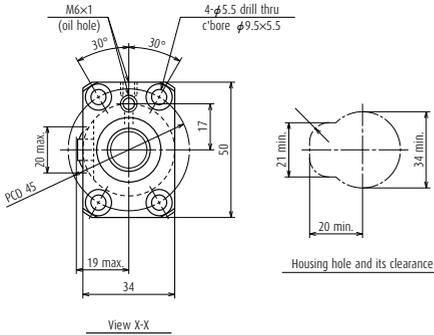

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 16 × 16 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 16.75 | |
| Screw shaft root diameter | 13.4 | |
| Effective turns of balls | 1.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 4 180 |
| | Static C_{0a} | 5 390 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 147 | - |
| Dynamic friction torque, (N·cm) | 1.5 - 7.8 | 2.4 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 2.1 | |
| Standard volume of grease replenishing (cm ³) | 1.1 | |


Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_0 | T | e_p | v_U | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 184 | 204 | 271 | 0 | 0.020 | 0.018 | 0.025 | 0.69 | 3 000 | 3 000 |
| 234 | 254 | 321 | 0 | 0.023 | 0.018 | 0.035 | 0.77 | 3 000 | 3 000 |
| 284 | 304 | 371 | 0 | 0.023 | 0.018 | 0.035 | 0.84 | 3 000 | 3 000 |
| 334 | 354 | 421 | 0 | 0.025 | 0.020 | 0.040 | 0.92 | 3 000 | 3 000 |
| 384 | 404 | 471 | 0 | 0.025 | 0.020 | 0.040 | 0.99 | 3 000 | 3 000 |
| 434 | 454 | 521 | 0 | 0.027 | 0.020 | 0.050 | 1.1 | 3 000 | 3 000 |
| 484 | 504 | 571 | 0 | 0.027 | 0.020 | 0.050 | 1.1 | 3 000 | 3 000 |
| 534 | 554 | 621 | 0 | 0.030 | 0.023 | 0.050 | 1.2 | 3 000 | 3 000 |
| 584 | 604 | 671 | 0 | 0.030 | 0.023 | 0.065 | 1.3 | 3 000 | 3 000 |
| 634 | 654 | 721 | 0 | 0.035 | 0.025 | 0.065 | 1.4 | 3 000 | 3 000 |
| 684 | 704 | 771 | 0 | 0.035 | 0.025 | 0.065 | 1.4 | 3 000 | 3 000 |
| 784 | 804 | 871 | 0 | 0.035 | 0.025 | 0.085 | 1.6 | 3 000 | 3 000 |
| 884 | 904 | 971 | 0 | 0.040 | 0.027 | 0.085 | 1.7 | 2 720 | 3 000 |
| 1 084 | 1 104 | 1 171 | 0 | 0.046 | 0.030 | 0.110 | 2.0 | 1 790 | 2 480 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut models: UPFC, USFC

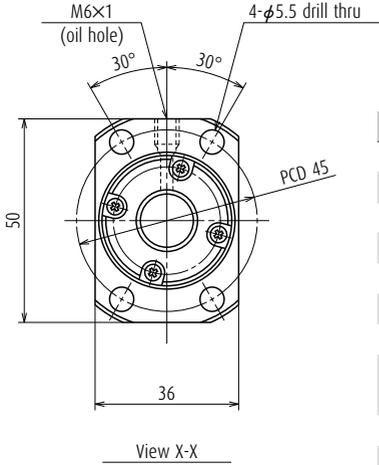

Screw shaft ϕ 16

Lead 32

Unit: mm

| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 16 × 32 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 16.75 | |
| Screw shaft root diameter | 13.4 | |
| Effective turns of balls | 0.7 × 2 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 4 320 |
| | Static C_{0a} | 6 760 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 118 | - |
| Dynamic friction torque, (N-cm) | 1.5 - 9.8 | 2.4 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 2.0 | |
| Standard volume of grease replenishing (cm ³) | 1.0 | |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK12-01A (square) | WBK12S-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 382 | 404 | 471 | 0 | 0.025 | 0.020 | 0.040 | 0.90 | 3 000 | 3 000 |
| 582 | 604 | 671 | 0 | 0.030 | 0.023 | 0.065 | 1.2 | 3 000 | 3 000 |
| 882 | 904 | 971 | 0 | 0.040 | 0.027 | 0.085 | 1.7 | 2 670 | 3 000 |
| 1 282 | 1 304 | 1 371 | 0 | 0.054 | 0.035 | 0.150 | 2.3 | 1 250 | 1 740 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

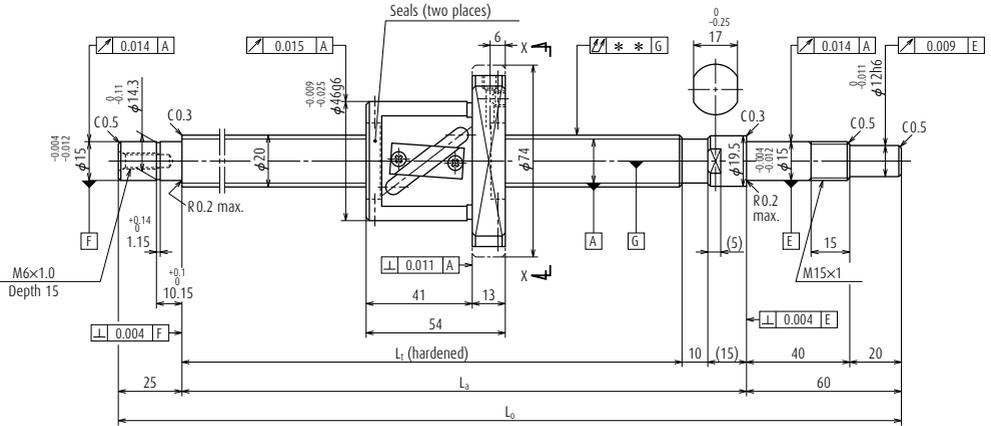

| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W2002FA-1P-C5Z10 | W2002FA-2-C5T10 | 200 | 229 |
| W2003FA-1P-C5Z10 | W2003FA-2-C5T10 | 300 | 329 |
| W2004FA-1P-C5Z10 | W2004FA-2-C5T10 | 400 | 429 |
| W2005FA-1P-C5Z10 | W2005FA-2-C5T10 | 500 | 529 |
| W2006FA-1P-C5Z10 | W2006FA-2-C5T10 | 600 | 629 |
| W2007FA-1P-C5Z10 | W2007FA-2-C5T10 | 700 | 729 |
| W2008FA-1P-C5Z10 | W2008FA-2-C5T10 | 800 | 829 |
| W2009FA-1P-C5Z10 | W2009FA-2-C5T10 | 900 | 929 |
| W2010FA-1P-C5Z10 | W2010FA-2-C5T10 | 1 000 | 1 029 |
| W2011FA-1P-C5Z10 | W2011FA-2-C5T10 | 1 100 | 1 129 |
| W2012FA-1P-C5Z10 | W2012FA-2-C5T10 | 1 200 | 1 229 |

Notes


1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 20$

Lead 10

Unit: mm

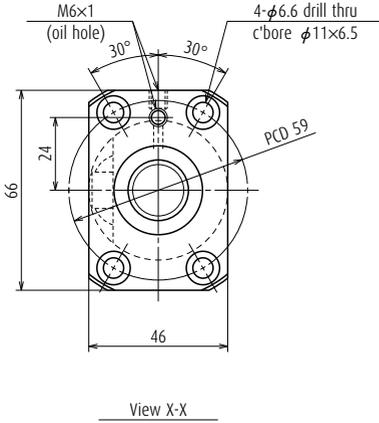

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK15-01A (square) | WBK155-01 (square) |
| WBK15-11 (round) | |

| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 20 × 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 21 | |
| Screw shaft root diameter | 16.9 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 8 350 |
| | Static C_{0a} | 11 000 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 196 | - |
| Dynamic friction torque, (N·cm) | 2.0 - 11.8 | 2.9 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 4.7 | |
| Standard volume of grease replenishing (cm ³) | 2.4 | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_0 | T | e_p | v_U | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 289 | 314 | 399 | 0 | 0.023 | 0.018 | 0.035 | 1.4 | 3 000 | 3 000 |
| 389 | 414 | 499 | 0 | 0.025 | 0.020 | 0.040 | 1.6 | 3 000 | 3 000 |
| 489 | 514 | 599 | 0 | 0.027 | 0.020 | 0.050 | 1.9 | 3 000 | 3 000 |
| 589 | 614 | 699 | 0 | 0.030 | 0.023 | 0.065 | 2.1 | 3 000 | 3 000 |
| 689 | 714 | 799 | 0 | 0.035 | 0.025 | 0.065 | 2.3 | 3 000 | 3 000 |
| 789 | 814 | 899 | 0 | 0.035 | 0.025 | 0.085 | 2.5 | 3 000 | 3 000 |
| 889 | 914 | 999 | 0 | 0.040 | 0.027 | 0.085 | 2.8 | 3 000 | 3 000 |
| 989 | 1 014 | 1 099 | 0 | 0.040 | 0.027 | 0.110 | 3.0 | 2 710 | 3 000 |
| 1 089 | 1 114 | 1 199 | 0 | 0.046 | 0.030 | 0.110 | 3.2 | 2 220 | 3 000 |
| 1 189 | 1 214 | 1 299 | 0 | 0.046 | 0.030 | 0.150 | 3.4 | 1 860 | 2 570 |
| 1 289 | 1 314 | 1 399 | 0 | 0.054 | 0.035 | 0.150 | 3.7 | 1 580 | 2 190 |

- Notes
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
 5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

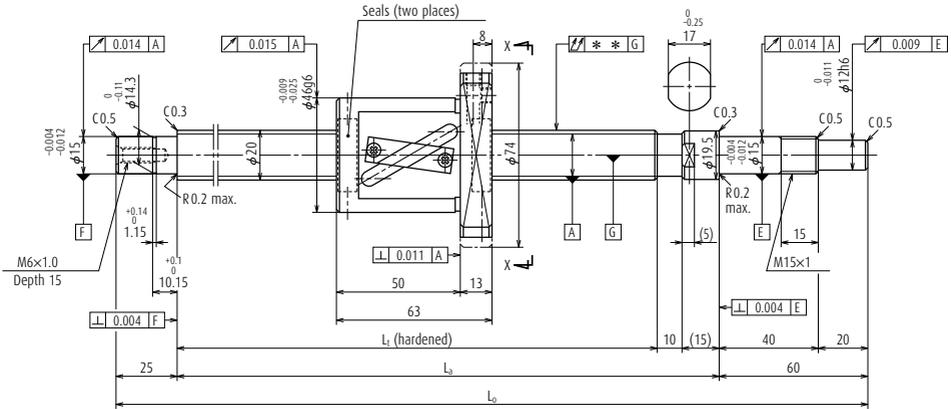

| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W2003FA-3P-C5Z20 | W2003FA-4-C5T20 | 200 | 241 |
| W2004FA-3P-C5Z20 | W2004FA-4-C5T20 | 300 | 341 |
| W2005FA-3P-C5Z20 | W2005FA-4-C5T20 | 400 | 441 |
| W2006FA-3P-C5Z20 | W2006FA-4-C5T20 | 500 | 541 |
| W2007FA-3P-C5Z20 | W2007FA-4-C5T20 | 600 | 641 |
| W2008FA-3P-C5Z20 | W2008FA-4-C5T20 | 700 | 741 |
| W2009FA-3P-C5Z20 | W2009FA-4-C5T20 | 800 | 841 |
| W2010FA-3P-C5Z20 | W2010FA-4-C5T20 | 900 | 941 |
| W2011FA-3P-C5Z20 | W2011FA-4-C5T20 | 1 000 | 1 040 |
| W2012FA-3P-C5Z20 | W2012FA-4-C5T20 | 1 100 | 1 141 |
| W2015FA-1P-C5Z20 | W2015FA-2-C5T20 | 1 400 | 1 441 |

Notes


1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 20$

Lead 20

Unit: mm

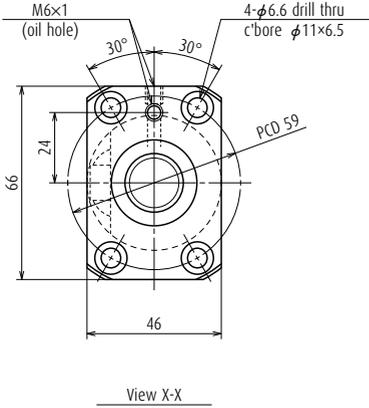

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK15-01A (square) | WBK155-01 (square) |
| WBK15-11 (round) | |


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 20 × 20 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 21 | |
| Screw shaft root diameter | 16.9 | |
| Effective turns of balls | 1.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 6 250 |
| | Static C_{0a} | 8 190 |
| | 8 760 | 13 100 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 196 | - |
| Dynamic friction torque, (N·cm) | 2.0 - 11.8 | 2.9 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 4.2 | |
| Standard volume of grease replenishing (cm ³) | 2.1 | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_0 | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 310 | 335 | 420 | 0 | 0.023 | 0.018 | 0.040 | 1.6 | 3 000 | 3 000 |
| 410 | 435 | 520 | 0 | 0.027 | 0.020 | 0.050 | 1.8 | 3 000 | 3 000 |
| 510 | 535 | 620 | 0 | 0.030 | 0.023 | 0.050 | 2.0 | 3 000 | 3 000 |
| 610 | 635 | 720 | 0 | 0.030 | 0.023 | 0.065 | 2.3 | 3 000 | 3 000 |
| 710 | 735 | 820 | 0 | 0.035 | 0.025 | 0.085 | 2.5 | 3 000 | 3 000 |
| 810 | 835 | 920 | 0 | 0.040 | 0.027 | 0.085 | 2.7 | 3 000 | 3 000 |
| 910 | 935 | 1 020 | 0 | 0.040 | 0.027 | 0.110 | 3.0 | 3 000 | 3 000 |
| 1 010 | 1 035 | 1 120 | 0 | 0.046 | 0.030 | 0.110 | 3.2 | 2 630 | 3 000 |
| 1 110 | 1 135 | 1 220 | 0 | 0.046 | 0.030 | 0.110 | 3.4 | 2 160 | 2 970 |
| 1 210 | 1 235 | 1 320 | 0 | 0.046 | 0.030 | 0.150 | 3.7 | 1 810 | 2 500 |
| 1 510 | 1 535 | 1 620 | 0 | 0.054 | 0.035 | 0.180 | 4.4 | 1 150 | 1 610 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

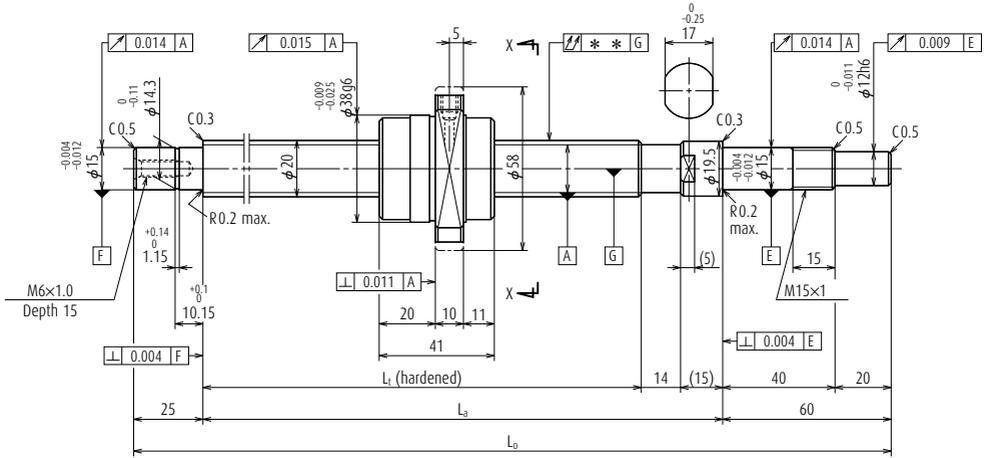


| Ball screw No. | | Stroke | |
|--------------------|--------------------------|---------|---------|
| Preloaded (UPFC) | Precise clearance (USFC) | Nominal | Maximum |
| W2005FA-SPGX-CSZ40 | W2005FA-6GX-CST40 | 400 | 459 |
| W2007FA-SPGX-CSZ40 | W2007FA-6GX-CST40 | 600 | 659 |
| W2009FA-SPGX-CSZ40 | W2009FA-6GX-CST40 | 800 | 859 |
| W2011FA-SPGX-CSZ40 | W2011FA-6GX-CST40 | 1 000 | 1 059 |
| W2013FA-1PGX-CSZ40 | W2013FA-2GX-CST40 | 1 200 | 1 259 |
| W2017FA-1PGX-CSZ40 | W2017FA-2GX-CST40 | 1 600 | 1 659 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

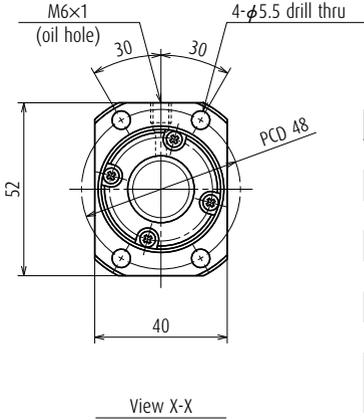

Screw shaft $\phi 20$

Lead 40

Unit: mm

| Ball screw specifications | | |
|---|---------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 20 × 40 / Right | |
| Preload / Ball recirculation | P-preload / End cap | |
| Ball dia. / Ball circle dia. | 3.175 / 20.75 | |
| Screw shaft root diameter | 17.4 | |
| Effective turns of balls | 0.7 × 2 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 4 870 |
| | Static C_{0a} | 8 420 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 148 | - |
| Dynamic friction torque, (N-cm) | 2.0 - 11.8 | 2.9 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 2.8 | |
| Standard volume of grease replenishing (cm ³) | 1.4 | |

Recommended support unit


| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK15-01A (square) | WBK15S-01 (square) |
| WBK15-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 506 | 535 | 620 | 0 | 0.030 | 0.023 | 0.050 | 1.7 | 3 000 | 3 000 |
| 706 | 735 | 820 | 0 | 0.035 | 0.025 | 0.085 | 2.2 | 3 000 | 3 000 |
| 906 | 935 | 1 020 | 0 | 0.040 | 0.027 | 0.110 | 2.7 | 3 000 | 3 000 |
| 1 106 | 1 135 | 1 220 | 0 | 0.046 | 0.030 | 0.110 | 3.1 | 2 210 | 3 000 |
| 1 306 | 1 335 | 1 420 | 0 | 0.054 | 0.035 | 0.150 | 3.6 | 1 570 | 2 160 |
| 1 706 | 1 735 | 1 820 | 0 | 0.065 | 0.040 | 0.230 | 4.6 | 910 | 1 270 |

Notes

- If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
- See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

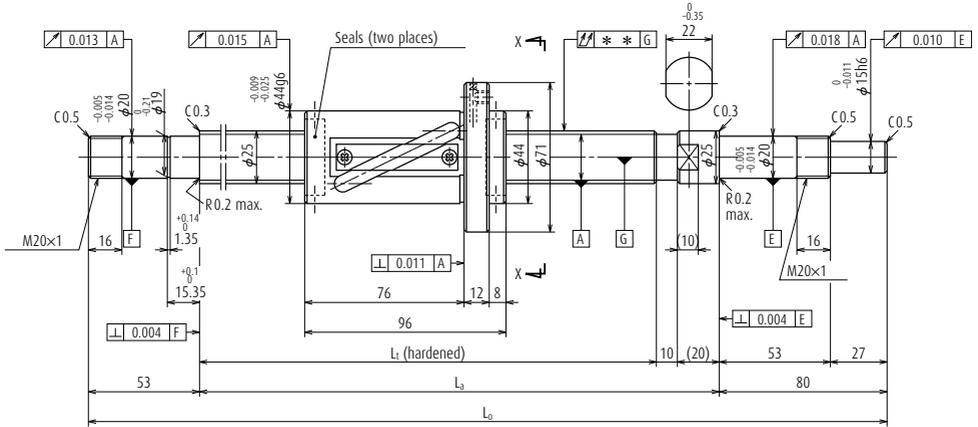

| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W2507FA-1P-C5Z20 | W2507FA-2-C5T20 | 600 | 640 |
| W2509FA-1P-C5Z20 | W2509FA-2-C5T20 | 800 | 840 |
| W2511FA-1P-C5Z20 | W2511FA-2-C5T20 | 1 000 | 1 040 |
| W2513FA-1P-C5Z20 | W2513FA-2-C5T20 | 1 200 | 1 240 |
| W2515FA-1P-C5Z20 | W2515FA-2-C5T20 | 1 400 | 1 440 |
| W2517FA-1P-C5Z20 | W2517FA-2-C5T20 | 1 600 | 1 640 |
| W2521FA-1P-C5Z20 | W2521FA-2-C5T20 | 2 000 | 2 040 |

Notes



1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 25$

Lead 20

Unit: mm




| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 25 × 20 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 26.25 | |
| Screw shaft root diameter | 21.3 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 11 700 |
| | Static C_{0a} | 16 300 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 343 | - |
| Dynamic friction torque, (N·cm) | 3.9 - 24.5 | 4.9 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 12 | |
| Standard volume of grease replenishing (cm ³) | 6 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 750 | 780 | 913 | 0 | 0.035 | 0.025 | 0.055 | 4.0 | 2 800 | 2 800 |
| 950 | 980 | 1 113 | 0 | 0.040 | 0.027 | 0.070 | 4.7 | 2 800 | 2 800 |
| 1 150 | 1 180 | 1 313 | 0 | 0.046 | 0.030 | 0.090 | 5.4 | 2 590 | 2 800 |
| 1 350 | 1 380 | 1 513 | 0 | 0.054 | 0.035 | 0.090 | 6.2 | 1 860 | 2 550 |
| 1 550 | 1 580 | 1 713 | 0 | 0.054 | 0.035 | 0.120 | 6.9 | 1 400 | 1 940 |
| 1 750 | 1 780 | 1 913 | 0 | 0.065 | 0.040 | 0.120 | 7.6 | 1 090 | 1 520 |
| 2 150 | 2 180 | 2 313 | 0 | 0.077 | 0.046 | 0.160 | 9.1 | 720 | 1 000 |

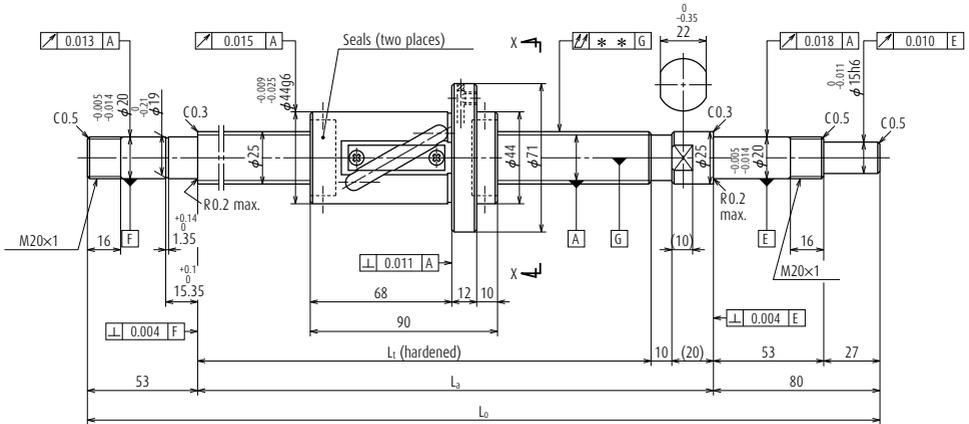

| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W2507FA-3P-C5Z25 | W2507FA-4-C5T25 | 600 | 646 |
| W2509FA-3P-C5Z25 | W2509FA-4-C5T25 | 800 | 846 |
| W2511FA-3P-C5Z25 | W2511FA-4-C5T25 | 1 000 | 1 046 |
| W2513FA-3P-C5Z25 | W2513FA-4-C5T25 | 1 200 | 1 246 |
| W2515FA-3P-C5Z25 | W2515FA-4-C5T25 | 1 400 | 1 446 |
| W2517FA-3P-C5Z25 | W2517FA-4-C5T25 | 1 600 | 1 646 |
| W2521FA-3P-C5Z25 | W2521FA-4-C5T25 | 2 000 | 2 046 |

Notes


1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

Screw shaft $\phi 25$

Lead 25

Unit: mm

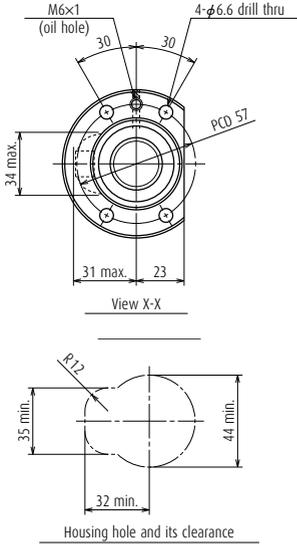


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 25 × 25 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 26.25 | |
| Screw shaft root diameter | 21.3 | |
| Effective turns of balls | 1.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 8 970 |
| | Static C_{0a} | 13 100 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 294 | - |
| Dynamic friction torque, (N·cm) | 3.9 - 24.5 | 4.9 |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 7.5 | |
| Standard volume of grease replenishing (cm ³) | 3.8 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 750 | 780 | 913 | 0 | 0.035 | 0.025 | 0.055 | 4.0 | 2 800 | 2 800 |
| 950 | 980 | 1 113 | 0 | 0.040 | 0.027 | 0.070 | 4.7 | 2 800 | 2 800 |
| 1 150 | 1 180 | 1 313 | 0 | 0.046 | 0.030 | 0.090 | 5.4 | 2 580 | 2 800 |
| 1 350 | 1 380 | 1 513 | 0 | 0.054 | 0.035 | 0.090 | 6.2 | 1 850 | 2 540 |
| 1 550 | 1 580 | 1 713 | 0 | 0.054 | 0.035 | 0.120 | 7.0 | 1 400 | 1 930 |
| 1 750 | 1 780 | 1 913 | 0 | 0.065 | 0.040 | 0.120 | 7.7 | 1 090 | 1 510 |
| 2 150 | 2 180 | 2 313 | 0 | 0.077 | 0.046 | 0.160 | 9.1 | 710 | 1 000 |

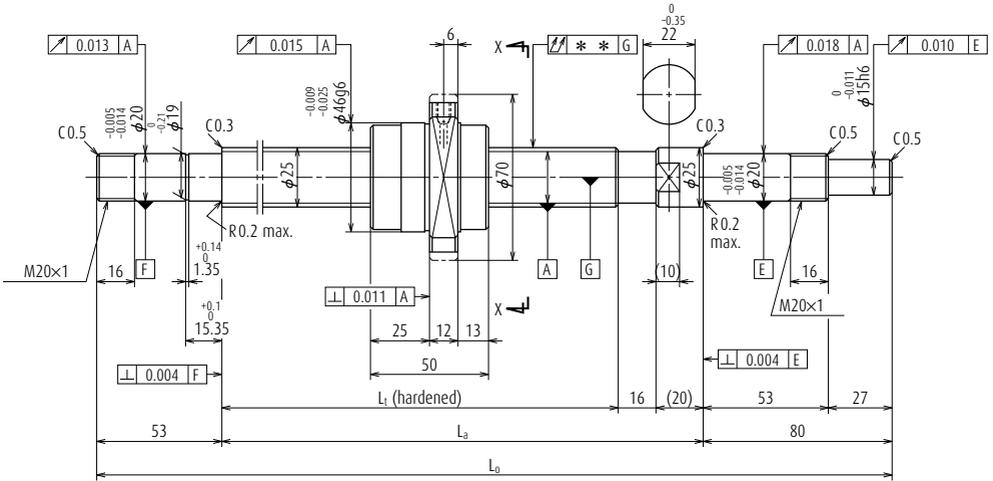


| Ball screw No. | | Stroke | |
|--------------------|--------------------------|---------|---------|
| Preloaded (UPFC) | Precise clearance (USFC) | Nominal | Maximum |
| W2508FA-1PGX-CSZ50 | W2508FA-2GX-CST50 | 700 | 780 |
| W2511FA-5PGX-CSZ50 | W2511FA-6GX-CST50 | 1 000 | 1 080 |
| W2516FA-1PGX-CSZ50 | W2516FA-2GX-CST50 | 1 500 | 1 580 |
| W2521FA-5PGX-CSZ50 | W2521FA-6GX-CST50 | 2 000 | 2 080 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Ball nut does not have seal.
4. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: UPFC, USFC

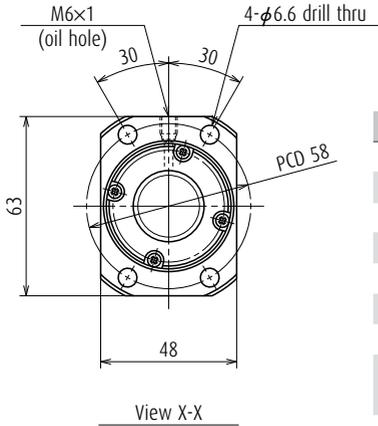

Screw shaft ϕ 25

Lead 50

Unit: mm


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. \times Lead / Direction of turn | 25 \times 50 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 26 | |
| Screw shaft root diameter | 21.9 | |
| Effective turns of balls | 0.7 \times 2 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 7 280 |
| | Static C_{0a} | 13 200 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 196 | - |
| Dynamic friction torque, (N-cm) | 2.9 - 21.5 | 4.9 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 4.2 | |
| Standard volume of grease replenishing (cm ³) | 2.1 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 844 | 880 | 1 013 | 0 | 0.040 | 0.027 | 0.070 | 4.1 | 2 800 | 2 800 |
| 1 144 | 1 180 | 1 313 | 0 | 0.046 | 0.030 | 0.090 | 5.3 | 2 600 | 2 800 |
| 1 644 | 1 680 | 1 813 | 0 | 0.065 | 0.040 | 0.120 | 7.2 | 1 250 | 1 710 |
| 2 144 | 2 180 | 2 313 | 0 | 0.077 | 0.046 | 0.160 | 9.1 | 730 | 1 010 |

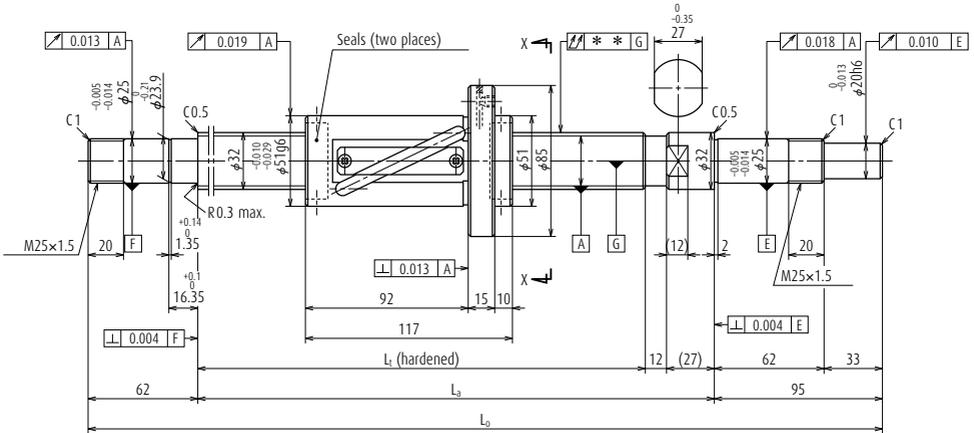


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (UPFC) | Precise clearance (USFC) | Nominal | Maximum |
| W3211FA-1P-C5Z25 | W3211FA-2-C5T25 | 1 000 | 1 046 |
| W3216FA-1P-C5Z25 | W3216FA-2-C5T25 | 1 500 | 1 546 |
| W3221FA-1P-C5Z25 | W3221FA-2-C5T25 | 2 000 | 2 046 |
| W3227FA-1P-C5Z25 | W3227FA-2-C5T25 | 2 600 | 2 646 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

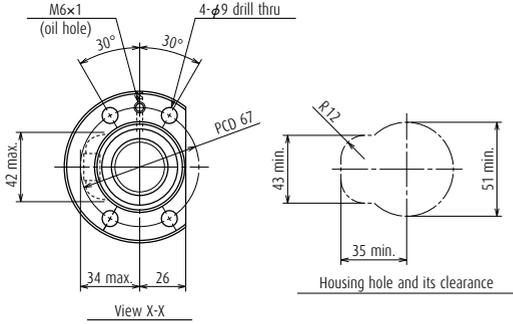

Screw shaft ϕ 32 Lead 25

Unit: mm


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 32 × 25 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 33.25 | |
| Screw shaft root diameter | 28.3 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 12 900 |
| | Static C_{0a} | 21 100 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 441 | - |
| Dynamic friction torque, (N-cm) | 6.8 - 31.5 | 7.8 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 17.5 | |
| Standard volume of grease replenishing (cm ³) | 8.8 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|---------------------|
| | (Fixed) | (Simple) |
| WBK25-01W (square) | WBK25-01W (square) | WBK25S-01W (square) |
| WBK25-11 (round) | WBK25-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ↗ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|-----------------------|-----------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 1 180 | 1 219 | 1 376 | 0 | 0.046 | 0.030 | 0.090 | 9.3 | 2 180 | 2 180 |
| 1 680 | 1 719 | 1 876 | 0 | 0.065 | 0.040 | 0.120 | 12.3 | 1 600 | 2 180 |
| 2 180 | 2 219 | 2 376 | 0 | 0.077 | 0.046 | 0.160 | 15.4 | 930 | 1 300 |
| 2 780 | 2 819 | 2 976 | 0 | 0.093 | 0.054 | 0.200 | 19.1 | 570 | 800 |

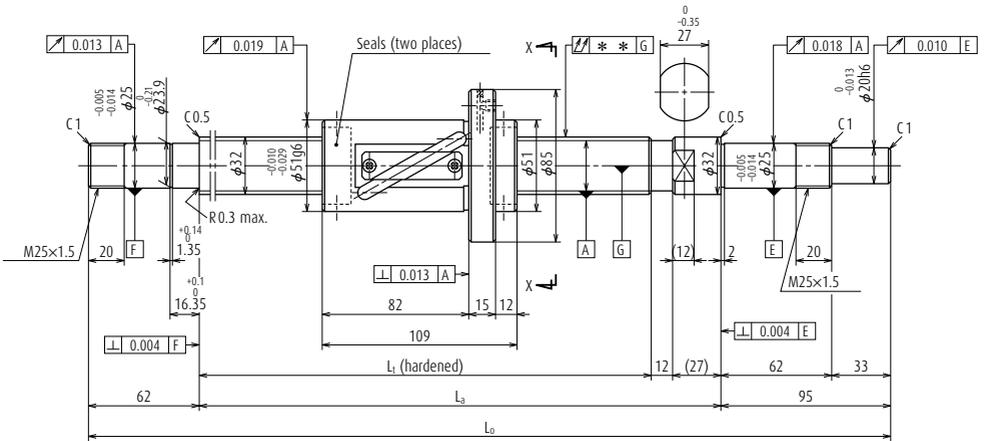


| Ball screw No. | | Stroke | |
|------------------|--------------------------|---------|---------|
| Preloaded (LPFT) | Precise clearance (LSFT) | Nominal | Maximum |
| W3211FA-3P-C5Z32 | W3211FA-4-C5T32 | 1 000 | 1 054 |
| W3216FA-3P-C5Z32 | W3216FA-4-C5T32 | 1 500 | 1 554 |
| W3221FA-3P-C5Z32 | W3221FA-4-C5T32 | 2 000 | 2 054 |
| W3227FA-3P-C5Z32 | W3227FA-4-C5T32 | 2 600 | 2 654 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut models: LPFT, LSFT

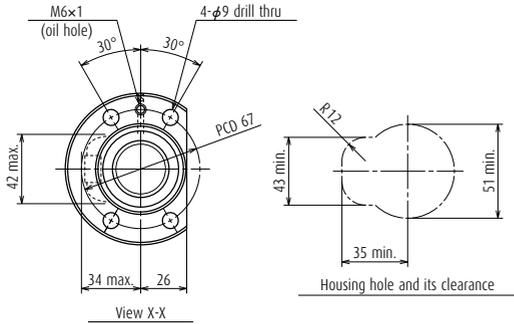

Screw shaft ϕ 32

Lead 32

Unit: mm


| Ball screw specifications | | |
|---|-------------------------|-------------------|
| Product classification | Preloaded | Precise clearance |
| Shaft dia. × Lead / Direction of turn | 32 × 32 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 33.25 | |
| Screw shaft root diameter | 28.3 | |
| Effective turns of balls | 1.5 × 1 | |
| Accuracy grade / Preload / Axial play | C5 / Z | C5 / T |
| Basic load rating (N) | Dynamic C_a | 10 100 |
| | Static C_{0a} | 16 800 |
| Axial play | 0 | 0.005 or less |
| Preload (N) | 392 | - |
| Dynamic friction torque, (N-cm) | 6.9 - 31.5 | 7.8 or less |
| Spacer ball | Yes | None |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 14 | |
| Standard volume of grease replenishing (cm ³) | 7 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|---------------------|
| | (Fixed) | (Simple) |
| WBK25-01W (square) | WBK25-01W (square) | WBK25S-01W (square) |
| WBK25-11 (round) | WBK25-11 (round) | |

Unit: mm

| Screw shaft length | | | Lead accuracy | | | Shaft run-out ** ↗ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|--------------------|-------|-------|---------------|-------|-------|-----------------------|--------------|---|---------------|
| L_t | L_a | L_o | T | e_p | v_u | | | Supporting condition | |
| | | | | | | | | Fixed - Simple support | Fixed - Fixed |
| 1 180 | 1 219 | 1 376 | 0 | 0.046 | 0.030 | 0.090 | 9.3 | 2 180 | 2 180 |
| 1 680 | 1 719 | 1 876 | 0 | 0.065 | 0.040 | 0.120 | 12.3 | 1 590 | 2 180 |
| 2 180 | 2 219 | 2 376 | 0 | 0.077 | 0.046 | 0.160 | 15.4 | 930 | 1 290 |
| 2 780 | 2 819 | 2 976 | 0 | 0.093 | 0.054 | 0.200 | 19.1 | 570 | 790 |

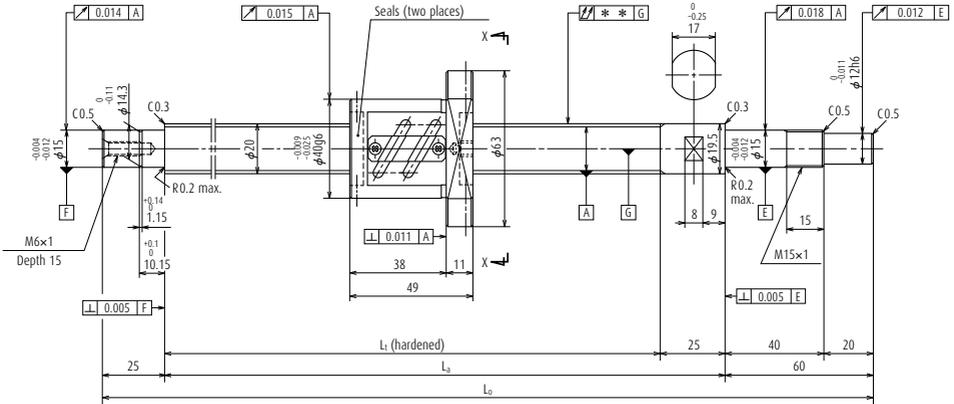


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L _t | L _a | L ₀ |
| W2002SA-1P-C5Z4 | 150 | 170 | 225 | 250 | 335 |
| W2002SA-2P-C5Z4 | 200 | 220 | 275 | 300 | 385 |
| W2003SA-1P-C5Z4 | 300 | 320 | 375 | 400 | 485 |
| W2004SA-1P-C5Z4 | 400 | 420 | 475 | 500 | 585 |
| W2005SA-1P-C5Z4 | 500 | 520 | 575 | 600 | 685 |
| W2006SA-1P-C5Z4 | 600 | 620 | 675 | 700 | 785 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut model: PFT

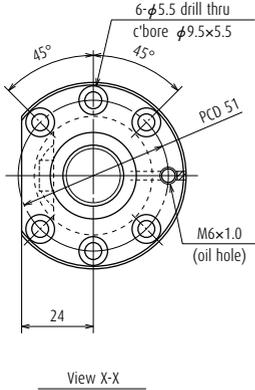

Screw shaft ϕ 20

Lead 4

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 20 \times 4 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 20.3 | |
| Effective turns of balls | 2.5 \times 2 | |
| Screw shaft root diameter | 17.8 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 6 550 |
| | Static C_{0a} | 10 900 |
| Preload (N) | 294 | |
| Dynamic friction torque, median, (N-cm) | 3.9 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 2.7 | |
| Standard volume of grease replenishing (cm ³) | 1.4 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK15-01A (square) | WBK155-01 (square) |
| WBK15-11 (round) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.005 | 0.023 | 0.018 | 0.045 | 1.1 | 3 000 | 3 000 |
| -0.007 | 0.023 | 0.018 | 0.045 | 1.2 | 3 000 | 3 000 |
| -0.009 | 0.025 | 0.020 | 0.055 | 1.5 | 3 000 | 3 000 |
| -0.011 | 0.027 | 0.020 | 0.070 | 1.7 | 3 000 | 3 000 |
| -0.014 | 0.030 | 0.023 | 0.085 | 1.9 | 3 000 | 3 000 |
| -0.016 | 0.035 | 0.025 | 0.085 | 2.1 | 3 000 | 3 000 |

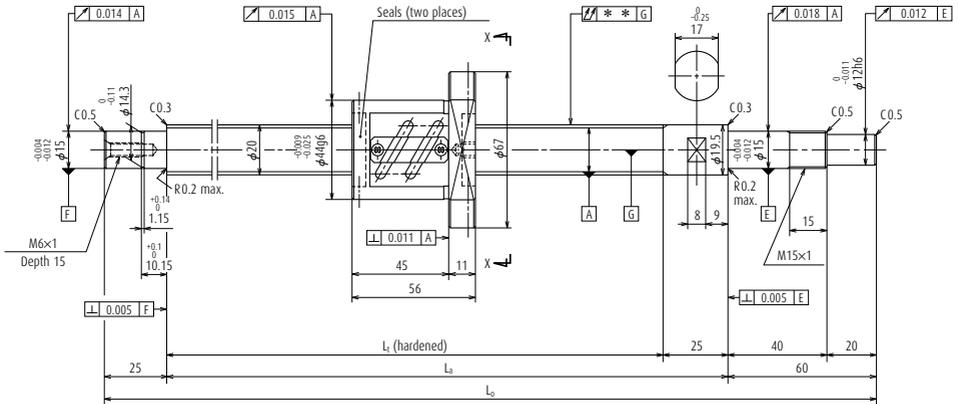


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L _t | L _a | L _o |
| W2002SA-3P-C5Z5 | 150 | 163 | 225 | 250 | 335 |
| W2002SA-4P-C5Z5 | 200 | 213 | 275 | 300 | 385 |
| W2003SA-2P-C5Z5 | 300 | 313 | 375 | 400 | 485 |
| W2004SA-2P-C5Z5 | 400 | 413 | 475 | 500 | 585 |
| W2005SA-2P-C5Z5 | 500 | 513 | 575 | 600 | 685 |
| W2007SA-1P-C5Z5 | 700 | 713 | 775 | 800 | 885 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. If Fixed is used for opposite driven side, configuration of support bearing area is designed by the customer.
5. See B51 and B52 for ball screw supporting method (Fixed-Supported, Fixed-Fixed, etc.).

Nut model: PFT

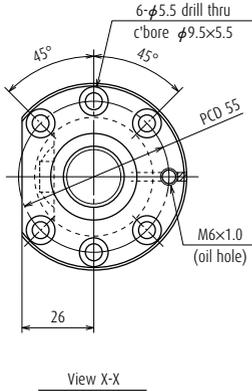

Screw shaft ϕ 20

Lead 5

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 20 \times 5 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 20.5 | |
| Screw shaft root diameter | 17.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 11 100 |
| | Static C_{0a} | 17 100 |
| Preload (N) | 490 | |
| Dynamic friction torque, median, (N-cm) | 7.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 4.3 | |
| Standard volume of grease replenishing (cm ³) | 2.2 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK15-01A (square) | WBK155-01 (square) |
| WBK15-11 (round) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.005 | 0.023 | 0.018 | 0.045 | 1.3 | 3 000 | 3 000 |
| -0.007 | 0.023 | 0.018 | 0.045 | 1.4 | 3 000 | 3 000 |
| -0.009 | 0.025 | 0.020 | 0.055 | 1.6 | 3 000 | 3 000 |
| -0.011 | 0.027 | 0.020 | 0.070 | 1.8 | 3 000 | 3 000 |
| -0.014 | 0.030 | 0.023 | 0.085 | 2.0 | 3 000 | 3 000 |
| -0.019 | 0.035 | 0.025 | 0.110 | 2.5 | 3 000 | 3 000 |

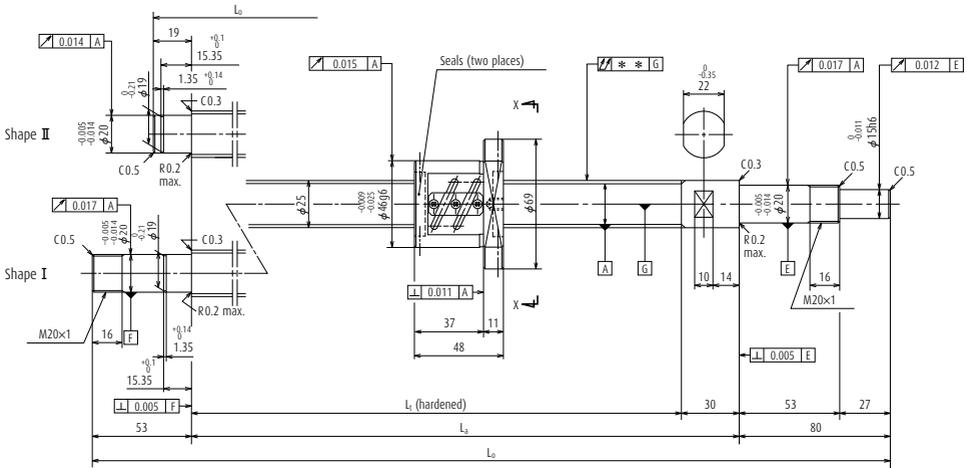


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L _t | L _a | L ₀ |
| W2502SA-1P-C5Z4 | 150 | 166 | 220 | 250 | 349 |
| W2502SA-2P-C5Z4 | 200 | 216 | 270 | 300 | 399 |
| W2503SA-1P-C5Z4 | 300 | 316 | 370 | 400 | 499 |
| W2504SA-1P-C5Z4 | 400 | 416 | 470 | 500 | 599 |
| W2505SA-1P-C5Z4 | 500 | 516 | 570 | 600 | 733 |
| W2507SA-1P-C5Z4 | 700 | 716 | 770 | 800 | 933 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

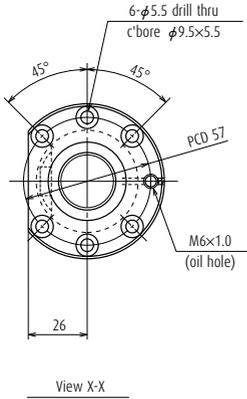

Screw shaft ϕ 25

Lead 4

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 25 \times 4 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 25.3 | |
| Screw shaft root diameter | 22.8 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 7 110 |
| | Static C_{0a} | 13 600 |
| Preload (N) | 290 | |
| Dynamic friction torque, median, (N-cm) | 4.9 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 3.2 | |
| Standard volume of grease replenishing (cm ³) | 1.6 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.005 | 0.023 | 0.018 | 0.035 | 1.6 | 2 800 | — |
| II | -0.006 | 0.023 | 0.018 | 0.035 | 1.8 | 2 800 | — |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 2.2 | 2 800 | — |
| II | -0.011 | 0.027 | 0.020 | 0.050 | 2.5 | 2 800 | — |
| I | -0.014 | 0.030 | 0.023 | 0.060 | 3.0 | 2 800 | 2 800 |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 3.7 | 2 800 | 2 800 |

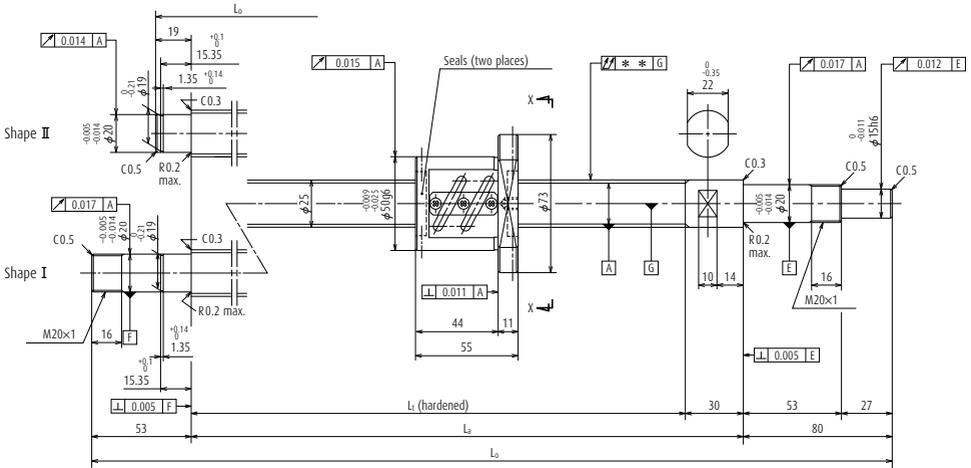

| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_1 | L_2 | L_0 |
| W2502SA-3P-C5Z5 | 150 | 159 | 220 | 250 | 349 |
| W2502SA-4P-C5Z5 | 200 | 209 | 270 | 300 | 399 |
| W2503SA-2P-C5Z5 | 300 | 309 | 370 | 400 | 499 |
| W2504SA-2P-C5Z5 | 400 | 409 | 470 | 500 | 599 |
| W2505SA-2P-C5Z5 | 500 | 509 | 570 | 600 | 733 |
| W2506SA-1P-C5Z5 | 600 | 609 | 670 | 700 | 833 |
| W2507SA-2P-C5Z5 | 700 | 709 | 770 | 800 | 933 |
| W2509SA-1P-C5Z5 | 900 | 909 | 970 | 1 000 | 1 133 |
| W2511SA-1P-C5Z5 | 1 000 | 1 109 | 1 170 | 1 200 | 1 333 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.
 4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

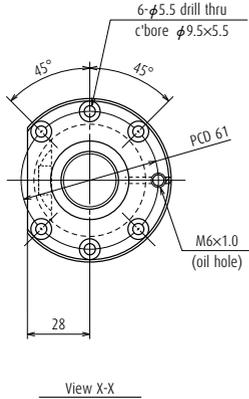

Screw shaft ϕ 25

Lead 5

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 25 \times 5 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 25.5 | |
| Screw shaft root diameter | 22.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 12 300 |
| | Static C_{0a} | 21 800 |
| Preload (N) | 540 | |
| Dynamic friction torque, median, (N-cm) | 8.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 5.0 | |
| Standard volume of grease replenishing (cm ³) | 2.5 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.005 | 0.023 | 0.018 | 0.035 | 1.8 | 2 800 | — |
| II | -0.006 | 0.023 | 0.018 | 0.035 | 2.0 | 2 800 | — |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 2.3 | 2 800 | — |
| II | -0.011 | 0.027 | 0.020 | 0.050 | 2.7 | 2 800 | — |
| I | -0.014 | 0.030 | 0.023 | 0.060 | 3.1 | 2 800 | 2 800 |
| I | -0.016 | 0.035 | 0.025 | 0.075 | 3.4 | 2 800 | 2 800 |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 3.8 | 2 800 | 2 800 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 4.5 | 2 800 | 2 800 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 5.2 | 2 520 | 2 800 |

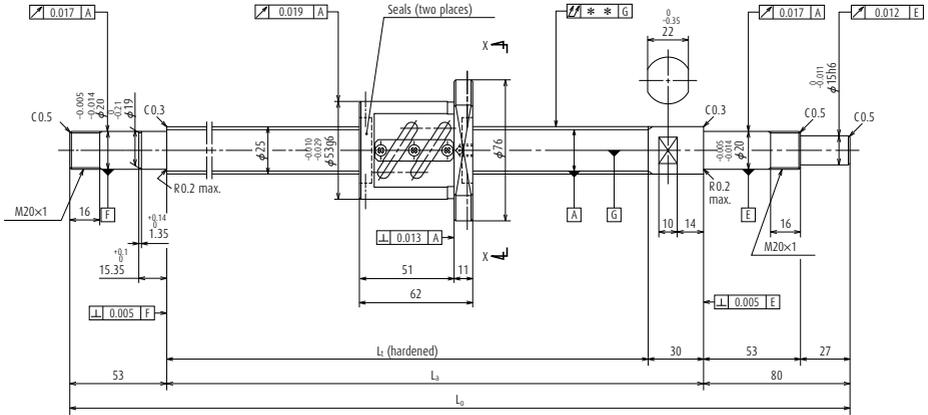


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_t | L_a | L_0 |
| W2503SA-3P-C5Z6 | 250 | 302 | 370 | 400 | 533 |
| W2505SA-3P-C5Z6 | 450 | 502 | 570 | 600 | 733 |
| W2507SA-3P-C5Z6 | 650 | 702 | 770 | 800 | 933 |
| W2511SA-2P-C5Z6 | 1 050 | 1 102 | 1 170 | 1 200 | 1 333 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -8 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

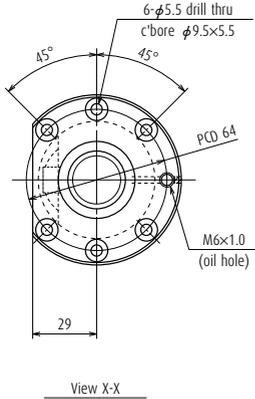

Screw shaft ϕ 25

Lead 6

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. × Lead / Direction of turn | 25 × 6 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 25.5 | |
| Screw shaft root diameter | 21.4 | |
| Effective turns of balls | 2.5 × 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 16 600 |
| | Static C_{0a} | 26 700 |
| Preload (N) | 685 | |
| Dynamic friction torque, median, (N-cm) | 13.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 7.0 | |
| Standard volume of grease replenishing (cm ³) | 3.5 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|-------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.009 | 0.025 | 0.020 | 0.050 | 2.5 | 2 800 | 2 800 |
| -0.014 | 0.030 | 0.023 | 0.060 | 3.2 | 2 800 | 2 800 |
| -0.018 | 0.035 | 0.025 | 0.075 | 3.9 | 2 800 | 2 800 |
| -0.028 | 0.046 | 0.030 | 0.120 | 5.2 | 2 450 | 2 800 |

Nut model: PFT

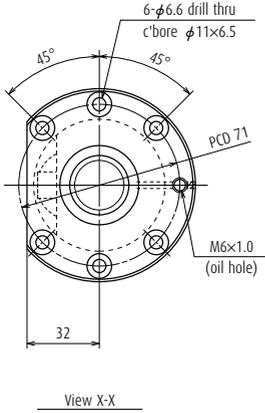

Screw shaft ϕ 25

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 25 \times 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 25.5 | |
| Screw shaft root diameter | 20.5 | |
| Effective turns of balls | 1.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 13 600 |
| | Static C_{0a} | 18 900 |
| Preload (N) | 585 | |
| Dynamic friction torque, median, (N-cm) | 13.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 9.5 | |
| Standard volume of grease replenishing (cm ³) | 4.8 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm


| Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------------------|--------------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.009 | 0.025 | 0.020 | 0.050 | 3.2 | 2 800 | 2 800 |
| -0.014 | 0.030 | 0.023 | 0.060 | 3.8 | 2 800 | 2 800 |
| -0.018 | 0.035 | 0.025 | 0.075 | 4.5 | 2 800 | 2 800 |
| -0.023 | 0.040 | 0.027 | 0.090 | 5.2 | 2 800 | 2 800 |
| -0.028 | 0.046 | 0.030 | 0.120 | 5.9 | 2 390 | 2 800 |
| -0.035 | 0.054 | 0.035 | 0.150 | 6.9 | 1 490 | 2 050 |

Nut model: PFT

Screw shaft $\phi 28$

Lead 5

Unit: mm

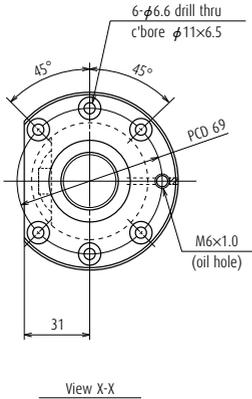


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 28 \times 5 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 28.5 | |
| Screw shaft root diameter | 25.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 13 000 |
| | Static C_{0a} | 24 400 |
| Preload (N) | 540 | |
| Dynamic friction torque, median, (N-cm) | 9.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 6.0 | |
| Standard volume of grease replenishing (cm ³) | 3.0 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|------------------------|----------------------------|-------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.006 | 0.023 | 0.018 | 0.035 | 2.5 | 2 500 | — |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 2.9 | 2 500 | — |
| II | -0.011 | 0.027 | 0.020 | 0.050 | 3.3 | 2 500 | — |
| I | -0.014 | 0.030 | 0.023 | 0.060 | 3.8 | 2 500 | 2 500 |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 4.7 | 2 500 | 2 500 |
| I | -0.024 | 0.040 | 0.027 | 0.090 | 5.6 | 2 500 | 2 500 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 6.5 | 2 500 | 2 500 |

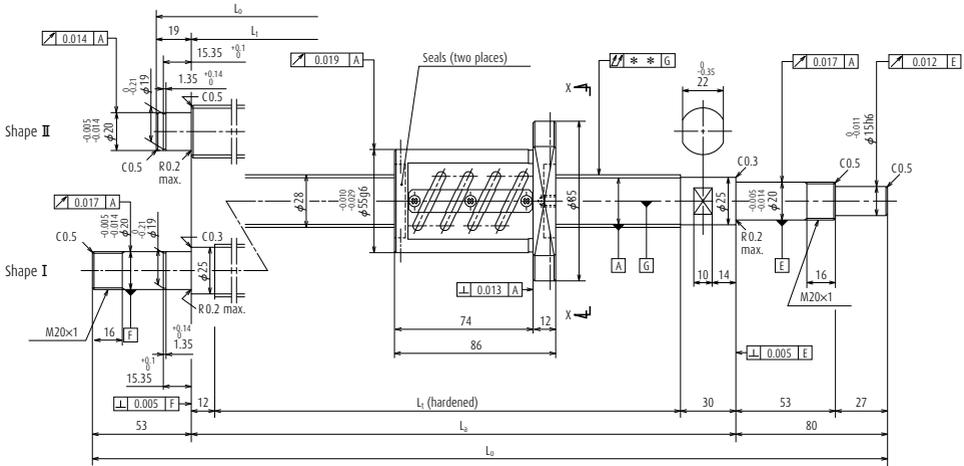


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L _t | L _a | L ₀ |
| W2802SA-2Z-C5Z5 | 150 | 178 | 270 | 300 | 399 |
| W2803SA-2Z-C5Z5 | 250 | 278 | 370 | 400 | 499 |
| W2804SA-2Z-C5Z5 | 350 | 378 | 470 | 500 | 599 |
| W2805SA-2Z-C5Z5 | 450 | 472 | 558 | 600 | 733 |
| W2807SA-2Z-C5Z5 | 650 | 672 | 758 | 800 | 933 |
| W2809SA-2Z-C5Z5 | 850 | 872 | 958 | 1 000 | 1 133 |
| W2811SA-2Z-C5Z5 | 1 050 | 1 072 | 1 158 | 1 200 | 1 333 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -2 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: ZFT

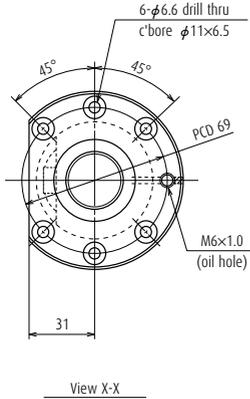

Screw shaft ϕ 28

Lead 5

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 28 \times 5 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 28.5 | |
| Screw shaft root diameter | 25.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 20 600 |
| | Static C_{0a} | 48 700 |
| Preload (N) | 1 220 | |
| Dynamic friction torque, median, (N-cm) | 21.5 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 9.0 | |
| Standard volume of grease replenishing (cm ³) | 4.5 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|-------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.006 | 0.023 | 0.018 | 0.035 | 2.8 | 2 500 | — |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 3.2 | 2 500 | — |
| II | -0.011 | 0.027 | 0.020 | 0.050 | 3.7 | 2 500 | — |
| I | -0.013 | 0.030 | 0.023 | 0.060 | 4.2 | 2 500 | 2 500 |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 5.1 | 2 500 | 2 500 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 5.9 | 2 500 | 2 500 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 6.8 | 2 500 | 2 500 |

Nut model: PFT

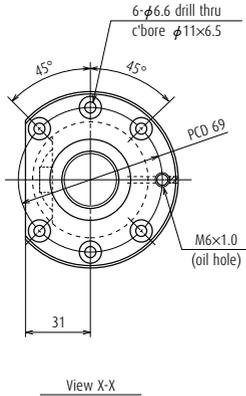

Screw shaft $\phi 28$

Lead 6

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 28 \times 6 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 28.5 | |
| Screw shaft root diameter | 25.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 12 900 |
| | Static C_{0a} | 24 300 |
| Preload (N) | 540 | |
| Dynamic friction torque, median, (N-cm) | 11.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 6.0 | |
| Standard volume of grease replenishing (cm ³) | 3.0 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 3.0 | 2 500 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 3.9 | 2 500 | — |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 4.9 | 2 500 | 2 500 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 5.8 | 2 500 | 2 500 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 6.6 | 2 500 | 2 500 |

Nut model: ZFT

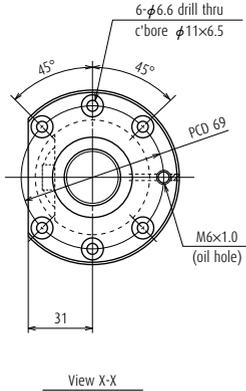

Screw shaft ϕ 28

Lead 6

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 28 \times 6 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 28.5 | |
| Screw shaft root diameter | 25.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 20 600 |
| | Static C_{0a} | 48 700 |
| Preload (N) | 1 220 | |
| Dynamic friction torque, median, (N-cm) | 23.5 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 9.5 | |
| Standard volume of grease replenishing (cm ³) | 4.8 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|-------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.040 | 3.4 | 2 500 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 4.3 | 2 500 | — |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 5.3 | 2 500 | 2 500 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 6.2 | 2 500 | 2 500 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 7.1 | 2 500 | 2 500 |

Nut model: PFT

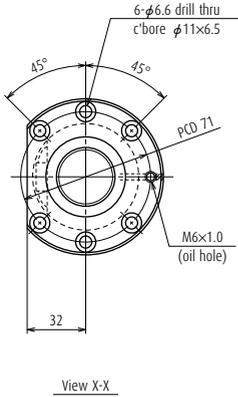

Screw shaft ϕ 32

Lead 5

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 32 \times 5 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 32.5 | |
| Screw shaft root diameter | 29.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 13 700 |
| | Static C_{0a} | 28 000 |
| Preload (N) | 590 | |
| Dynamic friction torque, median, (N-cm) | 11.8 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 7.0 | |
| Standard volume of grease replenishing (cm ³) | 3.5 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|--------------------|
| | (Fixed) | (Simple) |
| WBK20-01 (square) | WBK20-01 (square) | WBK20S-01 (square) |
| WBK20-11 (round) | WBK20-11 (round) | |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out ** \uparrow | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|------------------------|---------------|-------|-------|--------------------------------|--------------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.006 | 0.023 | 0.018 | 0.040 | 3.1 | 2 180 | — |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 3.7 | 2 180 | — |
| II | -0.011 | 0.027 | 0.020 | 0.050 | 4.2 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 4.8 | 2 180 | — |
| I | -0.016 | 0.035 | 0.025 | 0.075 | 5.6 | 2 180 | 2 180 |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 6.1 | 2 180 | 2 180 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 7.3 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 8.5 | 2 180 | 2 180 |
| I | -0.035 | 0.054 | 0.035 | 0.150 | 10.2 | 2 100 | 2 180 |

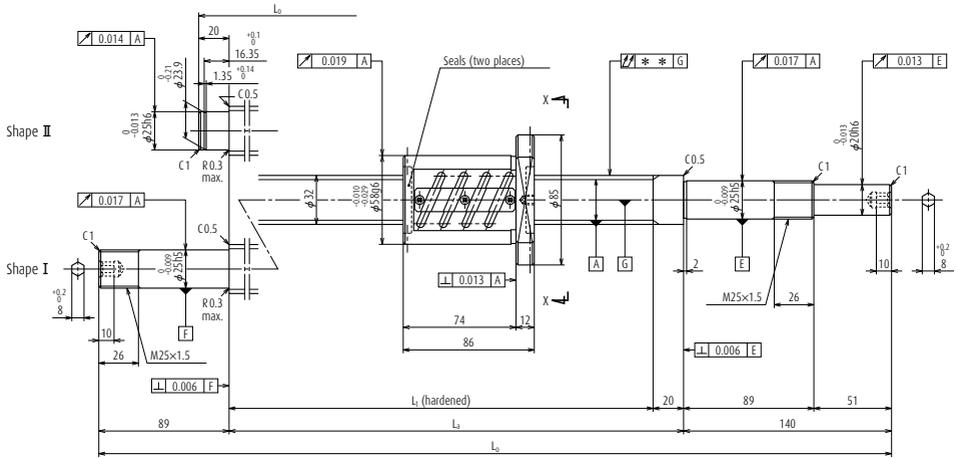

| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L ₂ | L ₀ |
| W3202SA-ZZ-C5Z5 | 150 | 186 | 280 | 300 | 460 |
| W3203SA-ZZ-C5Z5 | 250 | 286 | 380 | 400 | 560 |
| W3204SA-ZZ-C5Z5 | 350 | 386 | 480 | 500 | 660 |
| W3205SA-ZZ-C5Z5 | 450 | 486 | 580 | 600 | 760 |
| W3206SA-ZZ-C5Z5 | 550 | 586 | 680 | 700 | 929 |
| W3207SA-ZZ-C5Z5 | 650 | 686 | 780 | 800 | 1 029 |
| W3209SA-ZZ-C5Z5 | 850 | 886 | 980 | 1 000 | 1 229 |
| W3211SA-ZZ-C5Z5 | 1 050 | 1 086 | 1 180 | 1 200 | 1 429 |
| W3214SA-ZZ-C5Z5 | 1 350 | 1 386 | 1 480 | 1 500 | 1 729 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.
 4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: ZFT

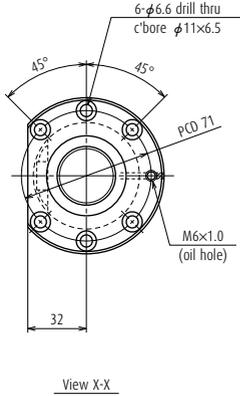

Screw shaft $\phi 32$

Lead 5

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 32 \times 5 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 32.5 | |
| Screw shaft root diameter | 29.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 21 800 |
| | Static C_{0a} | 56 000 |
| Preload (N) | 1 270 | |
| Dynamic friction torque, median, (N-cm) | 23.5 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 10 | |
| Standard volume of grease replenishing (cm ³) | 5 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK25DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.007 | 0.023 | 0.018 | 0.040 | 3.5 | 2 180 | — |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 4.1 | 2 180 | — |
| II | -0.012 | 0.027 | 0.020 | 0.060 | 4.7 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 5.3 | 2 180 | — |
| I | -0.016 | 0.035 | 0.025 | 0.075 | 6.1 | 2 180 | 2 180 |
| I | -0.019 | 0.035 | 0.025 | 0.090 | 6.7 | 2 180 | 2 180 |
| I | -0.024 | 0.040 | 0.027 | 0.090 | 7.9 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 9.0 | 2 180 | 2 180 |
| I | -0.036 | 0.054 | 0.035 | 0.150 | 10.8 | 2 100 | 2 180 |

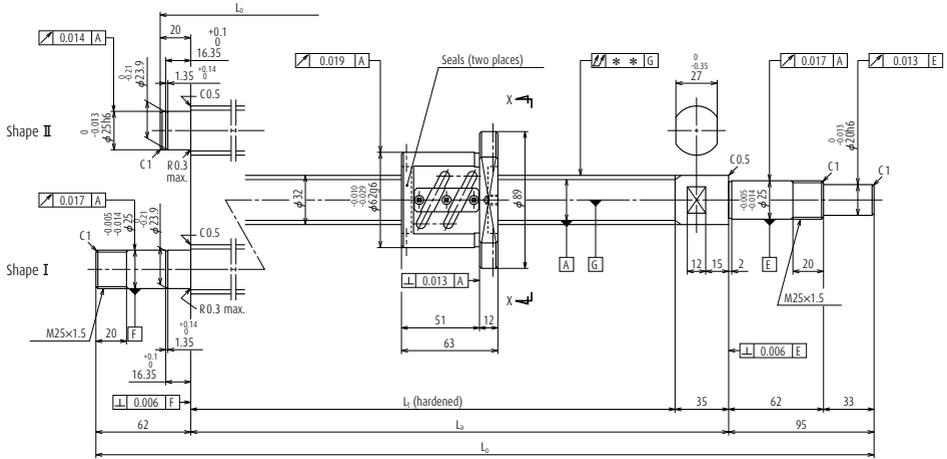


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L _a | L ₀ |
| W3203SA-3P-C5Z6 | 250 | 294 | 365 | 400 | 515 |
| W3205SA-3P-C5Z6 | 450 | 494 | 565 | 600 | 715 |
| W3207SA-3P-C5Z6 | 650 | 694 | 765 | 800 | 957 |
| W3209SA-3P-C5Z6 | 850 | 894 | 965 | 1 000 | 1 157 |
| W3211SA-3P-C5Z6 | 1 050 | 1 094 | 1 165 | 1 200 | 1 357 |
| W3214SA-3P-C5Z6 | 1 350 | 1 394 | 1 465 | 1 500 | 1 657 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.
4. The maximum stroke is -9 mm when Fixed-Fixed is used for left shaft end shape I.

Nut model: PFT

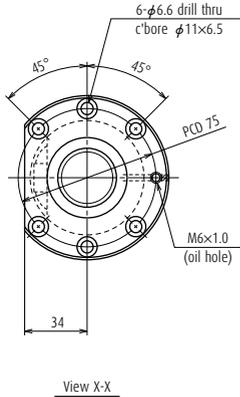

Screw shaft ϕ 32

Lead 6

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 32 \times 6 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 32.5 | |
| Screw shaft root diameter | 28.4 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 18 300 |
| | Static C_{0a} | 34 700 |
| Preload (N) | 780 | |
| Dynamic friction torque, median, (N-cm) | 15.7 | |
| Spacer ball | Yes | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 9.5 | |
| Standard volume of grease replenishing (cm ³) | 4.8 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side | |
|---------------------------|----------------------------|---------------------|
| | (Fixed) | (Simple) |
| WBK25-01W (square) | WBK25-01W (square) | WBK255-01W (square) |
| WBK25-11 (round) | WBK25-11 (round) | |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out ** $\uparrow \downarrow$ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|---|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 3.8 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 5.0 | 2 180 | — |
| I | -0.018 | 0.035 | 0.025 | 0.075 | 6.3 | 2 180 | 2 180 |
| I | -0.023 | 0.040 | 0.027 | 0.090 | 7.4 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 8.5 | 2 180 | 2 180 |
| I | -0.035 | 0.054 | 0.035 | 0.150 | 10.2 | 2 050 | 2 180 |

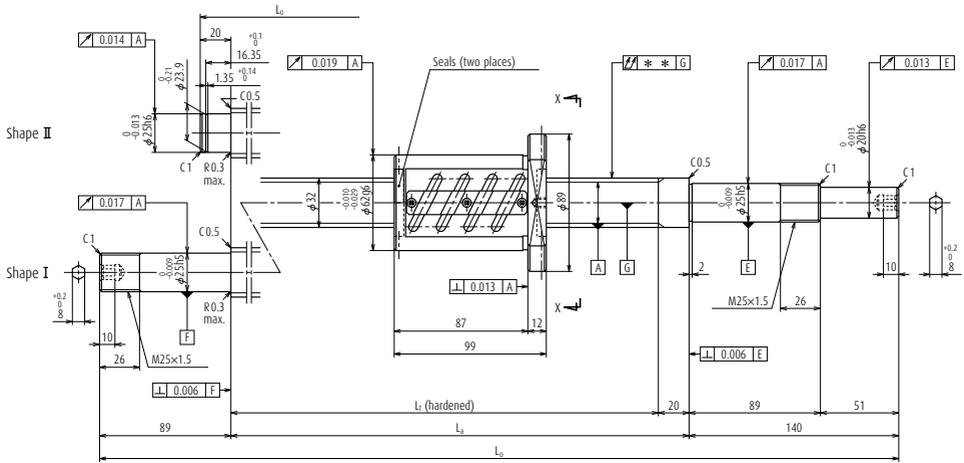

| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L ₂ | L ₀ |
| W3203SA-4Z-C5Z6 | 250 | 273 | 380 | 400 | 560 |
| W3205SA-4Z-C5Z6 | 450 | 473 | 580 | 600 | 760 |
| W3207SA-4Z-C5Z6 | 650 | 673 | 780 | 800 | 1 029 |
| W3209SA-4Z-C5Z6 | 850 | 873 | 980 | 1 000 | 1 229 |
| W3211SA-4Z-C5Z6 | 1 050 | 1 073 | 1 180 | 1 200 | 1 429 |
| W3214SA-4Z-C5Z6 | 1 350 | 1 373 | 1 480 | 1 500 | 1 729 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

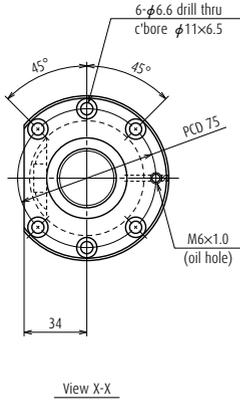

Screw shaft ϕ 32

Lead 6

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 32 \times 6 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 32.5 | |
| Screw shaft root diameter | 28.4 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 29 100 |
| | Static C_{0a} | 69 300 |
| Preload (N) | 1 710 | |
| Dynamic friction torque, median, (N-cm) | 35.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 14 | |
| Standard volume of grease replenishing (cm ³) | 7 | |

Recommended support unit

| |
|--|
| For drive side, for opposite to drive side (Fixed) |
| WBK25DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out** $\uparrow \downarrow$ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|--|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 4.5 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 5.6 | 2 180 | — |
| I | -0.019 | 0.035 | 0.025 | 0.090 | 7.0 | 2 180 | 2 180 |
| I | -0.024 | 0.040 | 0.027 | 0.090 | 8.1 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 9.3 | 2 180 | 2 180 |
| I | -0.036 | 0.054 | 0.035 | 0.150 | 11.0 | 2 060 | 2 180 |

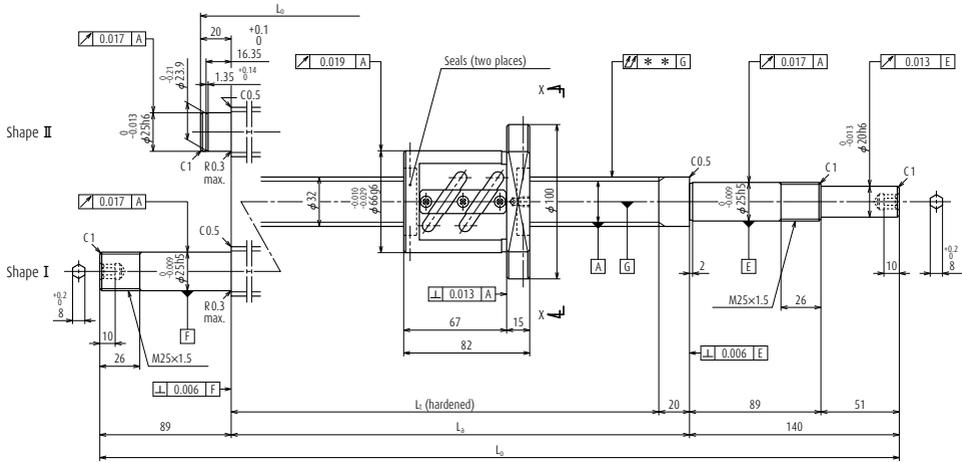


| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L _a | L ₀ |
| W3203SA-5Z-C5Z8 | 250 | 290 | 380 | 400 | 560 |
| W3205SA-5Z-C5Z8 | 450 | 490 | 580 | 600 | 760 |
| W3207SA-5Z-C5Z8 | 650 | 690 | 780 | 800 | 1 029 |
| W3209SA-5Z-C5Z8 | 850 | 890 | 980 | 1 000 | 1 229 |
| W3214SA-5Z-C5Z8 | 1 350 | 1 390 | 1 480 | 1 500 | 1 729 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

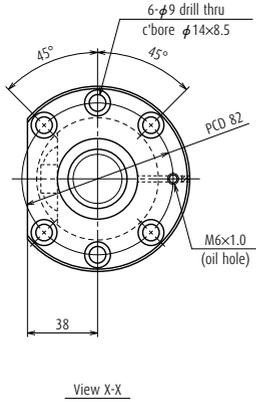

Screw shaft $\phi 32$

Lead 8

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. × Lead / Direction of turn | 32 × 8 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 32.5 | |
| Screw shaft root diameter | 27.5 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 20 600 |
| | Static C_{0a} | 40 900 |
| Preload (N) | 1 320 | |
| Dynamic friction torque, median, (N-cm) | 31.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 13 | |
| Standard volume of grease replenishing (cm ³) | 6.5 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK25DF-31H (round) |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out ** ↕ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|-----------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 4.7 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 5.8 | 2 180 | — |
| I | -0.019 | 0.035 | 0.025 | 0.090 | 7.2 | 2 180 | 2 180 |
| I | -0.024 | 0.040 | 0.027 | 0.090 | 8.3 | 2 180 | 2 180 |
| I | -0.036 | 0.054 | 0.035 | 0.150 | 11.1 | 1 960 | 2 180 |

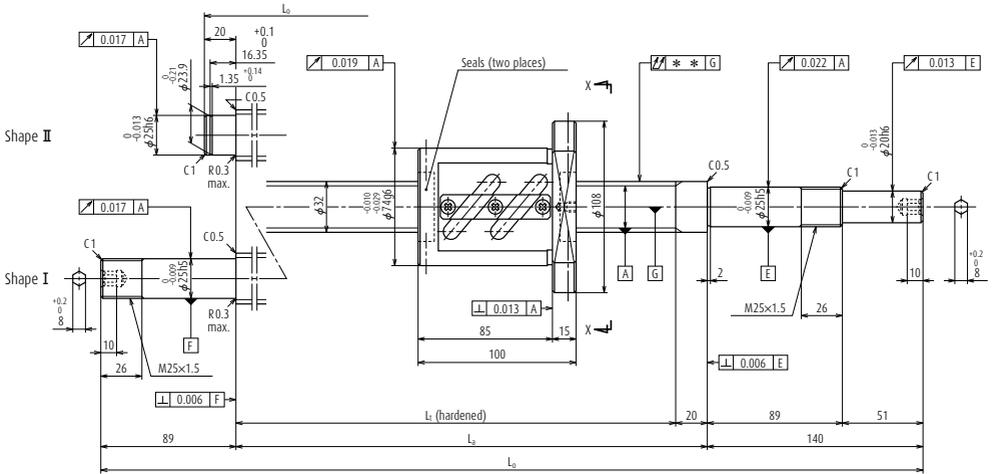

| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L ₂ | L ₀ |
| W3203SA-6Z-C5Z10 | 250 | 272 | 380 | 400 | 560 |
| W3204SA-3Z-C5Z10 | 350 | 372 | 480 | 500 | 660 |
| W3205SA-6Z-C5Z10 | 450 | 472 | 580 | 600 | 760 |
| W3206SA-3Z-C5Z10 | 550 | 572 | 680 | 700 | 929 |
| W3207SA-6Z-C5Z10 | 650 | 672 | 780 | 800 | 1 029 |
| W3209SA-6Z-C5Z10 | 850 | 872 | 980 | 1 000 | 1 229 |
| W3211SA-5Z-C5Z10 | 1 050 | 1 072 | 1 180 | 1 200 | 1 429 |
| W3214SA-6Z-C5Z10 | 1 350 | 1 372 | 1 480 | 1 500 | 1 729 |
| W3217SA-1Z-C5Z10 | 1 650 | 1 672 | 1 780 | 1 800 | 2 029 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

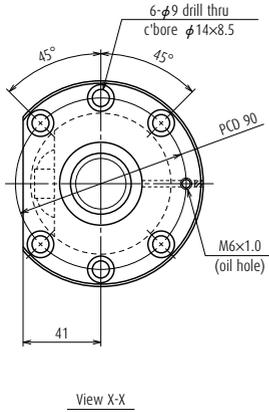

Screw shaft ϕ 32

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 32 \times 10 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 33 | |
| Screw shaft root diameter | 26.4 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 30 000 |
| | Static C_{0a} | 55 100 |
| Preload (N) | 1 960 | |
| Dynamic friction torque, median, (N-cm) | 54.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 22 | |
| Standard volume of grease replenishing (cm ³) | 11 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK25DF-31H (round) |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out ** \uparrow | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|--------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 5.5 | 2 180 | — |
| II | -0.012 | 0.027 | 0.020 | 0.060 | 6.0 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 6.6 | 2 180 | — |
| I | -0.016 | 0.035 | 0.025 | 0.075 | 7.4 | 2 180 | 2 180 |
| I | -0.019 | 0.035 | 0.025 | 0.090 | 7.9 | 2 180 | 2 180 |
| I | -0.024 | 0.040 | 0.027 | 0.090 | 9.0 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 10.1 | 2 180 | 2 180 |
| I | -0.036 | 0.054 | 0.035 | 0.150 | 11.7 | 1 920 | 2 180 |
| I | -0.043 | 0.065 | 0.040 | 0.200 | 13.3 | 1 310 | 1 810 |

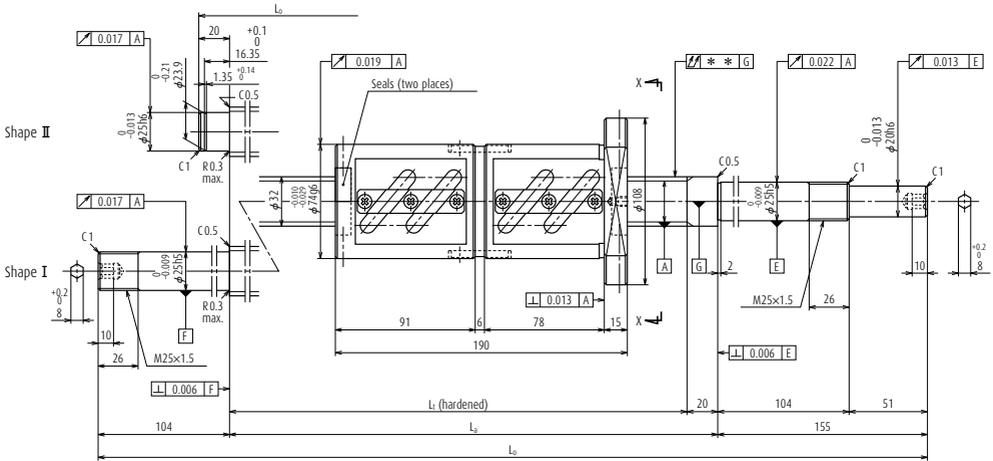

| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L _a | L ₀ |
| W3203SA-7D-C5Z10 | 150 | 182 | 380 | 400 | 575 |
| W3204SA-4D-C5Z10 | 250 | 282 | 480 | 500 | 675 |
| W3205SA-7D-C5Z10 | 350 | 382 | 580 | 600 | 775 |
| W3206SA-4D-C5Z10 | 450 | 482 | 680 | 700 | 959 |
| W3207SA-7D-C5Z10 | 550 | 582 | 780 | 800 | 1 059 |
| W3209SA-7D-C5Z10 | 750 | 782 | 980 | 1 000 | 1 259 |
| W3211SA-6D-C5Z10 | 950 | 982 | 1 180 | 1 200 | 1 459 |
| W3214SA-7D-C5Z10 | 1 250 | 1 282 | 1 480 | 1 500 | 1 759 |
| W3217SA-2D-C5Z10 | 1 550 | 1 582 | 1 780 | 1 800 | 2 059 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

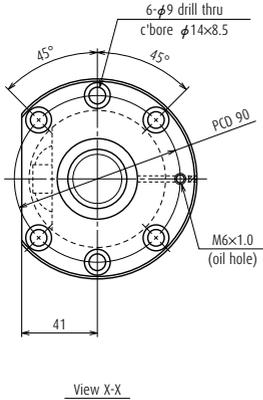

Screw shaft ϕ 32

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|-----------------|--------------------------|
| Shaft dia. \times Lead / Direction of turn | | 32 \times 10 / Right |
| Preload / Ball recirculation | | D-preload / Return tube |
| Ball dia. / Ball circle dia. | | 6.35 / 33 |
| Screw shaft root diameter | | 26.4 |
| Effective turns of balls | | 2.5 \times 2 |
| Accuracy grade / Preload | | C5 / Z |
| Basic load rating (N) | Dynamic C_d | 54 500 |
| | Static C_{0a} | 110 000 |
| Preload (N) | | 3 230 |
| Dynamic friction torque, median, (N-cm) | | 83.0 |
| Spacer ball | | None |
| Factory-packed grease | | Refer to Notes 2. |
| Internal spatial volume of nut (cm ³) | | 44 |
| Standard volume of grease replenishing (cm ³) | | 22 |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK25DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** \uparrow | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|--------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.050 | 7.5 | 2 180 | — |
| II | -0.012 | 0.027 | 0.020 | 0.060 | 8.1 | 2 180 | — |
| II | -0.014 | 0.030 | 0.023 | 0.060 | 8.6 | 2 180 | — |
| I | -0.016 | 0.035 | 0.025 | 0.075 | 9.5 | 2 180 | 2 180 |
| I | -0.019 | 0.035 | 0.025 | 0.090 | 10.0 | 2 180 | 2 180 |
| I | -0.024 | 0.040 | 0.027 | 0.120 | 11.1 | 2 180 | 2 180 |
| I | -0.028 | 0.046 | 0.030 | 0.120 | 12.2 | 2 180 | 2 180 |
| I | -0.036 | 0.054 | 0.035 | 0.150 | 13.8 | 2 050 | 2 180 |
| I | -0.043 | 0.065 | 0.040 | 0.200 | 15.4 | 1 380 | 1 910 |

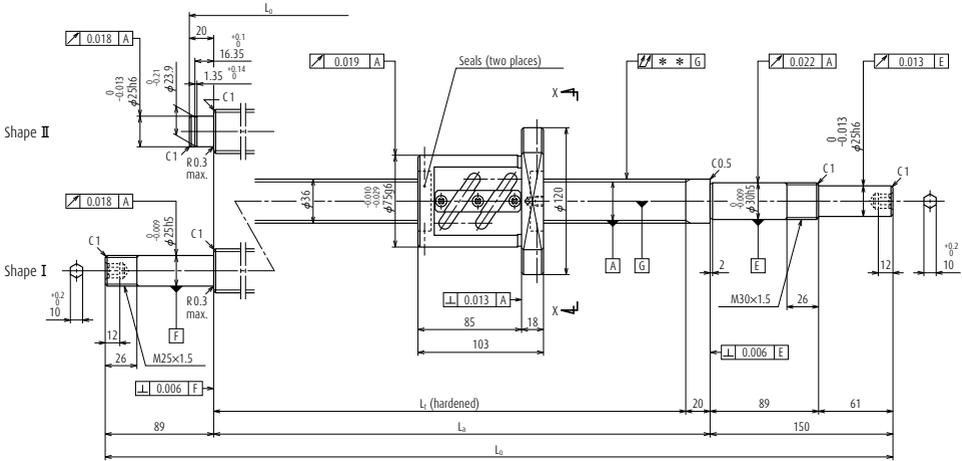


| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_1 | L_3 | L_0 |
| W3604SA-1Z-C5Z10 | 350 | 370 | 480 | 500 | 670 |
| W3606SA-1Z-C5Z10 | 550 | 570 | 680 | 700 | 870 |
| W3609SA-1Z-C5Z10 | 850 | 870 | 980 | 1 000 | 1 239 |
| W3613SA-1Z-C5Z10 | 1 250 | 1 270 | 1 380 | 1 400 | 1 639 |
| W3617SA-1Z-C5Z10 | 1 650 | 1 670 | 1 780 | 1 800 | 2 039 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

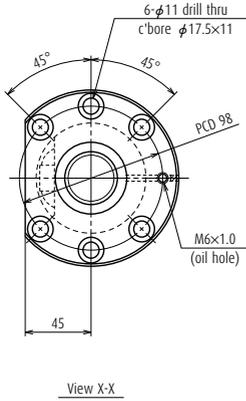

Screw shaft ϕ 36

Lead 10

Unit: mm

| Ball screw specifications | |
|---|--------------------------|
| Shaft dia. \times Lead / Direction of turn | 36 \times 10 / Right |
| Preload / Ball recirculation | Z-preload / Return tube |
| Ball dia. / Ball circle dia. | 6.35 / 37 |
| Screw shaft root diameter | 30.4 |
| Effective turns of balls | 2.5 \times 1 |
| Accuracy grade / Preload | C5 / Z |
| Basic load rating (N) | Dynamic C_d |
| | Static C_{0a} |
| Preload (N) | 2 060 |
| Dynamic friction torque, median, (N-cm) | 59.0 |
| Spacer ball | None |
| Factory-packed grease | Refer to Notes 2. |
| Internal spatial volume of nut (cm ³) | 32 |
| Standard volume of grease replenishing (cm ³) | 16 |


Recommended support unit

| For drive side (Fixed) | for opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK300DF-31H (round) | WBK25DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** $\uparrow \downarrow$ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|---|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.012 | 0.027 | 0.020 | 0.040 | 7.4 | 1 940 | — |
| II | -0.016 | 0.035 | 0.025 | 0.050 | 8.8 | 1 940 | — |
| I | -0.024 | 0.040 | 0.027 | 0.065 | 11.1 | 1 940 | 1 940 |
| I | -0.033 | 0.054 | 0.035 | 0.100 | 13.9 | 1 940 | 1 940 |
| I | -0.043 | 0.065 | 0.040 | 0.130 | 16.6 | 1 510 | 1 940 |

Nut model: DFT

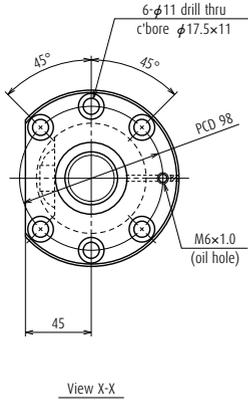

Screw shaft ϕ 36

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|---------|
| Shaft dia. \times Lead / Direction of turn | 36 \times 10 / Right | |
| Preload / Ball recirculation | D-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 37 | |
| Screw shaft root diameter | 30.4 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 58 000 |
| | Static C_{0a} | 122 000 |
| Preload (N) | 3 430 | |
| Dynamic friction torque, median, (N-cm) | 93.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 64 | |
| Standard volume of grease replenishing (cm ³) | 27 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Simple) |
|------------------------|-------------------------------------|
| WBK30DFD-31H | WBK25DFD-31H |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.012 | 0.027 | 0.020 | 0.040 | 9.3 | 1 940 | — |
| II | -0.016 | 0.035 | 0.025 | 0.050 | 10.7 | 1 940 | — |
| I | -0.024 | 0.040 | 0.027 | 0.080 | 13.1 | 1 940 | 1 940 |
| I | -0.033 | 0.054 | 0.035 | 0.100 | 15.9 | 1 940 | 1 940 |
| I | -0.043 | 0.065 | 0.040 | 0.130 | 18.6 | 1 600 | 1 940 |

Nut model: ZFT

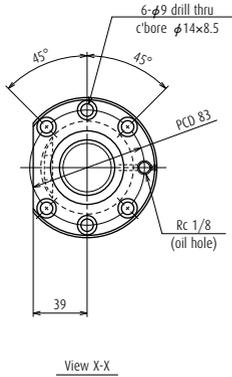

Screw shaft ϕ 40

Lead 5

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 40 \times 5 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 40.5 | |
| Screw shaft root diameter | 37.2 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 23 900 |
| | Static C_{0a} | 70 500 |
| Preload (N) | 1 420 | |
| Dynamic friction torque, median, (N-cm) | 29.5 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 14 | |
| Standard volume of grease replenishing (cm ³) | 7 | |


Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** $\uparrow \downarrow$ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|---|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.035 | 6.3 | 1 750 | — |
| II | -0.014 | 0.030 | 0.023 | 0.040 | 8.1 | 1 750 | — |
| I | -0.019 | 0.035 | 0.025 | 0.065 | 10.3 | 1 750 | 1 750 |
| I | -0.024 | 0.040 | 0.027 | 0.065 | 12.2 | 1 750 | 1 750 |
| I | -0.028 | 0.046 | 0.030 | 0.080 | 14.0 | 1 750 | 1 750 |
| I | -0.038 | 0.054 | 0.035 | 0.100 | 17.7 | 1 750 | 1 750 |

Nut model: ZFT

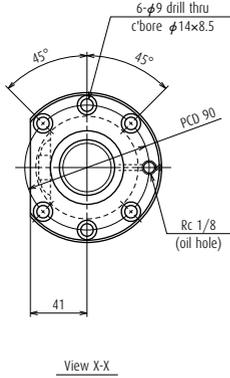

Screw shaft ϕ 40

Lead 8

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|---------|
| Shaft dia. × Lead / Direction of turn | 40 × 8 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 4.762 / 40.5 | |
| Screw shaft root diameter | 35.5 | |
| Effective turns of balls | 2.5 × 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 41 100 |
| | Static C_{0a} | 103 000 |
| Preload (N) | 2 450 | |
| Dynamic friction torque, median, (N-cm) | 64.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 27 | |
| Standard volume of grease replenishing (cm ³) | 14 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DF-31H (round) |

Unit: mm


| Left side shaft end | Lead accuracy | | | Shaft run-out** ↕ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|----------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.009 | 0.025 | 0.020 | 0.035 | 7.4 | 1 750 | — |
| II | -0.014 | 0.030 | 0.023 | 0.040 | 9.2 | 1 750 | — |
| I | -0.019 | 0.035 | 0.025 | 0.065 | 11.3 | 1 750 | 1 750 |
| I | -0.024 | 0.040 | 0.027 | 0.065 | 13.1 | 1 750 | 1 750 |
| I | -0.028 | 0.046 | 0.030 | 0.080 | 14.9 | 1 750 | 1 750 |
| I | -0.038 | 0.054 | 0.035 | 0.100 | 18.5 | 1 750 | 1 750 |

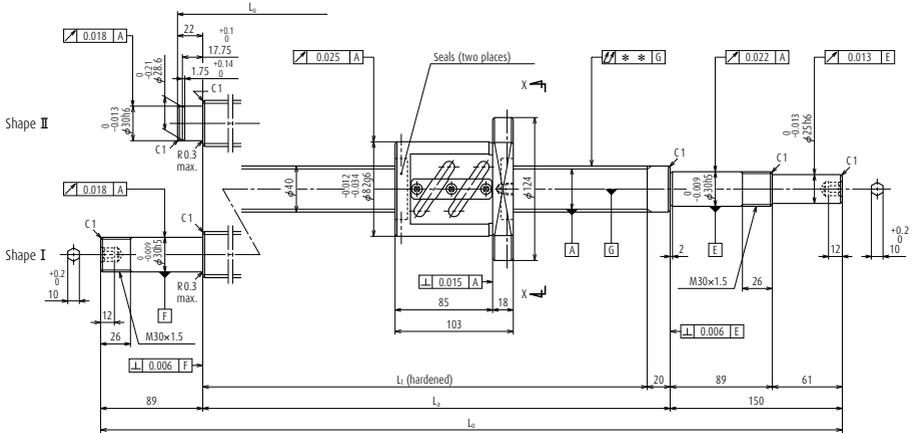

| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L ₁ | L ₂ | L ₀ |
| W4004SA-1Z-C5Z10 | 350 | 370 | 480 | 500 | 672 |
| W4005SA-3Z-C5Z10 | 450 | 470 | 580 | 600 | 772 |
| W4006SA-1Z-C5Z10 | 550 | 570 | 680 | 700 | 872 |
| W4007SA-3Z-C5Z10 | 650 | 670 | 780 | 800 | 1 039 |
| W4009SA-3Z-C5Z10 | 850 | 870 | 980 | 1 000 | 1 239 |
| W4011SA-3Z-C5Z10 | 1 050 | 1 070 | 1 180 | 1 200 | 1 439 |
| W4013SA-1Z-C5Z10 | 1 250 | 1 270 | 1 380 | 1 400 | 1 639 |
| W4015SA-3Z-C5Z10 | 1 450 | 1 470 | 1 580 | 1 600 | 1 839 |
| W4017SA-1Z-C5Z10 | 1 650 | 1 670 | 1 780 | 1 800 | 2 039 |
| W4023SA-1Z-C5Z10 | 2 250 | 2 270 | 2 380 | 2 400 | 2 639 |

- Notes**
1. We recommend NSK support unit. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

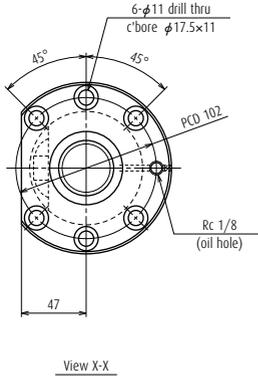

Screw shaft ϕ 40

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. × Lead / Direction of turn | 40 × 10 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 41 | |
| Screw shaft root diameter | 34.4 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 33 700 |
| | Static C_{0a} | 68 300 |
| Preload (N) | 2 160 | |
| Dynamic friction torque, median, (N-cm) | 64.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 30 | |
| Standard volume of grease replenishing (cm ³) | 15 | |


Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DF-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** ↗ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|-----------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.012 | 0.027 | 0.020 | 0.040 | 8.7 | 1 750 | — |
| II | -0.014 | 0.030 | 0.023 | 0.040 | 9.6 | 1 750 | — |
| II | -0.016 | 0.035 | 0.025 | 0.050 | 10.4 | 1 750 | — |
| I | -0.019 | 0.035 | 0.025 | 0.065 | 11.7 | 1 750 | 1 750 |
| I | -0.024 | 0.040 | 0.027 | 0.065 | 13.4 | 1 750 | 1 750 |
| I | -0.028 | 0.046 | 0.030 | 0.080 | 15.1 | 1 750 | 1 750 |
| I | -0.033 | 0.054 | 0.035 | 0.100 | 16.9 | 1 750 | 1 750 |
| I | -0.038 | 0.054 | 0.035 | 0.100 | 18.6 | 1 750 | 1 750 |
| I | -0.043 | 0.065 | 0.040 | 0.130 | 20.3 | 1 710 | 1 750 |
| I | -0.057 | 0.077 | 0.046 | 0.170 | 25.5 | 940 | 1 320 |

Nut model: DFT

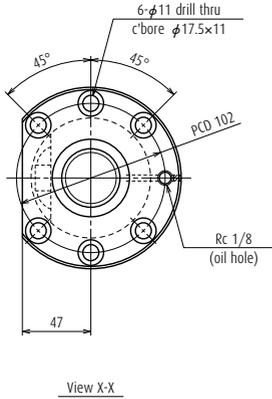

Screw shaft ϕ 40

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|---------|
| Shaft dia. \times Lead / Direction of turn | 40 \times 10 / Right | |
| Preload / Ball recirculation | D-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 41 | |
| Screw shaft root diameter | 34.4 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 61 200 |
| | Static C_{0a} | 137 000 |
| Preload (N) | 3 630 | |
| Dynamic friction torque, median, (N-cm) | 108 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 59 | |
| Standard volume of grease replenishing (cm ³) | 30 | |


Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DFD-31H (round) |

Unit: mm

| Left side shaft end | Lead accuracy | | | Shaft run-out ** \uparrow | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------------|---------------|-------|-------|--------------------------------|-----------|---|---------------|
| | T | e_p | v_u | | | Supporting condition | |
| | | | | | | Fixed - Simple Support | Fixed - Fixed |
| II | -0.012 | 0.027 | 0.020 | 0.040 | 11.0 | 1 750 | — |
| II | -0.014 | 0.030 | 0.023 | 0.040 | 11.9 | 1 750 | — |
| II | -0.016 | 0.035 | 0.025 | 0.050 | 12.7 | 1 750 | — |
| I | -0.019 | 0.035 | 0.025 | 0.065 | 14.1 | 1 750 | 1 750 |
| I | -0.024 | 0.040 | 0.027 | 0.065 | 15.8 | 1 750 | 1 750 |
| I | -0.028 | 0.046 | 0.030 | 0.080 | 17.5 | 1 750 | 1 750 |
| I | -0.033 | 0.054 | 0.035 | 0.100 | 19.3 | 1 750 | 1 750 |
| I | -0.038 | 0.054 | 0.035 | 0.100 | 21.0 | 1 750 | 1 750 |
| I | -0.043 | 0.065 | 0.040 | 0.130 | 22.7 | 1 750 | 1 750 |
| I | -0.057 | 0.077 | 0.046 | 0.170 | 27.9 | 980 | 1 370 |

Nut model: ZFT

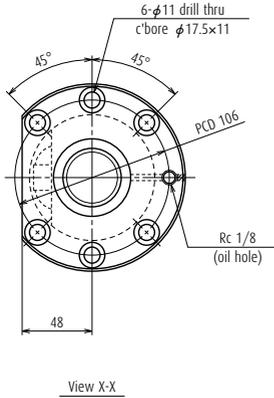

Screw shaft ϕ 40

Lead 12

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 40 \times 12 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 7.144 / 41.5 | |
| Screw shaft root diameter | 34.1 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 39 500 |
| | Static C_{0a} | 77 200 |
| Preload (N) | 2 250 | |
| Dynamic friction torque, median, (N-cm) | 83.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 33 | |
| Standard volume of grease replenishing (cm ³) | 17 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DF-31H (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------------------|-----------|---|---------------|
| T | e_p | u_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.016 | 0.035 | 0.025 | 0.050 | 11.6 | 1 750 | 1 750 |
| -0.024 | 0.040 | 0.027 | 0.065 | 14.2 | 1 750 | 1 750 |
| -0.033 | 0.054 | 0.035 | 0.100 | 17.7 | 1 750 | 1 750 |
| -0.043 | 0.065 | 0.040 | 0.130 | 21.2 | 1 710 | 1 750 |
| -0.060 | 0.077 | 0.046 | 0.170 | 27.2 | 870 | 1 210 |

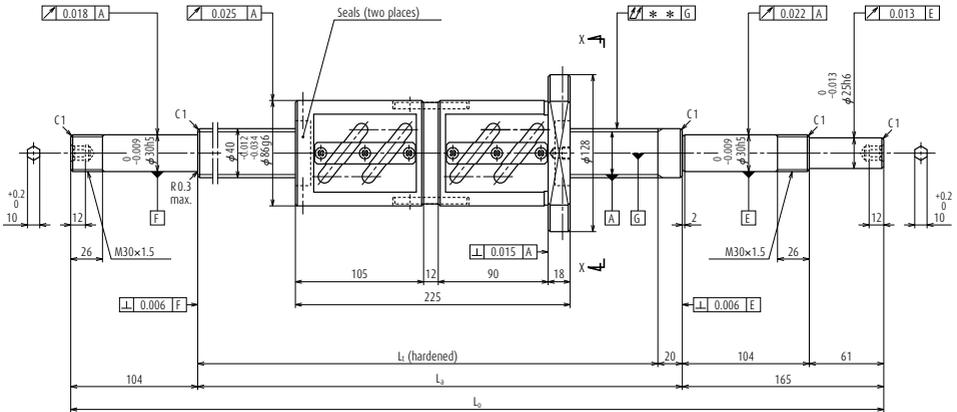


| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_t | L_s | L_0 |
| W4006SA-4D-C5Z12 | 400 | 448 | 680 | 700 | 969 |
| W4009SA-6D-C5Z12 | 700 | 748 | 980 | 1 000 | 1 269 |
| W4013SA-4D-C5Z12 | 1 100 | 1 148 | 1 380 | 1 400 | 1 669 |
| W4017SA-4D-C5Z12 | 1 500 | 1 548 | 1 780 | 1 800 | 2 069 |
| W4024SA-2D-C5Z12 | 2 200 | 2 248 | 2 480 | 2 500 | 2 769 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: DFT

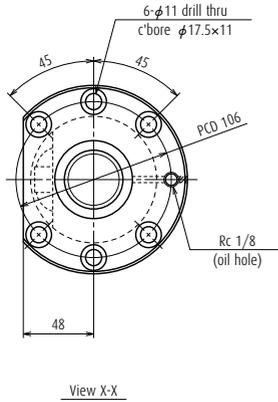

Screw shaft ϕ 40

Lead 12

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|---------|
| Shaft dia. \times Lead / Direction of turn | 40 \times 12 / Right | |
| Preload / Ball recirculation | D-preload / Return tube | |
| Ball dia. / Ball circle dia. | 7.144 / 41.5 | |
| Screw shaft root diameter | 34.1 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 71 700 |
| | Static C_{0a} | 154 000 |
| Preload (N) | 4 310 | |
| Dynamic friction torque, median, (N-cm) | 137 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 76 | |
| Standard volume of grease replenishing (cm ³) | 38 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK30DFD-31H (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|---|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.016 | 0.035 | 0.025 | 0.050 | 14.8 | 1 750 | 1 750 |
| -0.024 | 0.040 | 0.027 | 0.080 | 17.4 | 1 750 | 1 750 |
| -0.033 | 0.054 | 0.035 | 0.100 | 20.9 | 1 750 | 1 750 |
| -0.043 | 0.065 | 0.040 | 0.130 | 24.3 | 1 750 | 1 750 |
| -0.060 | 0.077 | 0.046 | 0.170 | 30.4 | 910 | 1 270 |

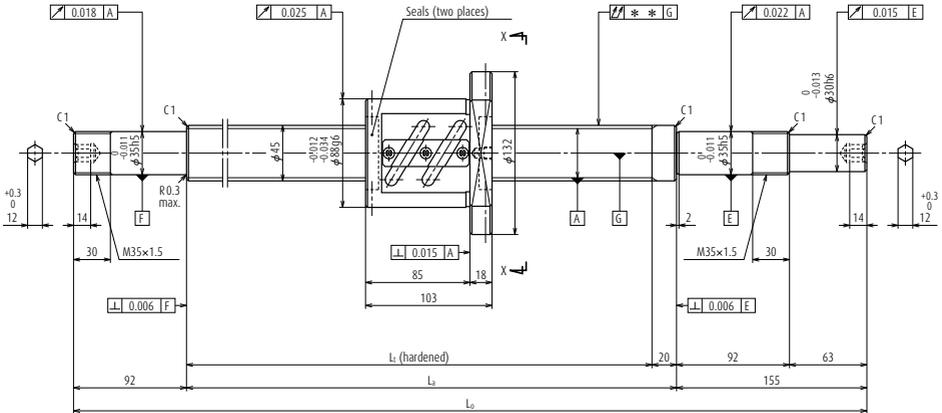


| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|----------------|----------------|
| | Nominal | Maximum | L _t | L _a | L ₀ |
| W4506SA-1Z-C5Z10 | 550 | 568 | 680 | 700 | 947 |
| W4509SA-1Z-C5Z10 | 850 | 868 | 980 | 1 000 | 1 247 |
| W4513SA-1Z-C5Z10 | 1 250 | 1 268 | 1 380 | 1 400 | 1 647 |
| W4517SA-1Z-C5Z10 | 1 650 | 1 668 | 1 780 | 1 800 | 2 047 |
| W4524SA-1Z-C5Z10 | 2 350 | 2 368 | 2 480 | 2 500 | 2 747 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

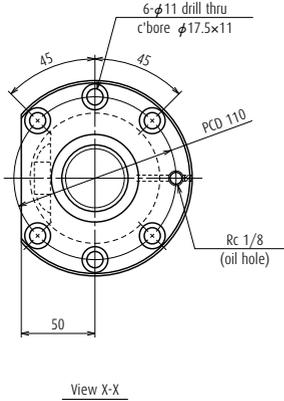

Screw shaft ϕ 45

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 45 \times 10 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 46 | |
| Screw shaft root diameter | 39.4 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 36 300 |
| | Static C_{0a} | 78 500 |
| Preload (N) | 2 260 | |
| Dynamic friction torque, median, (N-cm) | 69.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 33 | |
| Standard volume of grease replenishing (cm ³) | 17 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK35DF-31H (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.016 | 0.035 | 0.025 | 0.050 | 13.4 | 1 550 | 1 550 |
| -0.024 | 0.040 | 0.027 | 0.065 | 16.7 | 1 550 | 1 550 |
| -0.033 | 0.054 | 0.035 | 0.100 | 21.2 | 1 550 | 1 550 |
| -0.043 | 0.065 | 0.040 | 0.130 | 25.6 | 1 550 | 1 550 |
| -0.060 | 0.077 | 0.046 | 0.170 | 33.4 | 990 | 1 390 |

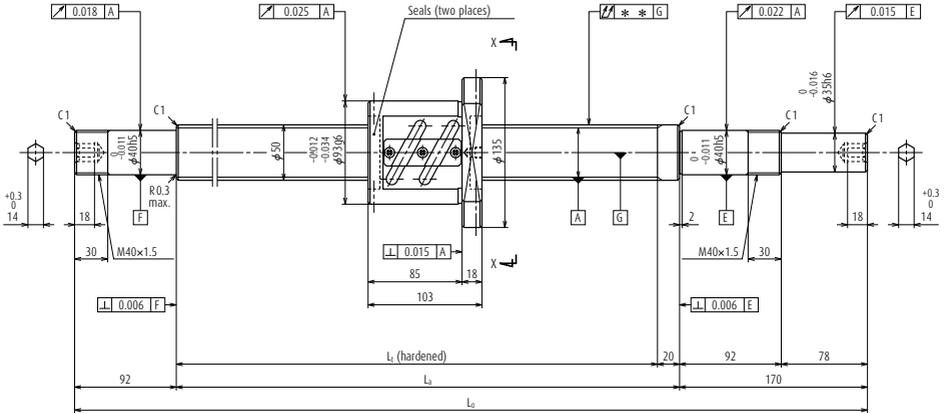


| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_t | L_a | L_o |
| W5005SA-1Z-C5Z10 | 450 | 468 | 580 | 600 | 862 |
| W5007SA-1Z-C5Z10 | 650 | 667 | 780 | 800 | 1 062 |
| W5009SA-1Z-C5Z10 | 850 | 868 | 980 | 1 000 | 1 262 |
| W5011SA-1Z-C5Z10 | 1 050 | 1 068 | 1 180 | 1 200 | 1 462 |
| W5014SA-1Z-C5Z10 | 1 350 | 1 368 | 1 480 | 1 500 | 1 762 |
| W5019SA-1Z-C5Z10 | 1 850 | 1 868 | 1 980 | 2 000 | 2 262 |
| W5025SA-1Z-C5Z10 | 2 450 | 2 468 | 2 580 | 2 600 | 2 862 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

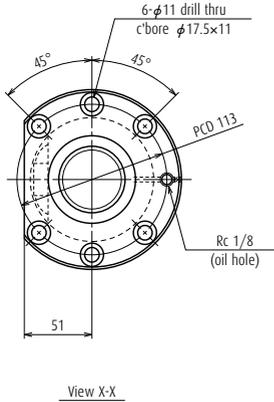

Screw shaft ϕ 50

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|--------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 50 \times 10 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 51 | |
| Screw shaft root diameter | 44.4 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 37 500 |
| | Static C_{0a} | 87 200 |
| Preload (N) | 2 450 | |
| Dynamic friction torque, median, (N-cm) | 79.0 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 37 | |
| Standard volume of grease replenishing (cm ³) | 19 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK40DF-31H (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|----------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.014 | 0.030 | 0.023 | 0.050 | 14.8 | 1 400 | 1 400 |
| -0.019 | 0.035 | 0.025 | 0.065 | 17.6 | 1 400 | 1 400 |
| -0.024 | 0.040 | 0.027 | 0.080 | 20.3 | 1 400 | 1 400 |
| -0.028 | 0.046 | 0.030 | 0.080 | 23.1 | 1 400 | 1 400 |
| -0.036 | 0.054 | 0.035 | 0.100 | 27.3 | 1 400 | 1 400 |
| -0.048 | 0.065 | 0.040 | 0.130 | 34.2 | 1 400 | 1 400 |
| -0.062 | 0.093 | 0.054 | 0.170 | 42.5 | 1 030 | 1 400 |

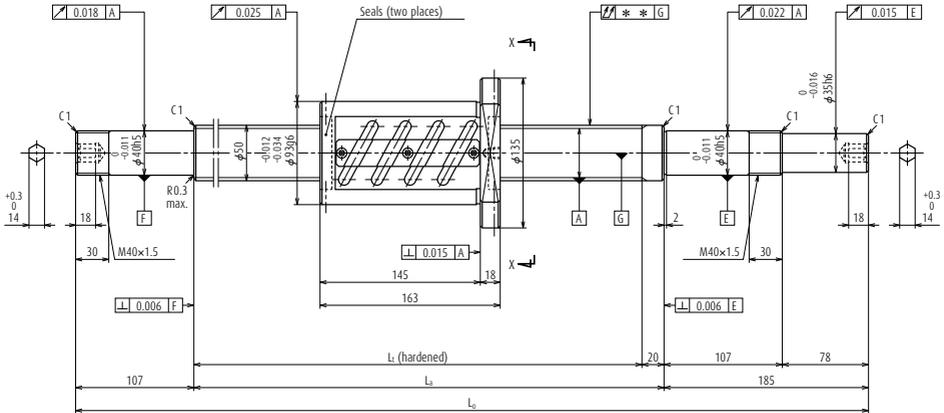


| Ball screw No. | Stroke | | Screw shaft length | | |
|------------------|---------|---------|--------------------|-------|-------|
| | Nominal | Maximum | L_t | L_a | L_o |
| W5005SA-2Z-C5Z10 | 350 | 408 | 580 | 600 | 892 |
| W5007SA-2Z-C5Z10 | 550 | 608 | 780 | 800 | 1 092 |
| W5009SA-2Z-C5Z10 | 750 | 808 | 980 | 1 000 | 1 292 |
| W5011SA-2Z-C5Z10 | 950 | 1 008 | 1 180 | 1 200 | 1 492 |
| W5014SA-2Z-C5Z10 | 1 250 | 1 308 | 1 480 | 1 500 | 1 792 |
| W5019SA-2Z-C5Z10 | 1 750 | 1 808 | 1 980 | 2 000 | 2 292 |
| W5025SA-2Z-C5Z10 | 2 350 | 2 408 | 2 580 | 2 600 | 2 892 |

Notes

1. We recommend NSK support unit. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.** See page D13 for details.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: ZFT

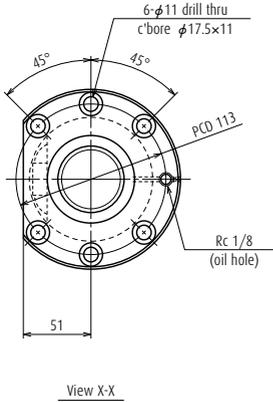

Screw shaft ϕ 50

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|---------|
| Shaft dia. \times Lead / Direction of turn | 50 \times 10 / Right | |
| Preload / Ball recirculation | Z-preload / Return tube | |
| Ball dia. / Ball circle dia. | 6.35 / 51 | |
| Screw shaft root diameter | 44.4 | |
| Effective turns of balls | 2.5 \times 2 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 68 100 |
| | Static C_{0a} | 174 000 |
| Preload (N) | 4 020 | |
| Dynamic friction torque, median, (N-cm) | 137 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 2. | |
| Internal spatial volume of nut (cm ³) | 59 | |
| Standard volume of grease replenishing (cm ³) | 30 | |

Recommended support unit

| |
|---|
| For drive side, for opposite to drive side (Fixed) |
| WBK40DFD-31H (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ∇ | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|------------------------------|-----------|---|---------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | Fixed - Fixed |
| -0.014 | 0.030 | 0.023 | 0.050 | 16.8 | 1 400 | 1 400 |
| -0.019 | 0.035 | 0.025 | 0.065 | 19.6 | 1 400 | 1 400 |
| -0.024 | 0.040 | 0.027 | 0.080 | 22.3 | 1 400 | 1 400 |
| -0.028 | 0.046 | 0.030 | 0.080 | 25.1 | 1 400 | 1 400 |
| -0.036 | 0.054 | 0.035 | 0.100 | 29.3 | 1 400 | 1 400 |
| -0.048 | 0.065 | 0.040 | 0.130 | 36.2 | 1 400 | 1 400 |
| -0.062 | 0.093 | 0.054 | 0.170 | 44.6 | 1 060 | 1 400 |

B-3-1.4 Finished Shaft End Ball Screws Made of Stainless Steel KA Type

1. Order of the dimension tables

The tables begin with the smallest shaft diameter ball screw, and proceeds to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in Table 1.

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

> Stroke

Nominal stroke: A reference for your use.

Maximum stroke: The stroke limit that the nut can move.

> Lead accuracy

Lead accuracy is either C3 or C5 grades.

T : Travel compensation

e_p : Tolerance on specified travel

σ_{Δ} : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

> Permissible rotational speed

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

The lower of the two criteria, the $d \cdot n$ and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

Table 1 Combinations of screw shaft diameter and lead

| Screw shaft diameter (mm) | Lead (mm) | | |
|---------------------------|-----------|------|------|
| | | 1 | 2 |
| 6 | | B275 | |
| 8 | | B277 | B279 |
| 10 | | | B281 |
| 12 | | | B285 |
| 15 | | | |
| 16 | | | B295 |
| 20 | | | |

3. Material

A martensitic stainless steel is used. A special heat treatment technology provides the ball groove section with sufficient hardness which produces high load carrying capacity and durability.


4. Other

The seal of the ball screw, ball recirculating deflector, and end cap are made of synthetic resin. Consult NSK when using our ball screws under extreme environments or in special environments, or if using special lubricant or oil. For special environments, see pages B70 and D2. For lubricants, see pages B67 and D13.

Note: For details of standard stock products, contact NSK.

| 4 | 5 | 10 | 20 |
|------|------|------|------|
| | | | |
| B283 | | | |
| | B287 | B289 | |
| | | B291 | B293 |
| | | | B297 |

Finished shaft end stainless steel product KA Type (Fine lead)

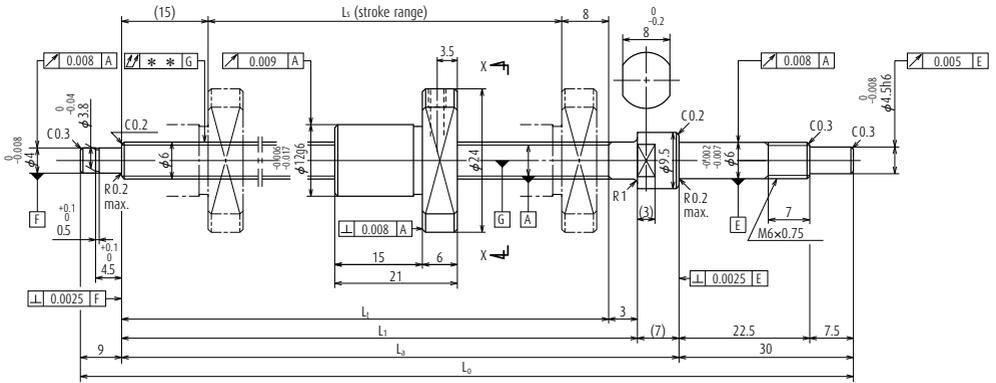

| Ball screw No. | Stroke L_s | | Thread length | | | |
|------------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_t | L_1 | L_a | L_0 |
| W0601KA-3PY-C3Z1 | 100 | 102 | 125 | 128 | 135 | 174 |

Notes


1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

Screw shaft $\phi 6$

Lead 1

Unit: mm

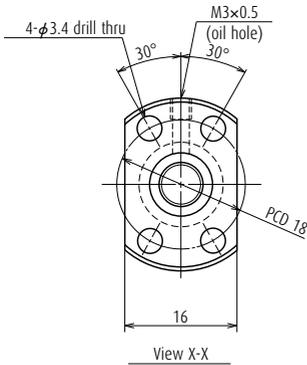


Ball screw specifications

| | | |
|--|--------------------------------|-----|
| Shaft dia. \times Lead / Direction of turn | 6 \times 1 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 6.2 | |
| Screw shaft root diameter | 5.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 555 |
| | Static C_{0a} | 680 |
| Axial play | 0 | |
| Preload (N) | 24.5 | |
| Dynamic friction torque, (N-cm) | 1.3 or less | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |

Unit: mm

| Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|---|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| 0 | 0.010 | 0.008 | 0.025 | 0.06 | Fixed - Simple Support 3 000 |

Finished shaft end stainless steel product KA Type (Fine lead)

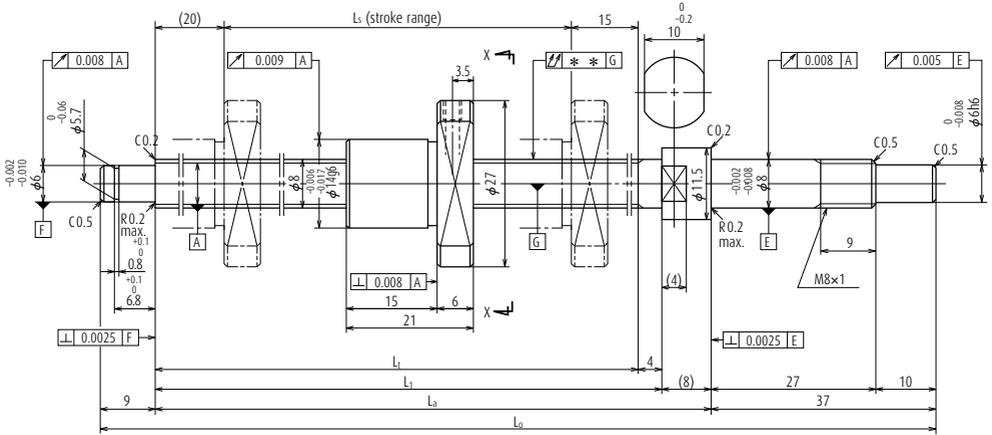


| Ball screw No. | Stroke L_s | | Thread length | | | |
|------------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_t | L_1 | L_a | L_0 |
| W0802KA-1PY-C3Z1 | 150 | 155 | 190 | 194 | 202 | 248 |

Notes

1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Ball nut does not have seal.
3. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

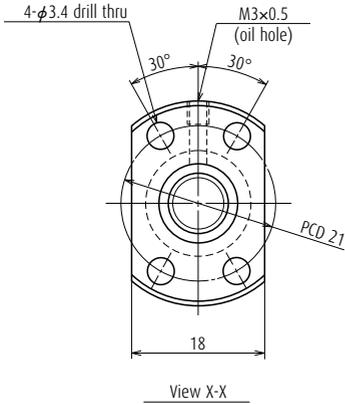

Screw shaft ϕ 8

Lead 1

Unit: mm

| Ball screw specifications | | |
|--|--------------------------------|-----|
| Shaft dia. \times Lead / Direction of turn | 8 \times 1 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 8.2 | |
| Screw shaft root diameter | 7.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 645 |
| | Static C_{0a} | 955 |
| Axial play | 0 | |
| Preload (N) | 29.4 | |
| Dynamic friction torque, (N-cm) | 1.8 or less | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK08-01C (square, clean) | WBK08S-01C (square, clean) |
| WBK08-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| 0 | 0.010 | 0.008 | 0.035 | 0.12 | Fixed - Simple Support 3 000 |


Finished shaft end stainless steel product KA Type (Fine lead)

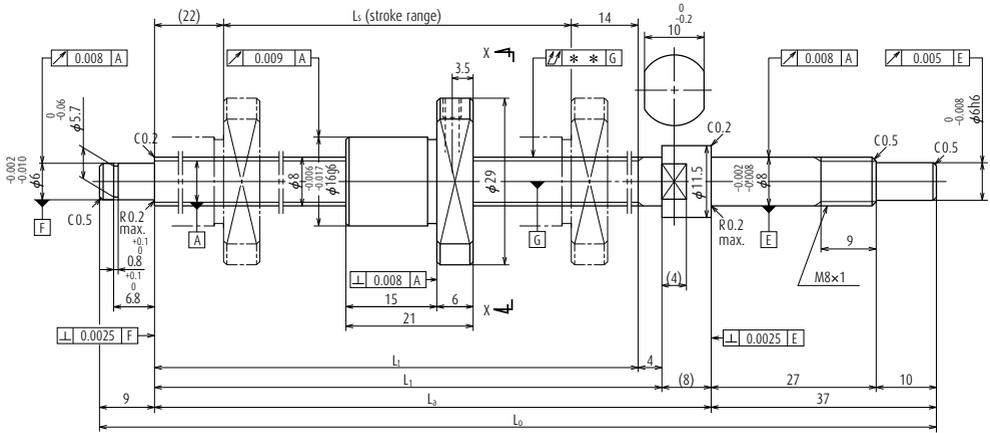

| Ball screw No. | Stroke L_s | | Thread length | | | |
|------------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_t | L_1 | L_a | L_0 |
| W0802KA-5PY-C3Z2 | 150 | 154 | 190 | 194 | 202 | 248 |

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

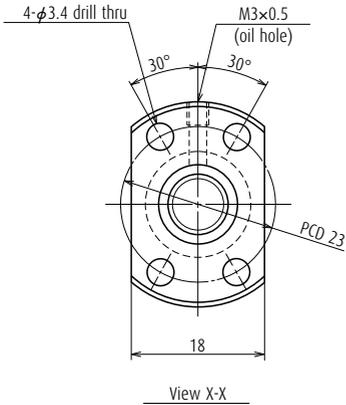

Screw shaft ϕ 8

Lead 2

Unit: mm

| Ball screw specifications | | |
|---|--------------------------------|-------|
| Shaft dia. × Lead / Direction of turn | 8 × 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 8.3 | |
| Screw shaft root diameter | 6.9 | |
| Effective turns of balls | 1 × 3 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 1 270 |
| | Static C_{0a} | 1 630 |
| Axial play | 0 | |
| Preload (N) | 49.0 | |
| Dynamic friction torque, (N-cm) | 2.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 0.34 | |
| Standard volume of grease replenishing (cm ³) | 0.17 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK08-01C (square, clean) | WBK08S-01C (square, clean) |
| WBK08-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.010 | 0.008 | 0.035 | 0.13 | 3 000 |


Finished shaft end stainless steel product KA Type (Fine lead)

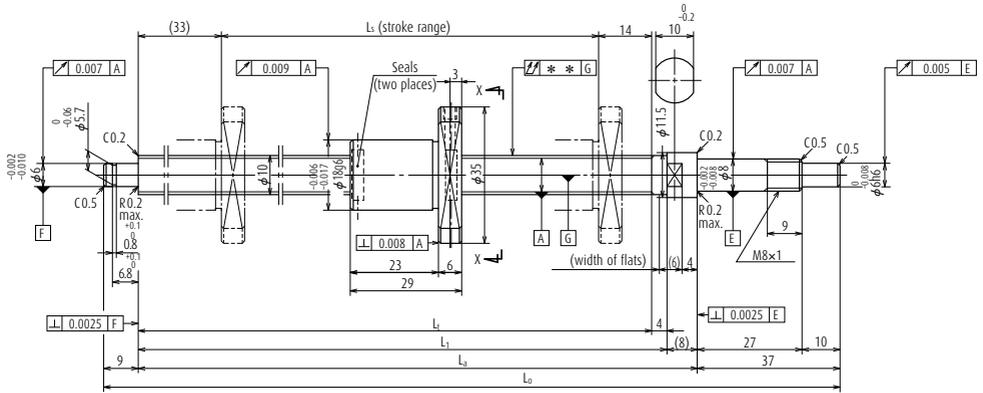

| Ball screw No. | Stroke L_s | | Thread length | | | |
|------------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_1 | L_2 | L_3 | L_4 |
| W1002KA-3PY-C3Z2 | 200 | 203 | 250 | 254 | 262 | 308 |

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: MPFD

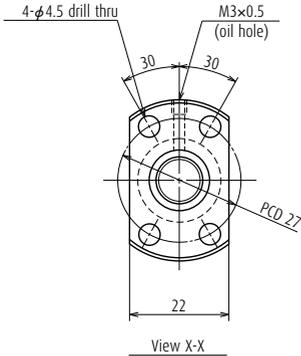

Screw shaft ϕ 10

Lead 2

Unit: mm

| Ball screw specifications | | |
|---|--------------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 10 \times 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 10.3 | |
| Screw shaft root diameter | 8.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 1 470 |
| | Static C_{0a} | 2 190 |
| Axial play | 0 | |
| Preload (N) | 58.8 | |
| Dynamic friction torque, (N-cm) | 0.10 - 2.5 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 0.44 | |
| Standard volume of grease replenishing (cm ³) | 0.22 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK08-01C (square, clean) | WBK08S-01C (square, clean) |
| WBK08-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ↗ ↘ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|-------------------------|-----------|---|
| T | e_p | u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.012 | 0.008 | 0.030 | 0.22 | 3 000 |

Nut model: PFT

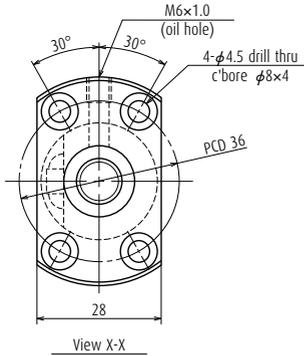

Screw shaft ϕ 10

Lead 4

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 10 \times 4 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.000 / 10.3 | |
| Screw shaft root diameter | 8.2 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_d | 2 630 |
| | Static C_{0a} | 3 270 |
| Axial play | 0 | |
| Preload (N) | 98.1 | |
| Dynamic friction torque, (N-cm) | 0.5 - 3.9 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 0.8 | |
| Standard volume of grease replenishing (cm ³) | 0.4 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK10-01C (square, clean) | WBK10S-01C (square, clean) |
| WBK10-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | |
| 0 | 0.010 | 0.008 | 0.030 | 0.29 | Supporting condition Fixed - Simple Support 3 000 |
| 0 | 0.013 | 0.008 | 0.050 | 0.39 | 3 000 |

Nut model: MPFD



Screw shaft ϕ 12

Lead 2

Unit: mm

| Ball screw specifications | | |
|---|--------------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 12 \times 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 12.3 | |
| Screw shaft root diameter | 10.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 1 600 |
| | Static C_{0a} | 2 670 |
| Axial play | 0 | |
| Preload (N) | 98.1 | |
| Dynamic friction torque, (N-cm) | 0.4 - 3.4 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 0.53 | |
| Standard volume of grease replenishing (cm ³) | 0.27 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK10-01C (square, clean) | WBK10S-01C (square, clean) |
| WBK10-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|---|-----------|---|--|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | |
| 0 | 0.010 | 0.008 | 0.030 | 0.24 | 3 000 | |
| 0 | 0.012 | 0.008 | 0.040 | 0.36 | 3 000 | |

Finished shaft end stainless steel product KA Type (Fine lead)

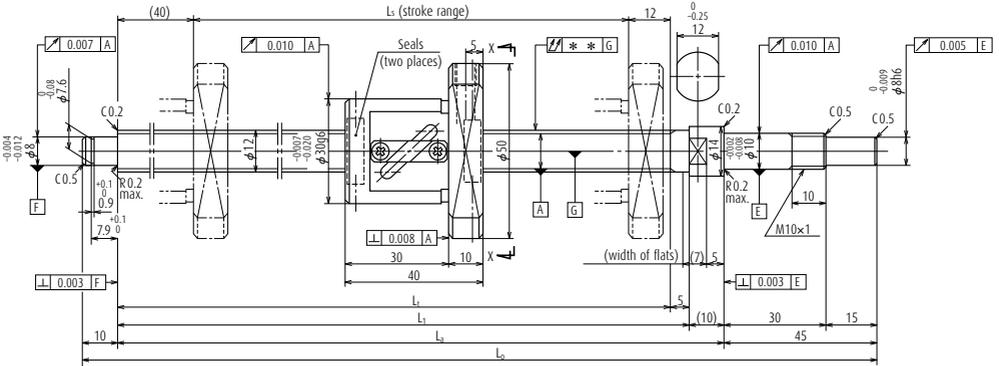

| Ball screw No. | Stroke L_s | | Thread length | | | |
|-----------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_t | L_1 | L_2 | L_0 |
| W1202KA-3P-C3Z5 | 200 | 208 | 260 | 265 | 275 | 330 |
| W1205KA-1P-C3Z5 | 450 | 458 | 510 | 515 | 525 | 580 |


- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: PFT

Screw shaft ϕ 12

Lead 5

Unit: mm

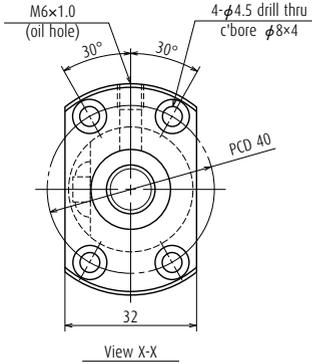

Ball screw specifications

| | | |
|---|--------------------------|-------|
| Shaft dia. × Lead / Direction of turn | 12 × 5 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 12.3 | |
| Screw shaft root diameter | 9.8 | |
| Effective turns of balls | 2.5 × 1 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 3 590 |
| | Static C_{0a} | 4 630 |
| Axial play | 0 | |
| Preload (N) | 98.1 | |
| Dynamic friction torque, (N·cm) | 1.0 - 4.4 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 1.2 | |
| Standard volume of grease replenishing (cm ³) | 0.6 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK10-01C (square, clean) | WBK10S-01C (square, clean) |
| WBK10-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** ↗ | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|-----------------------|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.012 | 0.008 | 0.040 | 0.47 | 3 000 |
| 0 | 0.016 | 0.012 | 0.065 | 0.66 | 3 000 |

Finished shaft end stainless steel product KA Type (Medium lead)

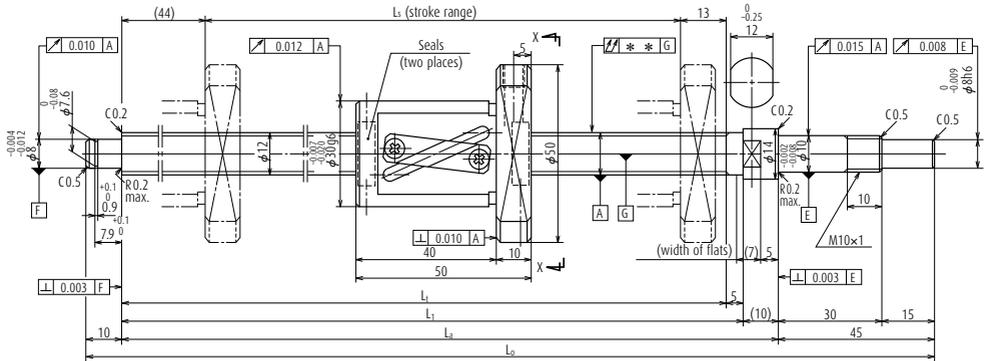


| Ball screw No. | Stroke L_s | | Thread length | | | |
|------------------|--------------|---------|---------------|-------|-------|-------|
| | Nominal | Maximum | L_t | L_1 | L_a | L_b |
| W1203KA-3P-C5Z10 | 250 | 253 | 310 | 315 | 325 | 380 |
| W1205KA-3P-C5Z10 | 450 | 453 | 510 | 515 | 525 | 580 |

Notes

1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

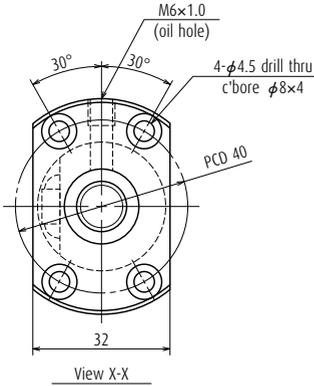

Screw shaft ϕ 12

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 12 \times 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 12.5 | |
| Screw shaft root diameter | 10.0 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 3 620 |
| | Static C_{0a} | 4 750 |
| Axial play | 0 | |
| Preload (N) | 98.1 | |
| Dynamic friction torque, (N-cm) | 1.0 - 4.9 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 1.4 | |
| Standard volume of grease replenishing (cm ³) | 0.7 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK10-01C (square, clean) | WBK10S-01C (square, clean) |
| WBK10-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|---|-----------|---|--|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple Support | |
| 0 | 0.023 | 0.018 | 0.050 | 0.56 | 3 000 | |
| 0 | 0.030 | 0.023 | 0.075 | 0.72 | 3 000 | |


Finished shaft end stainless steel product KA Type (Medium lead)

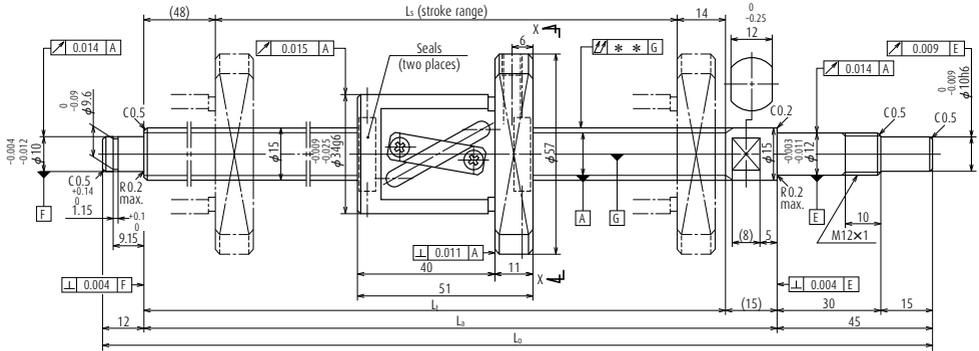

| Ball screw No. | Stroke L_s | | Thread length | | |
|------------------|--------------|---------|---------------|-------|-------|
| | Nominal | Maximum | L_1 | L_3 | L_0 |
| W1504KA-3P-C5Z10 | 400 | 427 | 489 | 504 | 561 |
| W1506KA-3P-C5Z10 | 600 | 627 | 689 | 704 | 761 |
| W1510KA-1P-C5Z10 | 1 000 | 1 027 | 1 089 | 1 104 | 1 161 |

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

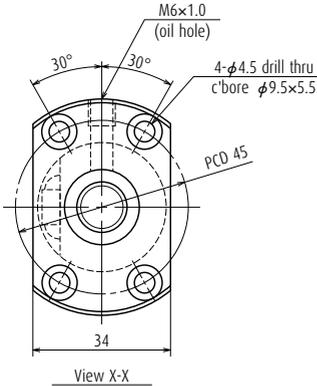

Screw shaft ϕ 15

Lead 10

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 15 \times 10 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 15.5 | |
| Screw shaft root diameter | 12.2 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 6 660 |
| | Static C_{0a} | 9 480 |
| Axial play | 0 | |
| Preload (N) | 147 | |
| Dynamic friction torque, (N-cm) | 1.5 - 7.9 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 2.3 | |
| Standard volume of grease replenishing (cm ³) | 1.4 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK12-01C (square, clean) | WBK12S-01C (square, clean) |
| WBK12-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out **  | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|---|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.027 | 0.020 | 0.050 | 0.99 | 3 000 |
| 0 | 0.035 | 0.025 | 0.065 | 1.2 | 3 000 |
| 0 | 0.046 | 0.030 | 0.110 | 1.7 | 1 610 |


Finished shaft end stainless steel product KA Type (Medium lead)

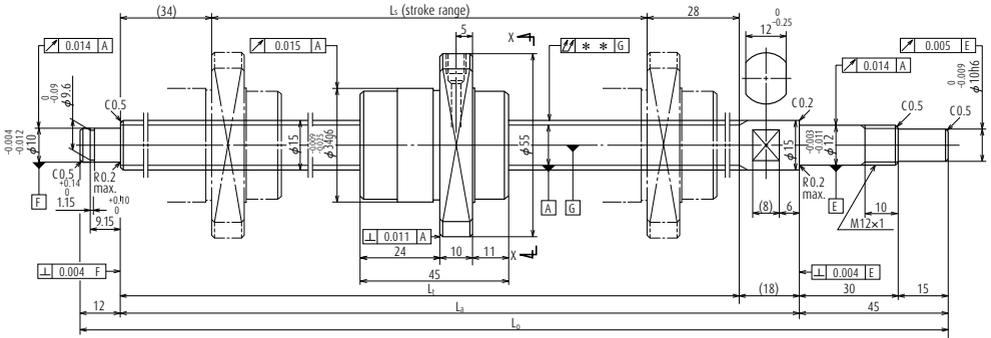

| Ball screw No. | Stroke L_s | | Thread length | | |
|-------------------|--------------|---------|---------------|-------|-------|
| | Nominal | Maximum | L_1 | L_2 | L_0 |
| W1504KA-7PG-C5Z20 | 400 | 424 | 486 | 504 | 561 |
| W1506KA-7PG-C5Z20 | 600 | 624 | 686 | 704 | 761 |
| W1510KA-3PG-C5Z20 | 1 000 | 1 024 | 1 086 | 1 104 | 1 161 |

- Notes**
1. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 2. Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: UPFC

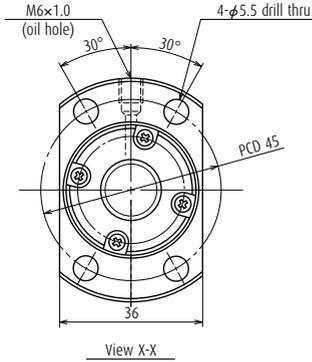

Screw shaft ϕ 15

Lead 20

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 15 \times 20 / Right | |
| Preload / Ball recirculation | P-preload / End cap | |
| Ball dia. / Ball circle dia. | 3.175 / 15.5 | |
| Screw shaft root diameter | 12.2 | |
| Effective turns of balls | 1.7 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_a | 4 630 |
| | Static C_{0a} | 6 430 |
| Axial play | 0 | |
| Preload (N) | 147 | |
| Dynamic friction torque, (N-cm) | 1.5 - 7.9 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 1.9 | |
| Standard volume of grease replenishing (cm ³) | 1.0 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK12-01C (square, clean) | WBK12S-01C (square, clean) |
| WBK12-11C (round, clean) | |

Unit: mm


| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.027 | 0.020 | 0.050 | 1.0 | 3 000 |
| 0 | 0.035 | 0.025 | 0.065 | 1.3 | 3 000 |
| 0 | 0.046 | 0.030 | 0.110 | 1.8 | 1 610 |

Nut model: MPFD

Screw shaft $\phi 16$

Lead 2

Unit: mm

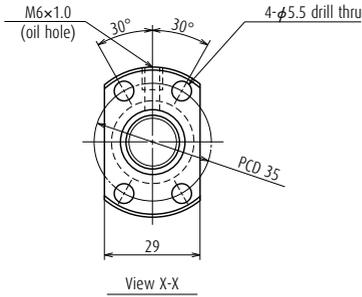

Ball screw specifications

| | | |
|---|--------------------------------|-------|
| Shaft dia. × Lead / Direction of turn | 16 × 2 / Right | |
| Preload / Ball recirculation | P-preload / Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.588 / 16.4 | |
| Screw shaft root diameter | 14.6 | |
| Effective turns of balls | 1 × 4 | |
| Accuracy grade / Preload | C3 / Z | |
| Basic load rating (N) | Dynamic C_a | 3 400 |
| | Static C_{0a} | 6 240 |
| Axial play | 0 | |
| Preload (N) | 147 | |
| Dynamic friction torque, (N-cm) | 0.5 - 4.9 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 1.6 | |
| Standard volume of grease replenishing (cm ³) | 0.8 | |


Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK12-01C (square, clean) | WBK12S-01C (square, clean) |
| WBK12-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | |
| 0 | 0.010 | 0.008 | 0.020 | 0.46 | Supporting condition Fixed - Simple Support 3 000 |
| 0 | 0.013 | 0.010 | 0.035 | 0.75 | 3 000 |


Finished shaft end stainless steel product KA Type (High helix lead)

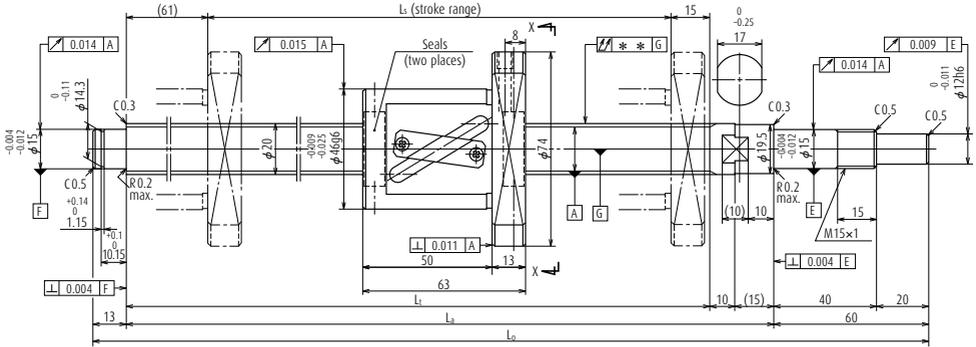

| Ball screw No. | Stroke L_s | | Thread length | | |
|------------------|--------------|---------|---------------|-------|-------|
| | Nominal | Maximum | L_1 | L_2 | L_3 |
| W2005KA-3P-C5Z20 | 400 | 434 | 510 | 535 | 608 |
| W2007KA-3P-C5Z20 | 600 | 634 | 710 | 735 | 808 |
| W2011KA-3P-C5Z20 | 1 000 | 1 034 | 1 110 | 1 135 | 1 208 |

- Notes**
- Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
See page D13 for details.
Use of NSK Clean Grease LG2 is recommended.
 - Contact NSK if the permissible rotational speed is to be exceeded.

Nut model: LPFT

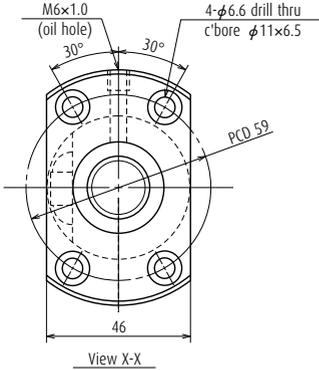

Screw shaft ϕ 20

Lead 20

Unit: mm

| Ball screw specifications | | |
|---|--------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 20 \times 20 / Right | |
| Preload / Ball recirculation | P-preload / Return tube | |
| Ball dia. / Ball circle dia. | 3.969 / 21 | |
| Screw shaft root diameter | 16.9 | |
| Effective turns of balls | 1.5 \times 1 | |
| Accuracy grade / Preload | C5 / Z | |
| Basic load rating (N) | Dynamic C_d | 6 700 |
| | Static C_{0a} | 9 710 |
| Axial play | 0 | |
| Preload (N) | 196 | |
| Dynamic friction torque, (N-cm) | 2.0 - 11.8 | |
| Spacer ball | None | |
| Factory-packed grease | Refer to Notes 1. | |
| Internal spatial volume of nut (cm ³) | 4.2 | |
| Standard volume of grease replenishing (cm ³) | 2.1 | |

Recommended support unit

| For drive side (Fixed) | For opposite to drive side (Free) |
|---------------------------|-----------------------------------|
| WBK15-01C (square, clean) | WBK15S-01C (square, clean) |
| WBK15-11C (round, clean) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ** | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|---------------|-------|-------|------------------|-----------|---|
| T | e_p | v_u | | | Supporting condition |
| | | | | | Fixed - Simple Support |
| 0 | 0.030 | 0.023 | 0.050 | 2.0 | 3 000 |
| 0 | 0.035 | 0.025 | 0.085 | 2.5 | 3 000 |
| 0 | 0.046 | 0.030 | 0.110 | 3.4 | 2 160 |

B-3-1.5 Blank Shaft End MS Type, FS Type, SS Type

1. Order of the dimension tables

The dimension table begins with the smallest shaft diameter of each MS, FS and SS type ball screws, and proceed to larger sizes. If ball screws have the same shaft diameter, those with smaller leads appear first. Page numbers of shaft diameter and lead combinations are shown in the **Table 1**.

2. Dimension tables

The dimension tables show shapes/sizes as well as specification factors of each shaft diameter/lead combination. Tables also contain data as follows:

> Lead accuracy

Lead accuracy is either C3 or C5 grades.

T : Travel compensation

e_p : Tolerance on specified travel

v_u : Travel variation

See "Technical Description: Lead Accuracy" (page B37) for the details of the codes.

> Permissible rotational speed

$d \cdot n$: Limited by the relative peripheral speed between the screw shaft and the nut.

Critical speed: Limited by the natural frequency of a ball screw shaft. Critical speed depends on the supporting condition of screw shaft.

Criterion of maximum rotational speed: 3000 min⁻¹

Table 1 Combinations of screw shaft diameter and lead

| Screw shaft diameter (mm) | Lead (mm) | | | | | | | |
|---------------------------|-----------|------|------|------|------|----------------------|--------------|--|
| | 1 | 1.5 | 2 | 2.5 | 4 | 5 | 6 | |
| 4 | B301 | | | | | | | |
| 6 | B301 | | | | | | | |
| 8 | B301 | B303 | B303 | | | | | |
| 10 | | | B303 | B305 | B309 | | | |
| 12 | | | B305 | B305 | | B309 | | |
| 14 | | | | | | B311 | | |
| 15 | | | | | | | | |
| 16 | | | B307 | B307 | | B315 | | |
| 20 | | | | | B321 | B321 | | |
| 25 | | | | | B323 | B323 B325 | B323 | |
| 28 | | | | | | B327 B329 | B327 B329 | |
| 32 | | | | | | B331 B333 B335 | B331 B333 | |
| 36 | | | | | | | | |
| 40 | | | | | | B337 | | |
| 45 | | | | | | | | |
| 50 | | | | | | | | |

The lower of the two criteria, d-n and critical speed, will determine the overall permissible rotational speed of the ball screw. For details, see "Technical Description: Permissible Rotational Speed" (page B47).

3. Shaft end processing

MS, FS, and SS types require shaft end processing to your specification. The exclusive support units (page B389) are available to design the bearing seats. See "Configuration of shaft end" (page B27 and following pages) when using a support unit. See "Technical Description: Shaft End Processing" (page B86) for procedures of shaft end processing and precautions.


4. Other

The seals of the ball screw, ball recirculating deflectors and end caps are made of synthetic resin. Consult NSK when using the ball screws under extreme environments or special environments, or using special lubricant or oil.

For special environments, see pages B70 and D2. See pages B67 and D13 for lubricants.

Note: For details of standard stock products, contact NSK.

| 8 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 |
|------|----------------------|--------------|------|------|------|------|------|------|
| | | | | | | | | |
| | B309 | | | | | | | |
| B311 | B311 | | | B313 | | | | |
| | | | B315 | | | B313 | | |
| | B315 | | | B315 | | | B313 | |
| | B325 B327 | | | B317 | B317 | | | B317 |
| | | | | | | | | |
| B333 | B335 B337 B339 | | | | B319 | B319 | | |
| | B337 B339 | | | | | | | |
| B341 | B341 B343 B345 | B341 B343 | | | | | | |
| | B347 | | | | | | | |
| | B345 B347 | | | | | | | |

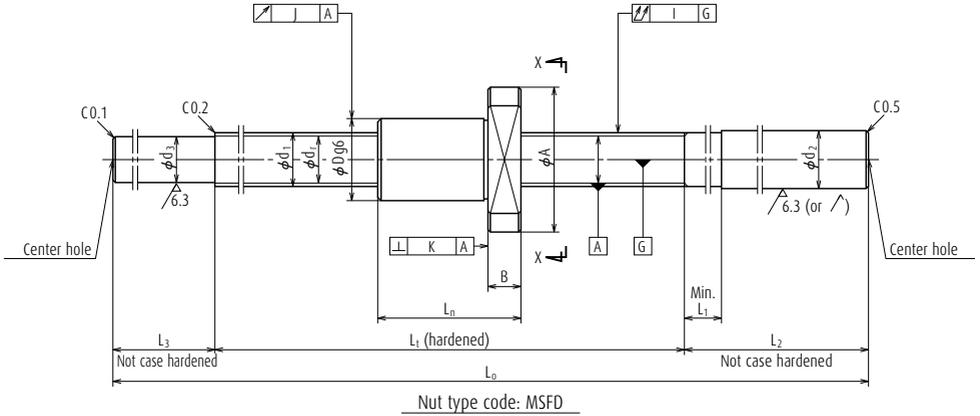


| Ball screw No. | Stroke Max. L_r-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Axial play Max. | Nut | | | |
|-----------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|--------------------|-----------------|--------------|----|--------|-----|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. | | Flange | |
| | | | | | | | | | | | D | A | H | B |
| W0400MS-1Y-C3T1 | 68 | 4 | 1 | 0.8 | 4.2 | 3.2 | 2 | 370 | 370 | 0.005 | 10 | 20 | 14 | 3 |
| W0601MS-1Y-C3T1 | 110 | 6 | 1 | 0.8 | 6.2 | 5.2 | 3 | 680 | 920 | 0.005 | 12 | 24 | 16 | 3.5 |
| W0801MS-1Y-C3T1 | 94 | 8 | 1 | 0.8 | 8.2 | 7.2 | 3 | 790 | 1290 | 0.005 | 14 | 27 | 18 | 4 |
| W0802MS-1Y-C3T1 | 174 | 8 | 1 | 0.8 | 8.2 | 7.2 | 3 | 790 | 1290 | 0.005 | 14 | 27 | 18 | 4 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. Ball nut does not have seal.
 4. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47.
The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD


Screw shaft $\phi 4$, $\phi 6$, $\phi 8$
Lead 1



View X-X

Unit: mm


| dimensions | | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed |
|----------------|----------------|-----|------------------------|-----------------|----------------|----------------|----------------|----------------|----------------|---------------|-----------|-----------|--------------------|-----------------------|-------------------------|----------------|------------------------------|
| Overall length | Bolt hole | | Threaded length | Shaft end right | | | Shaft end left | | Overall length | T | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | |
| | L _n | W | | X | L _t | d ₂ | L ₁ | L ₂ | | | | | | | | d ₃ | L ₃ |
| 12 | 15 | 2.9 | 80 | 6.0 | 4 | 40 | 3.3 | 10 | 130 | 0 | 0.008 | 0.008 | 0.030 | 0.009 | 0.008 | 0.026 | 3 000 |
| 15 | 18 | 3.4 | 125 | 8.0 | 4 | 50 | 5.3 | 15 | 190 | 0 | 0.010 | 0.008 | 0.030 | 0.009 | 0.008 | 0.063 | 3 000 |
| 16 | 21 | 3.4 | 110 | 10.2 | 4 | 60 | 7.3 | 25 | 195 | 0 | 0.010 | 0.008 | 0.030 | 0.009 | 0.008 | 0.11 | 3 000 |
| 16 | 21 | 3.4 | 190 | 10.2 | 4 | 60 | 7.3 | 25 | 275 | 0 | 0.010 | 0.008 | 0.050 | 0.009 | 0.008 | 0.14 | 3 000 |

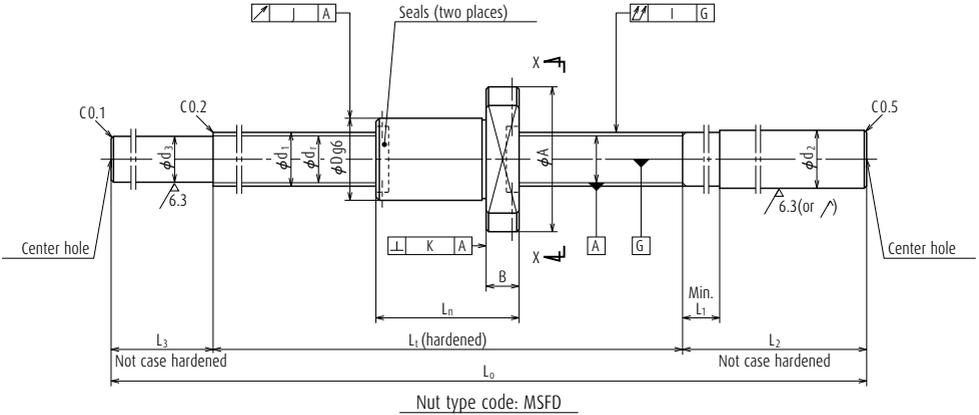

| Ball screw No. | Stroke Max. L_f-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Axial play Max. | Nut | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|--------------------|-----------------|--------------|----|--------|---|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. | | Flange | |
| | | | | | | | | | | | D | A | H | B |
| W0801MS-2Y-C3T1.5 | 88 | 8 | 1.5 | 1.0 | 8.3 | 7.0 | 3 | 1 270 | 1 970 | 0.005 | 15 | 28 | 19 | 4 |
| W0802MS-2Y-C3T1.5 | 168 | 8 | 1.5 | 1.0 | 8.3 | 7.0 | 3 | 1 270 | 1 970 | 0.005 | 15 | 28 | 19 | 4 |
| W0801MS-3Y-C3T2 | 84 | 8 | 2 | 1.2 | 8.3 | 6.9 | 3 | 1 560 | 2 200 | 0.005 | 16 | 29 | 20 | 4 |
| W0802MS-3Y-C3T2 | 164 | 8 | 2 | 1.2 | 8.3 | 6.9 | 3 | 1 560 | 2 200 | 0.005 | 16 | 29 | 20 | 4 |
| W1001MS-1Y-C3T2 | 122 | 10 | 2 | 1.2 | 10.3 | 8.9 | 3 | 1 800 | 2 970 | 0.005 | 18 | 35 | 22 | 5 |
| W1002MS-1Y-C3T2 | 222 | 10 | 2 | 1.2 | 10.3 | 8.9 | 3 | 1 800 | 2 970 | 0.005 | 18 | 35 | 22 | 5 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d·n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD




View X-X

Screw shaft ϕ 8
 Lead 1.5, 2
 Screw shaft ϕ 10
 Lead 2

Unit: mm


| dimensions | | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed |
|----------------|----------------|-----|------------------------|-----------------|----------------|----------------|----------------|----------------|----------------|---------------|-----------|-----------|--------------------|-----------------------|-------------------------|----------------|------------------------------|
| Overall length | Bolt hole | | Threaded length | Shaft end right | | | Shaft end left | | Overall length | T | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | |
| | L _n | W | | X | L _t | d ₂ | L ₁ | L ₂ | | | | | | | | d ₃ | L ₃ |
| 22 | 22 | 3.4 | 110 | 10.2 | 4 | 60 | 7.2 | 25 | 195 | 0 | 0.010 | 0.008 | 0.030 | 0.009 | 0.008 | 0.12 | 3 000 |
| 22 | 22 | 3.4 | 190 | 10.2 | 4 | 60 | 7.2 | 25 | 275 | 0 | 0.010 | 0.008 | 0.050 | 0.009 | 0.008 | 0.15 | 3 000 |
| 26 | 23 | 3.4 | 110 | 10.2 | 4 | 60 | 7.0 | 25 | 195 | 0 | 0.010 | 0.008 | 0.030 | 0.009 | 0.008 | 0.12 | 3 000 |
| 26 | 23 | 3.4 | 190 | 10.2 | 4 | 60 | 7.0 | 25 | 275 | 0 | 0.010 | 0.008 | 0.050 | 0.009 | 0.008 | 0.15 | 3 000 |
| 28 | 27 | 4.5 | 150 | 12.2 | 4 | 70 | 9.0 | 30 | 250 | 0 | 0.010 | 0.008 | 0.035 | 0.009 | 0.008 | 0.22 | 3 000 |
| 28 | 27 | 4.5 | 250 | 12.2 | 4 | 70 | 9.0 | 30 | 350 | 0 | 0.012 | 0.008 | 0.050 | 0.009 | 0.008 | 0.17 | 3 000 |

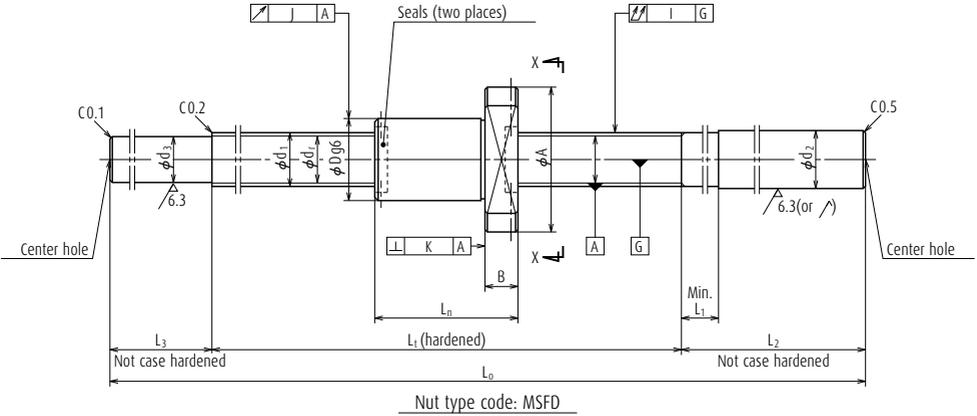

| Ball screw No. | Stroke Max. L_f-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Axial play Max. | Nut | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|--------------------|-----------------|--------------|----|--------|---|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. | | Flange | |
| | | | | | | | | | | | D | A | H | B |
| W1001MS-2Y-C3T2.5 | 118 | 10 | 2.5 | 1.588 | 10.4 | 8.6 | 3 | 2 500 | 3 630 | 0.005 | 19 | 36 | 23 | 5 |
| W1002MS-2Y-C3T2.5 | 218 | 10 | 2.5 | 1.588 | 10.4 | 8.6 | 3 | 2 500 | 3 630 | 0.005 | 19 | 36 | 23 | 5 |
| W1202MS-1Y-C3T2 | 182 | 12 | 2 | 1.200 | 12.3 | 10.9 | 3 | 1 960 | 3 620 | 0.005 | 20 | 37 | 24 | 5 |
| W1203MS-1Y-C3T2 | 282 | 12 | 2 | 1.200 | 12.3 | 10.9 | 3 | 1 960 | 3 620 | 0.005 | 20 | 37 | 24 | 5 |
| W1202MS-2Y-C3T2.5 | 178 | 12 | 2.5 | 1.588 | 12.4 | 10.6 | 3 | 2 790 | 4 530 | 0.005 | 21 | 38 | 25 | 5 |
| W1203MS-2Y-C3T2.5 | 278 | 12 | 2.5 | 1.588 | 12.4 | 10.6 | 3 | 2 790 | 4 530 | 0.005 | 21 | 38 | 25 | 5 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD




View X-X

Screw shaft ϕ 10
Lead 2.5
Screw shaft ϕ 12
Lead 2, 2.5

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) |
|-------------------|-----------|-----|------------------------|-----------------------|----------------|----------------|----------------------|----------------|-------------------|---------------|----------------|----------------|----------------------------|-----------------------------|---------------------------------|--------------|---|
| Overall length | Bolt hole | | Threaded length | Shaft end right | | | Shaft end left | | Overall length | T | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccentricity | Flange perpen- dicularity | | |
| | W | X | | L _t | d ₂ | L ₁ | L ₂ | d ₃ | | | L ₃ | L ₀ | e _p | v _u | I | | |
| 32 | 28 | 4.5 | 150 | 12.2 | 4 | 70 | 8.7 | 30 | 250 | 0 | 0.010 | 0.008 | 0.035 | 0.010 | 0.008 | 0.23 | 3 000 |
| 32 | 28 | 4.5 | 250 | 12.2 | 4 | 70 | 8.7 | 30 | 350 | 0 | 0.012 | 0.008 | 0.050 | 0.010 | 0.008 | 0.28 | 3 000 |
| 28 | 29 | 4.5 | 210 | 14.2 | 5 | 80 | 11.0 | 35 | 325 | 0 | 0.012 | 0.008 | 0.050 | 0.010 | 0.008 | 0.36 | 3 000 |
| 28 | 29 | 4.5 | 310 | 14.2 | 5 | 80 | 11.0 | 35 | 425 | 0 | 0.012 | 0.008 | 0.060 | 0.010 | 0.008 | 0.44 | 3 000 |
| 32 | 30 | 4.5 | 210 | 14.2 | 5 | 80 | 10.7 | 35 | 325 | 0 | 0.012 | 0.008 | 0.050 | 0.010 | 0.008 | 0.37 | 3 000 |
| 32 | 30 | 4.5 | 310 | 14.2 | 5 | 80 | 10.7 | 35 | 425 | 0 | 0.012 | 0.008 | 0.060 | 0.010 | 0.008 | 0.45 | 3 000 |

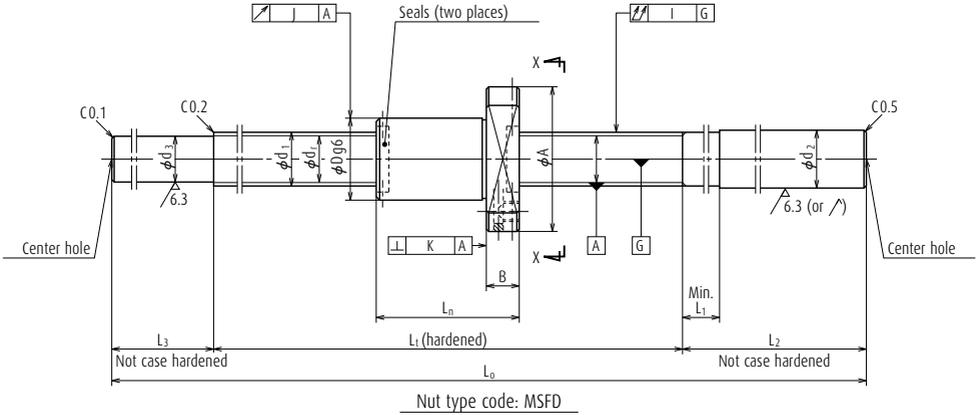


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead I | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|--------------------|-----------------|---------------------|--------|-----|-----|----------------|-----|-----------|--|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. D | Flange | | | Overall length | | Bolt hole | |
| | | | | | | | | | | | | A | H | B | L_n | W | X | |
| W1602MS-1Y-C3T2 | 210 | 16 | 2 | 1.588 | 16.4 | 14.6 | 4 | 4 150 | 8 450 | 0.005 | 25 | 44 | 29 | 10 | 40 | 35 | 5.5 | |
| W1604MS-1Y-C3T2 | 360 | 16 | 2 | 1.588 | 16.4 | 14.6 | 4 | 4 150 | 8 450 | 0.005 | 25 | 44 | 29 | 10 | 40 | 35 | 5.5 | |
| W1602MS-2Y-C3T2.5 | 206 | 16 | 2.5 | 1.588 | 16.4 | 14.6 | 4 | 4 150 | 8 440 | 0.005 | 25 | 44 | 29 | 10 | 44 | 35 | 5.5 | |
| W1604MS-2Y-C3T2.5 | 356 | 16 | 2.5 | 1.588 | 16.4 | 14.6 | 4 | 4 150 | 8 440 | 0.005 | 25 | 44 | 29 | 10 | 44 | 35 | 5.5 | |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by $d \cdot n$ value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: MSFD

Screw shaft $\phi 16$
Lead 2, 2.5

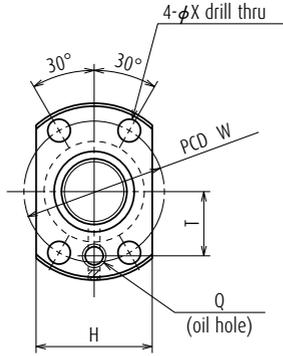


View X-X

Unit: mm

| dimensions | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing |
|------------|-----------------|------------------------|------|----------------|----------------|----------------|----------------|-----|----------------|----------------|--------------------|-----------------------|-------------------------|----------------|------|------------------------------|--------------------------------|--|
| Oil hole | Threaded length | Shaft end right | | | Shaft end left | | Overall length | T | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | |
| | | Q | T | L _t | d ₂ | L ₁ | | | L ₂ | d ₃ | L ₃ | L ₀ | e _p | v _u | I | J | K | (kg) |
| M6×1 | 16 | 250 | 16.2 | 30 | 100 | 14.7 | 40 | 390 | 0 | 0.012 | 0.008 | 0.035 | 0.010 | 0.008 | 0.71 | 3 000 | 1.5 | 0.8 |
| M6×1 | 16 | 400 | 16.2 | 30 | 100 | 14.7 | 40 | 540 | 0 | 0.013 | 0.010 | 0.050 | 0.010 | 0.008 | 0.93 | 3 000 | 1.5 | 0.8 |
| M6×1 | 16 | 250 | 16.2 | 30 | 100 | 14.7 | 40 | 390 | 0 | 0.012 | 0.008 | 0.035 | 0.010 | 0.008 | 0.73 | 3 000 | 1.5 | 0.8 |
| M6×1 | 16 | 400 | 16.2 | 30 | 100 | 14.7 | 40 | 540 | 0 | 0.013 | 0.010 | 0.050 | 0.010 | 0.008 | 0.95 | 3 000 | 1.5 | 0.8 |

Blank shaft end FS type

(Fine, Medium lead: Tube type)

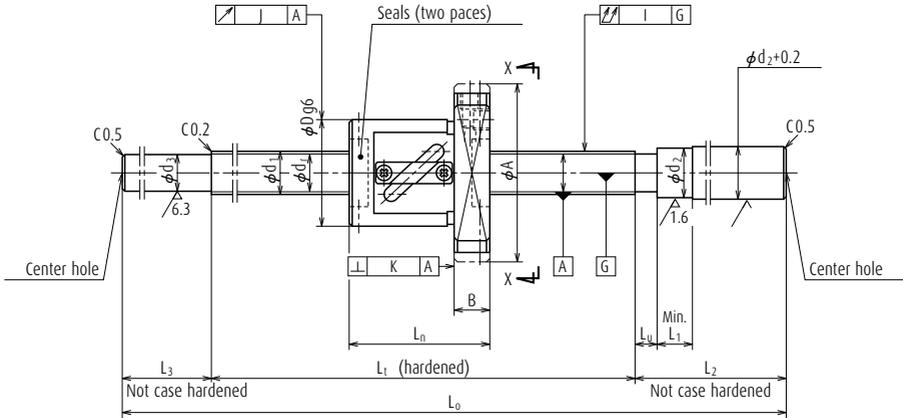


Nut type code: SFT, LSFT

| Ball screw No. | Stroke Max. $L_t - L_n$ | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns Tune \times Circuits | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | | | |
|-----------------|----------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|---------------------|--------|----|----|-------------------------|-----------|----|-----|---|-----|
| | | | | | | | | Dynamic C_d | Static C_{0a} | | Outside dia. D | Flange | | | Overall length L_n | Bolt hole | | | | |
| | | | | | | | | | | | | A | H | K | | B | W | X | Y | Z |
| | | | | | | | | | | | | | | | | | | | | |
| W1001FS-1-C3T4 | 126 | 10 | 4 | 2.000 | 10.3 | 8.2 | 2.5×1 | 3 210 | 4 420 | 0.005 | 26 | 46 | 28 | 42 | 10 | 34 | 36 | 4.5 | 8 | 4.5 |
| W1002FS-1-C3T4 | 226 | 10 | 4 | 2.000 | 10.3 | 8.2 | 2.5×1 | 3 210 | 4 420 | 0.005 | 26 | 46 | 28 | 42 | 10 | 34 | 36 | 4.5 | 8 | 4.5 |
| W1003FS-1-C3T4 | 326 | 10 | 4 | 2.000 | 10.3 | 8.2 | 2.5×1 | 3 210 | 4 420 | 0.005 | 26 | 46 | 28 | 42 | 10 | 34 | 36 | 4.5 | 8 | 4.5 |
| W1201FS-1-C3T5 | 110 | 12 | 5 | 2.381 | 12.3 | 9.8 | 2.5×1 | 4 390 | 6 260 | 0.005 | 30 | 50 | 32 | 45 | 10 | 40 | 40 | 4.5 | 8 | 4.5 |
| W1202FS-1-C3T5 | 210 | 12 | 5 | 2.381 | 12.3 | 9.8 | 2.5×1 | 4 390 | 6 260 | 0.005 | 30 | 50 | 32 | 45 | 10 | 40 | 40 | 4.5 | 8 | 4.5 |
| W1204FS-1-C3T5 | 410 | 12 | 5 | 2.381 | 12.3 | 9.8 | 2.5×1 | 4 390 | 6 260 | 0.005 | 30 | 50 | 32 | 45 | 10 | 40 | 40 | 4.5 | 8 | 4.5 |
| W1202FS-2-C5T10 | 200 | 12 | 10 | 2.381 | 12.5 | 10.0 | 2.5×1 | 4 430 | 6 430 | 0.005 | 30 | 50 | 32 | 45 | 10 | 50 | 40 | 4.5 | 8 | 4.5 |
| W1204FS-2-C5T10 | 400 | 12 | 10 | 2.381 | 12.5 | 10.0 | 2.5×1 | 4 430 | 6 430 | 0.005 | 30 | 50 | 32 | 45 | 10 | 50 | 40 | 4.5 | 8 | 4.5 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

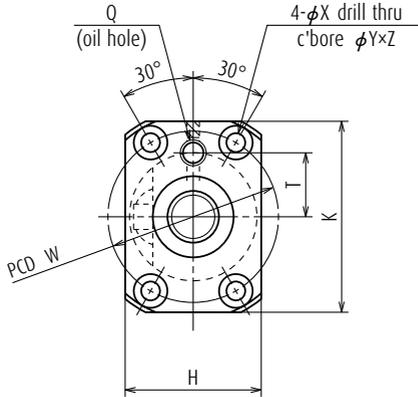

View X-X


Screw shaft ϕ 10
Lead 4
Screw shaft ϕ 12
Lead 5, 10

Unit: mm

| dimensions | | Screw shaft dimensions | | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing |
|------------|-----------------|------------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------|-----------|-----------|--------------------|-----------------------|----------------|------------------------------|--------------------------------|--|
| Oil hole | Threaded length | Shaft end right | | | | Shaft end left | | | | Overall length | T | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | | | | |
| | | Q | T | L _t | d ₂ | L _u | L ₁ | L ₂ | d ₃ | | | | | | | L ₃ | L ₀ | e _p | v _u |
| M6×1 | 14 | 160 | 14 | 5 | 40 | 70 | 8.2 | 35 | 265 | 0 | 0.010 | 0.008 | 0.030 | 0.010 | 0.008 | 0.34 | 3 000 | 0.86 | 0.43 |
| M6×1 | 14 | 260 | 14 | 5 | 40 | 70 | 8.2 | 35 | 365 | 0 | 0.012 | 0.008 | 0.040 | 0.010 | 0.008 | 0.39 | 3 000 | 0.86 | 0.43 |
| M6×1 | 14 | 360 | 14 | 5 | 40 | 70 | 8.2 | 35 | 465 | 0 | 0.013 | 0.010 | 0.050 | 0.010 | 0.008 | 0.45 | 3 000 | 0.86 | 0.43 |
| M6×1 | 15 | 150 | 14 | 5 | 40 | 70 | 9.8 | 35 | 255 | 0 | 0.010 | 0.008 | 0.030 | 0.010 | 0.008 | 0.44 | 3 000 | 1.2 | 0.6 |
| M6×1 | 15 | 250 | 14 | 5 | 40 | 70 | 9.8 | 35 | 355 | 0 | 0.012 | 0.008 | 0.040 | 0.010 | 0.008 | 0.52 | 3 000 | 1.2 | 0.6 |
| M6×1 | 15 | 450 | 14 | 5 | 40 | 70 | 9.8 | 35 | 555 | 0 | 0.015 | 0.010 | 0.065 | 0.010 | 0.008 | 0.67 | 3 000 | 1.2 | 0.6 |
| M6×1 | 15 | 250 | 14 | 8 | 40 | 70 | 10.0 | 35 | 355 | 0 | 0.023 | 0.018 | 0.050 | 0.012 | 0.010 | 0.57 | 3 000 | 1.4 | 0.7 |
| M6×1 | 15 | 450 | 14 | 8 | 40 | 70 | 10.0 | 35 | 555 | 0 | 0.027 | 0.020 | 0.075 | 0.012 | 0.010 | 0.74 | 3 000 | 1.4 | 0.7 |

Blank shaft end FS type

(Fine, Medium lead: Tube type)

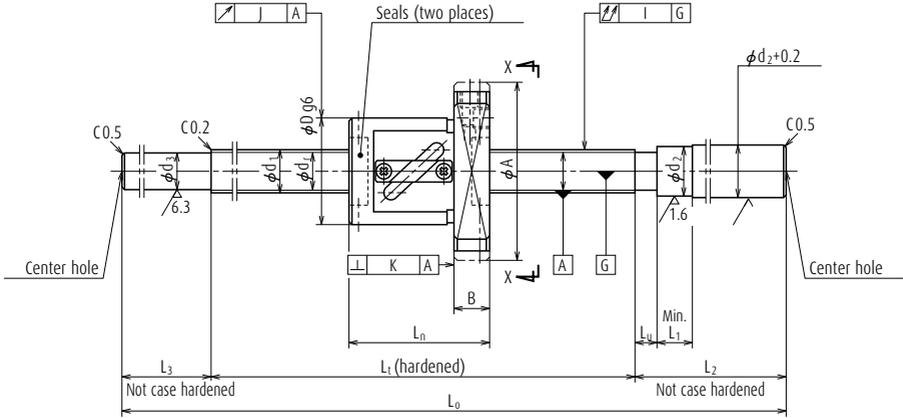


Nut type code: SFT, LSFT

| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | | | |
|-----------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|---------------------|--------|----|----|-------------------------|-----------|----|-----|------|-----|
| | | | | | | | | Dynamic C_d | Static C_{0a} | | Outside dia. D | Flange | | | Overall length L_n | Bolt hole | | | | |
| | | | | | | | | | | | | A | H | K | | B | W | X | Y | Z |
| | | | | | | | | | | | | | | | | | | | Min. | |
| W1403FS-1-C3T5 | 310 | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 970 | 11 900 | 0.005 | 34 | 57 | 34 | 50 | 11 | 40 | 45 | 5.5 | 9.5 | 5.5 |
| W1406FS-1-C3T5 | 560 | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 970 | 11 900 | 0.005 | 34 | 57 | 34 | 50 | 11 | 40 | 45 | 5.5 | 9.5 | 5.5 |
| W1405FS-1-C5T8 | 454 | 14 | 8 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 880 | 11 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 46 | 45 | 5.5 | 9.5 | 5.5 |
| W1408FS-1-C5T8 | 754 | 14 | 8 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 880 | 11 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 46 | 45 | 5.5 | 9.5 | 5.5 |
| W1504FS-1-C5T10 | 349 | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 8 140 | 12 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 51 | 45 | 5.5 | 9.5 | 5.5 |
| W1506FS-1-C5T10 | 549 | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 8 140 | 12 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 51 | 45 | 5.5 | 9.5 | 5.5 |
| W1509FS-1-C5T10 | 849 | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 8 140 | 12 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 51 | 45 | 5.5 | 9.5 | 5.5 |
| W1511FS-1-C5T10 | 1 049 | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 8 140 | 12 800 | 0.005 | 34 | 57 | 34 | 50 | 11 | 51 | 45 | 5.5 | 9.5 | 5.5 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

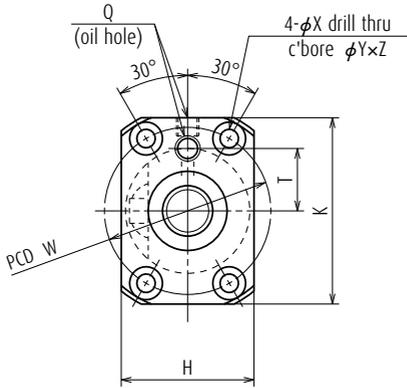


View X-X

Screw shaft ϕ 14
Lead 5, 8
Screw shaft ϕ 15
Lead 10

Unit: mm

| dimensions | | Screw shaft dimensions | | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|------------|--------------------|------------------------|----------------|----------------|----------------------|----------------|----------------|-------------------|----------------|----------------|----------------|----------------------------|-----------------------------|---------------------------------|-------|--------------|--|---|---|
| Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | T | Devia- tion | Vari- ation | Shaft straight- ness | Nut O.D. eccentricity | Flange perpen- dicularity | | | | | |
| Q | T | L _t | d ₂ | L _u | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | | e _p | v _u | I | J | K | | | | |
| M6×1 | 17 | 350 | 15 | 5 | 40 | 100 | 11.2 | 40 | 490 | 0 | 0.013 | 0.010 | 0.035 | 0.012 | 0.008 | 0.78 | 3 000 | 2.0 | 1.0 |
| M6×1 | 17 | 600 | 15 | 5 | 40 | 100 | 11.2 | 40 | 740 | 0 | 0.016 | 0.012 | 0.055 | 0.012 | 0.008 | 1.0 | 3 000 | 2.0 | 1.0 |
| M6×1 | 17 | 500 | 15 | 8 | 40 | 100 | 11.2 | 40 | 640 | 0 | 0.027 | 0.020 | 0.065 | 0.015 | 0.011 | 1.0 | 3 000 | 2.0 | 1.0 |
| M6×1 | 17 | 800 | 15 | 8 | 40 | 100 | 11.2 | 40 | 940 | 0 | 0.035 | 0.025 | 0.085 | 0.015 | 0.011 | 1.3 | 3 000 | 2.0 | 1.0 |
| M6×1 | 17 | 400 | 15 | 8 | 40 | 120 | 12.2 | 50 | 570 | 0 | 0.025 | 0.020 | 0.050 | 0.015 | 0.011 | 1.0 | 3 000 | 2.3 | 1.2 |
| M6×1 | 17 | 600 | 15 | 8 | 40 | 120 | 12.2 | 50 | 770 | 0 | 0.030 | 0.023 | 0.065 | 0.015 | 0.011 | 1.3 | 3 000 | 2.3 | 1.2 |
| M6×1 | 17 | 900 | 15 | 8 | 40 | 120 | 12.2 | 50 | 1 070 | 0 | 0.040 | 0.027 | 0.110 | 0.015 | 0.011 | 1.7 | 3 000 | 2.3 | 1.2 |
| M6×1 | 17 | 1 100 | 15 | 8 | 40 | 120 | 12.2 | 50 | 1 270 | 0 | 0.046 | 0.030 | 0.150 | 0.015 | 0.011 | 1.9 | 3 000 | 2.3 | 1.2 |

Blank shaft end FS type (High helix, Ultra high helix: End cap type)

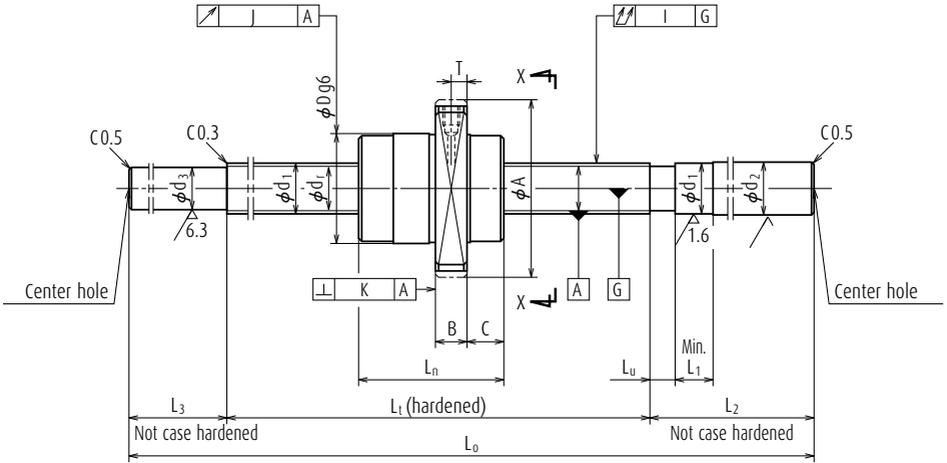


Nut type code: USFC

| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|--------------|--------|----|----|----|------|-------------------------|-----------|-----|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. | Flange | | | | | Overall length L_n | Bolt hole | |
| | | | | | | | | | | | | D | A | H | K | B | | C | W |
| | | | | | | | | | | | | | | | | | | | |
| W1504FS-2G-CST20 | 355 | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 0.005 | 34 | 55 | 36 | 50 | 10 | 11 | 45 | 45 | 5.5 |
| W1506FS-2G-CST20 | 555 | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 0.005 | 34 | 55 | 36 | 50 | 10 | 11 | 45 | 45 | 5.5 |
| W1509FS-2G-CST20 | 855 | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 0.005 | 34 | 55 | 36 | 50 | 10 | 11 | 45 | 45 | 5.5 |
| W1511FS-2G-CST20 | 1 055 | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 0.005 | 34 | 55 | 36 | 50 | 10 | 11 | 45 | 45 | 5.5 |
| W1609FS-2GX-CST32 | 866 | 16 | 32 | 3.175 | 16.75 | 13.4 | 0.7×2 | 4 320 | 6 760 | 0.005 | 34 | 55 | 36 | 50 | 10 | 10.5 | 34 | 45 | 5.5 |
| W1613FS-1GX-CST32 | 1 266 | 16 | 32 | 3.175 | 16.75 | 13.4 | 0.7×2 | 4 320 | 6 760 | 0.005 | 34 | 55 | 36 | 50 | 10 | 10.5 | 34 | 45 | 5.5 |
| W2011FS-1GX-CST40 | 1 059 | 20 | 40 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 870 | 8 420 | 0.005 | 38 | 58 | 40 | 52 | 10 | 11 | 41 | 48 | 5.5 |
| W2017FS-1GX-CST40 | 1 659 | 20 | 40 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 870 | 8 420 | 0.005 | 38 | 58 | 40 | 52 | 10 | 11 | 41 | 48 | 5.5 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: USFC

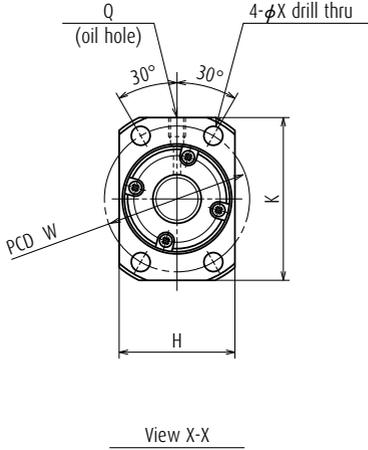


- Screw shaft ϕ 15
Lead 20
- Screw shaft ϕ 16
Lead 32
- Screw shaft ϕ 20
Lead 40

Unit: mm

| dimensions | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | |
|------------|--------------------|------------------------|----------------|----------------|----------------------|----------------|-------------------|------------------------|----------------|----------------|----------------------------|-----------------------------|---------------------------------|-------|--------------|--|---|---|-----|
| Oil hole | Threaded length | Shaft end right | | | Shaft end left | | Overall length | Travel compensation | Devia- tion | Vari- ation | Shaft straight- ness | Nut O.D. eccentricity | Flange perpen- dicularity | | | | | | |
| Q | T | L _t | d ₂ | L _u | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| M6×1 | 5 | 400 | 15.2 | 13 | 40 | 120 | 12.2 | 50 | 570 | 0 | 0.025 | 0.020 | 0.050 | 0.015 | 0.011 | 1.0 | 3 000 | 1.9 | 1.0 |
| M6×1 | 5 | 600 | 15.2 | 13 | 40 | 120 | 12.2 | 50 | 770 | 0 | 0.030 | 0.023 | 0.065 | 0.015 | 0.011 | 1.3 | 3 000 | 1.9 | 1.0 |
| M6×1 | 5 | 900 | 15.2 | 13 | 40 | 120 | 12.2 | 50 | 1 070 | 0 | 0.040 | 0.027 | 0.110 | 0.015 | 0.011 | 1.7 | 3 000 | 1.9 | 1.0 |
| M6×1 | 5 | 1 100 | 15.2 | 13 | 40 | 120 | 12.2 | 50 | 1 270 | 0 | 0.046 | 0.030 | 0.150 | 0.015 | 0.011 | 2.0 | 3 000 | 1.9 | 1.0 |
| M6×1 | 5 | 900 | 16.2 | 19 | 40 | 150 | 13.4 | 60 | 1 110 | 0 | 0.040 | 0.027 | 0.110 | 0.015 | 0.011 | 1.9 | 3 000 | 2.0 | 1.0 |
| M6×1 | 5 | 1 300 | 16.2 | 19 | 40 | 150 | 13.4 | 60 | 1 510 | 0 | 0.054 | 0.035 | 0.150 | 0.015 | 0.011 | 2.5 | 3 000 | 2.0 | 1.0 |
| M6×1 | 5 | 1 100 | 20.2 | 22 | 60 | 150 | 17.4 | 80 | 1 330 | 0 | 0.046 | 0.030 | 0.150 | 0.015 | 0.011 | 3.5 | 3 000 | 2.7 | 1.4 |
| M6×1 | 5 | 1 700 | 20.2 | 22 | 60 | 150 | 17.4 | 80 | 1 930 | 0 | 0.065 | 0.040 | 0.200 | 0.015 | 0.011 | 4.9 | 3 000 | 2.7 | 1.4 |

Blank shaft end FS type (High helix, Ultra high helix: End cap type)

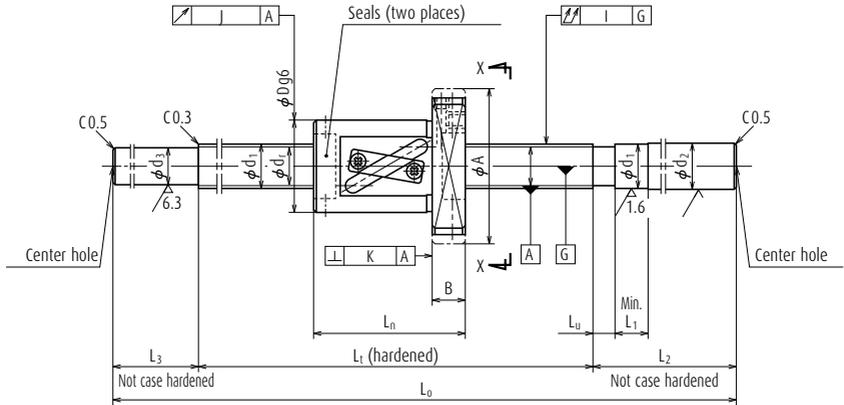


Nut type code: SFT, LSFT


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead I | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | | | |
|-----------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|--------------|--------|----|----|----------------|-----------|----|-------|-----|-----|
| | | | | | | | | Dynamic C_3 | Static C_{0a} | | Outside dia. | Flange | | | Overall length | Bolt hole | | | | |
| | | | | | | | | | | | | D | A | H | | K | B | L_n | W | X |
| | | | | | | | | | | | | | | | | | | | | |
| W1605FS-1-C3T5 | 458 | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 620 | 13 800 | 0.005 | 40 | 63 | 40 | 55 | 11 | 42 | 51 | 5.5 | 9.5 | 5.5 |
| W1609FS-1-C3T5 | 858 | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 620 | 13 800 | 0.005 | 40 | 63 | 40 | 55 | 11 | 42 | 51 | 5.5 | 9.5 | 5.5 |
| W1606FS-1-CST16 | 544 | 16 | 16 | 3.175 | 16.75 | 13.4 | 1.5×1 | 5 480 | 8 080 | 0.005 | 34 | 57 | 34 | 50 | 12 | 56 | 45 | 5.5 | 9.5 | 5.5 |
| W1611FS-1-CST16 | 1 044 | 16 | 16 | 3.175 | 16.75 | 13.4 | 1.5×1 | 5 480 | 8 080 | 0.005 | 34 | 57 | 34 | 50 | 12 | 56 | 45 | 5.5 | 9.5 | 5.5 |
| W2009FS-1-CST10 | 846 | 20 | 10 | 3.969 | 21 | 16.9 | 2.5×1 | 13 300 | 21 900 | 0.005 | 46 | 74 | 46 | 66 | 13 | 54 | 59 | 6.6 | 11 | 6.5 |
| W2013FS-1-CST10 | 1 246 | 20 | 10 | 3.969 | 21 | 16.9 | 2.5×1 | 13 300 | 21 900 | 0.005 | 46 | 74 | 46 | 66 | 13 | 54 | 59 | 6.6 | 11 | 6.5 |
| W2010FS-1-CST20 | 937 | 20 | 20 | 3.969 | 21 | 16.9 | 1.5×1 | 8 190 | 13 100 | 0.005 | 46 | 74 | 46 | 66 | 13 | 63 | 59 | 6.6 | 11 | 6.5 |
| W2015FS-1-CST20 | 1 437 | 20 | 20 | 3.969 | 21 | 16.9 | 1.5×1 | 8 190 | 13 100 | 0.005 | 46 | 74 | 46 | 66 | 13 | 63 | 59 | 6.6 | 11 | 6.5 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: SFT, LSFT

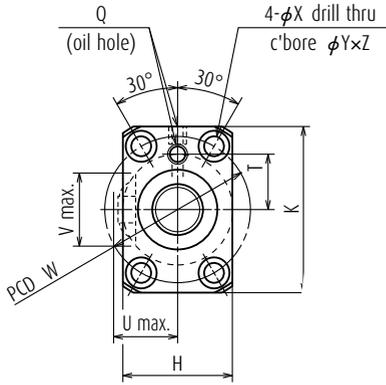

View X-X




Housing hole and its clearance
(only applicable to shaft dia. φ16, lead 16)

Screw shaft φ 16
Lead 5, 16
Screw shaft φ 20
Lead 10, 20

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | | | | | Lead accuracy | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | |
|-----------------|----------|-----------------|------------------------|----|-------|----------------|----|----------------|----------------|------|-----------|-----------|--------------------|-----------------------|-------------------------|----------------|----------------|----------------|------------------------------|--------------------------------|--|----------------|
| Projecting tube | Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | T | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | | |
| | | | U | V | R | Q | T | L _t | | | | | | | | d ₂ | L _u | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ |
| — | — | — | M6×1 | 17 | 500 | 16.2 | 5 | 40 | 150 | 13.2 | 60 | 710 | 0 | 0.015 | 0.010 | 0.055 | 0.012 | 0.008 | 1.4 | 3 000 | 2.6 | 1.3 |
| — | — | — | M6×1 | 17 | 900 | 16.2 | 5 | 40 | 150 | 13.2 | 60 | 1 100 | 0 | 0.021 | 0.015 | 0.095 | 0.012 | 0.008 | 1.9 | 3 000 | 2.6 | 1.3 |
| 19 | 20 | 8 | M6×1 | 17 | 600 | 16.2 | 10 | 40 | 150 | 13.4 | 60 | 810 | 0 | 0.030 | 0.023 | 0.085 | 0.015 | 0.011 | 1.5 | 3 000 | 2.1 | 1.1 |
| 19 | 20 | 8 | M6×1 | 17 | 1 100 | 16.2 | 10 | 40 | 150 | 13.4 | 60 | 1 310 | 0 | 0.046 | 0.030 | 0.150 | 0.015 | 0.011 | 2.3 | 2 480 | 2.1 | 1.1 |
| — | — | — | M6×1 | 24 | 900 | 20.2 | 10 | 60 | 150 | 16.9 | 80 | 1 130 | 0 | 0.040 | 0.027 | 0.110 | 0.015 | 0.011 | 3.2 | 3 000 | 4.7 | 2.4 |
| — | — | — | M6×1 | 24 | 1 300 | 20.2 | 10 | 60 | 150 | 16.9 | 80 | 1 530 | 0 | 0.054 | 0.035 | 0.150 | 0.015 | 0.011 | 4.1 | 2 190 | 4.7 | 2.4 |
| — | — | — | M6×1 | 24 | 1 000 | 20.2 | 13 | 60 | 150 | 16.9 | 80 | 1 230 | 0 | 0.040 | 0.027 | 0.110 | 0.015 | 0.011 | 3.6 | 3 000 | 4.2 | 2.1 |
| — | — | — | M6×1 | 24 | 1 500 | 20.2 | 13 | 60 | 150 | 16.9 | 80 | 1 730 | 0 | 0.054 | 0.035 | 0.200 | 0.015 | 0.011 | 4.8 | 1 610 | 4.2 | 2.1 |

Blank shaft end FS type (Medium, High helix, Ultra high helix lead: End cap type)

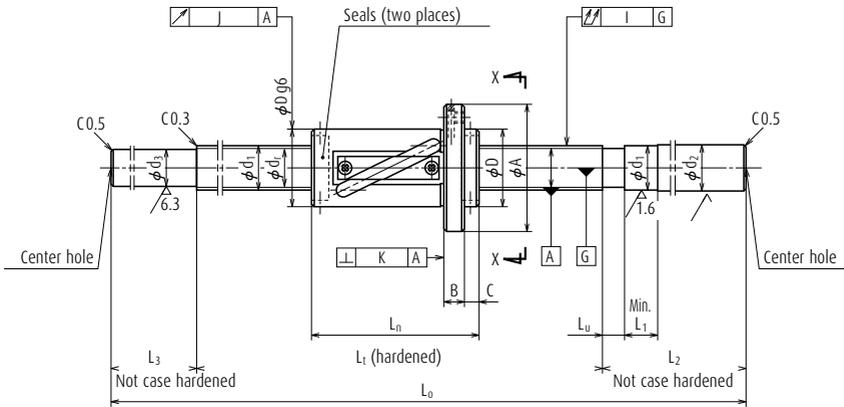


Nut type code: LSFT

| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Axial play Max. | Nut type code | Nut | | | | | | | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|---------------|---------------------|--------|----|----|----|----|-------------------------|-----------|----|-----|
| | | | | | | | | Dynamic C_3 | Static C_{0a} | | | Outside dia. D | Flange | | | | | Overall length L_n | Bolt hole | | |
| | | | | | | | | | | | | | A | G | H | K | B | | C | W | X |
| | | | | | | | | | | | | | | | | | | | | | |
| W2513FS-1-CST20 | 1 254 | 25 | 20 | 4.762 | 26.25 | 21.3 | 2.5×1 | 18 600 | 32 600 | 0.005 | LSFT | 44 | 71 | 23 | — | — | 12 | 8 | 96 | 57 | 6.6 |
| W2521FS-1-CST20 | 2 054 | 25 | 20 | 4.762 | 26.25 | 21.3 | 2.5×1 | 18 600 | 32 600 | 0.005 | LSFT | 44 | 71 | 23 | — | — | 12 | 8 | 96 | 57 | 6.6 |
| W2513FS-2-CST25 | 1 260 | 25 | 25 | 4.762 | 26.25 | 21.3 | 1.5×1 | 11 700 | 19 700 | 0.005 | LSFT | 44 | 71 | 23 | — | — | 12 | 10 | 90 | 57 | 6.6 |
| W2521FS-2-CST25 | 2 060 | 25 | 25 | 4.762 | 26.25 | 21.3 | 1.5×1 | 11 700 | 19 700 | 0.005 | LSFT | 44 | 71 | 23 | — | — | 12 | 10 | 90 | 57 | 6.6 |
| W2515FS-1GX-CST50 | 1 450 | 25 | 50 | 3.969 | 26 | 21.9 | 0.7×2 | 7 280 | 13 200 | 0.005 | USFC | 46 | 70 | — | 48 | 63 | 12 | 13 | 50 | 58 | 6.6 |
| W2521FS-3GX-CST50 | 2 100 | 25 | 50 | 3.969 | 26 | 21.9 | 0.7×2 | 7 280 | 13 200 | 0.005 | USFC | 46 | 70 | — | 48 | 63 | 12 | 13 | 50 | 58 | 6.6 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut models: LSFT, USFC

Screw shaft $\phi 25$
Lead 20, 25, 50

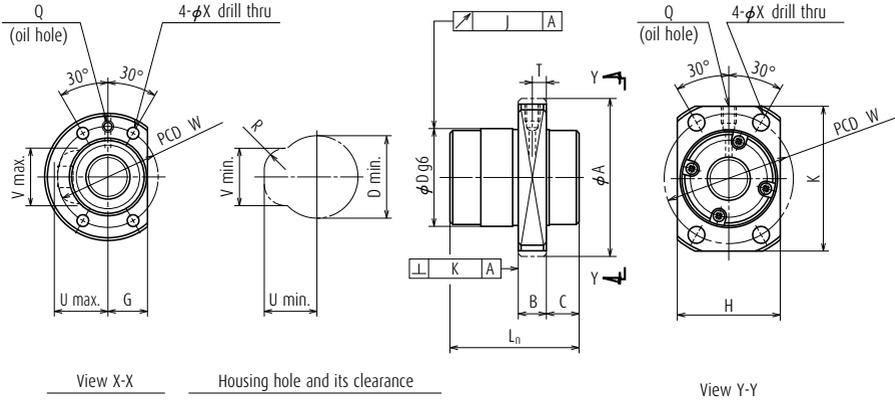


Nut type code: USFC

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | | | | |
|-----------------|----------|-----------------|------------------------|-------|-------|----------------|-------|-------|----------------|-----------|-----------|--------------------|-----------------------|-------------------------|-------|------------------------------|--------------------------------|--|-----|-------|-----|------|
| Projecting tube | Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | | | |
| | | | L_t | d_2 | L_u | L_1 | L_2 | d_3 | | | | | | | L_3 | L_0 | e_p | v_u | I | J | K | (kg) |
| 31 | 35 | 12 | M6×1 | — | 1 350 | 25.2 | 13 | 70 | 200 | 21.3 | 100 | 1 650 | 0 | 0.054 | 0.035 | 0.120 | 0.015 | 0.011 | 6.8 | 2 550 | 12 | 6.0 |
| 31 | 35 | 12 | M6×1 | — | 2 150 | 25.2 | 13 | 70 | 200 | 21.3 | 100 | 2 450 | 0 | 0.077 | 0.046 | 0.160 | 0.015 | 0.011 | 9.8 | 1 000 | 12 | 6.0 |
| 32 | 34 | 12 | M6×1 | — | 1 350 | 25.2 | 15 | 70 | 200 | 21.3 | 100 | 1 650 | 0 | 0.054 | 0.035 | 0.120 | 0.015 | 0.011 | 6.8 | 2 540 | 10 | 5.0 |
| 32 | 34 | 12 | M6×1 | — | 2 150 | 25.2 | 15 | 70 | 200 | 21.3 | 100 | 2 450 | 0 | 0.077 | 0.046 | 0.160 | 0.015 | 0.011 | 9.8 | 1 000 | 10 | 5.0 |
| — | — | — | M6×1 | 6 | 1 500 | 25.2 | 26 | 70 | 200 | 21.9 | 100 | 1 800 | 0 | 0.054 | 0.035 | 0.120 | 0.015 | 0.011 | 7.3 | 1 250 | 5.3 | 2.7 |
| — | — | — | M6×1 | 6 | 2 150 | 25.2 | 26 | 70 | 200 | 21.9 | 100 | 2 450 | 0 | 0.077 | 0.046 | 0.160 | 0.015 | 0.011 | 9.8 | 1 000 | 5.3 | 2.7 |

Blank shaft end FS type (Medium, High helix lead: Tube type)

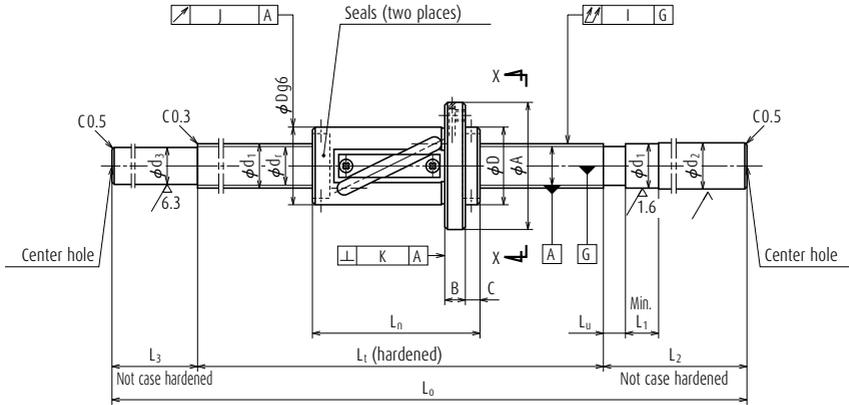


Nut type code: LSFT


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_f | Effective ball turns \times Circuits | Basic load rating (N) | | Axial play Max. | Nut | | | | | | | |
|-----------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|-----------------|---------------------|--------|----|----|-------------------------|-----------|----|---|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | Outside dia. D | Flange | | | Overall length L_n | Bolt hole | | |
| | | | | | | | | | | | | A | G | B | | C | W | X |
| | | | | | | | | | | | | | | | | | | |
| W3217FS-1-CST25 | 1 583 | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 0.005 | 51 | 85 | 26 | 15 | 10 | 117 | 67 | 9 |
| W3227FS-1-CST25 | 2 583 | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 0.005 | 51 | 85 | 26 | 15 | 10 | 117 | 67 | 9 |
| W3217FS-2-CST32 | 1 591 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 0.005 | 51 | 85 | 26 | 15 | 12 | 109 | 67 | 9 |
| W3227FS-2-CST32 | 2 591 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 0.005 | 51 | 85 | 26 | 15 | 12 | 109 | 67 | 9 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
 3. The permissible rotational speed is determined by $d-n$ value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: LSFT

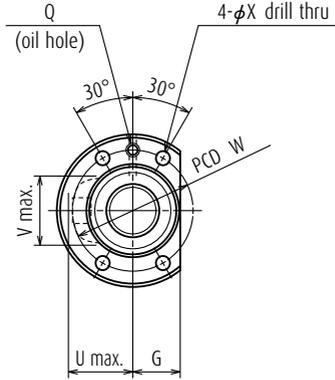

View X-X




Housing hole and its clearance

Screw shaft ϕ 32
Lead 25, 32

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing |
|-----------------|----|----------|------------------------|-----------------|----------------|----------------|----------------|----------------|----------------|----------------|---------------------|-----------|----------------|--------------------|-----------------------|-------------------------|-------|------|------------------------|------------------------------|--------------------------------|--|
| Projecting tube | | Oil hole | Threaded length | Shaft end right | | | Shaft end left | | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | |
| U | V | R | Q | L _t | d ₂ | L _u | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | u _u | I | J | K | (kg) | N (min ⁻¹) | (cm ³) | (cm ³) | |
| 34 | 42 | 12 | M6×1 | 1 700 | 32.3 | 15 | 70 | 250 | 28.3 | 120 | 2 070 | 0 | 0.065 | 0.040 | 0.160 | 0.019 | 0.013 | 13.8 | 2 180 | 17 | 8.5 | |
| 34 | 42 | 12 | M6×1 | 2 700 | 32.3 | 15 | 70 | 250 | 28.3 | 120 | 3 070 | 0 | 0.093 | 0.054 | 0.210 | 0.019 | 0.013 | 20.0 | 800 | 17 | 8.5 | |
| 34 | 42 | 12 | M6×1 | 1 700 | 32.3 | 19 | 70 | 250 | 28.3 | 120 | 2 070 | 0 | 0.065 | 0.040 | 0.160 | 0.019 | 0.013 | 13.9 | 2 180 | 15 | 7.5 | |
| 34 | 42 | 12 | M6×1 | 2 700 | 32.3 | 19 | 70 | 250 | 28.3 | 120 | 3 070 | 0 | 0.093 | 0.054 | 0.210 | 0.019 | 0.013 | 20.0 | 790 | 15 | 7.5 | |

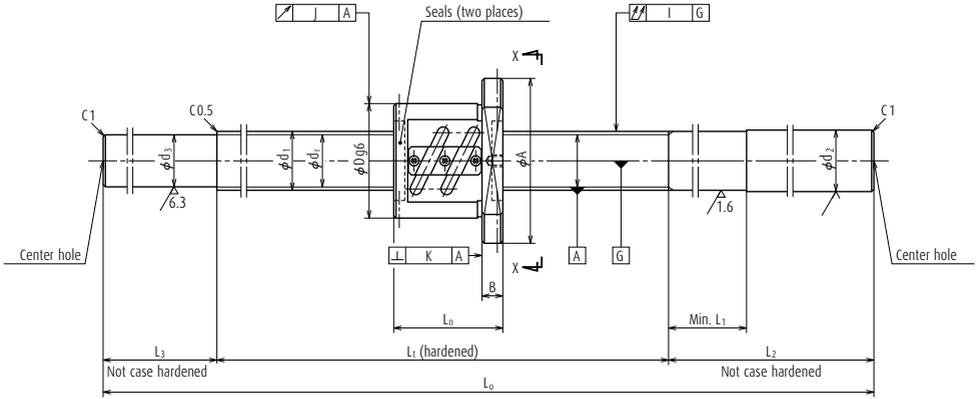

Nut type code: PFT


| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | | | | |
|-----------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------|----|-----------|--|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length | | Bolt hole | |
| | | | | | | | | | | | | | A | G | B | L _n | W | X | |
| W2003SS-1P-CSZ4 | 251 | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 6 550 | 10 900 | 290 | 3.9 | 40 | 63 | 24 | 11 | 49 | 51 | 5.5 | |
| W2005SS-1P-CSZ4 | 451 | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 6 550 | 10 900 | 290 | 3.9 | 40 | 63 | 24 | 11 | 49 | 51 | 5.5 | |
| W2008SS-1P-CSZ4 | 751 | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 6 550 | 10 900 | 290 | 3.9 | 40 | 63 | 24 | 11 | 49 | 51 | 5.5 | |
| W2003SS-2P-CSZ5 | 244 | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 11 100 | 17 100 | 490 | 7.8 | 44 | 67 | 26 | 11 | 56 | 55 | 5.5 | |
| W2005SS-2P-CSZ5 | 444 | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 11 100 | 17 100 | 490 | 7.8 | 44 | 67 | 26 | 11 | 56 | 55 | 5.5 | |
| W2007SS-1P-CSZ5 | 644 | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 11 100 | 17 100 | 490 | 7.8 | 44 | 67 | 26 | 11 | 56 | 55 | 5.5 | |
| W2010SS-1P-CSZ5 | 944 | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 11 100 | 17 100 | 490 | 7.8 | 44 | 67 | 26 | 11 | 56 | 55 | 5.5 | |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: PFT

Screw shaft $\phi 20$
Lead 4, 5

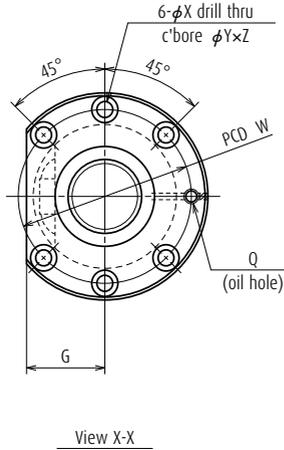

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|------------|----------|-----------------|------------------------|----------------|----------------|----------------|----------------|---------------------|----------------|-----------|--------------------|-----------------------|-------------------------|-------|--------------|--|--|--|
| Bolt hole | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | |
| Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | υ _u | I | J | K | | | |
| 9.55.5 | M6×1 | 300 | 20.2 | 40 | 150 | 17.8 | — | 450 | -0.007 | 0.023 | 0.018 | 0.055 | 0.015 | 0.011 | 1.5 | 3 000 | 2.7 | 1.4 |
| 9.55.5 | M6×1 | 500 | 20.2 | 40 | 150 | 17.8 | 50 | 700 | -0.012 | 0.027 | 0.020 | 0.085 | 0.015 | 0.011 | 2.0 | 3 000 | 2.7 | 1.4 |
| 9.55.5 | M6×1 | 800 | 20.2 | 40 | 200 | 17.8 | 100 | 1 100 | -0.019 | 0.035 | 0.025 | 0.140 | 0.015 | 0.011 | 2.9 | 3 000 | 2.7 | 1.4 |
| 9.55.5 | M6×1 | 300 | 20.2 | 40 | 150 | 17.2 | — | 450 | -0.007 | 0.023 | 0.018 | 0.055 | 0.015 | 0.011 | 1.6 | 3 000 | 4.3 | 2.2 |
| 9.55.5 | M6×1 | 500 | 20.2 | 40 | 150 | 17.2 | 50 | 700 | -0.012 | 0.027 | 0.020 | 0.085 | 0.015 | 0.011 | 2.2 | 3 000 | 4.3 | 2.2 |
| 9.55.5 | M6×1 | 700 | 20.2 | 40 | 200 | 17.2 | 100 | 1 000 | -0.017 | 0.035 | 0.025 | 0.110 | 0.015 | 0.011 | 2.8 | 3 000 | 4.3 | 2.2 |
| 9.55.5 | M6×1 | 1 000 | 20.2 | 40 | 200 | 17.2 | 100 | 1 300 | -0.024 | 0.040 | 0.027 | 0.180 | 0.015 | 0.011 | 3.5 | 3 000 | 4.3 | 2.2 |

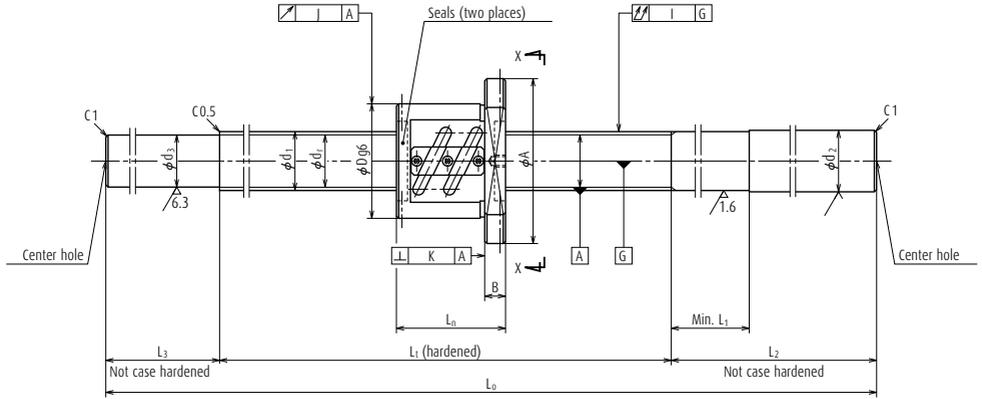

Nut type code: PFT


| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | | | |
|-----------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------------------------|-----------|-----|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length L _n | Bolt hole | |
| | | | | | | | | | | | | | A | G | B | | W | X |
| | | | | | | | | | | | | | | | | | | |
| W2503SS-1P-CSZ4 | 252 | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 7 110 | 13 600 | 290 | 4.9 | 46 | 69 | 26 | 11 | 48 | 57 | 5.5 |
| W2506SS-1P-CSZ4 | 552 | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 7 110 | 13 600 | 290 | 4.9 | 46 | 69 | 26 | 11 | 48 | 57 | 5.5 |
| W2510SS-1P-CSZ4 | 952 | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 7 110 | 13 600 | 290 | 4.9 | 46 | 69 | 26 | 11 | 48 | 57 | 5.5 |
| W2503SS-2P-CSZ5 | 245 | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 12 300 | 21 800 | 540 | 8.8 | 50 | 73 | 28 | 11 | 55 | 61 | 5.5 |
| W2505SS-1P-CSZ5 | 445 | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 12 300 | 21 800 | 540 | 8.8 | 50 | 73 | 28 | 11 | 55 | 61 | 5.5 |
| W2508SS-1P-CSZ5 | 745 | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 12 300 | 21 800 | 540 | 8.8 | 50 | 73 | 28 | 11 | 55 | 61 | 5.5 |
| W2512SS-1P-CSZ5 | 1 145 | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 12 300 | 21 800 | 540 | 8.8 | 50 | 73 | 28 | 11 | 55 | 61 | 5.5 |
| W2504SS-1P-CSZ6 | 338 | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 16 600 | 26 700 | 690 | 13.8 | 53 | 76 | 29 | 11 | 62 | 64 | 5.5 |
| W2508SS-2P-CSZ6 | 738 | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 16 600 | 26 700 | 690 | 13.8 | 53 | 76 | 29 | 11 | 62 | 64 | 5.5 |
| W2512SS-2P-CSZ6 | 1 138 | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 16 600 | 26 700 | 690 | 13.8 | 53 | 76 | 29 | 11 | 62 | 64 | 5.5 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: PFT


Screw shaft $\phi 25$
Lead 4, 5, 6

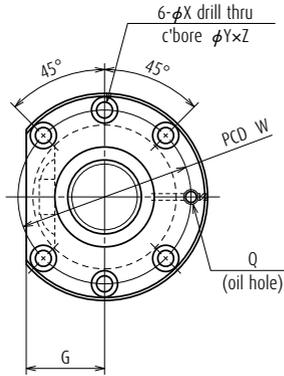

View X-X

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) |
|--------------|-------------|--------------------|------------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|-----------|----------------------------|----------------------------------|---------------------------------|-------|--------------|--|---|---|
| Bolt hole | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Deviation | Variation | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | |
| Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | υ _u | I | J | K | | | |
| 9.55.5 | M6×1 | 300 | 25.2 | 40 | 150 | 22.8 | — | 450 | -0.007 | 0.023 | 0.018 | 0.040 | 0.015 | 0.011 | 2.2 | 2 800 | 3.2 | 1.6 |
| 9.55.5 | M6×1 | 600 | 25.2 | 40 | 200 | 22.8 | 100 | 900 | -0.014 | 0.030 | 0.023 | 0.075 | 0.015 | 0.011 | 3.8 | 2 800 | 3.2 | 1.6 |
| 9.55.5 | M6×1 | 1 000 | 25.2 | 40 | 200 | 22.8 | 100 | 1 300 | -0.024 | 0.040 | 0.027 | 0.120 | 0.015 | 0.011 | 5.2 | 2 800 | 3.2 | 1.6 |
| 9.55.5 | M6×1 | 300 | 25.2 | 40 | 200 | 22.2 | — | 500 | -0.007 | 0.023 | 0.018 | 0.040 | 0.015 | 0.011 | 2.5 | 2 800 | 5.2 | 2.6 |
| 9.55.5 | M6×1 | 500 | 25.2 | 40 | 200 | 22.2 | 50 | 750 | -0.012 | 0.027 | 0.020 | 0.060 | 0.015 | 0.011 | 3.4 | 2 800 | 5.2 | 2.6 |
| 9.55.5 | M6×1 | 800 | 25.2 | 40 | 250 | 22.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.015 | 0.011 | 4.8 | 2 800 | 5.2 | 2.6 |
| 9.55.5 | M6×1 | 1 200 | 25.2 | 40 | 300 | 22.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.015 | 0.011 | 6.3 | 2 800 | 5.2 | 2.6 |
| 9.55.5 | M6×1 | 400 | 25.2 | 40 | 200 | 21.4 | — | 600 | -0.010 | 0.025 | 0.020 | 0.050 | 0.019 | 0.013 | 3.0 | 2 800 | 7.0 | 3.5 |
| 9.55.5 | M6×1 | 800 | 25.2 | 40 | 250 | 21.4 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 4.8 | 2 800 | 7.0 | 3.5 |
| 9.55.5 | M6×1 | 1 200 | 25.2 | 40 | 300 | 21.4 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 6.3 | 2 800 | 7.0 | 3.5 |

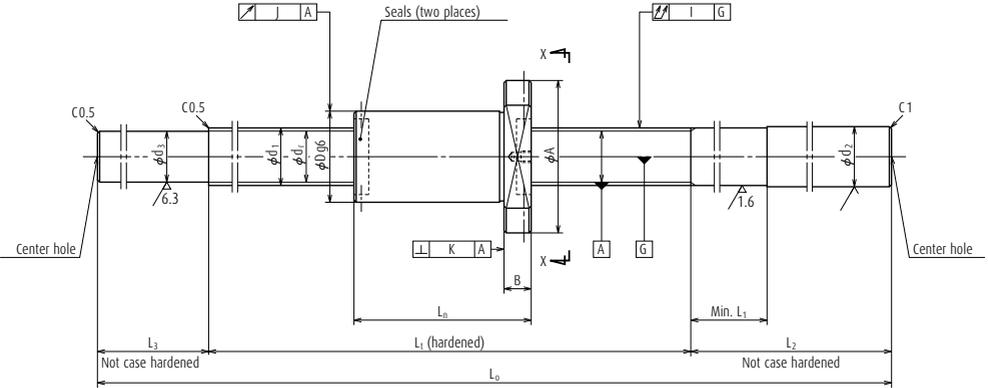


Nut type code: ZFD

| Ball screw No. | Stroke Max. $L-L_n$ | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | | | |
|-------------------|------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|---------------------|--------|----|----|-------------------------|-----------|-----|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. D | Flange | | | Overall length L_n | Bolt hole | |
| | | | | | | | | | | | | | A | G | B | | W | X |
| | | | | | | | | | | | | | | | | | | |
| W2502SS-1ZY-CSZ5 | 184 | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 740 | 13.8 | 40 | 63 | 24 | 11 | 66 | 51 | 5.5 |
| W2504SS-3ZY-CSZ5 | 334 | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 740 | 13.8 | 40 | 63 | 24 | 11 | 66 | 51 | 5.5 |
| W2506SS-2ZY-CSZ5 | 534 | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 740 | 13.8 | 40 | 63 | 24 | 11 | 66 | 51 | 5.5 |
| W2509SS-1ZY-CSZ5 | 834 | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 740 | 13.8 | 40 | 63 | 24 | 11 | 66 | 51 | 5.5 |
| W2512SS-3ZY-CSZ5 | 1 134 | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 740 | 13.8 | 40 | 63 | 24 | 11 | 66 | 51 | 5.5 |
| W2504SS-4ZY-CSZ10 | 312 | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 880 | 21.5 | 42 | 69 | 26 | 15 | 88 | 55 | 6.6 |
| W2506SS-3ZY-CSZ10 | 512 | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 880 | 21.5 | 42 | 69 | 26 | 15 | 88 | 55 | 6.6 |
| W2508SS-3ZY-CSZ10 | 712 | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 880 | 21.5 | 42 | 69 | 26 | 15 | 88 | 55 | 6.6 |
| W2511SS-1ZY-CSZ10 | 1 012 | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 880 | 21.5 | 42 | 69 | 26 | 15 | 88 | 55 | 6.6 |
| W2515SS-2ZY-CSZ10 | 1 412 | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 880 | 21.5 | 42 | 69 | 26 | 15 | 88 | 55 | 6.6 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: ZFD

Screw shaft $\phi 25$
Lead 5, 10

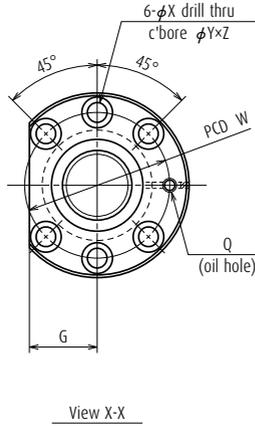

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | |
|--------------|-------------|--------------------|------------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|-----------|----------------------------|----------------------------------|---------------------------------|-------|--------------|---|---|---|-----|
| Bolt hole | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Deviation | Variation | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | | |
| Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 9.5 | 5.5 | M6×1 | 250 | 25.2 | 40 | 200 | 22.4 | — | 450 | -0.005 | 0.023 | 0.018 | 0.040 | 0.015 | 0.011 | 2.1 | 2 800 | 5.4 | 2.7 |
| 9.5 | 5.5 | M6×1 | 400 | 25.2 | 40 | 200 | 22.4 | 50 | 650 | -0.009 | 0.025 | 0.020 | 0.060 | 0.015 | 0.011 | 2.8 | 2 800 | 5.4 | 2.7 |
| 9.5 | 5.5 | M6×1 | 600 | 25.2 | 40 | 250 | 22.4 | 100 | 950 | -0.013 | 0.030 | 0.023 | 0.075 | 0.015 | 0.011 | 3.9 | 2 800 | 5.4 | 2.7 |
| 9.5 | 5.5 | M6×1 | 900 | 25.2 | 40 | 250 | 22.4 | 100 | 1 250 | -0.021 | 0.040 | 0.027 | 0.090 | 0.015 | 0.011 | 4.9 | 2 800 | 5.4 | 2.7 |
| 9.5 | 5.5 | M6×1 | 1 200 | 25.2 | 40 | 300 | 22.4 | 100 | 1 600 | -0.028 | 0.046 | 0.030 | 0.120 | 0.015 | 0.011 | 6.2 | 2 800 | 5.4 | 2.7 |
| 11 | 6.5 | M6×1 | 400 | 25.2 | 60 | 200 | 21.3 | 50 | 650 | -0.008 | 0.025 | 0.020 | 0.060 | 0.015 | 0.011 | 3.0 | 2 800 | 9.0 | 4.5 |
| 11 | 6.5 | M6×1 | 600 | 25.2 | 60 | 250 | 21.3 | 100 | 950 | -0.012 | 0.030 | 0.023 | 0.075 | 0.015 | 0.011 | 4.1 | 2 800 | 9.0 | 4.5 |
| 11 | 6.5 | M6×1 | 800 | 25.2 | 60 | 250 | 21.3 | 100 | 1 150 | -0.017 | 0.035 | 0.025 | 0.090 | 0.015 | 0.011 | 4.8 | 2 800 | 9.0 | 4.5 |
| 11 | 6.5 | M6×1 | 1 100 | 25.2 | 60 | 300 | 21.3 | 100 | 1 500 | -0.024 | 0.046 | 0.030 | 0.120 | 0.015 | 0.011 | 6.0 | 2 800 | 9.0 | 4.5 |
| 11 | 6.5 | M6×1 | 1 500 | 25.2 | 60 | 300 | 21.3 | 100 | 1 900 | -0.034 | 0.054 | 0.035 | 0.150 | 0.015 | 0.011 | 7.4 | 2 800 | 9.0 | 4.5 |

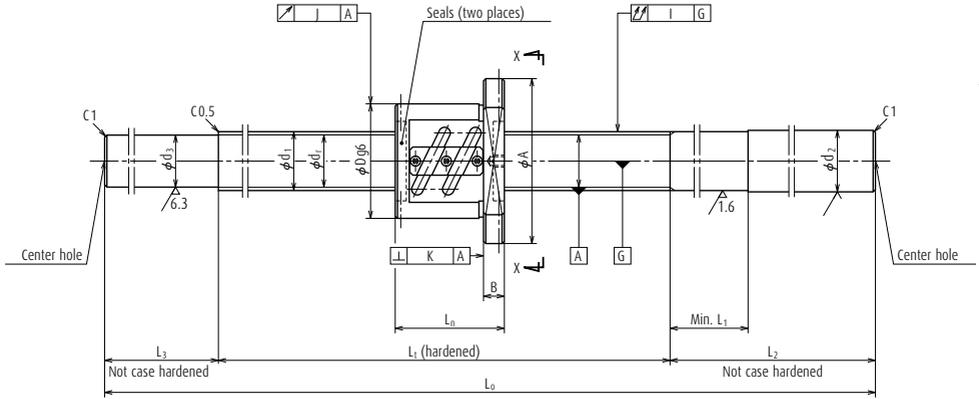


Nut type code: PFT

| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | | | |
|------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|--------------|----|--------|----|-------------------------|-----------|-----|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. | | Flange | | Overall length L_n | Bolt hole | |
| | | | | | | | | | | | | D | A | G | B | | W | X |
| W2504SS-2P-CSZ10 | 319 | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 600 | 18 900 | 590 | 13.8 | 58 | 85 | 32 | 15 | 81 | 71 | 6.6 |
| W2507SS-1P-CSZ10 | 619 | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 600 | 18 900 | 590 | 13.8 | 58 | 85 | 32 | 15 | 81 | 71 | 6.6 |
| W2510SS-2P-CSZ10 | 919 | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 600 | 18 900 | 590 | 13.8 | 58 | 85 | 32 | 15 | 81 | 71 | 6.6 |
| W2515SS-1P-CSZ10 | 1 419 | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 600 | 18 900 | 590 | 13.8 | 58 | 85 | 32 | 15 | 81 | 71 | 6.6 |
| W2804SS-1P-CSZ5 | 344 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 13 000 | 24 400 | 540 | 9.8 | 55 | 85 | 31 | 12 | 56 | 69 | 6.6 |
| W2806SS-1P-CSZ5 | 544 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 13 000 | 24 400 | 540 | 9.8 | 55 | 85 | 31 | 12 | 56 | 69 | 6.6 |
| W2808SS-1P-CSZ5 | 744 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 13 000 | 24 400 | 540 | 9.8 | 55 | 85 | 31 | 12 | 56 | 69 | 6.6 |
| W2812SS-1P-CSZ5 | 1 144 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 13 000 | 24 400 | 540 | 9.8 | 55 | 85 | 31 | 12 | 56 | 69 | 6.6 |
| W2804SS-3P-CSZ6 | 337 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 12 900 | 24 300 | 540 | 10.8 | 55 | 85 | 31 | 12 | 63 | 69 | 6.6 |
| W2806SS-3P-CSZ6 | 537 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 12 900 | 24 300 | 540 | 10.8 | 55 | 85 | 31 | 12 | 63 | 69 | 6.6 |
| W2808SS-3P-CSZ6 | 737 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 12 900 | 24 300 | 540 | 10.8 | 55 | 85 | 31 | 12 | 63 | 69 | 6.6 |
| W2812SS-3P-CSZ6 | 1 137 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 12 900 | 24 300 | 540 | 10.8 | 55 | 85 | 31 | 12 | 63 | 69 | 6.6 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.** See page D13 for details.
 3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed. See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.

Nut model: PFT

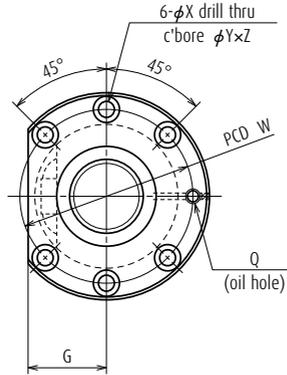


View X-X

Screw shaft $\phi 25$
Lead 5, 10
Screw shaft $\phi 28$
Lead 5, 6

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | |
|------------|----------|-----------------|------------------------|-------|----------------|-------|----------------|---------------------|---------------|-----------|--------------------|-----------------------|-------------------------|-------|-------|------------------------------|--------------------------------|--|--------------------|
| Bolt hole | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | |
| Y | Z | Q | L_t | d_2 | L_1 | L_2 | d_3 | L_3 | L_0 | T | e_p | v_u | I | J | K | (kg) | N (min ⁻¹) | (cm ³) | (cm ³) |
| 11 | 6.5 | M6×1 | 400 | 25.2 | 60 | 200 | 20.5 | 50 | 650 | -0.010 | 0.025 | 0.020 | 0.060 | 0.019 | 0.013 | 3.8 | 2 800 | 9.7 | 4.9 |
| 11 | 6.5 | M6×1 | 700 | 25.2 | 60 | 250 | 20.5 | 100 | 1 050 | -0.017 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 5.1 | 2 800 | 9.7 | 4.9 |
| 11 | 6.5 | M6×1 | 1 000 | 25.2 | 60 | 250 | 20.5 | 100 | 1 350 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 6.1 | 2 800 | 9.7 | 4.9 |
| 11 | 6.5 | M6×1 | 1 500 | 25.2 | 60 | 300 | 20.5 | 100 | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 8.0 | 2 050 | 9.7 | 4.9 |
| 11 | 6.5 | M6×1 | 400 | 28.2 | 40 | 200 | 25.2 | — | 600 | -0.010 | 0.025 | 0.020 | 0.050 | 0.019 | 0.013 | 3.7 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 600 | 28.2 | 40 | 250 | 25.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 5.2 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 800 | 28.2 | 40 | 250 | 25.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 6.1 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 1 200 | 28.2 | 40 | 300 | 25.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 8.1 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 400 | 28.2 | 40 | 200 | 25.2 | — | 600 | -0.010 | 0.025 | 0.020 | 0.050 | 0.019 | 0.013 | 3.8 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 600 | 28.2 | 40 | 250 | 25.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 5.3 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 800 | 28.2 | 40 | 250 | 25.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 6.2 | 2 500 | 6.1 | 3.1 |
| 11 | 6.5 | M6×1 | 1 200 | 28.2 | 40 | 300 | 25.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 8.2 | 2 500 | 6.1 | 3.1 |

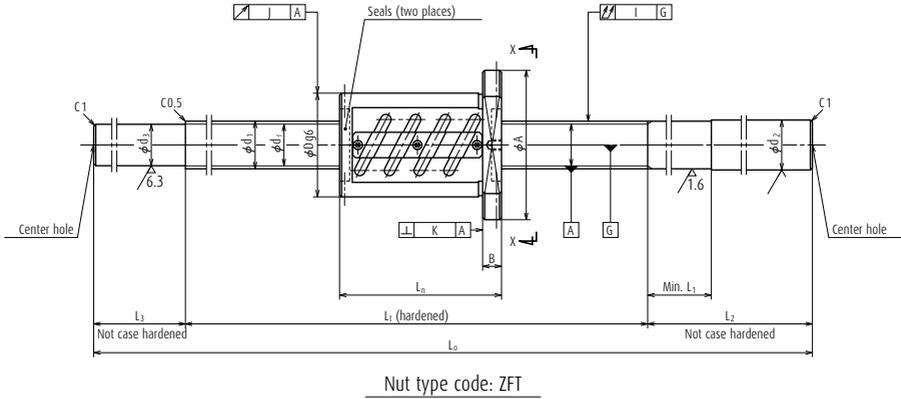


| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | | | | |
|-----------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------|----|-----------|--|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length | | Bolt hole | |
| | | | | | | | | | | | | | A | G | B | L _n | W | X | |
| W2804SS-2Z-C5Z5 | 314 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 21.5 | 55 | 85 | 31 | 12 | 86 | 69 | 6.6 | |
| W2806SS-2Z-C5Z5 | 514 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 21.5 | 55 | 85 | 31 | 12 | 86 | 69 | 6.6 | |
| W2808SS-2Z-C5Z5 | 714 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 21.5 | 55 | 85 | 31 | 12 | 86 | 69 | 6.6 | |
| W2812SS-2Z-C5Z5 | 1 114 | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 21.5 | 55 | 85 | 31 | 12 | 86 | 69 | 6.6 | |
| W2804SS-4Z-C5Z6 | 301 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 22.5 | 55 | 85 | 31 | 12 | 99 | 69 | 6.6 | |
| W2806SS-4Z-C5Z6 | 501 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 22.5 | 55 | 85 | 31 | 12 | 99 | 69 | 6.6 | |
| W2808SS-4Z-C5Z6 | 701 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 22.5 | 55 | 85 | 31 | 12 | 99 | 69 | 6.6 | |
| W2812SS-4Z-C5Z6 | 1 101 | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 1 225 | 22.5 | 55 | 85 | 31 | 12 | 99 | 69 | 6.6 | |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. **Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. The permissible rotational speed is determined by d-n value, critical speed, and maximum rotational speed.
See B299 and B47. The permissible rotational speed shown in the table is the value when the ball screw mounting method is Fixed-Fixed.


Nut model: ZFT

Screw shaft $\phi 28$
Lead 5, 6

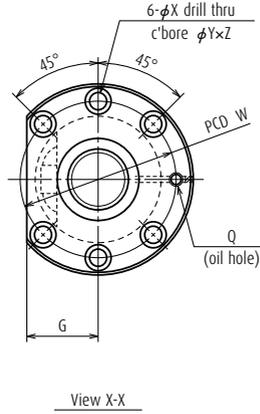

Unit: mm

| dimensions | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Permissible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | |
|--------------|-------------|--------------------|------------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|-----------|----------------------------|----------------------------------|---------------------------------|-------|--------------|--|---|---|-----|
| Bolt hole | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Deviation | Variation | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | | |
| Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | υ _u | I | J | K | | | | |
| 11 | 6.5 | M6×1 | 400 | 28.2 | 40 | 200 | 25.2 | — | 600 | -0.010 | 0.025 | 0.020 | 0.050 | 0.019 | 0.013 | 4.7 | 2 500 | 9.2 | 4.6 |
| 11 | 6.5 | M6×1 | 600 | 28.2 | 40 | 250 | 25.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 5.5 | 2 500 | 9.2 | 4.6 |
| 11 | 6.5 | M6×1 | 800 | 28.2 | 40 | 250 | 25.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 6.4 | 2 500 | 9.2 | 4.6 |
| 11 | 6.5 | M6×1 | 1 200 | 28.2 | 40 | 300 | 25.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 8.4 | 2 500 | 9.2 | 4.6 |
| 11 | 6.5 | M6×1 | 400 | 28.2 | 40 | 200 | 25.2 | — | 600 | -0.010 | 0.025 | 0.020 | 0.050 | 0.019 | 0.013 | 4.2 | 2 500 | 9.5 | 4.8 |
| 11 | 6.5 | M6×1 | 600 | 28.2 | 40 | 250 | 25.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 5.7 | 2 500 | 9.5 | 4.8 |
| 11 | 6.5 | M6×1 | 800 | 28.2 | 40 | 250 | 25.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 6.6 | 2 500 | 9.5 | 4.8 |
| 11 | 6.5 | M6×1 | 1 200 | 28.2 | 40 | 300 | 25.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 8.6 | 2 500 | 9.5 | 4.8 |

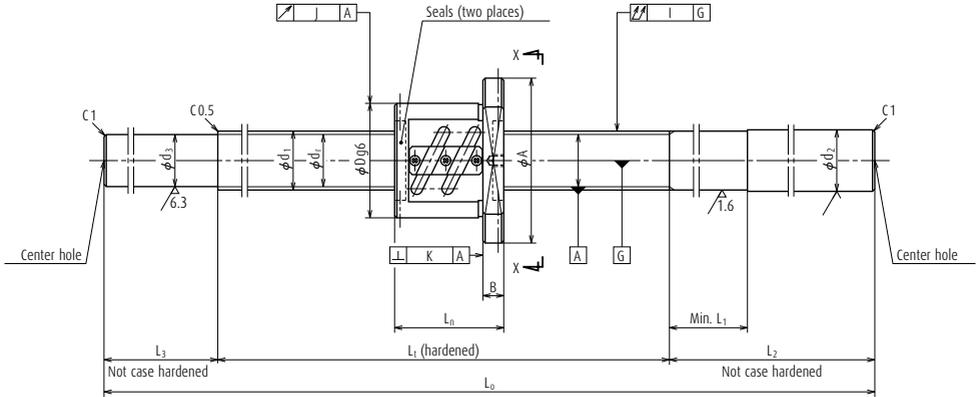

Nut type code: PFT


| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|-----------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|----------------------|-----------------------|------------------------|-------------|--|------------------------|--------------|--------|----------------|----|
| | | | | | | | | Turns × Circuits | Dynamic C _a | | | Static C _{0a} | Outside dia. | Flange | | |
| | | | | | | | D | | | A | G | | | B | L _n | |
| W3204SS-1P-CSZ5 | 344 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 590 | 10.8 | 58 | 85 | 32 | 12 | 56 |
| W3206SS-1P-CSZ5 | 544 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 590 | 10.8 | 58 | 85 | 32 | 12 | 56 |
| W3208SS-1P-CSZ5 | 744 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 590 | 10.8 | 58 | 85 | 32 | 12 | 56 |
| W3212SS-1P-CSZ5 | 1 144 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 590 | 10.8 | 58 | 85 | 32 | 12 | 56 |
| W3215SS-1P-CSZ5 | 1 144 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 590 | 10.8 | 58 | 85 | 32 | 12 | 56 |
| W3206SS-3P-CSZ6 | 537 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 18 300 | 34 700 | 780 | 15.6 | 62 | 89 | 34 | 12 | 63 |
| W3210SS-1P-CSZ6 | 937 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 18 300 | 34 700 | 780 | 15.6 | 62 | 89 | 34 | 12 | 63 |
| W3215SS-3P-CSZ6 | 1 437 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 18 300 | 34 700 | 780 | 15.6 | 62 | 89 | 34 | 12 | 63 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: PFT


Screw shaft ϕ 32
Lead 5, 6

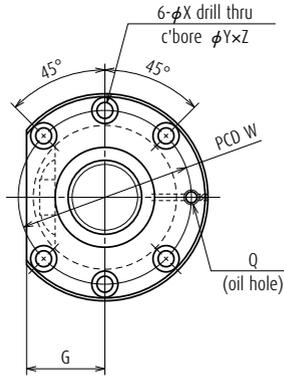

View X-X

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | | |
|------------|-----|----|-----|------------------------|-----------------|----------------|----------------|----------------|----------------|---------------------|----------------|-----------|--------------------|-----------------------|-------------------------|-------|------------------------------|--------------------------------|--|--------------------|--------------------|
| Bolt hole | | | | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | (kg) | N (min ⁻¹) | (cm ³) | (cm ³) |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 400 | 32.3 | 40 | 200 | 29.2 | 50 | 650 | -0.010 | 0.025 | 0.020 | 0.060 | 0.019 | 0.013 | 4.8 | 2 180 | 6.9 | 3.5 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 600 | 32.3 | 40 | 250 | 29.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 6.5 | 2 180 | 6.9 | 3.5 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 800 | 32.3 | 40 | 250 | 29.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 7.7 | 2 180 | 6.9 | 3.5 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 1 200 | 32.3 | 40 | 300 | 29.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 10.3 | 2 180 | 6.9 | 3.5 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 1 500 | 32.3 | 40 | 300 | 29.2 | 100 | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 12.1 | 2 180 | 6.9 | 3.5 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 600 | 32.3 | 40 | 250 | 28.4 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 6.7 | 2 180 | 9.4 | 4.7 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 1 000 | 32.3 | 40 | 300 | 28.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 9.2 | 2 180 | 9.4 | 4.7 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 1 500 | 32.3 | 40 | 300 | 28.4 | 100 | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 12.1 | 2 180 | 9.4 | 4.7 |

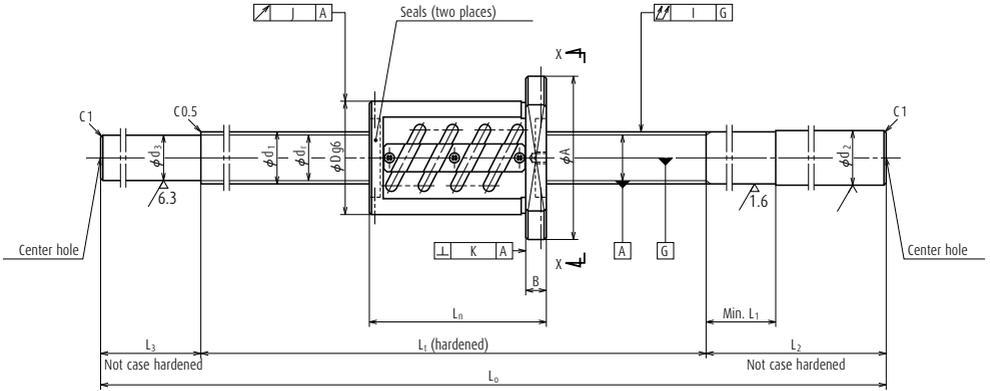

Nut type code: ZFT


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead I | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|-----------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|---------------------|--------|----|----|-------------------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. D | Flange | | | Overall length L_n |
| | | | | | | | | | | | | | A | G | B | |
| W3204SS-2Z-C5Z5 | 314 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 270 | 22.5 | 58 | 85 | 32 | 12 | 86 |
| W3206SS-2Z-C5Z5 | 514 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 270 | 22.5 | 58 | 85 | 32 | 12 | 86 |
| W3208SS-2Z-C5Z5 | 714 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 270 | 22.5 | 58 | 85 | 32 | 12 | 86 |
| W3212SS-2Z-C5Z5 | 1 114 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 270 | 22.5 | 58 | 85 | 32 | 12 | 86 |
| W3215SS-2Z-C5Z5 | 1 414 | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 270 | 22.5 | 58 | 85 | 32 | 12 | 86 |
| W3206SS-4Z-C5Z6 | 501 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 29 100 | 69 300 | 1 720 | 34.5 | 62 | 89 | 34 | 12 | 99 |
| W3210SS-2Z-C5Z6 | 901 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 29 100 | 69 300 | 1 720 | 34.5 | 62 | 89 | 34 | 12 | 99 |
| W3215SS-4Z-C5Z6 | 1 401 | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 29 100 | 69 300 | 1 720 | 34.5 | 62 | 89 | 34 | 12 | 99 |
| W3206SS-5Z-C5Z8 | 518 | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×1 | 20 600 | 40 900 | 1 320 | 30.5 | 66 | 100 | 38 | 15 | 82 |
| W3210SS-3Z-C5Z8 | 918 | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×1 | 20 600 | 40 900 | 1 320 | 30.5 | 66 | 100 | 38 | 15 | 82 |
| W3215SS-5Z-C5Z8 | 1 418 | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×1 | 20 600 | 40 900 | 1 320 | 30.5 | 66 | 100 | 38 | 15 | 82 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT


Screw shaft $\phi 32$
Lead 5, 6, 8



View X-X

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | | |
|------------|-----|----------|-----------------|------------------------|----------------|----------------|----------------|----------------|---------------------|----------------|----------------|--------------------|-----------------------|-------------------------|-------|-------|------------------------------|--------------------------------|--|--------------------|--------------------|
| Bolt hole | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | (kg) | N (min ⁻¹) | (cm ³) | (cm ³) |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 400 | 32.3 | 40 | 200 | 29.2 | 50 | 650 | -0.010 | 0.025 | 0.020 | 0.060 | 0.019 | 0.013 | 5.1 | 2 180 | 10 | 5.0 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 600 | 32.3 | 40 | 250 | 29.2 | 100 | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 6.9 | 2 180 | 10 | 5.0 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 800 | 32.3 | 40 | 250 | 29.2 | 100 | 1 150 | -0.019 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 8.0 | 2 180 | 10 | 5.0 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 1 200 | 32.3 | 40 | 300 | 29.2 | 100 | 1 600 | -0.029 | 0.046 | 0.030 | 0.120 | 0.019 | 0.013 | 10.1 | 2 180 | 10 | 5.0 |
| 71 | 6.6 | 11 | 6.5 | M6×1 | 1 500 | 32.3 | 40 | 300 | 29.2 | 100 | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 12.4 | 2 180 | 10 | 5.0 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 600 | 32.3 | 40 | 250 | 28.4 | — | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 7.1 | 2 180 | 15 | 7.5 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 1 000 | 32.3 | 40 | 300 | 28.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 9.7 | 2 180 | 15 | 7.5 |
| 75 | 6.6 | 11 | 6.5 | M6×1 | 1 500 | 32.3 | 40 | 300 | 28.4 | — | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 12.6 | 2 180 | 15 | 7.5 |
| 82 | 9 | 14 | 8.5 | M6×1 | 600 | 32.3 | 50 | 250 | 27.5 | — | 950 | -0.014 | 0.030 | 0.023 | 0.075 | 0.019 | 0.013 | 7.3 | 2 180 | 7.9 | 4.0 |
| 82 | 9 | 14 | 8.5 | M6×1 | 1 000 | 32.3 | 50 | 300 | 27.5 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 9.8 | 2 180 | 7.9 | 4.0 |
| 82 | 9 | 14 | 8.5 | M6×1 | 1 500 | 32.3 | 50 | 300 | 27.5 | — | 1 900 | -0.036 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 12.6 | 2 180 | 7.9 | 4.0 |

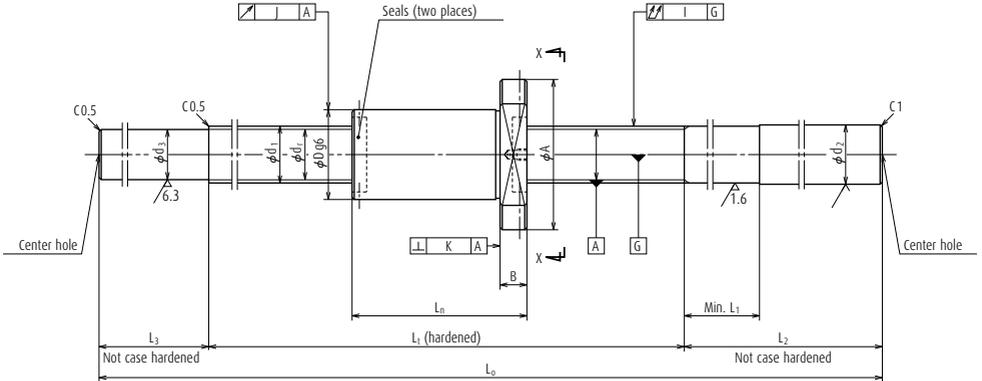

Nut type code: ZFD


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead I | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|---------------------|--------|----|----|-------------------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. D | Flange | | | Overall length L_n |
| | | | | | | | | | | | | | A | G | B | |
| W3204SS-3ZY-CSZ5 | 323 | 32 | 5 | 3.175 | 32.75 | 29.4 | 4 | 16 800 | 40 600 | 1 080 | 19.6 | 48 | 75 | 29 | 12 | 77 |
| W3206SS-6ZY-CSZ5 | 523 | 32 | 5 | 3.175 | 32.75 | 29.4 | 4 | 16 800 | 40 600 | 1 080 | 19.6 | 48 | 75 | 29 | 12 | 77 |
| W3209SS-1ZY-CSZ5 | 823 | 32 | 5 | 3.175 | 32.75 | 29.4 | 4 | 16 800 | 40 600 | 1 080 | 19.6 | 48 | 75 | 29 | 12 | 77 |
| W3212SS-3ZY-CSZ5 | 1 123 | 32 | 5 | 3.175 | 32.75 | 29.4 | 4 | 16 800 | 40 600 | 1 080 | 19.6 | 48 | 75 | 29 | 12 | 77 |
| W3216SS-1ZY-CSZ5 | 1 523 | 32 | 5 | 3.175 | 32.75 | 29.4 | 4 | 16 800 | 40 600 | 1 080 | 19.6 | 48 | 75 | 29 | 12 | 77 |
| W3205SS-3ZY-CSZ10 | 380 | 32 | 10 | 6.35 | 33.75 | 27.1 | 3 | 30 500 | 52 500 | 1 860 | 49.0 | 54 | 88 | 34 | 15 | 120 |
| W3207SS-3ZY-CSZ10 | 580 | 32 | 10 | 6.35 | 33.75 | 27.1 | 3 | 30 500 | 52 500 | 1 860 | 49.0 | 54 | 88 | 34 | 15 | 120 |
| W3210SS-6ZY-CSZ10 | 880 | 32 | 10 | 6.35 | 33.75 | 27.1 | 3 | 30 500 | 52 500 | 1 860 | 49.0 | 54 | 88 | 34 | 15 | 120 |
| W3214SS-3ZY-CSZ10 | 1 280 | 32 | 10 | 6.35 | 33.75 | 27.1 | 3 | 30 500 | 52 500 | 1 860 | 49.0 | 54 | 88 | 34 | 15 | 120 |
| W3218SS-3ZY-CSZ10 | 1 680 | 32 | 10 | 6.35 | 33.75 | 27.1 | 3 | 30 500 | 52 500 | 1 860 | 49.0 | 54 | 88 | 34 | 15 | 120 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFD


Screw shaft ϕ 32
Lead 5, 10



View X-X

Unit: mm


| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass | Permissible rotational speed | Internal spatial volume of nut | Standard volume of grease replenishing | | |
|------------|-----|----------|-----------------|------------------------|----------------|----------------|----------------|----------------|---------------------|----------------|----------------|--------------------|-----------------------|-------------------------|-------|-------|------------------------------|--------------------------------|--|--------------------|--------------------|
| Bolt hole | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compensation | Deviation | Variation | Shaft straightness | Nut O.D. eccentricity | Flange perpendicularity | | | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | υ _u | I | J | K | (kg) | N (min ⁻¹) | (cm ³) | (cm ³) |
| 61 | 6.6 | 11 | 6.5 | M6×1 | 400 | 32.3 | 40 | 200 | 29.4 | 50 | 650 | -0.009 | 0.025 | 0.020 | 0.060 | 0.015 | 0.011 | 4.6 | 2 180 | 22 | 11 |
| 61 | 6.6 | 11 | 6.5 | M6×1 | 600 | 32.3 | 40 | 250 | 29.4 | 100 | 950 | -0.013 | 0.030 | 0.023 | 0.075 | 0.015 | 0.011 | 6.4 | 2 180 | 22 | 11 |
| 61 | 6.6 | 11 | 6.5 | M6×1 | 900 | 32.3 | 40 | 250 | 29.4 | 100 | 1 250 | -0.021 | 0.040 | 0.027 | 0.090 | 0.015 | 0.011 | 8.1 | 2 180 | 22 | 11 |
| 61 | 6.6 | 11 | 6.5 | M6×1 | 1 200 | 32.3 | 40 | 300 | 29.4 | 100 | 1 600 | -0.028 | 0.046 | 0.030 | 0.120 | 0.015 | 0.011 | 10.2 | 2 180 | 22 | 11 |
| 61 | 6.6 | 11 | 6.5 | M6×1 | 1 600 | 32.3 | 40 | 300 | 29.4 | 100 | 2 000 | -0.037 | 0.054 | 0.035 | 0.150 | 0.015 | 0.011 | 12.6 | 2 180 | 22 | 11 |
| 70 | 9 | 14 | 8.5 | M6×1 | 500 | 32.3 | 60 | 250 | 27.1 | 100 | 850 | -0.010 | 0.027 | 0.020 | 0.075 | 0.019 | 0.013 | 6.2 | 2 180 | 23 | 12 |
| 70 | 9 | 14 | 8.5 | M6×1 | 700 | 32.3 | 60 | 250 | 27.1 | 100 | 1 050 | -0.015 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 7.3 | 2 180 | 23 | 12 |
| 70 | 9 | 14 | 8.5 | M6×1 | 1 000 | 32.3 | 60 | 300 | 27.1 | 100 | 1 400 | -0.022 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 9.3 | 2 180 | 23 | 12 |
| 70 | 9 | 14 | 8.5 | M6×1 | 1 400 | 32.3 | 60 | 350 | 27.1 | 120 | 1 870 | -0.032 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 11.9 | 2 180 | 23 | 12 |
| 70 | 9 | 14 | 8.5 | M6×1 | 1 800 | 32.3 | 60 | 350 | 27.1 | 120 | 2 270 | -0.041 | 0.065 | 0.040 | 0.200 | 0.019 | 0.013 | 14.1 | 2 180 | 23 | 12 |

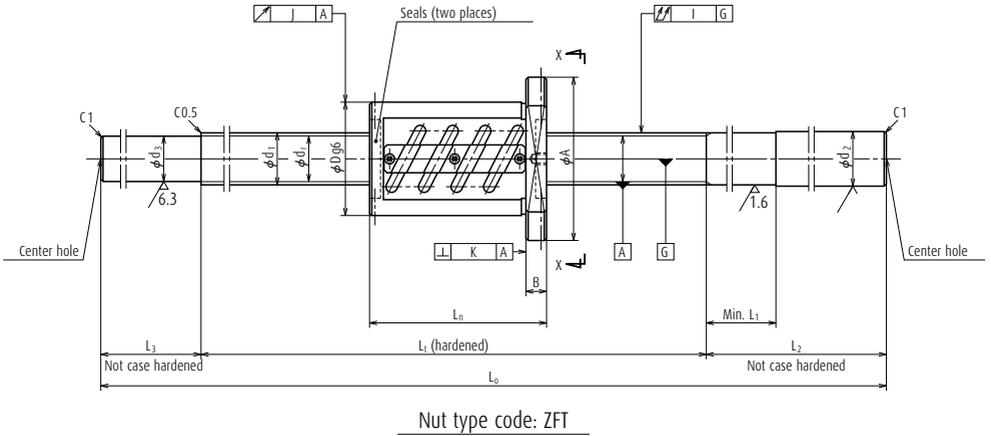

| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|------------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length L _n |
| | | | | | | | | | | | | | A | G | B | |
| W3205SS-1Z-CSZ10 | 400 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×1 | 30 000 | 55 100 | 1 960 | 50 | 74 | 108 | 41 | 15 | 100 |
| W3207SS-1Z-CSZ10 | 600 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×1 | 30 000 | 55 100 | 1 960 | 50 | 74 | 108 | 41 | 15 | 100 |
| W3210SS-4Z-CSZ10 | 900 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×1 | 30 000 | 55 100 | 1 960 | 50 | 74 | 108 | 41 | 15 | 100 |
| W3214SS-1Z-CSZ10 | 1 300 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×1 | 30 000 | 55 100 | 1 960 | 50 | 74 | 108 | 41 | 15 | 100 |
| W3218SS-1Z-CSZ10 | 1 700 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×1 | 30 000 | 55 100 | 1 960 | 50 | 74 | 108 | 41 | 15 | 100 |
| W3607SS-1Z-CSZ10 | 597 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×1 | 32 000 | 61 100 | 2 060 | 56 | 75 | 120 | 45 | 18 | 103 |
| W3612SS-1Z-CSZ10 | 1 097 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×1 | 32 000 | 61 100 | 2 060 | 56 | 75 | 120 | 45 | 18 | 103 |
| W3620SS-1Z-CSZ10 | 1 897 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×1 | 32 000 | 61 100 | 2 060 | 56 | 75 | 120 | 45 | 18 | 103 |
| W4006SS-1Z-CSZ5 | 511 | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 23 900 | 70 500 | 1 420 | 28.5 | 67 | 101 | 39 | 15 | 89 |
| W4010SS-1Z-CSZ5 | 911 | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 23 900 | 70 500 | 1 420 | 28.5 | 67 | 101 | 39 | 15 | 89 |
| W4016SS-1Z-CSZ5 | 1 511 | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 23 900 | 70 500 | 1 420 | 28.5 | 67 | 101 | 39 | 15 | 89 |

- Notes**
1. Use of NSK support unit is recommended. See page B389 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
 3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT

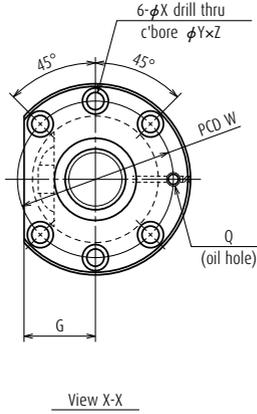

Screw shaft φ 32, φ 36


Lead 10

Screw shaft φ 40

Lead 5

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | | |
|------------|----|------|-----|------------------------|-----------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|---------------------------------|--------------|---|---|--|----|-----|
| Bolt hole | | | | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | ν _u | I | J | K | | | | |
| 90 | 9 | 14 | 8.5 | M6×1 | 500 | 32.3 | 60 | 250 | 26.4 | 100 | 850 | -0.012 | 0.027 | 0.020 | 0.075 | 0.019 | 0.013 | 7.5 | 2 180 | 22 | 11 |
| 90 | 9 | 14 | 8.5 | M6×1 | 700 | 32.3 | 60 | 250 | 26.4 | 100 | 1 050 | -0.017 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 8.5 | 2 180 | 22 | 11 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 000 | 32.3 | 60 | 300 | 26.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 10.5 | 2 180 | 22 | 11 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 400 | 32.3 | 60 | 350 | 26.4 | 120 | 1 870 | -0.034 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 13.1 | 2 180 | 22 | 11 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 800 | 32.3 | 60 | 350 | 26.4 | 120 | 2 270 | -0.043 | 0.065 | 0.040 | 0.200 | 0.019 | 0.013 | 15.2 | 1 820 | 22 | 11 |
| 98 | 11 | 17.5 | 11 | M6×1 | 700 | 36.3 | 60 | 300 | 30.4 | 100 | 1 100 | -0.017 | 0.035 | 0.025 | 0.065 | 0.019 | 0.013 | 10.9 | 1 940 | 27 | 14 |
| 98 | 11 | 17.5 | 11 | M6×1 | 1 200 | 36.3 | 60 | 350 | 30.4 | 120 | 1 670 | -0.029 | 0.046 | 0.030 | 0.100 | 0.019 | 0.013 | 14.9 | 1 940 | 27 | 14 |
| 98 | 11 | 17.5 | 11 | M6×1 | 2 000 | 36.3 | 60 | 350 | 30.4 | 120 | 2 470 | -0.048 | 0.065 | 0.040 | 0.130 | 0.019 | 0.013 | 20.4 | 1 940 | 27 | 14 |
| 83 | 9 | 14 | 8.5 | Rc1/8 | 600 | 40.3 | 50 | 300 | 37.2 | 100 | 1 000 | -0.014 | 0.030 | 0.023 | 0.050 | 0.019 | 0.013 | 11.1 | 1 750 | 14 | 7.0 |
| 83 | 9 | 14 | 8.5 | Rc1/8 | 1 000 | 40.3 | 50 | 300 | 37.2 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.019 | 0.013 | 14.8 | 1 750 | 14 | 7.0 |
| 83 | 9 | 14 | 8.5 | Rc1/8 | 1 600 | 40.3 | 50 | 350 | 37.2 | 100 | 2 050 | -0.038 | 0.054 | 0.035 | 0.130 | 0.019 | 0.013 | 20.8 | 1 750 | 14 | 7.0 |

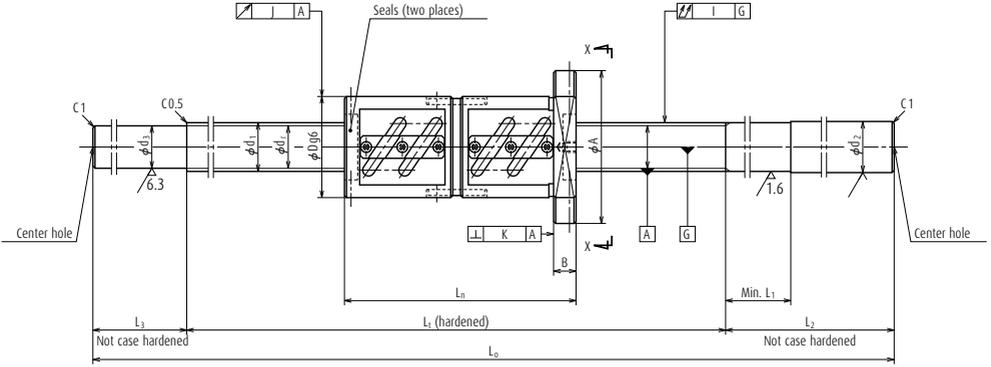

Nut type code: DFT


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|---------------------|--------|----|----|-------------------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. D | Flange | | | Overall length L_n |
| | | | | | | | | | | | | | A | G | B | |
| W3205SS-2D-CSZ10 | 310 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×2 | 54 500 | 110 000 | 3 240 | 83 | 74 | 108 | 41 | 15 | 190 |
| W3207SS-2D-CSZ10 | 510 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×2 | 54 500 | 110 000 | 3 240 | 83 | 74 | 108 | 41 | 15 | 190 |
| W3210SS-5D-CSZ10 | 810 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×2 | 54 500 | 110 000 | 3 240 | 83 | 74 | 108 | 41 | 15 | 190 |
| W3214SS-2D-CSZ10 | 1 210 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×2 | 54 500 | 110 000 | 3 240 | 83 | 74 | 108 | 41 | 15 | 190 |
| W3218SS-2D-CSZ10 | 1 610 | 32 | 10 | 6.350 | 33 | 26.4 | 2.5×2 | 54 500 | 110 000 | 3 240 | 83 | 74 | 108 | 41 | 15 | 190 |
| W3607SS-2D-CSZ10 | 507 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×2 | 58 000 | 122 000 | 3 430 | 93 | 75 | 120 | 45 | 18 | 193 |
| W3612SS-2D-CSZ10 | 1 007 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×2 | 58 000 | 122 000 | 3 430 | 93 | 75 | 120 | 45 | 18 | 193 |
| W3620SS-2D-CSZ10 | 1 807 | 36 | 10 | 6.350 | 37 | 30.4 | 2.5×2 | 58 000 | 122 000 | 3 430 | 93 | 75 | 120 | 45 | 18 | 193 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: DFT

Screw shaft $\phi 32$, $\phi 36$
Lead 10

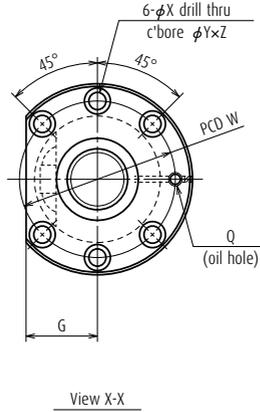

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | | |
|------------|----|------|-----|------------------------|--------------------|-----------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|--------------|---|---|--|---------------------------------|----|
| Bolt hole | | | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccen- tricity | | | | | Flange perpen- dicularity | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 90 | 9 | 14 | 8.5 | M6×1 | 500 | 32.3 | 60 | 250 | 26.4 | 100 | 850 | -0.012 | 0.027 | 0.020 | 0.075 | 0.019 | 0.013 | 9.5 | 2 180 | 57 | 29 |
| 90 | 9 | 14 | 8.5 | M6×1 | 700 | 32.3 | 60 | 250 | 26.4 | 100 | 1 050 | -0.017 | 0.035 | 0.025 | 0.090 | 0.019 | 0.013 | 10.6 | 2 180 | 57 | 29 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 000 | 32.3 | 60 | 300 | 26.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.120 | 0.019 | 0.013 | 12.5 | 2 180 | 57 | 29 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 400 | 32.3 | 60 | 350 | 26.4 | 120 | 1 870 | -0.034 | 0.054 | 0.035 | 0.150 | 0.019 | 0.013 | 15.1 | 2 180 | 57 | 29 |
| 90 | 9 | 14 | 8.5 | M6×1 | 1 800 | 32.3 | 60 | 350 | 26.4 | 120 | 2 270 | -0.043 | 0.065 | 0.040 | 0.200 | 0.019 | 0.013 | 17.2 | 1 910 | 57 | 29 |
| 98 | 11 | 17.5 | 11 | M6×1 | 700 | 36.3 | 60 | 300 | 30.4 | 100 | 1 100 | -0.017 | 0.035 | 0.025 | 0.065 | 0.019 | 0.013 | 12.8 | 1 940 | 67 | 34 |
| 98 | 11 | 17.5 | 11 | M6×1 | 1 200 | 36.3 | 60 | 350 | 30.4 | 120 | 1 670 | -0.029 | 0.046 | 0.030 | 0.100 | 0.019 | 0.013 | 16.8 | 1 940 | 67 | 34 |
| 98 | 11 | 17.5 | 11 | M6×1 | 2 000 | 36.3 | 60 | 350 | 30.4 | 120 | 2 470 | -0.048 | 0.065 | 0.040 | 0.130 | 0.019 | 0.013 | 22.3 | 1 940 | 67 | 34 |

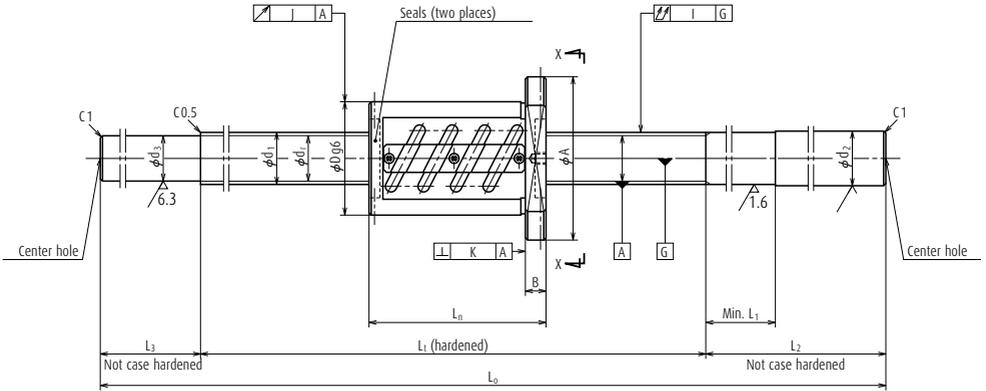

Nut type code: ZFT


| Ball screw No. | Stroke Max. L ₁ -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|------------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length L _n |
| | | | | | | | | | | | | | A | G | B | |
| W4007SS-1Z-CSZ8 | 570 | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 41 100 | 103 000 | 2 450 | 64 | 74 | 108 | 41 | 15 | 130 |
| W4012SS-1Z-CSZ8 | 1 070 | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 41 100 | 103 000 | 2 450 | 64 | 74 | 108 | 41 | 15 | 130 |
| W4018SS-1Z-CSZ8 | 1 670 | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 41 100 | 103 000 | 2 450 | 64 | 74 | 108 | 41 | 15 | 130 |
| W4007SS-2Z-CSZ10 | 597 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 2 160 | 64 | 82 | 124 | 47 | 18 | 103 |
| W4010SS-2Z-CSZ10 | 897 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 2 160 | 64 | 82 | 124 | 47 | 18 | 103 |
| W4014SS-1Z-CSZ10 | 1 297 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 2 160 | 64 | 82 | 124 | 47 | 18 | 103 |
| W4018SS-2Z-CSZ10 | 1 697 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 2 160 | 64 | 82 | 124 | 47 | 18 | 103 |
| W4024SS-1Z-CSZ10 | 2 297 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 2 160 | 64 | 82 | 124 | 47 | 18 | 103 |
| W4010SS-4Z-CSZ12 | 883 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 500 | 77 200 | 2 550 | 83 | 86 | 128 | 48 | 18 | 117 |
| W4016SS-2Z-CSZ12 | 1 483 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 500 | 77 200 | 2 550 | 83 | 86 | 128 | 48 | 18 | 117 |
| W4025SS-1Z-CSZ12 | 2 383 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 500 | 77 200 | 2 550 | 83 | 86 | 128 | 48 | 18 | 117 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: ZFT

Screw shaft $\phi 40$
Lead 8, 10, 12

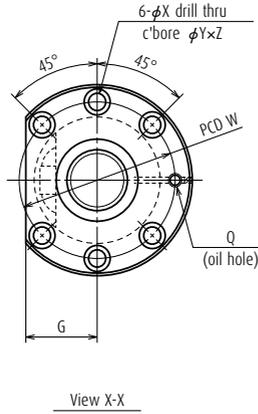

Unit: mm

| dimensions | | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | |
|------------|----|------|-----|-------------|------------------------|-----------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|---------------------------------|--------------|---|---|--|----|
| Bolt hole | | | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 90 | 9 | 14 | 8.5 | Rc1/8 | 700 | 40.3 | 50 | 300 | 35.5 | 100 | 1 100 | -0.017 | 0.035 | 0.025 | 0.065 | 0.019 | 0.013 | 13.0 | 1 750 | 27 | 14 |
| 90 | 9 | 14 | 8.5 | Rc1/8 | 1 200 | 40.3 | 50 | 350 | 35.5 | 100 | 1 650 | -0.029 | 0.046 | 0.030 | 0.100 | 0.019 | 0.013 | 18.0 | 1 750 | 27 | 14 |
| 90 | 9 | 14 | 8.5 | Rc1/8 | 1 800 | 40.3 | 50 | 350 | 35.5 | 120 | 2 270 | -0.043 | 0.065 | 0.040 | 0.130 | 0.019 | 0.013 | 23.5 | 1 750 | 27 | 14 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 700 | 40.3 | 60 | 300 | 34.4 | 100 | 1 100 | -0.017 | 0.035 | 0.025 | 0.065 | 0.025 | 0.015 | 13.3 | 1 750 | 30 | 15 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 40.3 | 60 | 300 | 34.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 15.9 | 1 750 | 30 | 15 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 1 400 | 40.3 | 60 | 350 | 34.4 | 120 | 1 870 | -0.034 | 0.054 | 0.035 | 0.100 | 0.025 | 0.015 | 20.0 | 1 750 | 30 | 15 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 1 800 | 40.3 | 60 | 350 | 34.4 | 120 | 2 270 | -0.043 | 0.065 | 0.040 | 0.130 | 0.025 | 0.015 | 23.4 | 1 750 | 30 | 15 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 2 400 | 40.3 | 60 | 400 | 34.4 | 150 | 2 950 | -0.058 | 0.077 | 0.046 | 0.170 | 0.025 | 0.015 | 29.4 | 1 750 | 30 | 15 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 40.3 | 70 | 300 | 34.1 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 16.7 | 1 750 | 35 | 18 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 1 600 | 40.3 | 70 | 350 | 34.1 | 150 | 2 100 | -0.038 | 0.054 | 0.035 | 0.130 | 0.025 | 0.015 | 22.9 | 1 750 | 35 | 18 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 2 500 | 40.3 | 70 | 400 | 34.1 | 150 | 3 050 | -0.060 | 0.077 | 0.046 | 0.170 | 0.025 | 0.015 | 31.1 | 1 220 | 35 | 18 |

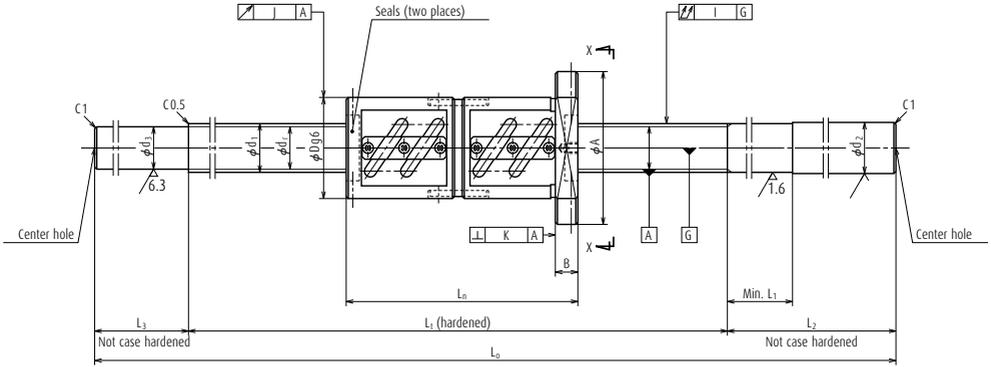

Nut type code: DFT


| Ball screw No. | Stroke Max. L_1-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns \times Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|--|-----------------------|-----------------|-------------|--|---------------------|--------|----|----|-------------------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. D | Flange | | | Overall length L_n |
| | | | | | | | | | | | | | A | G | B | |
| W4007SS-3D-CSZ10 | 507 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 3 630 | 108 | 82 | 124 | 47 | 18 | 193 |
| W4010SS-3D-CSZ10 | 807 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 3 630 | 108 | 82 | 124 | 47 | 18 | 193 |
| W4014SS-2D-CSZ10 | 1 207 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 3 630 | 108 | 82 | 124 | 47 | 18 | 193 |
| W4018SS-3D-CSZ10 | 1 607 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 3 630 | 108 | 82 | 124 | 47 | 18 | 193 |
| W4024SS-2D-CSZ10 | 2 207 | 40 | 10 | 6.350 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 3 630 | 108 | 82 | 124 | 47 | 18 | 193 |
| W4010SS-5D-CSZ12 | 775 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 4 310 | 138 | 86 | 128 | 48 | 18 | 225 |
| W4016SS-3D-CSZ12 | 1 375 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 4 310 | 138 | 86 | 128 | 48 | 18 | 225 |
| W4025SS-2D-CSZ12 | 2 275 | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 4 310 | 138 | 86 | 128 | 48 | 18 | 225 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: DFT

Screw shaft $\phi 40$
Lead 10, 12

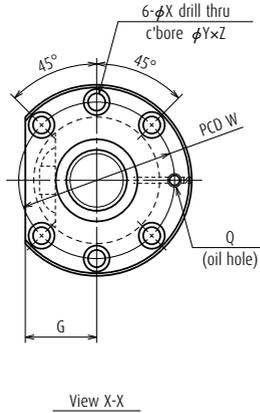

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | | |
|------------|----|------|----|------------------------|--------------------|-----------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|--------------|---|---|--|---------------------------------|----|
| Bolt hole | | | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccen- tricity | | | | | Flange perpen- dicularity | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 700 | 40.3 | 60 | 300 | 34.4 | 100 | 1 100 | -0.017 | 0.035 | 0.025 | 0.065 | 0.025 | 0.015 | 15.5 | 1 750 | 74 | 37 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 40.3 | 60 | 300 | 34.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 18.1 | 1 750 | 74 | 37 |
| 102 | 11 | 17.5 | 11 | Rc1/8 | 1 400 | 40.3 | 60 | 350 | 34.4 | 120 | 1 870 | -0.034 | 0.054 | 0.035 | 0.100 | 0.025 | 0.015 | 22.5 | 1 750 | 74 | 37 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 1 800 | 40.3 | 60 | 350 | 34.4 | 120 | 2 270 | -0.043 | 0.065 | 0.040 | 0.130 | 0.025 | 0.015 | 25.6 | 1 750 | 74 | 37 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 2 400 | 40.3 | 60 | 400 | 34.4 | 150 | 2 950 | -0.058 | 0.077 | 0.046 | 0.170 | 0.025 | 0.015 | 31.6 | 1 370 | 74 | 37 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 40.3 | 70 | 300 | 34.1 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 19.7 | 1 750 | 93 | 47 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 1 600 | 40.3 | 70 | 350 | 34.1 | 150 | 2 100 | -0.038 | 0.054 | 0.035 | 0.130 | 0.025 | 0.015 | 25.8 | 1 750 | 93 | 47 |
| 106 | 11 | 17.5 | 11 | Rc1/8 | 2 500 | 40.3 | 70 | 400 | 34.1 | 150 | 3 050 | -0.060 | 0.077 | 0.046 | 0.170 | 0.025 | 0.015 | 34.0 | 1 260 | 93 | 47 |

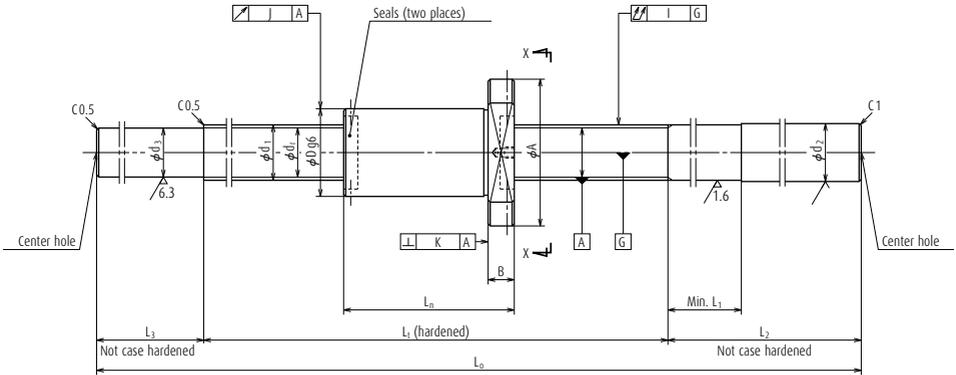

Nut type code: ZFD


| Ball screw No. | Stroke Max. L_t-L_n | Screw shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|-------------------|--------------------------|---------------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|-----------------|-------------|--|--------------|--------|----|----|----------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | | Outside dia. | Flange | | | Overall length |
| | | | | | | | | | | | | | D | A | G | |
| W4007SS-4ZY-CSZ10 | 557 | 40 | 10 | 6.350 | 41.75 | 35.1 | 4 | 45 200 | 93 100 | 2 840 | 83 | 62 | 104 | 40 | 18 | 143 |
| W4010SS-6ZY-CSZ10 | 857 | 40 | 10 | 6.350 | 41.75 | 35.1 | 4 | 45 200 | 93 100 | 2 840 | 83 | 62 | 104 | 40 | 18 | 143 |
| W4014SS-3ZY-CSZ10 | 1 257 | 40 | 10 | 6.350 | 41.75 | 35.1 | 4 | 45 200 | 93 100 | 2 840 | 83 | 62 | 104 | 40 | 18 | 143 |
| W4018SS-4ZY-CSZ10 | 1 657 | 40 | 10 | 6.350 | 41.75 | 35.1 | 4 | 45 200 | 93 100 | 2 840 | 83 | 62 | 104 | 40 | 18 | 143 |
| W4024SS-3ZY-CSZ10 | 2 257 | 40 | 10 | 6.350 | 41.75 | 35.1 | 4 | 45 200 | 93 100 | 2 840 | 83 | 62 | 104 | 40 | 18 | 143 |
| W5007SS-1ZY-CSZ10 | 557 | 50 | 10 | 6.350 | 51.75 | 45.1 | 4 | 51 500 | 122 000 | 3 240 | 108 | 72 | 114 | 44 | 18 | 143 |
| W5010SS-3ZY-CSZ10 | 857 | 50 | 10 | 6.350 | 51.75 | 45.1 | 4 | 51 500 | 122 000 | 3 240 | 108 | 72 | 114 | 44 | 18 | 143 |
| W5015SS-3ZY-CSZ10 | 1 357 | 50 | 10 | 6.350 | 51.75 | 45.1 | 4 | 51 500 | 122 000 | 3 240 | 108 | 72 | 114 | 44 | 18 | 143 |
| W5020SS-3ZY-CSZ10 | 1 857 | 50 | 10 | 6.350 | 51.75 | 45.1 | 4 | 51 500 | 122 000 | 3 240 | 108 | 72 | 114 | 44 | 18 | 143 |
| W5026SS-3ZY-CSZ10 | 2 457 | 50 | 10 | 6.350 | 51.75 | 45.1 | 4 | 51 500 | 122 000 | 3 240 | 108 | 72 | 114 | 44 | 18 | 143 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.


Nut model: ZFD

Screw shaft $\phi 40, \phi 50$
Lead 10

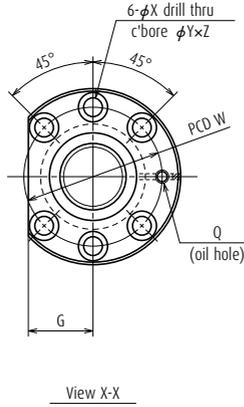

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | |
|------------|----|------|----|------------------------|--------------------|-----------------------|----------------|----------------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|---------------------------------|--------------|---|---|--|----|
| Bolt hole | | | | Oil hole | Threaded length | Shaft end right | | Shaft end left | | Overall length | Travel compen- sation | Devia- tion | Vari- ation | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 82 | 11 | 17.5 | 11 | Rc1/8 | 700 | 40.3 | 60 | 300 | 35.1 | 100 | 1 100 | -0.015 | 0.035 | 0.025 | 0.065 | 0.019 | 0.013 | 12.1 | 1 750 | 32 | 16 |
| 82 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 40.3 | 60 | 300 | 35.1 | 100 | 1 400 | -0.022 | 0.040 | 0.027 | 0.080 | 0.019 | 0.013 | 14.7 | 1 750 | 32 | 16 |
| 82 | 11 | 17.5 | 11 | Rc1/8 | 1 400 | 40.3 | 60 | 350 | 35.1 | 120 | 1 870 | -0.032 | 0.054 | 0.035 | 0.100 | 0.019 | 0.013 | 18.9 | 1 750 | 32 | 16 |
| 82 | 11 | 17.5 | 11 | Rc1/8 | 1 800 | 40.3 | 60 | 350 | 35.1 | 120 | 2 270 | -0.041 | 0.065 | 0.040 | 0.130 | 0.019 | 0.013 | 22.5 | 1 750 | 32 | 16 |
| 82 | 11 | 17.5 | 11 | Rc1/8 | 2 400 | 40.3 | 60 | 400 | 35.1 | 150 | 2 950 | -0.056 | 0.077 | 0.046 | 0.170 | 0.019 | 0.013 | 28.5 | 1 320 | 32 | 16 |
| 92 | 11 | 17.5 | 11 | Rc1/8 | 700 | 50.3 | 60 | 300 | 45.1 | 100 | 1 100 | -0.015 | 0.035 | 0.025 | 0.065 | 0.019 | 0.013 | 18.3 | 1 400 | 39 | 20 |
| 92 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 50.3 | 60 | 300 | 45.1 | 100 | 1 400 | -0.022 | 0.040 | 0.027 | 0.080 | 0.019 | 0.013 | 22.5 | 1 400 | 39 | 20 |
| 92 | 11 | 17.5 | 11 | Rc1/8 | 1 500 | 50.3 | 60 | 400 | 45.1 | 150 | 2 050 | -0.034 | 0.054 | 0.035 | 0.130 | 0.019 | 0.013 | 31.8 | 1 400 | 39 | 20 |
| 92 | 11 | 17.5 | 11 | Rc1/8 | 2 000 | 50.3 | 60 | 400 | 45.1 | 150 | 2 550 | -0.046 | 0.065 | 0.040 | 0.170 | 0.019 | 0.013 | 38.9 | 1 400 | 39 | 20 |
| 92 | 11 | 17.5 | 11 | Rc1/8 | 2 600 | 50.3 | 60 | 500 | 45.1 | 200 | 3 300 | -0.060 | 0.093 | 0.054 | 0.220 | 0.019 | 0.013 | 49.5 | 1 400 | 39 | 20 |

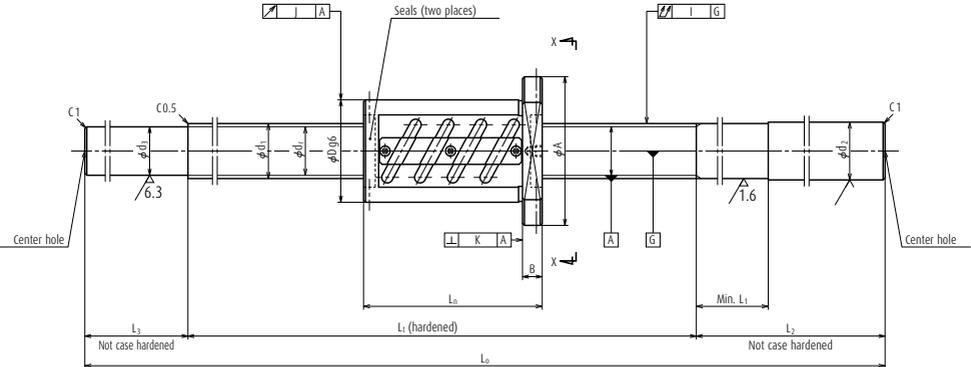

Nut type code: ZFT


| Ball screw No. | Stroke Max. L _t -L _n | Screw shaft dia. d ₁ | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective ball turns Turns × Circuits | Basic load rating (N) | | Preload (N) | Dynamic friction torque, median (N-cm) | Nut | | | | |
|------------------|---|------------------------------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------|--|-------------------|--------|----|----|----------------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | | Outside dia. D | Flange | | | Overall length L _n |
| | | | | | | | | | | | | | A | G | B | |
| W4510SS-1Z-CSZ10 | 897 | 45 | 10 | 6.350 | 46 | 39.4 | 2.5×1 | 36 300 | 78 500 | 2 260 | 69 | 88 | 132 | 50 | 18 | 103 |
| W4516SS-1Z-CSZ10 | 1 497 | 45 | 10 | 6.350 | 46 | 39.4 | 2.5×1 | 36 300 | 78 500 | 2 260 | 69 | 88 | 132 | 50 | 18 | 103 |
| W4525SS-1Z-CSZ10 | 2 397 | 45 | 10 | 6.350 | 46 | 39.4 | 2.5×1 | 36 300 | 78 500 | 2 260 | 69 | 88 | 132 | 50 | 18 | 103 |
| W5010SS-1Z-CSZ10 | 897 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×1 | 37 500 | 87 200 | 2 450 | 78 | 93 | 135 | 51 | 18 | 103 |
| W5015SS-1Z-CSZ10 | 1 397 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×1 | 37 500 | 87 200 | 2 450 | 78 | 93 | 135 | 51 | 18 | 103 |
| W5020SS-1Z-CSZ10 | 1 897 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×1 | 37 500 | 87 200 | 2 450 | 78 | 93 | 135 | 51 | 18 | 103 |
| W5026SS-1Z-CSZ10 | 2 497 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×1 | 37 500 | 87 200 | 2 450 | 78 | 93 | 135 | 51 | 18 | 103 |
| W5010SS-2Z-CSZ10 | 837 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×2 | 68 100 | 174 000 | 4 020 | 138 | 93 | 135 | 51 | 18 | 163 |
| W5015SS-2Z-CSZ10 | 1 337 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×2 | 68 100 | 174 000 | 4 020 | 138 | 93 | 135 | 51 | 18 | 163 |
| W5020SS-2Z-CSZ10 | 1 837 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×2 | 68 100 | 174 000 | 4 020 | 138 | 93 | 135 | 51 | 18 | 163 |
| W5026SS-2Z-CSZ10 | 2 437 | 50 | 10 | 6.350 | 51 | 44.4 | 2.5×2 | 68 100 | 174 000 | 4 020 | 138 | 93 | 135 | 51 | 18 | 163 |

Notes

1. Use of NSK support unit is recommended. See page B389 for details.
2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B299.

Nut model: ZFT

Screw shaft $\phi 40, \phi 50$
Lead 10



View X-X

Unit: mm

| dimensions | | | | Screw shaft dimensions | | | | | | | Lead accuracy | | | Run-out | | | Mass (kg) | Per- missible rotational speed N (min ⁻¹) | Internal spatial volume of nut (cm ³) | Standard volume of grease re- plenishing (cm ³) | |
|------------|----|------|----|------------------------|-----------------------|----------------|----------------------|----------------|----------------|-------------------|-----------------------------|----------------|----------------|----------------------------|----------------------------------|---------------------------------|--------------|---|---|--|----|
| Bolt hole | | | | Threaded length | Shaft end right | | Shaft end left | | | Overall length | Travel compen- sation | Devia- tion | Varia- tion | Shaft straight- ness | Nut O.D. eccen- tricity | Flange perpen- dicularity | | | | | |
| W | X | Y | Z | Q | L _t | d ₂ | L ₁ | L ₂ | d ₃ | L ₃ | L ₀ | T | e _p | v _u | I | J | K | | | | |
| 110 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 45.3 | 60 | 300 | 39.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 19.7 | 1 550 | 34 | 17 |
| 110 | 11 | 17.5 | 11 | Rc1/8 | 1 600 | 45.3 | 60 | 400 | 39.4 | 150 | 2 150 | -0.038 | 0.054 | 0.035 | 0.130 | 0.025 | 0.015 | 28.1 | 1 550 | 34 | 17 |
| 110 | 11 | 17.5 | 11 | Rc1/8 | 2 500 | 45.3 | 60 | 450 | 39.4 | 150 | 3 100 | -0.060 | 0.077 | 0.046 | 0.170 | 0.025 | 0.015 | 38.8 | 1 400 | 34 | 17 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 50.3 | 60 | 300 | 44.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 23.8 | 1 400 | 37 | 19 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 1 500 | 50.3 | 60 | 400 | 44.4 | 150 | 2 050 | -0.036 | 0.054 | 0.035 | 0.130 | 0.025 | 0.015 | 32.9 | 1 400 | 37 | 19 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 2 000 | 50.3 | 60 | 400 | 44.4 | 150 | 2 550 | -0.048 | 0.065 | 0.040 | 0.170 | 0.025 | 0.015 | 39.8 | 1 400 | 37 | 19 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 2 600 | 50.3 | 60 | 450 | 44.4 | 150 | 3 200 | -0.062 | 0.093 | 0.054 | 0.220 | 0.025 | 0.015 | 48.9 | 1 400 | 37 | 19 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 1 000 | 50.3 | 60 | 300 | 44.4 | 100 | 1 400 | -0.024 | 0.040 | 0.027 | 0.080 | 0.025 | 0.015 | 25.5 | 1 400 | 59 | 30 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 1 500 | 50.3 | 60 | 400 | 44.4 | 150 | 2 050 | -0.036 | 0.054 | 0.035 | 0.130 | 0.025 | 0.015 | 34.6 | 1 400 | 59 | 30 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 2 000 | 50.3 | 60 | 400 | 44.4 | 150 | 2 550 | -0.048 | 0.065 | 0.040 | 0.170 | 0.025 | 0.015 | 41.5 | 1 400 | 59 | 30 |
| 113 | 11 | 17.5 | 11 | Rc1/8 | 2 600 | 50.3 | 60 | 450 | 44.4 | 150 | 3 200 | -0.062 | 0.093 | 0.054 | 0.220 | 0.025 | 0.015 | 50.7 | 1 400 | 59 | 30 |

B-3-1.6 Ball Screws for Transfer Equipment

1. Features

> Transporting mechanism

A series with accuracy grades of Ct7 and Ct10 only demonstrates high ball screw performance for transporting mechanism of Cartesian type robots and single axis actuators.

The following types are categorized ball screw for transfer equipment. VFA and RMA types have finished shaft ends. RMS type, R Series of RNFTL, RNFBFL, RNCT, RNFL, and RNSTL types have blank shaft ends.

Table 1 Classifications of ball screws for transfer equipment

| Finished shaft end | VFA type, RMA type |
|--------------------|---|
| Blank shaft end | RMS type |
| | R Series |
| | RNFTL type, RNFBFL type RNCT type, RNFL type, RNSTL type |

> Interchangeable screw shaft and ball nut

Screw shaft and nut assembly components are sold separately, and randomly-matched. The maximum axial play after assembly is shown in the dimension tables.

2. Specifications

(1) Ball recirculation system

Figs. 1, 2, and 3 show the structures of ball return tube, deflector (bridge type), and end cap ball recirculation systems.

Deflector (bridge type) recirculation system has the feature of compact nut outside diameter for small lead. End cap recirculation system is for screws with high helix lead and multiple start threads. Since the leads are in the range larger than 1.3 times of the screw shaft diameter, it is suitable for high-speed operation.

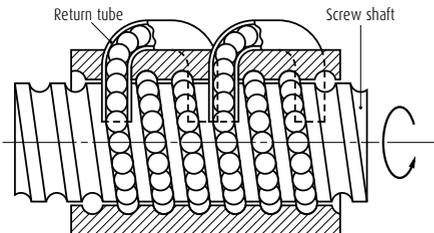


Fig. 1 Structure of return tube recirculation system

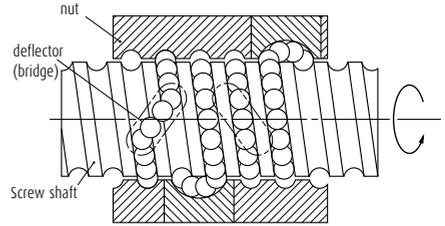


Fig. 2 Structure of deflector (bridge type) recirculation system

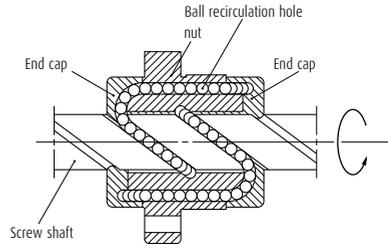


Fig. 3 Structure of end cap recirculation system

(2) Accuracy grade and axial play

Standard lead accuracy and axial play are shown on Table 2. Axial play varies with internal specification. Refer to the dimension tables.

Table 2 Accuracy grade and axial play

| | |
|----------------|---|
| Accuracy grade | VFA type, RMA type, RMS type: Ct7 R Series: Ct10 |
| Axial play | See dimension tables |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 3 Allowable d-n value and the criterion of maximum rotational speed

| | |
|---------------------------------------|-------------------------|
| Allowable d-n value | 50 000 or less |
| Criterion of maximum rotational speed | 3 000 min ⁻¹ |


d-n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

3. Product categories

Ball screws for transfer equipment have models as follows.

Table 4 Product categories of ball screws for transfer equipment

| Nut model | Shape | Flange Shape | Recirculation system | Preload system | Page |
|------------|---|--|-------------------------|----------------------------------|----------------|
| VFA |  | Flanged rectangular | Return tube type | Non-preload Slight axial play | B353 - B358 |
| RMA RMS |  | Flanged Circular III | Deflector (bridge) type | Non-preload Slight axial play | B359 - B372 |
| RNFTL |  | Flanged Circular I Projecting tube type | Return tube type | Non-preload Slight axial play | B373 - B378 |
| RNFBL |  | Flanged Circular II | Return tube type | Non-preload Slight axial play | B379 - B380 |
| RNCT |  | V-thread (no flange) Projecting tube type | Return tube type | Non-preload Slight axial play | B381 - B382 |
| RNFCL |  | Flanged Circular III | End cap type | Non-preload Slight axial play | B383 - B386 |
| RNSTL |  | Square type | Return tube type | Non-preload Slight axial play | B387 - B388 |

4. Structure of reference number


The followings describe the structure of "Reference number for ball screw".

➤ Reference number for VFA, RMA, and RMS types


| | |
|---|--|
| VFA 15 10 - C7 S - 500 | |
| Ball screw for transfer equipment: VFA, RMA, RMS Screw shaft diameter (mm) Lead (mm) | Screw shaft length (mm) Axial play Accuracy grade code |

▶ Reference number for R series

Nut assembly (example)

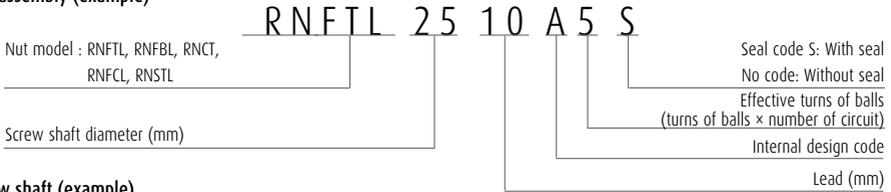

Screw shaft (example)

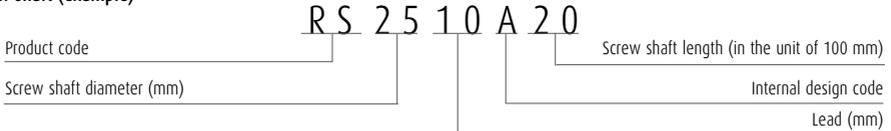

5. Combinations of shaft diameter and lead

Combinations of shaft diameter and lead are shown below. For details of standard stock products, contact NSK.

Table 5 Combinations of shaft diameter and lead for VFA, RMA, RMS types

| Screw shaft diameter | Lead | | | | |
|----------------------|-----------|-----------|-----------|------|------|
| | 5 | 10 | 12 | 16 | 20 |
| 6 | B359, 371 | | | | |
| 8 | B361, 371 | B363, 371 | B365, 371 | | |
| 10 | | | B367, 371 | | |
| 12 | | | B369, 371 | B353 | |
| 15 | | | | B355 | B357 |

Table 6 Combinations of shaft diameter and lead for R series

| Screw shaft diameter (mm) | 3 | 4 | 5 | 6 | 8 | 10 | 12 | 16 | 20 | 25 | 32 | 40 | 50 | 64 | 80 |
|---------------------------|----|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------------|----------------|----|----------------|----------------|----|-------|-------|----|
| | 10 | ○B373 △B381 | | | ○B373●B379 | | | | | | | | | | |
| 12 | | | | | ○B373●B379 | | ○B377 ◎B383 | | | | | | | | |
| 14 | | ○B373●B379 △B381□B387 | ○B373●B379 △B381□B387 | | | | | | | | | | | | |
| 15 | | | | | | | | ◎B383 | | | | | | | |
| 16 | | | | | | ○B373 | | ○B377 ◎B383 | | | ◎B385 | | | | |
| 18 | | | | | ○B373●B379 △B381□B387 | | | | | | | | | | |
| 20 | | | ○B373●B379 △B381□B387 | | | ○B373●B379 □B387 | | ◎B383 | | | ◎B385 | | | | |
| 25 | | | ○B373●B379 △B381□B387 | | | ○B373●B379 △B367□B387 | | | | ○B377 ◎B383 | | | ◎B385 | | |
| 28 | | | | ○B375●B379 △B381□B387 | | | | | | | | | | | |
| 32 | | | | | | ○B375●B379 △B381□B387 | | | | | ○B377 ◎B383 | | | ◎B385 | |
| 36 | | | | | | ○B375●B379 △B381□B387 | | | | | | | | | |
| 40 | | | | | | ○B375△B381 ●B379 | | | | | ○B377 ◎B383 | | | ◎B385 | |
| 45 | | | | | | | ○B375 △B381□B387 | | | | | | | | |
| 50 | | | | | | ○B375 △B381 | | ○B375 △B381 | | | | | ◎B383 | | |

○: RNFTL ●: RNFB L △: RNCT ◎: RNFL □: RNSTL

6. Precautions for designing

As shown in the illustration on Page B83 and B103, general precautions for ball screw.

(1) Nut assembly

When delivered, the nut of R series is separated from the screw shaft, and inserted into an arbor shaft. The nut must be inserted to the screw shaft when mounting ball screw.

(a) Consideration to end configuration of screw shaft

The balls may fall out during moving the assembled nut from the arbor to the screw shaft if the sizes and shapes of the arbor and the screw shaft are not appropriate.

If the end of the ball groove can touch the end of the arbor, connect both ends and move the assembled nut from the arbor to the screw shaft (Fig. 4).

If the end face of the arbor cannot connect to the end face of the screw because of configuration of both ends of screw shaft, wrap a tape outside of ball screw shaft so that the layers of tape is equal with the outside diameter of the arbor (Fig. 5)

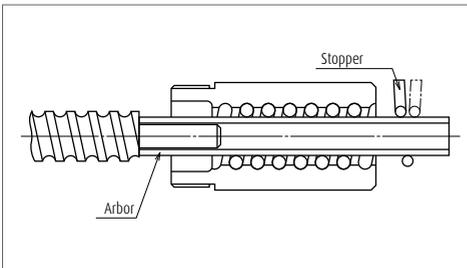


Fig. 4 Inserting nut into screwshaft

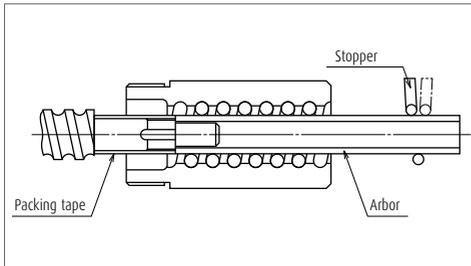


Fig. 5 Arbor and shaft end configuration

If there is a key way or a nick along the way, fill such gaps prior to moving the ball nut.

(b) Installation of arbor

Confirm the correct nut orientation for installation.

Remove the stop ring on the side from where the assembled nut is to be removed. Align the centers of the screw shaft and the arbor while pressing firmly the screw shaft end against the arbor.

(c) Moving the nut

Slide the nut until it lightly touches the shoulder of the ball groove section, and stop it. Turn the ball nut to the direction so that it moves to the ball grooves, while pressing the arbor to the screw shaft. Do not separate the arbor from the screw shaft until the ball groove end appears completely in the ball nut.

(2) Shaft end configuration

RMS type and R series must be machining of blank shaft ends. See page B27, use of NSK support unit.

(a) Cutting screw shaft

Carry out the same process as "(1) Machining of blank shaft ends of precision ball screws" above.

(b) Annealing the shaft end (Heat the section of the shaft end to be machined with an acetylene torch. Then gradually cool it in ambient atmosphere.)

* The area not machined loses hardness if exposed to heat. This may shorten the all screw life. Cool with water the areas where should not be heated to avoid heat conduction.

(c) Turning by lathe

Cut to the length, turn shaft end steps, turn thread screw, and provide the center hole. Refer to JIS B1192 which sets standards for the shaft end accuracy.

(d) Processing by grinding

Apply the same precautions as for cutting for centering, securing nut, and work rest. Grind sections where the bearings and a "Spanning ring" are installed.


(e) Milling processing

Process keyways and tooth seats for lock washers.

(f) Deburring, washing, and rust prevention

Wash with clean white kerosene after processing. Apply lubricant for immediate use. For later use, apply rust preventive agent.


Note: Contact NSK if nut is accidentally removed.

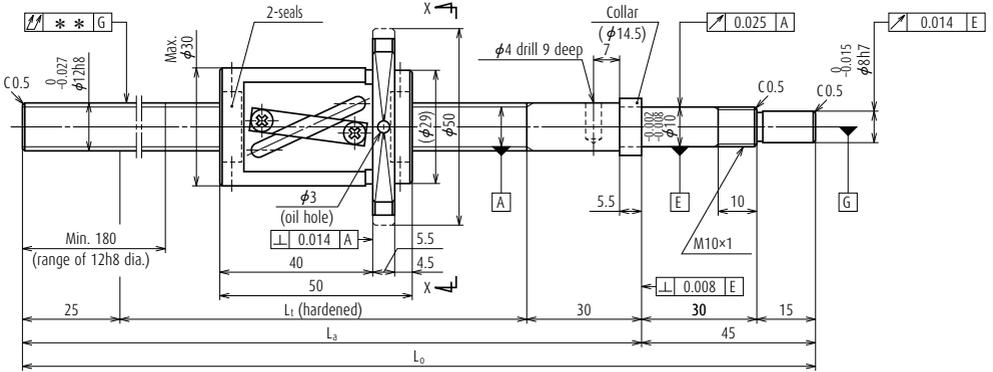

| Ball screw No. | Stroke | | Screw shaft length | | |
|----------------|---------|---------------------------------|--------------------|-------|-------|
| | Nominal | Maximum (L_t —Nut length) | L_t | L_a | L_o |
| VFA1210C7S-410 | 250 | 260 | 310 | 365 | 410 |
| VFA1210C7S-610 | 450 | 460 | 510 | 565 | 610 |

Notes

1. We recommend NSK support units (page B389). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

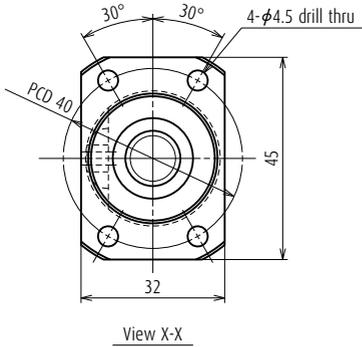

Screw shaft ϕ 12

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 12 \times 10 / Right | |
| Ball recirculation | Return tube | |
| Ball dia. / Ball circle dia. | 2.381 / 12.5 | |
| Screw shaft root dia. | 10.0 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 4 430 |
| | Static C_{0a} | 6 430 |
| Axial play | 0.010 or less | |
| Dynamic friction torque, (N \cdot cm) | 1.5 or less | |
| Spacer ball | None | |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm ³) | 1.4 | |
| Standard volume of grease replenishing (cm ³) | 0.7 | |

Recommended support unit

| For drive side (Fixed) | For drive side (Simple) |
|------------------------|-------------------------|
| WBK10-01A (square) | WBK12SF-01 (square) |
| WBK10-11 (round) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ^{**}  | Mass (kg) | Permissible rotational speed N (min ⁻¹) | |
|---------------|-------|-------|--|-----------|---|--------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple support | Fixed - Free |
| 0 | 0.085 | 0.052 | 0.100 | 0.56 | 3 000 | 3 000 |
| 0 | 0.155 | 0.052 | 0.160 | 0.73 | 3 000 | 1 300 |

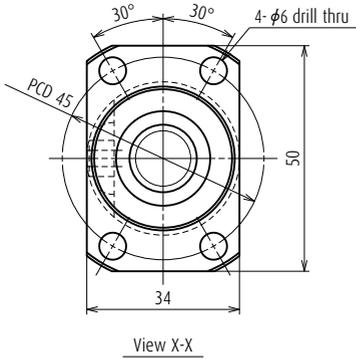

Screw shaft ϕ 15

Lead 10

Unit: mm


| Ball screw specifications | | |
|---|------------------------|--------|
| Shaft dia. \times Lead / Direction of turn | 15 \times 10 / Right | |
| Ball recirculation | Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 15.5 | |
| Screw shaft root dia. | 12.2 | |
| Effective turns of balls | 2.5 \times 1 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_d | 8 140 |
| | Static C_{0a} | 12 800 |
| Axial play | 0.010 or less | |
| Dynamic friction torque, (N \cdot cm) | 2.5 or less | |
| Spacer ball | None | |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm 3) | 2.3 | |
| Standard volume of grease replenishing (cm 3) | 1.2 | |

Recommended support unit

| For drive side (Fixed) | For drive side (Simple) |
|------------------------|-------------------------|
| WBK12-01A (square) | WBK15SF-01 (square) |
| WBK12-11 (round) | |

Unit: mm


| Lead accuracy | | | Shaft run-out ^{**}  | Mass (kg) | Permissible rotational speed N (min $^{-1}$) | |
|---------------|-------|-------|--|-----------|---|--------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple support | Fixed - Free |
| 0 | 0.120 | 0.052 | 0.075 | 0.89 | 3 000 | 2 600 |
| 0 | 0.195 | 0.052 | 0.110 | 1.1 | 3 000 | 1 150 |
| 0 | 0.310 | 0.052 | 0.180 | 1.5 | 2 340 | 510 |

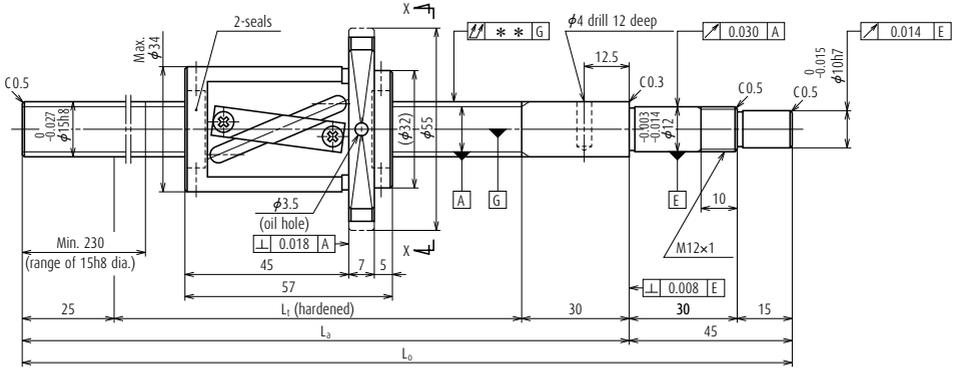

| Ball screw No. | Stroke | | Screw shaft length | | |
|-----------------|---------|---------------------------------|--------------------|-------|-------|
| | Nominal | Maximum (L_t —Nut length) | L_t | L_3 | L_0 |
| VFA1520C7S-500 | 300 | 343 | 400 | 455 | 500 |
| VFA1520C7S-700 | 500 | 543 | 600 | 655 | 700 |
| VFA1520C7S-1000 | 800 | 843 | 900 | 955 | 1 000 |

Notes

1. We recommend NSK support units (page B389). WBK12SF-01 (on simple support side) supports ball screw directly on shaft outside diameter.
2. Use of NSK grease LR3 is recommended. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.
3. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

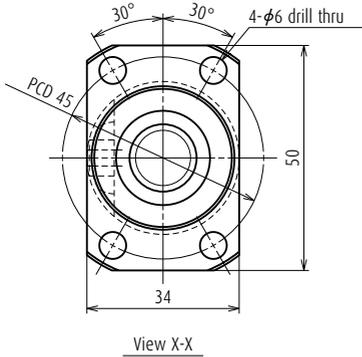

Screw shaft ϕ 15

Lead 20

Unit: mm


| Ball screw specifications | | |
|---|------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 15 \times 20 / Right | |
| Ball recirculation | Return tube | |
| Ball dia. / Ball circle dia. | 3.175 / 15.5 | |
| Screw shaft root dia. | 12.2 | |
| Effective turns of balls | 1.5 \times 1 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 5 080 |
| | Static C_{0a} | 7 460 |
| Axial play | 0.010 or less | |
| Dynamic friction torque, (N \cdot cm) | 2.5 or less | |
| Spacer ball | None | |
| Factory-packed grease | NSK grease LR3 | |
| Internal spatial volume of nut (cm 3) | 2.3 | |
| Standard volume of grease replenishing (cm 3) | 1.4 | |

Recommended support unit

| For drive side (Fixed) | For drive side (Simple) |
|------------------------|-------------------------|
| WBK12-01A (square) | WBK15SF-01 (square) |
| WBK12-11 (round) | |

Unit: mm

| Lead accuracy | | | Shaft run-out ^{**}  | Mass (kg) | Permissible rotational speed N (min $^{-1}$) | |
|---------------|-------|-------|--|-----------|---|--------------|
| T | e_p | v_u | | | Supporting condition | |
| | | | | | Fixed - Simple support | Fixed - Free |
| 0 | 0.120 | 0.052 | 0.075 | 0.94 | 3 000 | 2 630 |
| 0 | 0.195 | 0.052 | 0.110 | 1.2 | 3 000 | 1 160 |
| 0 | 0.310 | 0.052 | 0.180 | 1.6 | 2 350 | 510 |

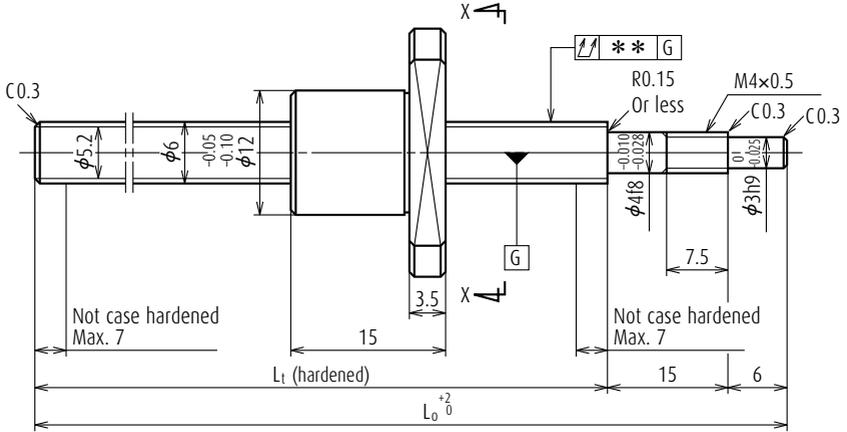

| Ball screw No. | Stroke | | Screw shaft length | |
|----------------|---------|---------------------------------|--------------------|-------|
| | Nominal | Maximum (L_t —Nut length) | L_t | L_0 |
| RMA0601C7S-160 | 100 | 124 | 139 | 160 |
| RMA0601C7S-260 | 200 | 224 | 239 | 260 |

Notes

1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

Screw shaft $\phi 6$

Lead 1

Unit: mm

| Ball screw specifications | | |
|--|----------------------|-----|
| Shaft dia. \times Lead / Direction of turn | 6 \times 1 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 6.2 | |
| Screw shaft root dia. | 5.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_d | 610 |
| | Static C_{0a} | 920 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| |
|-----------------------------------|
| For drive side (Fixed) |
| WBK04R-11 (round) |

Unit: mm

| Lead accuracy | | | Shaft run-out**  | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|--|-----------|------------------------------|
| Target compensation T | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.052 | 0.052 | 0.060 | 0.045 | 3 000 |
| 0 | 0.085 | 0.052 | 0.090 | 0.065 | 3 000 |

Screw shaft ϕ 8

Lead 1

Unit: mm


| Ball screw specifications | | |
|--|----------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 8 \times 1 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 0.800 / 8.2 | |
| Screw shaft root dia. | 7.2 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 710 |
| | Static C_{0a} | 1 290 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| |
|-----------------------------------|
| For drive side (Fixed) |
| WBK06R-11 (round) |

Unit: mm


| Lead accuracy | | | Shaft run-out**  | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|--|-----------|------------------------------|
| Target compensation T | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.052 | 0.052 | 0.060 | 0.085 | 3 000 |
| 0 | 0.085 | 0.052 | 0.090 | 0.12 | 3 000 |

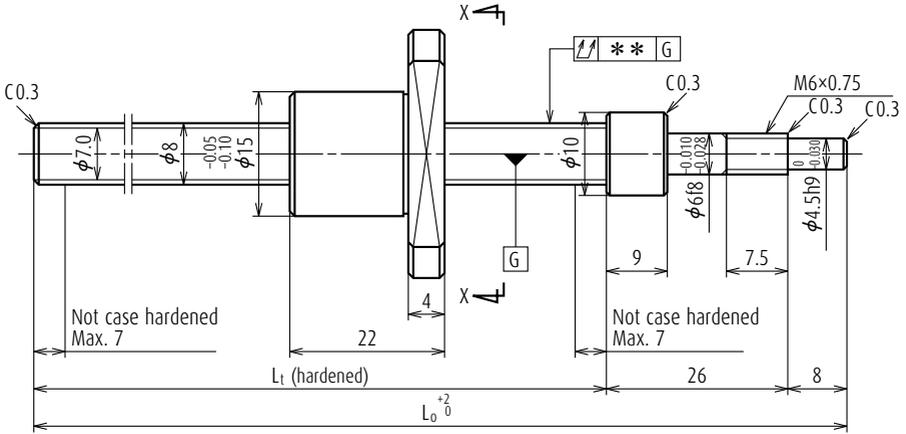

| Ball screw No. | Stroke | | Screw shaft length | |
|------------------|---------|---------------------------------|--------------------|-------|
| | Nominal | Maximum (L_t —Nut length) | L_t | L_0 |
| RMA0801.5C75-180 | 100 | 124 | 146 | 180 |
| RMA0801.5C75-280 | 200 | 224 | 246 | 280 |

Notes

1. We recommend NSK support bearing kit (page B401).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.

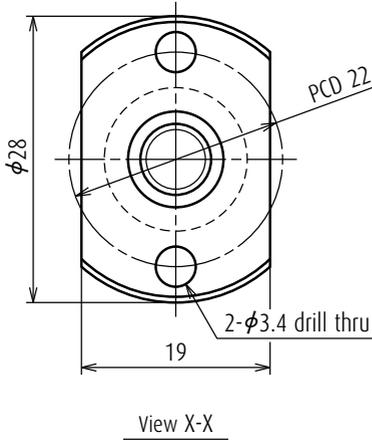

Screw shaft ϕ 8

Lead 1.5

Unit: mm


| Ball screw specifications | | |
|--|------------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 8 \times 1.5 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.000 / 8.3 | |
| Screw shaft root dia. | 7.0 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 955 |
| | Static C_{0a} | 1 580 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| |
|---------------------------|
| For drive side (Fixed) |
| WBK06R-11 (round) |

Unit: mm

| Target compensation T | Lead accuracy | | Shaft run-out** | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|---------------------|--------------|------------------------------|
| | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.052 | 0.052 | 0.060 | 0.093 | 3 000 |
| 0 | 0.085 | 0.052 | 0.090 | 0.13 | 3 000 |

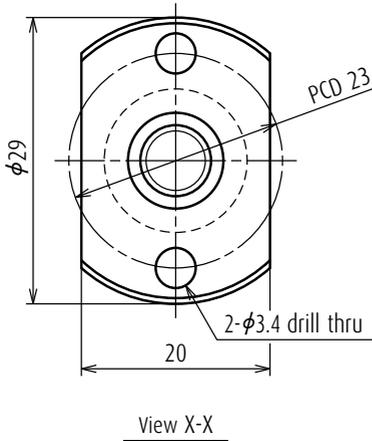

Screw shaft ϕ 8

Lead 2

Unit: mm


| Ball screw specifications | | |
|--|----------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 8 \times 2 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 8.3 | |
| Screw shaft root dia. | 6.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 1 260 |
| | Static C_{0a} | 1 940 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| |
|---------------------------|
| For drive side (Fixed) |
| WBK06R-11 (round) |

Unit: mm


| Target compensation T | Lead accuracy | | Shaft run-out** $\uparrow\uparrow$ | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|---------------------------------------|--------------|------------------------------|
| | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.052 | 0.052 | 0.060 | 0.10 | 3 000 |
| 0 | 0.085 | 0.052 | 0.090 | 0.14 | 3 000 |

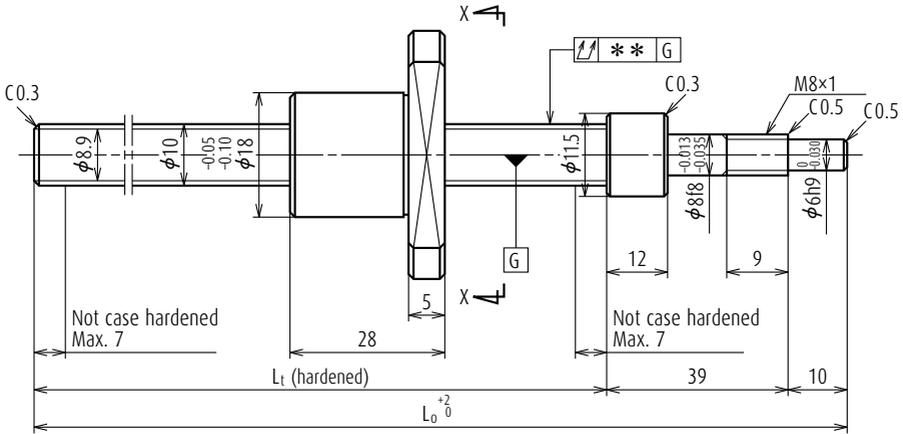

| Ball screw No. | Stroke | | Screw shaft length | |
|----------------|---------|--------------------------------------|--------------------|----------------|
| | Nominal | Maximum (L _t —Nut length) | L _t | L ₀ |
| RMA1002C7S-250 | 150 | 173 | 201 | 250 |
| RMA1002C7S-350 | 250 | 273 | 301 | 350 |

Notes

1. We recommend NSK support bearing kit (page B401).
2. Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use. See page D13 for details.
3. Permissible rotational speed is determined by d·n value and critical speed. See pages B47 and B349.

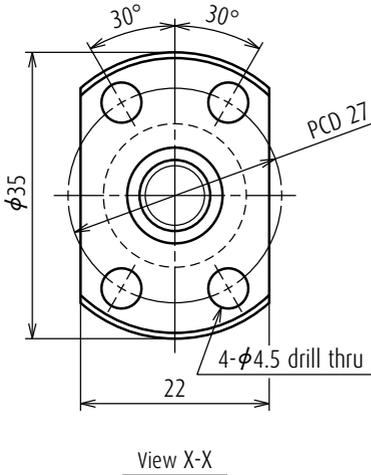

Screw shaft ϕ 10

Lead 2

Unit: mm


| Ball screw specifications | | |
|--|-----------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 10 \times 2 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 10.3 | |
| Screw shaft root dia. | 8.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 1 460 |
| | Static C_{0a} | 2 620 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| For drive side (Fixed) |
|---------------------------|
| WBK08-01A (square) |
| WBK08-11 (round) |

Unit: mm


| Target compensation T | Lead accuracy | | Shaft run-out** $\uparrow\uparrow$ | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|---------------------------------------|--------------|------------------------------|
| | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.085 | 0.052 | 0.070 | 0.19 | 3 000 |
| 0 | 0.085 | 0.052 | 0.100 | 0.25 | 3 000 |

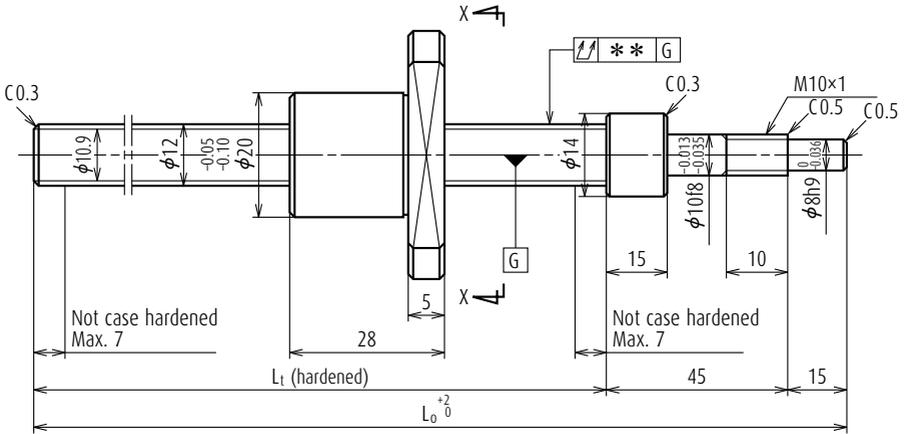

| Ball screw No. | Stroke | | Screw shaft length | |
|----------------|---------|---------------------------------|--------------------|-------|
| | Nominal | Maximum (L_t —Nut length) | L_t | L_0 |
| RMA1202C7S-250 | 150 | 162 | 190 | 250 |
| RMA1202C7S-350 | 250 | 262 | 290 | 350 |

Notes

1. We recommend NSK support bearing kit (page B389).
2. **Only rust preventive oil is applied at time of delivery. Please apply lubricant (oil or grease) before use.**
See page D13 for details.
3. Permissible rotational speed is determined by d-n value and critical speed. See pages B47 and B349.

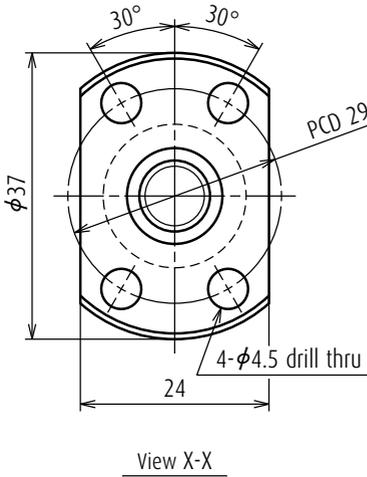

Screw shaft ϕ 12

Lead 2

Unit: mm


| Ball screw specifications | | |
|--|-----------------------|-------|
| Shaft dia. \times Lead / Direction of turn | 12 \times 2 / Right | |
| Ball recirculation | Deflector (bridge) | |
| Ball dia. / Ball circle dia. | 1.200 / 12.3 | |
| Screw shaft root dia. | 10.9 | |
| Effective turns of balls | 1 \times 3 | |
| Accuracy grade / Preload / Axial play | Ct7 / S | |
| Basic load rating (N) | Dynamic C_a | 1 590 |
| | Static C_{0a} | 3 190 |
| Axial play | 0.020 or less | |
| Dynamic friction torque, (N-cm) | 1.0 or less | |
| Spacer ball | None | |
| Factory-packed grease | See NOTES 2. | |

Recommended support unit

| For drive side (Fixed) |
|---------------------------|
| WBK10-01A (square) |
| WBK10-11 (round) |

Unit: mm


| Target compensation T | Lead accuracy | | Shaft run-out** $\uparrow\uparrow$ | Mass (kg) | Permissible rotational speed |
|--------------------------|--------------------|--------------------|---------------------------------------|--------------|------------------------------|
| | Deviation e_p | Variation v_u | | | N (min ⁻¹) |
| 0 | 0.060 | 0.052 | 0.070 | 0.26 | 3 000 |
| 0 | 0.085 | 0.052 | 0.100 | 0.34 | 3 000 |

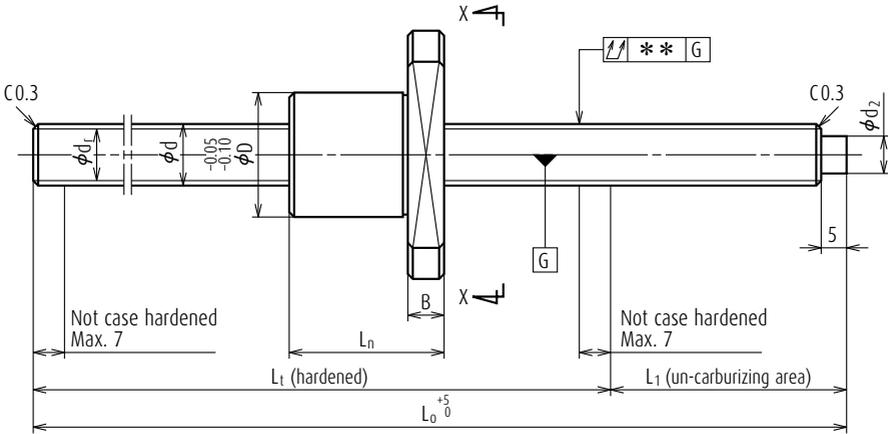

| Ball screw No. | Stroke Max. L_t-L_n | Shaft dia. d_1 | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective ball turns | Basic load rating (N) | | Axial play Max. |
|------------------|--------------------------|---------------------|-------------|--------------------|---------------------------|--------------------|----------------------|-----------------------|--------------------|-----------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | |
| RMS0601C7S-300 | 235 | 6 | 1 | 0.800 | 6.2 | 5.3 | 3 | 610 | 920 | 0.02 |
| RMS0801C7S-300 | 234 | 8 | 1 | 0.800 | 8.2 | 7.3 | 3 | 710 | 1 290 | 0.02 |
| RMS0801.5C7S-300 | 228 | 8 | 1.5 | 1.000 | 8.3 | 7.2 | 3 | 955 | 1 580 | 0.02 |
| RMS0802C7S-300 | 224 | 8 | 2 | 1.200 | 8.3 | 7.0 | 3 | 1 260 | 1 940 | 0.02 |
| RMS1002C7S-350 | 262 | 10 | 2 | 1.200 | 10.3 | 9.0 | 3 | 1 460 | 2 620 | 0.02 |
| RMS1202C7S-350 | 262 | 12 | 2 | 1.200 | 12.3 | 11.0 | 3 | 1 590 | 3 190 | 0.02 |


- Notes**
1. Use of NSK support unit is recommended. See page B401 for details.
 2. Only rust preventive agent is applied at time of delivery. Please apply lubricant (oil or grease) before use.
 3. Seal is not installed.
 4. Permissible rotational speed is determined by $d \cdot n$ value and critical speed. See pages B47 and B349.

RMS type

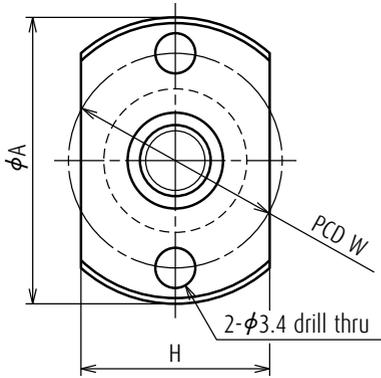

View X-X

(for screw shaft of 6 and 8 dia.)

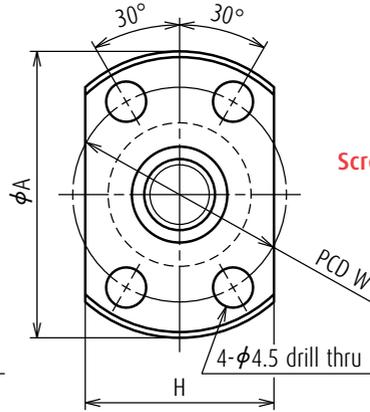

View X-X


(for screw shaft of 10 and 12 dia.)

Screw shaft $\phi 6$
Lead 1
Screw shaft $\phi 8$
Lead 1, 1.5, 2
Screw shaft $\phi 10, \phi 12$
Lead 2

Unit: mm

| Nut dimensions | | | | | | Screw shaft dimensions | | | | Lead accuracy | | | Shaft run-out ** | Mass | Permissible rotational speed |
|----------------|----|----|-----|----------------|----|---|--|----|----------------------------------|--------------------------|-----------------------------|-----------------------------|---------------------|-------|------------------------------|
| D | A | H | B | L _n | W | Effective thread length L _t | Shaft end L ₁ d ₂ | | Overall length L ₀ | Travel compensation T | Deviation e _p | Variation v _u | | | |
| | | | | | | | | | | | | | \uparrow | (kg) | N (min ⁻¹) |
| 12 | 24 | 16 | 3.5 | 15 | 18 | 250 | 50 | 4 | 300 | 0 | 0.085 | 0.052 | 0.09 | 0.075 | 3 000 |
| 14 | 27 | 18 | 4 | 16 | 21 | 250 | 50 | 6 | 300 | 0 | 0.085 | 0.052 | 0.09 | 0.13 | 3 000 |
| 15 | 28 | 19 | 4 | 22 | 22 | 250 | 50 | 6 | 300 | 0 | 0.085 | 0.052 | 0.09 | 0.14 | 3 000 |
| 16 | 29 | 20 | 4 | 26 | 23 | 250 | 50 | 6 | 300 | 0 | 0.085 | 0.052 | 0.09 | 0.15 | 3 000 |
| 18 | 35 | 22 | 5 | 28 | 27 | 290 | 60 | 8 | 350 | 0 | 0.085 | 0.052 | 0.10 | 0.25 | 3 000 |
| 20 | 37 | 24 | 5 | 28 | 29 | 290 | 60 | 10 | 350 | 0 | 0.085 | 0.052 | 0.10 | 0.35 | 3 000 |

Ball screws for transfer equipment Tube type, Flanged nut (Fine, Medium lead)

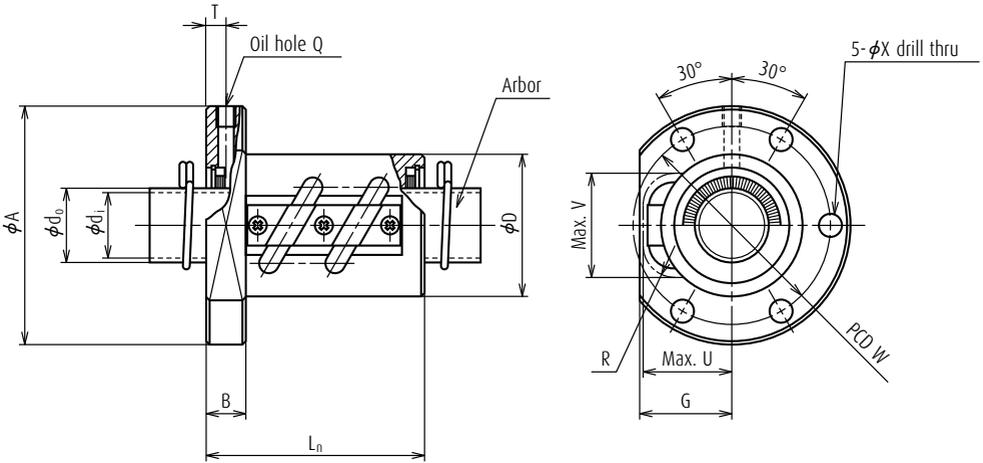

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|-----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNFTL 1003A3.5 | 10 | 3 | 2.381 | 10.65 | 8.1 | 3.5 × 1 | 4 440 | 6 700 | 0.10 | 20 |
| RNFTL 1006A2.5S | 10 | 6 | 2.381 | 10.65 | 8.1 | 2.5 × 1 | 3 280 | 4 730 | 0.10 | 20 |
| RNFTL 1208A2.5S | 12 | 8 | 2.778 | 12.65 | 9.6 | 2.5 × 1 | 4 290 | 6 610 | 0.10 | 25 |
| RNFTL 1404A3.5S | 14 | 4 | 2.778 | 14.5 | 11.5 | 3.5 × 1 | 6 310 | 10 800 | 0.10 | 25 |
| RNFTL 1405A2.5S | 14 | 5 | 3.175 | 14.5 | 11.0 | 2.5 × 1 | 6 170 | 9 940 | 0.10 | 30 |
| RNFTL 1610A2.5 | 16 | 10 | 3.175 | 16.75 | 13.3 | 2.5 × 1 | 6 810 | 11 600 | 0.10 | 30 |
| RNFTL 1610A2.5S | 16 | 10 | 3.175 | 16.75 | 13.3 | 2.5 × 1 | 6 810 | 11 600 | 0.10 | 30 |
| RNFTL 1808A3.5 | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 34 |
| RNFTL 1808A3.5S | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 34 |
| RNFTL 2005A2.5 | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 40 |
| RNFTL 2005A2.5S | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 40 |
| RNFTL 2010A2.5 | 20 | 10 | 4.762 | 21.25 | 16.2 | 2.5 × 1 | 12 700 | 21 600 | 0.15 | 40 |
| RNFTL 2010A2.5S | 20 | 10 | 4.762 | 21.25 | 16.2 | 2.5 × 1 | 12 700 | 21 600 | 0.15 | 40 |
| RNFTL 2505A5 | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 2 | 15 100 | 36 300 | 0.10 | 42 |
| RNFTL 2505A5S | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 2 | 15 100 | 36 300 | 0.10 | 42 |
| RNFTL 2510A2.5 | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 1 | 20 500 | 34 900 | 0.20 | 44 |
| RNFTL 2510A2.5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 1 | 20 500 | 34 900 | 0.20 | 44 |
| RNFTL 2510A5 | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 44 |
| RNFTL 2510A5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 44 |

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L_0 due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

R series RNFTL type



Unit: mm

| Ball nut dimensions | | | | | | | | | | | | Arbor | | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease replenishing |
|---------------------|----|--------|----------------|----|----------|--------|-----|-----------------|------|-----------|---------------|----------------|-----------------|----------------|-------------|-----------------|-----------|--------------------|--------------------|--------------------------------|--|
| Flange | | Length | Bolt hole | | Oil hole | | | Projecting tube | | Nut Mass. | Out-side dia. | Bore | Standard length | | | Screw shaft No. | | | | | |
| A | G | B | L _n | W | X | Q | T | U | V | R | (kg) | d ₀ | d ₁ | L ₀ | | | (kg) | (cm ³) | (cm ³) | | |
| 40 | 15 | 6 | 34 | 30 | 4.5 | M3×0.5 | 3.0 | 15 | 15 | 7 | 0.092 | 8.1 | 6.1 | 400 | 400 | - | RS1003A·· | 0.50 | - | - | |
| 40 | 15 | 6 | 36 | 30 | 4.5 | M3×0.5 | 3.5 | 15 | 15 | 5 | 0.095 | 8.1 | 6.1 | 400 | 800 | - | RS1006A·· | 0.56 | 1.1 | 0.6 | |
| 45 | 19 | 8 | 46 | 35 | 4.5 | M3×0.5 | 5.5 | 19 | 18 | 7 | 0.18 | 9.6 | 7.6 | 400 | 800 | - | RS1208A·· | 0.74 | 1.8 | 0.9 | |
| 50 | 19 | 10 | 43 | 40 | 4.5 | M6×1 | 5.0 | 19 | 20 | 7 | 0.20 | 11.5 | 9.5 | 500 | 1 000 | - | RS1404A·· | 1.02 | 2.0 | 1.0 | |
| 50 | 22 | 10 | 45 | 40 | 4.5 | M6×1 | 5.0 | 22 | 21 | 8 | 0.26 | 11.0 | 9.0 | 500 | 1 000 | - | RS1405A·· | 1.00 | 2.4 | 1.2 | |
| 53 | 23 | 10 | 54 | 41 | 5.5 | M6×1 | 5.5 | 23 | 22.5 | 8 | 0.28 | 13.3 | 11.3 | 500 | 1 000 | 1 500 | RS1610A·· | 1.37 | 2.7 | 1.4 | |
| 63 | 27 | 12 | 58 | 49 | 6.6 | M6×1 | 6.0 | 27 | 27 | 8 | 0.43 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1808A·· | 1.60 | 5.2 | 2.6 | |
| 60 | 28 | 10 | 46 | 50 | 4.5 | M6×1 | 5.0 | 28 | 27 | 10 | 0.42 | 17.0 | 14.6 | 500 | 1 000 | 2 000 | RS2005A·· | 2.17 | 3.5 | 1.8 | |
| 67 | 30 | 12 | 59 | 53 | 6.6 | M6×1 | 6.0 | 30 | 29 | 12 | 0.55 | 16.2 | 13.8 | 500 | 1 000 | 2 000 | RS2010A·· | 2.18 | 7.1 | 3.6 | |
| 71 | 28 | 12 | 66 | 57 | 6.6 | M6×1 | 6.0 | 28 | 31 | 10 | 0.62 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A·· | 3.47 | 6.5 | 3.3 | |
| 80 | 34 | 15 | 62 | 62 | 9 | M6×1 | 7.5 | 34 | 37 | 17 | 0.75 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2501A·· | 3.13 | 13 | 6.5 | |
| 80 | 34 | 15 | 92 | 62 | 9 | M6×1 | 7.5 | 34 | 37 | 17 | 0.75 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2501A·· | 3.13 | 18 | 9.0 | |


4. Nut assembly with arbor and screw shaft are separate at time of delivery.

5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.


Ball screws for transfer equipment Tube type, Flanged nut (Fine, Medium lead)

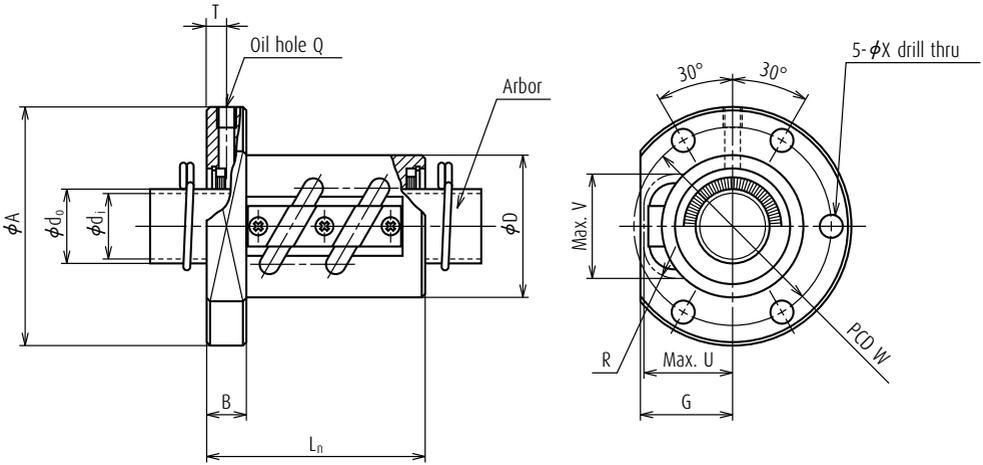

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|-----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNFTL 2806A2.5 | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 1 | 8 760 | 20 200 | 0.10 | 50 |
| RNFTL 2806A2.5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 1 | 8 760 | 20 200 | 0.10 | 50 |
| RNFTL 2806A5 | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 50 |
| RNFTL 2806A5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 50 |
| RNFTL 3210A5 | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 55 |
| RNFTL 3210A5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 55 |
| RNFTL 3610A2.5 | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 1 | 24 700 | 50 800 | 0.20 | 60 |
| RNFTL 3610A2.5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 1 | 24 700 | 50 800 | 0.20 | 60 |
| RNFTL 3610A5 | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 60 |
| RNFTL 3610A5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 60 |
| RNFTL 4010A7 | 40 | 10 | 6.35 | 41.75 | 35.0 | 3.5 × 2 | 63 100 | 164 000 | 0.20 | 65 |
| RNFTL 4010A7S | 40 | 10 | 6.35 | 41.75 | 35.0 | 3.5 × 2 | 63 100 | 164 000 | 0.20 | 65 |
| RNFTL 4512A5 | 45 | 12 | 7.144 | 46.5 | 39.0 | 2.5 × 2 | 58 500 | 147 000 | 0.23 | 70 |
| RNFTL 4512A5S | 45 | 12 | 7.144 | 46.5 | 39.0 | 2.5 × 2 | 58 500 | 147 000 | 0.23 | 70 |
| RNFTL 5010A7 | 50 | 10 | 6.35 | 51.75 | 45.0 | 3.5 × 2 | 70 100 | 205 000 | 0.20 | 80 |
| RNFTL 5010A7S | 50 | 10 | 6.35 | 51.75 | 45.0 | 3.5 × 2 | 70 100 | 205 000 | 0.20 | 80 |
| RNFTL 5016A5 | 50 | 16 | 9.525 | 52 | 42.0 | 2.5 × 2 | 117 000 | 299 000 | 0.23 | 85 |
| RNFTL 5016A5S | 50 | 16 | 9.525 | 52 | 42.0 | 2.5 × 2 | 117 000 | 299 000 | 0.23 | 85 |

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L_0 due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal.
Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

R series RNFTL type

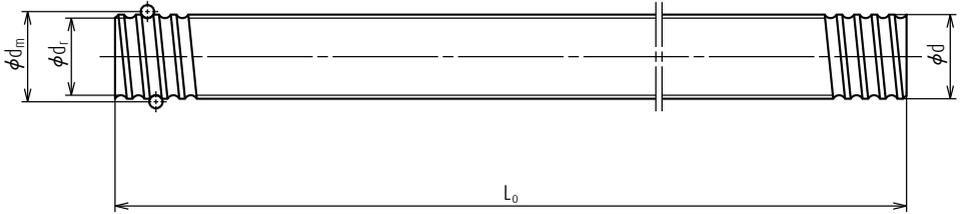

Unit: mm

| Ball nut dimensions | | | | | | | | | | | | Arbor | | Screw shaft | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing | |
|---------------------|----|----|--------|-----------|-----|----------|------|----|-----------------|----|------|-----------|---------------|-------------|-----------------|-------|--------------|--------------------------------|---|-----------------|
| Flange | | | Length | Bolt hole | | Oil hole | | | Projecting tube | | | Nut Mass. | Out-side dia. | Bore | Standard length | | | | | Screw shaft No. |
| A | G | B | L_n | W | X | Q | T | U | V | R | (kg) | d_0 | d_1 | L_0 | | | (kg) | (cm^3) | (cm^3) | |
| 79 | 33 | 15 | 55 | 65 | 6.6 | M6 × 1 | 7.5 | 33 | 34 | 10 | 0.85 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A · · | 4.47 | 5.9 | 3.0 |
| 79 | 33 | 15 | 55 | 65 | 6.6 | M6 × 1 | 7.5 | 33 | 34 | 10 | 0.85 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A · · | 4.47 | 5.9 | 3.0 |
| 79 | 33 | 15 | 79 | 65 | 6.6 | M6 × 1 | 7.5 | 33 | 34 | 10 | 1.07 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A · · | 4.47 | 8.4 | 4.2 |
| 79 | 33 | 15 | 79 | 65 | 6.6 | M6 × 1 | 7.5 | 33 | 34 | 10 | 1.07 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A · · | 4.47 | 8.4 | 4.2 |
| 97 | 39 | 18 | 97 | 75 | 11 | M6 × 1 | 9.0 | 39 | 42 | 17 | 1.55 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A · · | 5.53 | 29 | 15 |
| 97 | 39 | 18 | 97 | 75 | 11 | M6 × 1 | 9.0 | 39 | 42 | 17 | 1.55 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A · · | 5.53 | 29 | 15 |
| 102 | 42 | 18 | 68 | 80 | 11 | M6 × 1 | 9.0 | 42 | 46 | 17 | 1.47 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3601A · · | 6.91 | 21 | 11 |
| 102 | 42 | 18 | 68 | 80 | 11 | M6 × 1 | 9.0 | 42 | 46 | 17 | 1.47 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3601A · · | 6.91 | 21 | 11 |
| 102 | 42 | 18 | 98 | 80 | 11 | M6 × 1 | 9.0 | 42 | 46 | 17 | 1.80 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3601A · · | 6.91 | 33 | 17 |
| 102 | 42 | 18 | 98 | 80 | 11 | M6 × 1 | 9.0 | 42 | 46 | 17 | 1.80 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3601A · · | 6.91 | 33 | 17 |
| 114 | 44 | 20 | 120 | 90 | 14 | M6 × 1 | 10.0 | 44 | 50 | 20 | 2.49 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4010A · · | 8.87 | 42 | 21 |
| 114 | 44 | 20 | 120 | 90 | 14 | M6 × 1 | 10.0 | 44 | 50 | 20 | 2.49 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4010A · · | 8.87 | 42 | 21 |
| 130 | 47 | 22 | 116 | 100 | 18 | M6 × 1 | 11.0 | 47 | 55 | 20 | 3.07 | 39.0 | 35.8 | 2 000 | 3 000 | 4 000 | RS4512A · · | 11.16 | 49 | 25 |
| 130 | 47 | 22 | 116 | 100 | 18 | M6 × 1 | 11.0 | 47 | 55 | 20 | 3.07 | 39.0 | 35.8 | 2 000 | 3 000 | 4 000 | RS4512A · · | 11.16 | 49 | 25 |
| 140 | 52 | 22 | 122 | 110 | 18 | M6 × 1 | 11.0 | 52 | 59 | 20 | 4.06 | 45.0 | 41.8 | 2 000 | 3 000 | 4 000 | RS5010A · · | 14.15 | 53 | 27 |
| 140 | 52 | 22 | 122 | 110 | 18 | M6 × 1 | 11.0 | 52 | 59 | 20 | 4.06 | 45.0 | 41.8 | 2 000 | 3 000 | 4 000 | RS5010A · · | 14.15 | 53 | 27 |
| 163 | 57 | 28 | 146 | 125 | 22 | M6 × 1 | 14.0 | 57 | 63 | 25 | 6.42 | 42.0 | 38.8 | 2 000 | 3 000 | 4 000 | RS5016A · · | 13.48 | 94 | 47 |
| 163 | 57 | 28 | 146 | 125 | 22 | M6 × 1 | 14.0 | 57 | 63 | 25 | 6.42 | 42.0 | 38.8 | 2 000 | 3 000 | 4 000 | RS5016A · · | 13.48 | 94 | 47 |


4. Nut assembly with arbor and screw shaft are separate at time of delivery.

5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with · · .

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.


Ball screws for transfer equipment Tube type, Flanged nut (Medium, High helix lead)

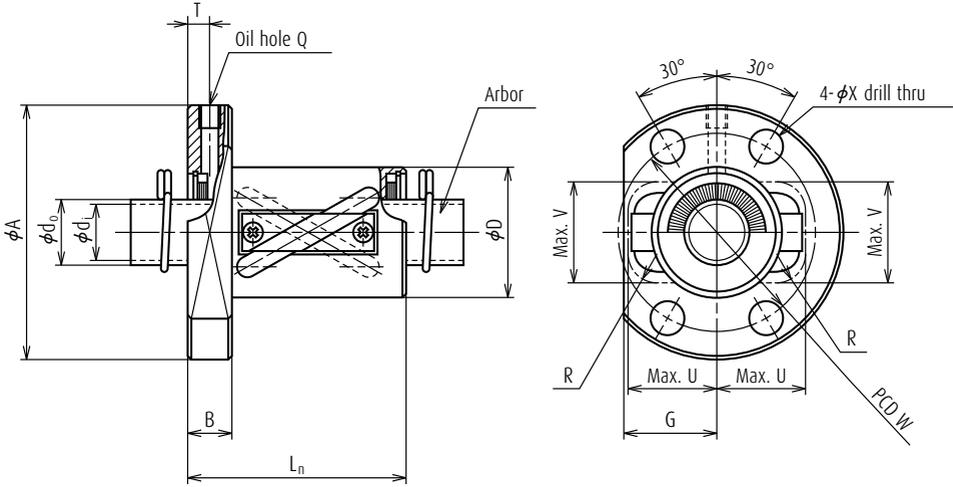

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|---------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNFTL 1212A3 | 12 | 12 | 2.381 | 12.65 | 10.1 | 1.5 × 2 | 3 900 | 6 250 | 0.10 | 24 |
| RNFTL 1616A3 | 16 | 16 | 2.778 | 16.65 | 13.6 | 1.5 × 2 | 5 440 | 9 550 | 0.10 | 30 |
| RNFTL 1616A3S | 16 | 16 | 2.778 | 16.65 | 13.6 | 1.5 × 2 | 5 440 | 9 550 | 0.10 | 30 |
| RNFTL 2020A3 | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.5 × 2 | 8 080 | 15 700 | 0.10 | 35 |
| RNFTL 2020A3S | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.5 × 2 | 8 080 | 15 700 | 0.10 | 35 |
| RNFTL 2525A3 | 25 | 25 | 3.969 | 26 | 22.0 | 1.5 × 2 | 12 100 | 24 500 | 0.12 | 45 |
| RNFTL 2525A3S | 25 | 25 | 3.969 | 26 | 22.0 | 1.5 × 2 | 12 100 | 24 500 | 0.12 | 45 |
| RNFTL 3232A3 | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.5 × 2 | 17 600 | 37 700 | 0.15 | 55 |
| RNFTL 3232A3S | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.5 × 2 | 17 600 | 37 700 | 0.15 | 55 |
| RNFTL 4040A3 | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.5 × 2 | 28 100 | 62 900 | 0.20 | 70 |
| RNFTL 4040A3S | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.5 × 2 | 28 100 | 62 900 | 0.20 | 70 |

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

R series RNFTL type

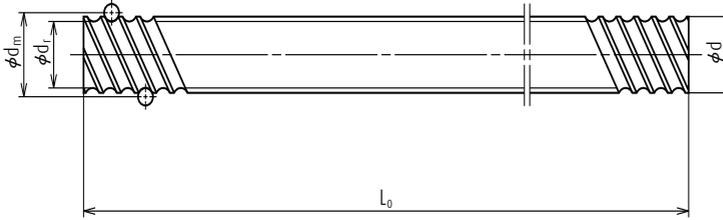

Unit: mm

| Ball nut dimensions | | | | | | | | | | | | Arbor | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing |
|---------------------|----|----|----------------|----|-----------|----------|----------|----|----|-----------------|------|-----------|---------------|-------------|-----------------|----------------|----------------|--------------|--------------------------------|---|
| Flange | | | Length | | Bolt hole | | Oil hole | | | Projecting tube | | Nut Mass. | Out-side dia. | Bore | Standard length | | | | | |
| A | G | B | L _n | W | X | Q | T | U | V | R | (kg) | | | | d ₀ | d ₁ | L ₀ | | | |
| 44 | 17 | 8 | 44 | 34 | 4.5 | M6 × 0.5 | 4.0 | 17 | 16 | 5 | 0.16 | 10.1 | 8.1 | 400 | 800 | - | RS1212A·· | 0.74 | 1.7 | 0.9 |
| 55 | 22 | 10 | 50 | 43 | 6.6 | M6 × 1 | 5.0 | 22 | 22 | 7 | 0.29 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1616A·· | 1.37 | 2.8 | 1.4 |
| 55 | 22 | 10 | 50 | 43 | 6.6 | M6 × 1 | 5.0 | 22 | 22 | 7 | 0.29 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1616A·· | 1.37 | 2.8 | 1.4 |
| 68 | 25 | 12 | 59 | 52 | 9 | M6 × 1 | 6.0 | 25 | 27 | 8 | 0.49 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A·· | 2.19 | 4.9 | 2.5 |
| 68 | 25 | 12 | 59 | 52 | 9 | M6 × 1 | 6.0 | 25 | 27 | 8 | 0.49 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A·· | 2.19 | 4.9 | 2.5 |
| 80 | 31 | 12 | 69 | 63 | 9 | M6 × 1 | 6.0 | 31 | 32 | 10 | 0.80 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2525A·· | 3.43 | 9.1 | 4.6 |
| 80 | 31 | 12 | 69 | 63 | 9 | M6 × 1 | 6.0 | 31 | 32 | 10 | 0.80 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2525A·· | 3.43 | 9.1 | 4.6 |
| 100 | 37 | 15 | 84 | 80 | 11 | M6 × 1 | 7.5 | 37 | 40 | 12 | 1.46 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A·· | 5.71 | 19 | 9.5 |
| 100 | 37 | 15 | 84 | 80 | 11 | M6 × 1 | 7.5 | 37 | 40 | 12 | 1.46 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A·· | 5.71 | 19 | 9.5 |
| 120 | 46 | 18 | 103 | 95 | 14 | M6 × 1 | 9.0 | 46 | 49 | 15 | 2.69 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A·· | 8.82 | 39 | 20 |
| 120 | 46 | 18 | 103 | 95 | 14 | M6 × 1 | 9.0 | 46 | 49 | 15 | 2.69 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A·· | 8.82 | 39 | 20 |

4. Nut assembly with arbor and screw shaft are separate at time of delivery.


5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ··.

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


Tube type, embedded -tube, Flanged (Fine, Medium lead)

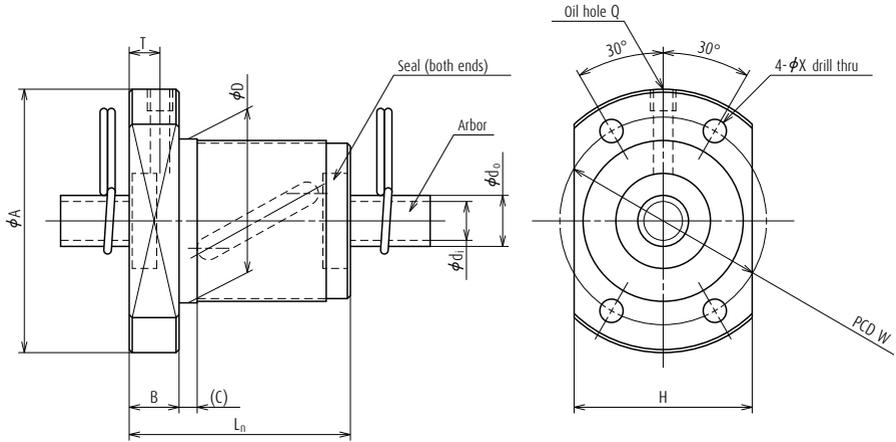

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|-----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNFBL 1006A2.5S | 10 | 6 | 2.381 | 10.65 | 8.1 | 2.5 × 1 | 3 280 | 4 730 | 0.10 | 26 |
| RNFBL 1208A2.5S | 12 | 8 | 2.778 | 12.65 | 9.6 | 2.5 × 1 | 4 290 | 6 610 | 0.10 | 29 |
| RNFBL 1404A3.5S | 14 | 4 | 2.778 | 14.5 | 11.5 | 3.5 × 1 | 6 310 | 10 800 | 0.10 | 31 |
| RNFBL 1405A2.5S | 14 | 5 | 3.175 | 14.5 | 11.0 | 2.5 × 1 | 6 170 | 9 940 | 0.10 | 32 |
| RNFBL 1808A3.5S | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 50 |
| RNFBL 2005A2.5S | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 40 |
| RNFBL 2010A2.5S | 20 | 10 | 4.762 | 21.25 | 16.2 | 2.5 × 1 | 12 700 | 21 600 | 0.15 | 52 |
| RNFBL 2505A2.5S | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 1 | 8 340 | 18 100 | 0.10 | 43 |
| RNFBL 2505A5S | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 2 | 15 100 | 36 300 | 0.10 | 43 |
| RNFBL 2510A2.5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 1 | 20 500 | 34 900 | 0.20 | 60 |
| RNFBL 2510A5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 60 |
| RNFBL 2806A2.5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 1 | 8 760 | 20 200 | 0.10 | 50 |
| RNFBL 2806A5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 50 |
| RNFBL 3210A2.5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 1 | 23 100 | 45 900 | 0.20 | 67 |
| RNFBL 3210A5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 67 |
| RNFBL 3610A2.5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 1 | 24 700 | 50 800 | 0.20 | 70 |
| RNFBL 3610A5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 70 |
| RNFBL 4010A5S | 40 | 10 | 6.35 | 41.75 | 35.0 | 2.5 × 2 | 47 200 | 116 000 | 0.20 | 76 |

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ∙ ∙.

R series RNFBL type

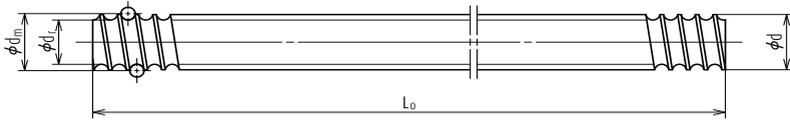

Unit: mm

| Ball nut dimensions | | | | | | | | | | Arbor | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing |
|---------------------|----|----|----------------|-----|-----------|------|----------|-----|------|----------------|--------------------|-------------|-----------------|-------|-----------|--------------|--------------------------------|---|
| Flange | | | Overall length | | Bolt hole | | Oil hole | | | Nut Mass. (kg) | Outside dia. d_0 | Bore d_1 | Standard length | | | | | |
| A | H | B | L_n | (C) | W | X | Q | T | | | | | | | | | | |
| 42 | 29 | 8 | 36 | 3 | 34 | 4.5 | M3×0.5 | 5.0 | 0.16 | 8.1 | 6.1 | 400 | 800 | - | RS1006A·· | 0.56 | 1.1 | 0.6 |
| 45 | 32 | 8 | 44 | 3 | 37 | 4.5 | M3×0.5 | 5.5 | 0.21 | 9.6 | 7.6 | 400 | 800 | - | RS1208A·· | 0.81 | 1.6 | 0.8 |
| 50 | 37 | 10 | 40 | 4 | 40 | 4.5 | M6 × 1 | 5.0 | 0.25 | 11.5 | 9.5 | 500 | 1 000 | - | RS1404A·· | 1.02 | 2.4 | 1.2 |
| 50 | 38 | 10 | 40 | 4 | 40 | 4.5 | M6 × 1 | 5.0 | 0.26 | 11.0 | 9.0 | 500 | 1 000 | - | RS1405A·· | 1.00 | 1.9 | 1.0 |
| 80 | 60 | 12 | 61 | 4 | 65 | 6.6 | M6 × 1 | 6.0 | 1.00 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1808A·· | 1.60 | 5.8 | 2.9 |
| 60 | 46 | 10 | 40 | 4 | 50 | 4.5 | M6 × 1 | 5.0 | 0.37 | 17.0 | 14.6 | 500 | 1 000 | 2 000 | RS2005A·· | 2.17 | 2.8 | 1.4 |
| 82 | 64 | 12 | 61 | 5 | 67 | 6.6 | M6 × 1 | 6.0 | 1.05 | 16.2 | 13.8 | 500 | 1 000 | 2 000 | RS2010A·· | 2.18 | 7.6 | 3.8 |
| 67 | 50 | 10 | 40 | 4 | 55 | 5.5 | M6 × 1 | 5.0 | 0.40 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A·· | 3.47 | 3.5 | 1.8 |
| 67 | 50 | 10 | 55 | 4 | 55 | 5.5 | M6 × 1 | 5.0 | 0.50 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A·· | 3.47 | 4.7 | 2.4 |
| 96 | 72 | 15 | 66 | 5 | 78 | 9.0 | M6 × 1 | 7.5 | 1.52 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2510A·· | 3.13 | 14 | 7.0 |
| 96 | 72 | 15 | 96 | 5 | 78 | 9.0 | M6 × 1 | 7.5 | 1.99 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2510A·· | 3.13 | 19 | 9.5 |
| 80 | 60 | 12 | 47 | 5 | 65 | 6.6 | M6 × 1 | 6.0 | 0.70 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A·· | 4.47 | 4.5 | 2.3 |
| 80 | 60 | 12 | 65 | 5 | 65 | 6.6 | M6 × 1 | 6.0 | 0.87 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A·· | 4.47 | 7.6 | 3.8 |
| 103 | 78 | 15 | 67 | 5 | 85 | 9.0 | M6 × 1 | 7.5 | 1.72 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A·· | 5.53 | 20 | 10 |
| 103 | 78 | 15 | 97 | 5 | 85 | 9.0 | M6 × 1 | 7.5 | 2.25 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A·· | 5.53 | 28 | 14 |
| 110 | 82 | 17 | 69 | 5 | 90 | 11.0 | M6 × 1 | 8.5 | 1.97 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A·· | 6.91 | 21 | 11 |
| 110 | 82 | 17 | 99 | 5 | 90 | 11.0 | M6 × 1 | 8.5 | 2.53 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A·· | 6.91 | 29 | 15 |
| 116 | 88 | 17 | 99 | 5 | 96 | 11.0 | M6 × 1 | 8.5 | 2.86 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4010A·· | 8.87 | 36 | 18 |


4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

6. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

Ball screws for transfer equipment


Return tube type, Nut with V-thread, (Fine lead)

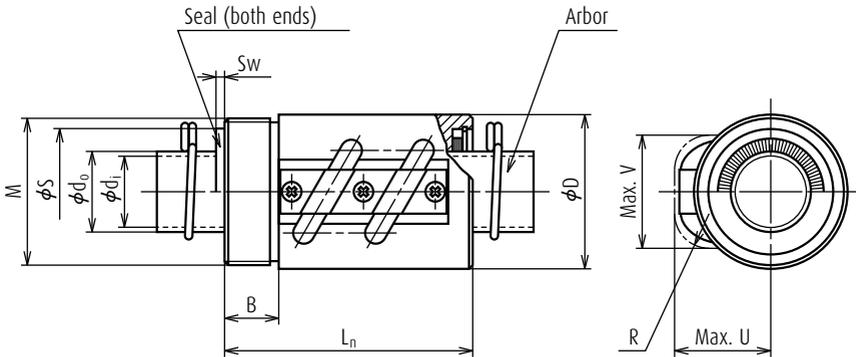

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNCT 1003A3.5 | 10 | 3 | 2.381 | 10.65 | 8.1 | 3.5 × 1 | 4 440 | 6 700 | 0.10 | 20 |
| RNCT 1404A3.5S | 14 | 4 | 2.778 | 14.5 | 11.5 | 3.5 × 1 | 6 310 | 10 800 | 0.10 | 25 |
| RNCT 1405A2.5S | 14 | 5 | 3.175 | 14.5 | 11.0 | 2.5 × 1 | 6 170 | 9 940 | 0.10 | 30 |
| RNCT 1808A3.5 | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 34 |
| RNCT 1808A3.5S | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 34 |
| RNCT 2005A2.5 | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 40 |
| RNCT 2005A2.5S | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 40 |
| RNCT 2505A5 | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 2 | 15 100 | 36 300 | 0.10 | 42 |
| RNCT 2505A5S | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 2 | 15 100 | 36 300 | 0.10 | 42 |
| RNCT 2510A5 | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 44 |
| RNCT 2510A5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 44 |
| RNCT 2806A5 | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 50 |
| RNCT 2806A5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 50 |
| RNCT 3210A5 | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 55 |
| RNCT 3210A5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 55 |
| RNCT 3610A5 | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 60 |
| RNCT 3610A5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 60 |
| RNCT 4010A7 | 40 | 10 | 6.35 | 41.75 | 35.0 | 3.5 × 2 | 63 100 | 164 000 | 0.20 | 65 |
| RNCT 4010A7S | 40 | 10 | 6.35 | 41.75 | 35.0 | 3.5 × 2 | 63 100 | 164 000 | 0.20 | 65 |
| RNCT 4512A5 | 45 | 12 | 7.144 | 46.5 | 39.0 | 2.5 × 2 | 58 500 | 147 000 | 0.23 | 70 |
| RNCT 4512A5S | 45 | 12 | 7.144 | 46.5 | 39.0 | 2.5 × 2 | 58 500 | 147 000 | 0.23 | 70 |
| RNCT 5010A7 | 50 | 10 | 6.35 | 51.75 | 45.0 | 3.5 × 2 | 70 100 | 205 000 | 0.20 | 80 |
| RNCT 5010A7S | 50 | 10 | 6.35 | 51.75 | 45.0 | 3.5 × 2 | 70 100 | 205 000 | 0.20 | 80 |
| RNCT 5016A5 | 50 | 16 | 9.525 | 52 | 42.0 | 2.5 × 2 | 117 000 | 299 000 | 0.23 | 85 |
| RNCT 5016A5S | 50 | 16 | 9.525 | 52 | 42.0 | 2.5 × 2 | 117 000 | 299 000 | 0.23 | 85 |

- Notes**
1. Protruding portion of tube does not interfere with ball nut housing if its dimensions corresponding to U and V are large enough.
 2. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 3. Only ball nut part numbers ending "S" are equipped with seals. External dimensions of those with seals are the same as those without. In ball nut side view drawing, above the center line there is a seal, and beneath it there is no seal. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

R series RNCT type

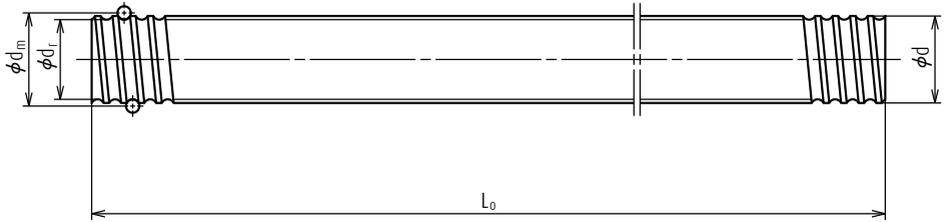

Unit: mm

| Ball nut dimensions | | | | | | Seal dimensions | | | Arbor | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing |
|---------------------|----|--------|----|----|----|-----------------|-----------|------------|--------------|-------|-----------------|-------|-----------------|-----------|--------------------|--------------------------------|---|
| V-thread | | Length | | | | Nut Mass. | Dia-meter | Thick-ness | Outside dia. | Bore | Standard length | | Screw shaft No. | | | | |
| M | B | L_n | U | V | R | | | | | | L_0 | | | | | | |
| | | | | | | (kg) | S | S_w | d_0 | d_1 | | | | (kg) | (cm ³) | (cm ³) | |
| M18 × 1 | 10 | 38 | 15 | 15 | 7 | 0.049 | - | - | 8.1 | 6.1 | 400 | 800 | - | RS1003A·· | 0.50 | - | - |
| M24 × 1 | 10 | 43 | 19 | 20 | 7 | 0.083 | - | - | 11.5 | 9.5 | 500 | 1 000 | - | RS1404A·· | 1.02 | 2.7 | 1.4 |
| M26 × 1.5 | 10 | 45 | 22 | 21 | 8 | 0.15 | - | - | 11.0 | 9.0 | 500 | 1 000 | - | RS1405A·· | 1.00 | 3.1 | 1.6 |
| M32 × 1.5 | 12 | 58 | 27 | 27 | 8 | 0.21 | 28.5 | 2.5 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1808A·· | 1.60 | 6.6 | 3.3 |
| M32 × 1.5 | 12 | 58 | 27 | 27 | 8 | 0.21 | 28.5 | 2.5 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1808A·· | 1.60 | 6.6 | 3.3 |
| M36 × 1.5 | 12 | 48 | 28 | 27 | 10 | 0.28 | 29.5 | 2.5 | 17.0 | 14.6 | 500 | 1 000 | 2 000 | RS2005A·· | 2.17 | 4.8 | 2.4 |
| M36 × 1.5 | 12 | 48 | 28 | 27 | 10 | 0.28 | 29.5 | 2.5 | 17.0 | 14.6 | 500 | 1 000 | 2 000 | RS2005A·· | 2.17 | 4.8 | 2.4 |
| M40 × 1.5 | 15 | 69 | 28 | 31 | 10 | 0.38 | 34.5 | 2.5 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A·· | 3.47 | 8.4 | 4.2 |
| M40 × 1.5 | 15 | 69 | 28 | 31 | 10 | 0.38 | 34.5 | 2.5 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A·· | 3.47 | 8.4 | 4.2 |
| M42 × 1.5 | 15 | 92 | 34 | 37 | 17 | 0.49 | 38.5 | 2.5 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2510A·· | 3.13 | 21 | 1 |
| M42 × 1.5 | 15 | 92 | 34 | 37 | 17 | 0.49 | 38.5 | 2.5 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2510A·· | 3.13 | 21 | 1 |
| M45 × 1.5 | 15 | 79 | 33 | 34 | 10 | 0.68 | 37.5 | 2.5 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A·· | 4.47 | 9.7 | 4.9 |
| M45 × 1.5 | 15 | 79 | 33 | 34 | 10 | 0.68 | 37.5 | 2.5 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A·· | 4.47 | 9.7 | 4.9 |
| M50 × 1.5 | 18 | 97 | 39 | 42 | 17 | 0.79 | 45.5 | 2.5 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A·· | 5.53 | 32 | 16 |
| M50 × 1.5 | 18 | 97 | 39 | 42 | 17 | 0.79 | 45.5 | 2.5 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A·· | 5.53 | 32 | 16 |
| M55 × 2 | 18 | 98 | 42 | 46 | 17 | 0.97 | 50.5 | 3.0 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A·· | 6.91 | 32 | 16 |
| M55 × 2 | 18 | 98 | 42 | 46 | 17 | 0.97 | 50.5 | 3.0 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A·· | 6.91 | 32 | 16 |
| M60 × 2 | 25 | 125 | 44 | 50 | 20 | 1.37 | 54.5 | 3.0 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4010A·· | 8.87 | 51 | 26 |
| M60 × 2 | 25 | 125 | 44 | 50 | 20 | 1.37 | 54.5 | 3.0 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4010A·· | 8.87 | 51 | 26 |
| M65 × 2 | 30 | 124 | 47 | 55 | 20 | 1.42 | 60.5 | 3.0 | 39.0 | 35.8 | 2 000 | 3 000 | 4 000 | RS4512A·· | 11.16 | 60 | 30 |
| M65 × 2 | 30 | 124 | 47 | 55 | 20 | 1.42 | 60.5 | 3.0 | 39.0 | 35.8 | 2 000 | 3 000 | 4 000 | RS4512A·· | 11.16 | 60 | 30 |
| M75 × 2 | 40 | 140 | 52 | 59 | 20 | 2.41 | 64.5 | 3.0 | 45.0 | 41.8 | 2 000 | 3 000 | 4 000 | RS5010A·· | 14.15 | 76 | 38 |
| M75 × 2 | 40 | 140 | 52 | 59 | 20 | 2.41 | 64.5 | 3.0 | 45.0 | 41.8 | 2 000 | 3 000 | 4 000 | RS5010A·· | 14.15 | 76 | 38 |
| M80 × 2 | 40 | 158 | 57 | 63 | 25 | 3.14 | 68.5 | 3.0 | 42.0 | 38.8 | 2 000 | 3 000 | 4 000 | RS5016A·· | 13.48 | 114 | 57 |
| M80 × 2 | 40 | 158 | 57 | 63 | 25 | 3.14 | 68.5 | 3.0 | 42.0 | 38.8 | 2 000 | 3 000 | 4 000 | RS5016A·· | 13.48 | 114 | 57 |

4. Nut assembly with arbor and screw shaft are separate at time of delivery.


5. Value obtained by diving standard screw shaft length by 100 mm will be entered at end of the part number where marked with ···.

6. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

7. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


End cap type, Flanged nut (Medium, Hige helix lead)

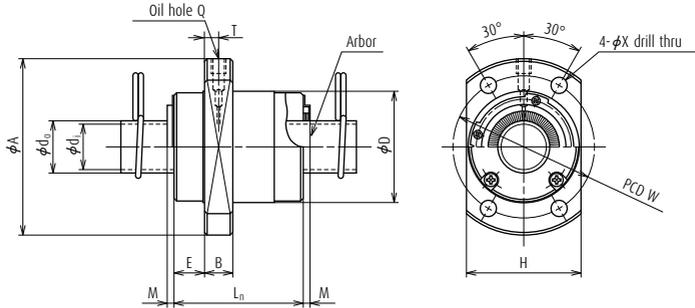

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns Turns × Circuits | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|---------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|---|------------------------|------------------------|-----------------|---------------------|
| | | | | | | | Dynamic C _a | Static C _{0a} | | Outside dia. |
| | | | | | | D | | | | |
| RNFCL 1212A3 | 12 | 12 | 2.381 | 12.65 | 10.1 | 1.7 × 2 | 4 350 | 6 580 | 0.10 | 26 |
| RNFCL 1212A6 | 12 | 12 | 2.381 | 12.65 | 10.1 | 1.7 × 4 | 7 890 | 13 200 | 0.10 | 26 |
| RNFCL 1520A3 | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7 × 2 | 7 510 | 12 300 | 0.10 | 33 |
| RNFCL 1520A3S | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7 × 2 | 7 510 | 12 300 | 0.10 | 33 |
| RNFCL 1616A3 | 16 | 16 | 2.778 | 16.65 | 13.5 | 1.7 × 2 | 6 060 | 10 300 | 0.10 | 32 |
| RNFCL 1616A3S | 16 | 16 | 2.778 | 16.65 | 13.5 | 1.7 × 2 | 6 060 | 10 300 | 0.10 | 32 |
| RNFCL 1616A6 | 16 | 16 | 2.778 | 16.65 | 13.5 | 2.5 × 1 | 11 000 | 20 500 | 0.10 | 32 |
| RNFCL 1616A6S | 16 | 16 | 2.778 | 16.65 | 13.5 | 2.5 × 2 | 11 000 | 20 500 | 0.10 | 32 |
| RNFCL 2020A3 | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.7 × 2 | 9 000 | 16 700 | 0.10 | 39 |
| RNFCL 2020A3S | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.7 × 2 | 9 000 | 16 700 | 0.10 | 39 |
| RNFCL 2020A6 | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.7 × 4 | 16 300 | 33 400 | 0.10 | 39 |
| RNFCL 2020A6S | 20 | 20 | 3.175 | 20.75 | 17.3 | 1.7 × 4 | 16 300 | 33 400 | 0.10 | 39 |
| RNFCL 2525A3 | 25 | 25 | 3.969 | 26 | 22.0 | 1.7 × 2 | 13 400 | 26 100 | 0.12 | 47 |
| RNFCL 2525A3S | 25 | 25 | 3.969 | 26 | 22.0 | 1.7 × 2 | 13 400 | 26 100 | 0.12 | 47 |
| RNFCL 2525A6 | 25 | 25 | 3.969 | 26 | 22.0 | 1.7 × 4 | 24 400 | 52 200 | 0.12 | 47 |
| RNFCL 2525A6S | 25 | 25 | 3.969 | 26 | 22.0 | 1.7 × 4 | 24 400 | 52 200 | 0.12 | 47 |
| RNFCL 3232A3 | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.7 × 2 | 19 600 | 39 800 | 0.15 | 58 |
| RNFCL 3232A3S | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.7 × 2 | 19 600 | 39 800 | 0.15 | 58 |
| RNFCL 3232A6 | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.7 × 4 | 35 600 | 79 600 | 0.15 | 58 |
| RNFCL 3232A6S | 32 | 32 | 4.762 | 33.25 | 28.0 | 1.7 × 4 | 35 600 | 79 600 | 0.15 | 58 |
| RNFCL 4040A3 | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.7 × 2 | 31 300 | 66 800 | 0.20 | 73 |
| RNFCL 4040A3S | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.7 × 2 | 31 300 | 66 800 | 0.20 | 73 |
| RNFCL 4040A6 | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.7 × 4 | 56 900 | 134 000 | 0.20 | 73 |
| RNFCL 4040A6S | 40 | 40 | 6.35 | 41.75 | 35.0 | 1.7 × 4 | 56 900 | 134 000 | 0.23 | 73 |
| RNFCL 5050A3 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.7 × 2 | 46 800 | 104 000 | 0.25 | 90 |
| RNFCL 5050A3S | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.7 × 2 | 46 800 | 104 000 | 0.25 | 90 |
| RNFCL 5050A6 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.7 × 4 | 85 000 | 209 000 | 0.25 | 90 |
| RNFCL 5050A6S | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.7 × 4 | 85 000 | 209 000 | 0.25 | 90 |

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by diving the standard screw shaft length by 100 mm will be entered at end of the part number where marked with ...
 4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

R series RNFL type

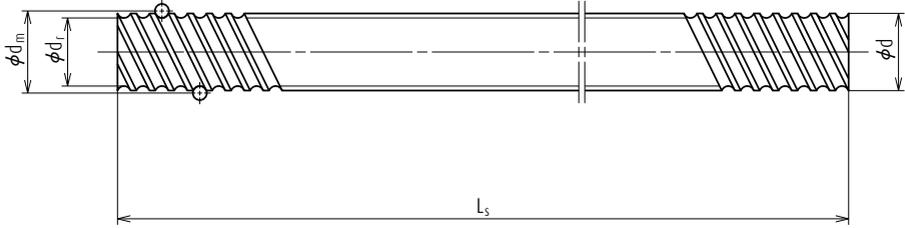

Unit: mm


| Ball nut dimensions | | | | | | | | | | | Arbor | | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease replenishing |
|---------------------|----|--------|------|----------------|-----------|-----|----------|----------|-----------|------|----------------|----------------|-----------------|-------------|-------|-----------------|--------------------|--------------------|--------------------------------|--|
| V-thread | | Length | | | Bolt hole | | Oil hole | | Nut Mass. | | Outside dia. | Bore | Standard length | | | Screw shaft No. | | | | |
| A | H | B | E | L _n | M | W | X | Q | T | (kg) | d ₀ | d ₁ | L ₀ | | | (kg) | (cm ³) | (cm ³) | | |
| 44 | 28 | 6 | 9 | 30 | - | 35 | 4.5 | M3 × 0.5 | 3.0 | 0.12 | 10.1 | 8.1 | 400 | 800 | - | RS1212A | 0.74 | - | - | |
| 44 | 28 | 6 | 9 | 30 | - | 35 | 4.5 | M3 × 0.5 | 3.0 | 0.12 | 10.1 | 8.1 | 400 | 800 | - | RS1212A | 0.74 | - | - | |
| 51 | 35 | 10 | 11 | 45 | - | 42 | 4.5 | M6 × 1 | 5.0 | 0.28 | 12.2 | 10.2 | 500 | 1 000 | 1 500 | RS1520A | 1.15 | 3.3 | 1.7 | |
| 51 | 35 | 10 | 11 | 45 | 3 | 42 | 4.5 | M6 × 1 | 5.0 | 0.28 | 12.2 | 10.2 | 500 | 1 000 | 1 500 | RS1520A | 1.15 | 3.3 | 1.7 | |
| 53 | 34 | 10 | 10 | 38 | - | 42 | 4.5 | M6 × 1 | 5.0 | 0.23 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | RS1616A | 1.37 | 2.6 | 1.3 | |
| 53 | 34 | 10 | 10 | 38 | 3 | 42 | 4.5 | M6 × 1 | 5.0 | 0.23 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | RS1616A | 1.37 | 2.6 | 1.3 | |
| 53 | 34 | 10 | 10 | 38 | - | 42 | 4.5 | M6 × 1 | 5.0 | 0.23 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | RS1616A | 1.37 | 2.6 | 1.3 | |
| 53 | 34 | 10 | 10 | 38 | 3 | 42 | 4.5 | M6 × 1 | 5.0 | 0.23 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | RS1616A | 1.37 | 2.6 | 1.3 | |
| 62 | 41 | 10 | 11.5 | 46 | - | 50 | 5.5 | M6 × 1 | 5.0 | 0.37 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A | 2.19 | 4.4 | 2.2 | |
| 62 | 41 | 10 | 11.5 | 46 | 3 | 50 | 5.5 | M6 × 1 | 5.0 | 0.37 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A | 2.19 | 4.4 | 2.2 | |
| 62 | 41 | 10 | 11.5 | 46 | - | 50 | 5.5 | M6 × 1 | 5.0 | 0.37 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A | 2.19 | 4.9 | 2.5 | |
| 62 | 41 | 10 | 11.5 | 46 | 3 | 50 | 5.5 | M6 × 1 | 5.0 | 0.37 | 17.3 | 14.9 | 500 | 1 000 | 2 000 | RS2020A | 2.19 | 4.9 | 2.5 | |
| 74 | 49 | 12 | 13 | 55 | - | 60 | 6.6 | M6 × 1 | 6.0 | 0.62 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2806A | 3.43 | 8.2 | 4.1 | |
| 74 | 49 | 12 | 13 | 55 | 3 | 60 | 6.6 | M6 × 1 | 6.0 | 0.62 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS3210A | 3.43 | 8.2 | 4.1 | |
| 74 | 49 | 12 | 13 | 55 | - | 60 | 6.6 | M6 × 1 | 6.0 | 0.62 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2525A | 3.43 | 8.9 | 4.5 | |
| 74 | 49 | 12 | 13 | 55 | 3 | 60 | 6.6 | M6 × 1 | 6.0 | 0.62 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2525A | 3.43 | 8.9 | 4.5 | |
| 92 | 60 | 12 | 16 | 70 | - | 74 | 9 | M6 × 1 | 5.5 | 1.10 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A | 5.71 | 16 | 8.0 | |
| 92 | 60 | 12 | 16 | 70 | 3 | 74 | 9 | M6 × 1 | 5.5 | 1.10 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A | 5.71 | 16 | 8.0 | |
| 92 | 60 | 12 | 16 | 70 | - | 74 | 9 | M6 × 1 | 5.5 | 1.10 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A | 5.71 | 17 | 8.5 | |
| 92 | 60 | 12 | 16 | 70 | 3 | 74 | 9 | M6 × 1 | 5.5 | 1.10 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | RS3232A | 5.71 | 17 | 8.5 | |
| 114 | 75 | 15 | 19.5 | 85 | - | 93 | 11 | M6 × 1 | 6.5 | 2.09 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A | 8.82 | 32 | 16 | |
| 114 | 75 | 15 | 19.5 | 85 | 3.5 | 93 | 11 | M6 × 1 | 6.5 | 2.09 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A | 8.82 | 32 | 16 | |
| 114 | 75 | 15 | 19.5 | 85 | - | 93 | 11 | M6 × 1 | 6.5 | 2.09 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A | 8.82 | 33 | 17 | |
| 114 | 75 | 15 | 19.5 | 85 | 3.5 | 93 | 11 | M6 × 1 | 6.5 | 2.09 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | RS4040A | 8.82 | 33 | 17 | |
| 135 | 92 | 20 | 21.5 | 107 | - | 112 | 14 | M6 × 1 | 7.0 | 3.90 | 44.0 | 40.8 | 2 000 | 3 000 | 4 000 | RS5050A | 13.81 | 64 | 32 | |
| 135 | 92 | 20 | 21.5 | 107 | 3.5 | 112 | 14 | M6 × 1 | 7.0 | 3.90 | 44.0 | 40.8 | 2 000 | 3 000 | 4 000 | RS5050A | 13.81 | 64 | 32 | |
| 135 | 92 | 20 | 21.5 | 107 | - | 112 | 14 | M6 × 1 | 7.0 | 3.90 | 44.0 | 40.8 | 2 000 | 3 000 | 4 000 | RS5050A | 13.81 | 68 | 34 | |
| 135 | 92 | 20 | 21.5 | 107 | 3.5 | 112 | 14 | M6 × 1 | 7.0 | 3.90 | 44.0 | 40.8 | 2 000 | 3 000 | 4 000 | RS5050A | 13.81 | 68 | 34 | |

5. Length of nut becomes longer (2 × M) for those with "brush" seals.

6. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


End cap type, Flanged nut (Ultra high helix lead)

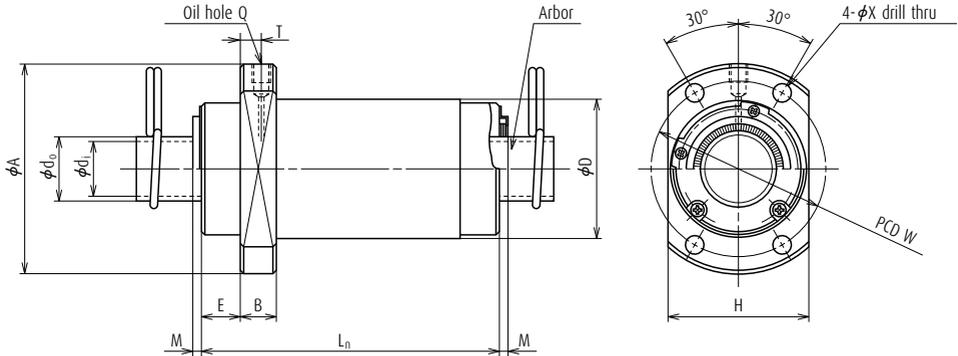

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|---------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | D | | | | |
| RNFCL 1632A2 | 16 | 32 | 2.778 | 16.65 | 13.5 | 0.7 × 4 | 4 880 | 8 330 | 0.10 | 32 |
| RNFCL 1632A2S | 16 | 32 | 2.778 | 16.65 | 13.5 | 0.7 × 4 | 4 880 | 8 330 | 0.10 | 32 |
| RNFCL 1632A3 | 16 | 32 | 2.778 | 16.65 | 13.5 | 1.7 × 2 | 5 760 | 10 300 | 0.10 | 32 |
| RNFCL 1632A3S | 16 | 32 | 2.778 | 16.65 | 13.5 | 1.7 × 2 | 5 760 | 10 300 | 0.10 | 32 |
| RNFCL 1632A6 | 16 | 32 | 2.778 | 16.65 | 13.5 | 1.7 × 4 | 10 500 | 20 500 | 0.10 | 32 |
| RNFCL 1632A6S | 16 | 32 | 2.778 | 16.65 | 13.5 | 1.7 × 4 | 10 500 | 20 500 | 0.10 | 32 |
| RNFCL 2040A2 | 20 | 40 | 3.175 | 20.75 | 17.3 | 0.7 × 4 | 7 170 | 13 200 | 0.10 | 38 |
| RNFCL 2040A2S | 20 | 40 | 3.175 | 20.75 | 17.3 | 0.7 × 4 | 7 170 | 13 200 | 0.10 | 38 |
| RNFCL 2040A3 | 20 | 40 | 3.175 | 20.75 | 17.3 | 1.7 × 2 | 8 480 | 16 500 | 0.10 | 38 |
| RNFCL 2040A3S | 20 | 40 | 3.175 | 20.75 | 17.3 | 1.7 × 2 | 8 480 | 16 500 | 0.10 | 38 |
| RNFCL 2040A6 | 20 | 40 | 3.175 | 20.75 | 17.3 | 1.7 × 4 | 15 400 | 33 100 | 0.10 | 38 |
| RNFCL 2040A6S | 20 | 40 | 3.175 | 20.75 | 17.3 | 1.7 × 4 | 15 400 | 33 100 | 0.10 | 38 |
| RNFCL 2550A2 | 25 | 50 | 3.969 | 26 | 22.0 | 0.7 × 4 | 10 700 | 20 700 | 0.12 | 46 |
| RNFCL 2550A2S | 25 | 50 | 3.969 | 26 | 22.0 | 0.7 × 4 | 10 700 | 20 700 | 0.12 | 46 |
| RNFCL 2550A3 | 25 | 50 | 3.969 | 26 | 22.0 | 1.7 × 2 | 12 700 | 26 500 | 0.12 | 46 |
| RNFCL 2550A3S | 25 | 50 | 3.969 | 26 | 22.0 | 1.7 × 2 | 12 700 | 26 500 | 0.12 | 46 |
| RNFCL 2550A6 | 25 | 50 | 3.969 | 26 | 22.0 | 1.7 × 4 | 23 000 | 53 000 | 0.12 | 46 |
| RNFCL 2550A6S | 25 | 50 | 3.969 | 26 | 22.0 | 1.7 × 4 | 23 000 | 53 000 | 0.12 | 46 |
| RNFCL 3264A3 | 32 | 64 | 4.762 | 33.25 | 28.0 | 1.7 × 2 | 17 900 | 40 200 | 0.15 | 58 |
| RNFCL 3264A3S | 32 | 64 | 4.762 | 33.25 | 28.0 | 1.7 × 2 | 17 900 | 40 200 | 0.15 | 58 |
| RNFCL 3264A6 | 32 | 64 | 4.762 | 33.25 | 28.0 | 1.7 × 4 | 32 400 | 80 300 | 0.15 | 58 |
| RNFCL 3264A6S | 32 | 64 | 4.762 | 33.25 | 28.0 | 1.7 × 4 | 32 400 | 80 300 | 0.15 | 58 |
| RNFCL 4080A3 | 40 | 80 | 6.350 | 41.75 | 35.0 | 1.7 × 2 | 29 500 | 67 900 | 0.20 | 73 |
| RNFCL 4080A3S | 40 | 80 | 6.350 | 41.75 | 35.0 | 1.7 × 2 | 29 500 | 67 900 | 0.20 | 73 |
| RNFCL 4080A6 | 40 | 80 | 6.350 | 41.75 | 35.0 | 1.7 × 4 | 53 600 | 136 000 | 0.20 | 73 |
| RNFCL 4080A6S | 40 | 80 | 6.350 | 41.75 | 35.0 | 1.7 × 4 | 53 600 | 136 000 | 0.20 | 73 |

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L0 due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by dividing the standard screw shaft length by 100 mm will be entered at end of the part number where marked with ∴.
 4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.

R series RNFL type

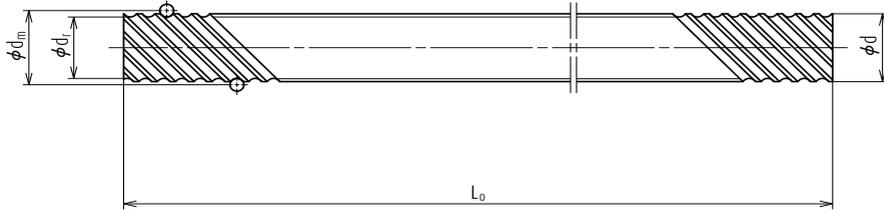

Unit: mm


| Ball nut dimensions | | | | | | | | | | | Arbor | | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing |
|---------------------|----|----|--------|----------------|-----------|----|----------|--------|-----------|--------------|-------|-----------------|-------|----------------|------------------|----------------|----------------|--------------|--------------------------------|---|
| V-thread | | | Length | | Bolt hole | | Oil hole | | Nut Mass. | Outside dia. | Bore | Standard length | | | Screws shaft No. | | | | | |
| A | H | B | E | L _n | M | W | X | Q | | | | T | (kg) | d ₀ | | d ₁ | L ₀ | | | (kg) |
| 50 | 34 | 10 | 10 | 34 | - | 41 | 4.5 | M6 × 1 | 5.5 | 0.21 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 2.4 | 1.2 |
| 50 | 34 | 10 | 10 | 34 | 3 | 41 | 4.5 | M6 × 1 | 5.5 | 0.21 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 2.4 | 1.2 |
| 50 | 34 | 10 | 10 | 66 | - | 41 | 4.5 | M6 × 1 | 5.5 | 0.33 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 3.9 | 2.0 |
| 50 | 34 | 10 | 10 | 66 | 3 | 41 | 4.5 | M6 × 1 | 5.5 | 0.33 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 3.9 | 2.0 |
| 50 | 34 | 10 | 10 | 66 | - | 41 | 4.5 | M6 × 1 | 5.5 | 0.33 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 4.1 | 2.1 |
| 50 | 34 | 10 | 10 | 66 | 3 | 41 | 4.5 | M6 × 1 | 5.5 | 0.33 | 13.5 | 11.5 | 500 | 1 000 | 1 500 | - | RS1632A | 1.34 | 4.1 | 2.1 |
| 58 | 40 | 10 | 11 | 41 | - | 48 | 5.5 | M6 × 1 | 5.5 | 0.31 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 4.1 | 2.1 |
| 58 | 40 | 10 | 11 | 41 | 3 | 48 | 5.5 | M6 × 1 | 5.5 | 0.31 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 4.1 | 2.1 |
| 58 | 40 | 10 | 11 | 81 | - | 48 | 5.5 | M6 × 1 | 5.5 | 0.53 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 6.3 | 3.2 |
| 58 | 40 | 10 | 11 | 81 | 3 | 48 | 5.5 | M6 × 1 | 5.5 | 0.53 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 6.3 | 3.2 |
| 58 | 40 | 10 | 11 | 81 | - | 48 | 5.5 | M6 × 1 | 5.5 | 0.53 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 7.0 | 3.5 |
| 58 | 40 | 10 | 11 | 81 | 3 | 48 | 5.5 | M6 × 1 | 5.5 | 0.53 | 17.3 | 14.9 | 500 | 1 000 | 1 500 | 2 000 | RS2040A | 2.15 | 7.0 | 3.5 |
| 70 | 48 | 12 | 13 | 50 | - | 58 | 6.6 | M6 × 1 | 7.0 | 0.53 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 8.4 | 4.2 |
| 70 | 48 | 12 | 13 | 50 | 3 | 58 | 6.6 | M6 × 1 | 7.0 | 0.53 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 8.4 | 4.2 |
| 70 | 48 | 12 | 13 | 100 | - | 58 | 6.6 | M6 × 1 | 7.0 | 0.91 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 14 | 7.0 |
| 70 | 48 | 12 | 13 | 100 | 3 | 58 | 6.6 | M6 × 1 | 7.0 | 0.91 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 14 | 7.0 |
| 70 | 48 | 12 | 13 | 100 | - | 58 | 6.6 | M6 × 1 | 7.0 | 0.91 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 15 | 7.5 |
| 70 | 48 | 12 | 13 | 100 | 3 | 58 | 6.6 | M6 × 1 | 7.0 | 0.91 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | - | RS2550A | 3.37 | 15 | 7.5 |
| 92 | 60 | 12 | 15.5 | 126 | - | 74 | 9 | M6 × 1 | 7.5 | 1.76 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | 4 000 | RS3264A | 5.63 | 24 | 12 |
| 92 | 60 | 12 | 15.5 | 126 | 3 | 74 | 9 | M6 × 1 | 7.5 | 1.76 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | 4 000 | RS3264A | 5.63 | 24 | 12 |
| 92 | 60 | 12 | 15.5 | 126 | - | 74 | 9 | M6 × 1 | 7.5 | 1.76 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | 4 000 | RS3264A | 5.63 | 26 | 13 |
| 92 | 60 | 12 | 15.5 | 126 | 3 | 74 | 9 | M6 × 1 | 7.5 | 1.76 | 28.0 | 25.6 | 1 000 | 2 000 | 3 000 | 4 000 | RS3264A | 5.63 | 26 | 13 |
| 114 | 75 | 15 | 19 | 158 | - | 93 | 11 | M6 × 1 | 10.0 | 3.44 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | 5 000 | RS4080A | 8.69 | 52 | 26 |
| 114 | 75 | 15 | 19 | 158 | 3.5 | 93 | 11 | M6 × 1 | 10.0 | 3.44 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | 5 000 | RS4080A | 8.69 | 52 | 26 |
| 114 | 75 | 15 | 19 | 158 | - | 93 | 11 | M6 × 1 | 10.0 | 3.44 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | 5 000 | RS4080A | 8.69 | 55 | 28 |
| 114 | 75 | 15 | 19 | 158 | 3.5 | 93 | 11 | M6 × 1 | 10.0 | 3.44 | 35.0 | 31.8 | 2 000 | 3 000 | 4 000 | 5 000 | RS4080A | 8.69 | 55 | 28 |

5. Length of nut becomes longer (2 x M) for those with "brush" seals.

6. Internal spatial volume of nut and volume of grease to be replenished are values for ball screws with seals. Recommended amount for replenishing is approximately 50% of nut's internal space. For ball screws without seals, apply grease to screw shaft surface or move ball nut by hand while filling them with grease so that grease permeates all areas. See page D16 for details.

Ball screws for transfer equipment


Return tube type, Square nut (Fine, Medium lead)

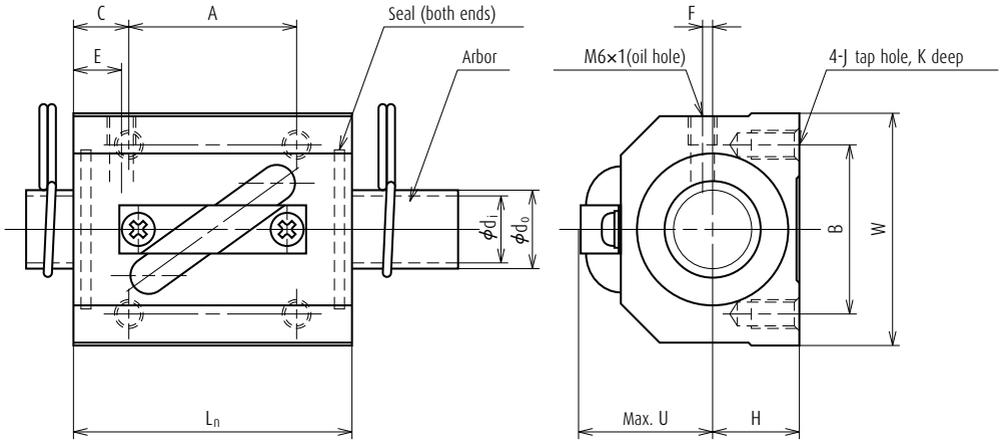

| Ball nut No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective balls turns | Basic load rating (N) | | Axial play Max. | Ball nut dimensions |
|-----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|-----------------------|-----------------------|------------------------|-----------------|------------------------|
| | | | | | | | Turns × Circuits | Dynamic C _a | | Static C _{0a} |
| | | | | | | L _n | | | | |
| RNSTL 1404A3.5S | 14 | 4 | 2.778 | 14.5 | 11.5 | 3.5 × 1 | 6 310 | 10 800 | 0.10 | 38 |
| RNSTL 1405A2.5S | 14 | 5 | 3.175 | 14.5 | 11.0 | 2.5 × 1 | 6 170 | 9 940 | 0.10 | 38 |
| RNSTL 1808A3.5S | 18 | 8 | 4.762 | 18.5 | 13.6 | 3.5 × 1 | 15 500 | 26 200 | 0.15 | 56 |
| RNSTL 2005A2.5S | 20 | 5 | 3.175 | 20.5 | 17.0 | 2.5 × 1 | 7 500 | 14 200 | 0.10 | 38 |
| RNSTL 2010A2.5S | 20 | 10 | 4.762 | 21.25 | 16.2 | 2.5 × 1 | 12 700 | 21 600 | 0.15 | 58 |
| RNSTL 2505A2.5S | 25 | 5 | 3.175 | 25.5 | 22.0 | 2.5 × 1 | 8 340 | 18 100 | 0.10 | 35 |
| RNSTL 2510A5S | 25 | 10 | 6.35 | 26 | 19.0 | 2.5 × 2 | 37 300 | 69 800 | 0.20 | 94 |
| RNSTL 2806A2.5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 1 | 8 760 | 20 200 | 0.10 | 42 |
| RNSTL 2806A5S | 28 | 6 | 3.175 | 28.5 | 25.0 | 2.5 × 2 | 15 900 | 40 500 | 0.10 | 67 |
| RNSTL 3210A2.5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 1 | 23 100 | 45 900 | 0.20 | 64 |
| RNSTL 3210A5S | 32 | 10 | 6.35 | 33.75 | 27.0 | 2.5 × 2 | 42 000 | 91 800 | 0.20 | 94 |
| RNSTL 3610A2.5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 1 | 24 700 | 50 800 | 0.20 | 64 |
| RNSTL 3610A5S | 36 | 10 | 6.35 | 37 | 30.0 | 2.5 × 2 | 44 900 | 102 000 | 0.20 | 96 |
| RNSTL 4512A5S | 45 | 12 | 7.144 | 46.5 | 39.0 | 2.5 × 2 | 58 500 | 147 000 | 0.23 | 115 |

- Notes**
1. Actual screw shaft length may become slightly longer than nominal length L₀ due to manufacturing tolerance.
 2. Nut assembly with arbor and screw shaft are separate at time of delivery.
 3. Value obtained by dividing the standard screw shaft length by 100 mm will be entered at end of the part number where marked with . . .

R series RNSTL type

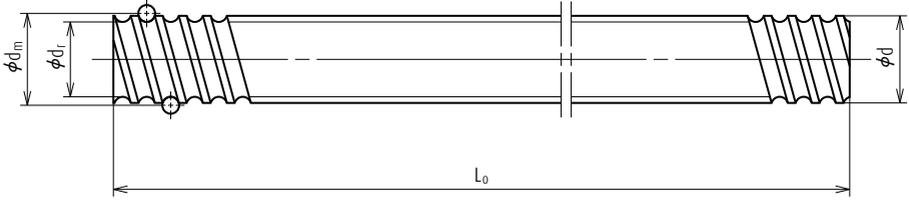

Unit: mm

| Ball nut dimensions | | | | | | | | | | | Arbor | | Screw shaft | | | | Shaft mass/m | Internal spatial volume of nut | Standard volume of grease re-plenishing |
|---------------------|---------------|-----------|----|------|-----|----|----------|---|----|------|----------------|--------------------|-------------|-----------------|-------|---------|--------------|--------------------------------|---|
| Width | Center height | Bolt hole | | | | | Oil hole | | | | Nut Mass. (kg) | Outside dia. d_0 | Bore d_1 | Standard length | | | | | |
| | | W | H | A | B | C | J | K | E | F | | | | U | L_0 | | | | |
| 34 | 13 | 22 | 26 | 8 | M4 | 7 | 7 | 3 | 20 | 0.20 | 11.5 | 9.5 | 500 | 1 000 | - | RS1404A | 1.02 | 1.6 | 0.8 |
| 34 | 13 | 22 | 26 | 8 | M4 | 7 | 7 | 3 | 21 | 0.20 | 11.0 | 9.0 | 500 | 1 000 | - | RS1405A | 1.00 | 1.8 | 0.9 |
| 48 | 17 | 35 | 35 | 10.5 | M6 | 10 | 8 | 3 | 26 | 0.31 | 13.6 | 11.6 | 500 | 1 000 | 1 500 | RS1808A | 1.60 | 3.4 | 1.7 |
| 48 | 17 | 22 | 35 | 8 | M6 | 9 | 6 | 2 | 27 | 0.24 | 17.0 | 14.6 | 500 | 1 000 | 2 000 | RS2005A | 2.17 | 2.5 | 1.3 |
| 48 | 18 | 35 | 35 | 11.5 | M6 | 10 | 10 | 2 | 28 | 0.35 | 16.2 | 13.8 | 500 | 1 000 | 2 000 | RS2010A | 2.18 | 6.3 | 3.2 |
| 60 | 20 | 22 | 40 | 6.5 | M8 | 10 | 6 | 0 | 27 | 0.31 | 22.0 | 19.6 | 1 000 | 2 000 | 2 500 | RS2505A | 3.47 | 2.6 | 1.3 |
| 60 | 23 | 60 | 40 | 17 | M8 | 12 | 10 | 0 | 32 | 1.32 | 19.0 | 16.6 | 1 000 | 2 000 | 2 500 | RS2510A | 3.13 | 18 | 9.0 |
| 60 | 22 | 18 | 40 | 12 | M8 | 12 | 8 | 0 | 32 | 0.65 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A | 4.47 | 3.5 | 1.8 |
| 60 | 22 | 40 | 40 | 13.5 | M8 | 12 | 8 | 0 | 32 | 1.04 | 25.0 | 22.6 | 1 000 | 2 000 | 2 500 | RS2806A | 4.47 | 7.0 | 3.5 |
| 70 | 26 | 45 | 50 | 9.5 | M8 | 12 | 10 | 0 | 38 | 1.12 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A | 5.53 | 18 | 9.0 |
| 70 | 26 | 45 | 50 | 17 | M8 | 12 | 10 | 0 | 38 | 1.75 | 27.0 | 24.6 | 1 000 | 2 000 | 3 000 | RS3210A | 5.53 | 27 | 14 |
| 86 | 29 | 45 | 60 | 9.5 | M10 | 16 | 11 | 0 | 41 | 1.76 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A | 6.91 | 18 | 9.0 |
| 86 | 29 | 60 | 60 | 18 | M10 | 16 | 11 | 0 | 41 | 2.64 | 30.0 | 27.6 | 1 000 | 2 000 | 3 000 | RS3610A | 6.91 | 27 | 14 |
| 100 | 36 | 75 | 75 | 20 | M12 | 20 | 13 | 0 | 46 | 1.22 | 39.0 | 35.8 | 2 000 | 3 000 | 4 000 | RS4512A | 11.16 | 47 | 24 |

4. Items in stock do not have surface treatment. For details of standard stock products, contact NSK.


5. Seal for those with shaft diameter of 14 mm or less is made of synthetic resin. Seal for those of 16 mm or more is a "Brush" seal.

6. Recommended quantity of grease is about 50% of ball nut's internal space. See page D16 for details.

B-3-1.7 Accessories

Accessories to use with NSK ball screws are available.

Table 1 Support unit categories

| Application | | Shape | Support side | Bearing in use | Bearing bore, Bearing seat diameter | Page |
|-----------------------------|--------|---|---------------------|------------------------------|--|-----------|
| Small equipment, light load | Square | WBK**S-01* | Fixed support side | Angular contact ball bearing | $\phi 4 - \phi 25$ | B395 - |
| | |  | | | | |
| Small equipment, light load | Square | WBK**S-01* | Simple support side | Deep groove ball bearing | $\phi 6 - \phi 25$ | B399 - |
| | |  | | | | |
| Small equipment, light load | Square | WBK**SF-01 | Simple support side | Deep groove ball bearing | $\phi 12, \phi 15$ (exclusive for VFA type) | B402 |
| | |  | | | | |

1. Classification

Ball screw support units are classified into categories by their shape (Table 1). Select the type that best suits your particular needs.

2. Features

› Bearings and seals

On the fixed support side, the angular contact ball bearing is used. It has great rigidity and low friction torque, which match the rigidity of the ball screw. The thrust angular contact ball bearing with high precision and great rigidity is another choice for the fixed support side.

An oil seal is installed to the fixed support side used with an angular contact ball bearing. Fine clearance may occur with this seal.

A deep-groove ball bearing with a shield on both sides is used on the simple support side.

› Lock nut is provided.

A lock nut with fine grade finish is provided to fix the bearing with high precision.

The lock nuts are designed to be difficult to loosen, but they can still loosen if subjected to strong mechanical vibration. If necessary, this should be prevented by applying threadlocking adhesive or taking similar precautions.

| Application | | Shape | Support side | Bearing in use | Bearing bore, Bearing seat diameter | Page |
|---------------------------------------|-------|--|--------------------|---|---|-----------|
| Small equipment, light load | Round | WBK**R-11 (Support kit)  | Fixed support side | Deep groove ball bearing (arranged to have angular contact) | $\phi 4, \phi 6$ (exclusive for RMA and RMS types) | B401 |
| Small equipment, light load | Round | WBK**-11*  | Fixed support side | Angular contact ball bearing | $\phi 4 - \phi 25$ | B397 - |
| Machine tools, high speed, heavy load | Round | WBK**DF ^o -31H  | Fixed support side | Thrust angular contact ball bearing | $\phi 17 - \phi 40$ | B407 - |

3. Reference number coding

(For light load)

Example: WBK 08 S - 01 A

Product code for support unit

Nominal size code*

Mounting code

No code: Fixed support unit

S: Simple support unit

SF: Simple support unit (for FSS and VFA)

R: Fixed support unit (support kit for miniature ball screws)

No code or A: For general use

B: Low-profile type (only for square type)

C: For clean environment use

M: Miniature general-purpose use

W: Lost-wax product

01: Square type

11: Round type

*) In case of simple support unit, please note that the nominal size code of 12 or less does not strictly represent internal bore of bearing in millimeters. Please refer to the dimensional table for internal bore of bearing.

(For high speed and heavy load)

Example: WBK 25 DF - 31 H

Product code for support unit

Nominal size code (internal bore of bearing)

H: High speed type

Bearing combination code

DF: Face to face duplex combination

DFD: Face to face triplex combination

DFF: Face to face quadruplex combination

(1) Support Units for Light Load and Small Equipment

Support units for light load and small equipment provide both fixed and support side bearing assemblies to support screw shafts. They provide all required parts such as bearing locknuts so that you can mount them directly to NSK standard ball screws, of which shaft ends are machined. Please refer to the dimensions listed on the dimension table for the configuration of standard screw shaft ends for NSK standard ball screws with blank shaft ends. For ball screws for transfer equipment, you require optional spacers when mounting fixed support side support units.

(a) Features

- › Prompt delivery
Support units are standard products.
- › Best selection of bearings for your application
General use support units for fixed support side are equipped with highly rigid angular contact ball bearings that have been assembled with proper preload, and packed with the appropriate volume of grease. On the other hand, clean support units for fixed support side uses low dust emission grease, and low torque special bearings. Sealed deep groove ball bearings are used for simple support side units for both general and clean environment use.


Accessories

> Accessories

Support units provide everything necessary for mounting ball screws to machines.

(Please refer to the table below.)

* Do not disassemble fixed support side units as they are equipped with bearings and oil seals.

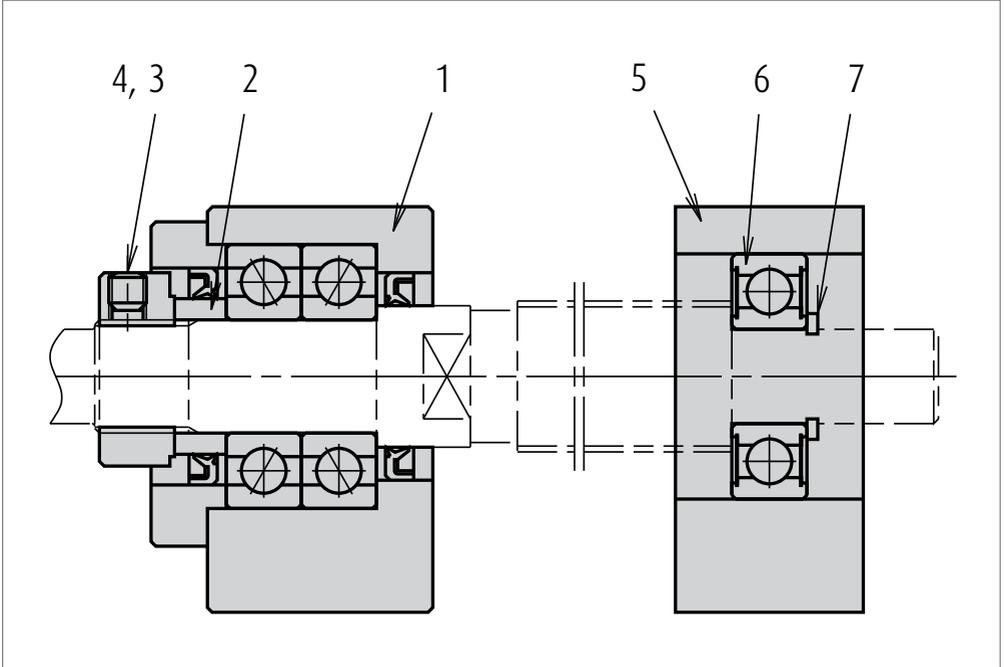

> Antirust treatment

The table on the right shows the surface treatment for the bearing housing, and material of small parts.



| Fixed support side | | Simple support side | |
|--------------------|--------------------------|---------------------|-----------------|
| Part No. | Name of parts | Part No. | Name of parts |
| 1 | Bearing housing | 5 | Bearing housing |
| 2 | Spacer | 6 | Bearing |
| 3 | Locknut | 7 | Snap ring |
| 4 | Set screw with brass pad | | |

| | General support unit |
|-----------------------|------------------------------------|
| Bearings and grease | Angular contact ball bearings, PS2 |
| Surface treatment | Black oxide |
| Screws and snap rings | Standard material |





(b) Features of Clean Support Unit

- > Outstanding low dust emission
Clean support unit uses "NSK clean grease LG2" which has a proven feature of low dust emission. It reduces dust emission to 1/10 of general support units.
- > Low torque
It features low torque characteristics because of special bearings. (50% lower than general support unit.)
- > High antirust specification
Low temperature chrome plating is applied to bearing housings, retaining plates, locknuts and spacers to improve antirust properties. Moreover, bolts and snap rings are made of stainless steel.
The table below shows the surface treatment of the bearing housing and material of small parts.

| | Clean support unit |
|----------------------------------|--------------------------------|
| Bearing • grease | Special bearings, LG2 |
| Surface treatment | Low temperature chrome plating |
| Set screw and snap ring material | Stainless steel |

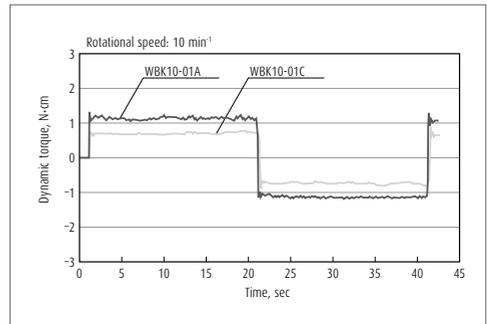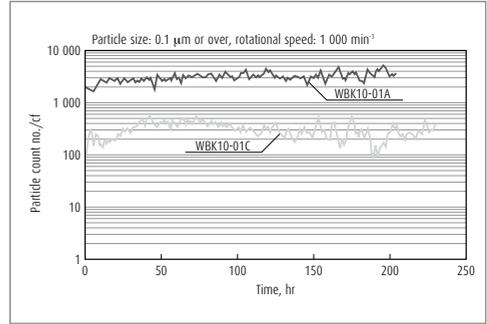

Support Units for Light Load and Small Equipment

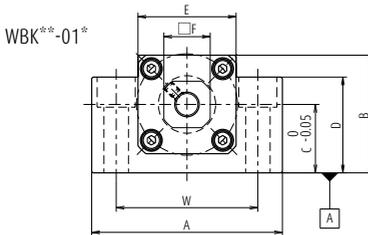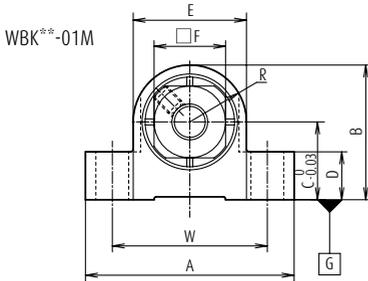



Fixed support side support unit (square type)

| Reference No. | Use | d ₁ | A | B | C | D | E | F | L | J | K | R |
|---------------|-------------------|----------------|-----|------|------|----|----|----|------|------|-----|-----|
| WBK04-01M | General | 4 | 27 | 17 | 10 | 6 | 14 | 10 | — | 14 | 5.5 | 7 |
| WBK06-01M | General | 6 | 35 | 22.5 | 13 | 8 | 19 | 12 | — | 17 | 7.5 | 9.5 |
| WBK06-01A*1 | General | 6 | 42 | 25 | 13 | 20 | 18 | 12 | 20 | 20 | 5.5 | — |
| WBK08-01A*1 | General | 8 | 52 | 32 | 17 | 26 | 25 | 14 | 23 | 23 | 7 | — |
| WBK08-01B | Low type | 8 | 62 | 31 | 15.5 | 31 | — | 14 | 21.5 | 25.5 | 4.5 | — |
| WBK08-01C*1 | Clean environment | 8 | 52 | 32 | 17 | 26 | 25 | 14 | 23 | 23 | 7 | — |
| WBK10-01A | General | 10 | 70 | 43 | 25 | 35 | 36 | 17 | 24 | 30 | 5.5 | — |
| WBK10-01B | Low type | 10 | 70 | 38 | 20 | 38 | — | 17 | 24 | 30 | 5.5 | — |
| WBK10-01C | Clean environment | 10 | 70 | 43 | 25 | 35 | 36 | 17 | 24 | 30 | 5.5 | — |
| WBK12-01A | General | 12 | 70 | 43 | 25 | 35 | 36 | 19 | 24 | 30 | 5.5 | — |
| WBK12-01B | Low type | 12 | 70 | 38 | 20 | 38 | — | 19 | 24 | 30 | 5.5 | — |
| WBK12-01C | Clean environment | 12 | 70 | 43 | 25 | 35 | 36 | 19 | 24 | 30 | 5.5 | — |
| WBK15-01A | General | 15 | 80 | 50 | 30 | 40 | 41 | 22 | 25 | 31 | 12 | — |
| WBK15-01B | Low type | 15 | 80 | 42 | 22 | 42 | — | 22 | 25 | 31 | 12 | — |
| WBK15-01C | Clean environment | 15 | 80 | 50 | 30 | 40 | 41 | 22 | 25 | 31 | 12 | — |
| WBK17-01A | General | 17 | 86 | 64 | 39 | 55 | 50 | 24 | 35 | 44 | 7 | — |
| WBK20-01 | General | 20 | 95 | 58 | 30 | 45 | 56 | 30 | 42 | 52 | 10 | — |
| WBK25-01W | General | 25 | 105 | 68 | 35 | 25 | 66 | 36 | 48 | 61 | 13 | — |


Notes

1. Use datum surface A for mounting to machine base.
2. Tighten set screw after locknut has been adjusted and tightened.
3. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
4. Deep groove ball bearing and snap ring are also provided for simple support side. (except WBK04-01M and WBK06-01M)

Support Unit (Support Units for Light Load and Small Equipment)



View S (WBK06 - 15)



View S (WBK17 - 25)

| Reference No. | Tightening torque (reference) [N·cm] | |
|-----------------------|--------------------------------------|-----------|
| | Locknut | Set screw |
| WBK04- ^{01A} | 100 | 69 (M3) |
| WBK06- ^{01A} | 190 | 69 (M3) |
| WBK08- ^{01A} | 230 | 69 (M3) |
| WBK10- ^{01A} | 280 | 147 (M4) |
| WBK12- ^{01A} | 630 | 147 (M4) |
| WBK15- ^{01A} | 790 | 147 (M4) |
| WBK17- ^{01A} | 910 | 147 (M4) |
| WBK20- ^{01A} | 1670 | 147 (M4) |
| WBK25- ^{01A} | 2060 | 490 (M6) |

Unit: mm

| T | U | N | Counterbore dimensions | | | | | | | Mass (kg) | Locknut screw M | Attached bearing for support side |
|----|-----|-----|------------------------|----|----|----|-----|-----|----|--------------|-----------------------|--------------------------------------|
| | | | H | P | Q | W | X | Y | Z | | | |
| 9 | 2.5 | 2 | 7 | — | — | 21 | 3.5 | — | — | 0.03 | M4×0.5 | — |
| 12 | 2.5 | 2.5 | 8.5 | — | — | 26 | 5.5 | — | — | 0.05 | M6×0.75 | — |
| — | — | 3.5 | 10 | — | — | 30 | 5.5 | 9.5 | 11 | 0.15 | M6×0.75 | — |
| — | — | 4 | 11.5 | — | — | 38 | 6.6 | 11 | 12 | 0.25 | M8×1 | 606ZZ |
| — | — | 3.5 | 11 | — | — | 46 | 9 | 14 | 18 | 0.3 | M8×1 | 606ZZ |
| — | — | 4 | 11.5 | — | — | 38 | 6.6 | 11 | 12 | 0.25 | M8×1 | 606ZZ |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 11 | 0.5 | M10×1 | 608ZZ |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 19 | 0.45 | M10×1 | 608ZZ |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 11 | 0.5 | M10×1 | 608VV |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 11 | 0.5 | M12×1 | 6000ZZ |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 19 | 0.4 | M12×1 | 6000ZZ |
| — | — | 6 | 12 | — | — | 52 | 9 | 14 | 11 | 0.5 | M12×1 | 6000VV |
| — | — | 5 | 12.5 | — | — | 60 | 11 | 17 | 15 | 0.7 | M15×1 | 6002ZZ |
| — | — | 5 | 12.5 | — | — | 60 | 11 | 17 | 23 | 0.6 | M15×1 | 6002ZZ |
| — | — | 5 | 12.5 | — | — | 60 | 11 | 17 | 15 | 0.7 | M15×1 | 6002VV |
| — | — | 7 | — | 19 | 8 | 68 | 9 | 14 | 11 | 1.3 | M17×1 | 6203ZZ |
| — | — | 10 | — | 22 | 10 | 75 | 11 | 17 | 15 | 1.4 | M20×1 | 6204ZZ |
| — | — | 14 | — | 30 | 9 | 85 | 11 | — | — | 1.9 | M25×1.5 | 6205ZZ |



5. Bearings for WBK04-01M and WBK06-01M are equipped with non-contact metal shield.

*1) For retaining cover side of WBK06-01A, WBK08-01A, and WBK08-01C, there are no seals.



6. Contact NSK if the rotational speed is 50 min⁻¹ and below.

Accessories

WBK** -11M



WBK** -11*



View X-X (example 1)


Fixed support side support unit (round type)

| Reference No. | Use | d ₁ | A | C | D ₁ | D ₂ | E | H | L | K | F | N |
|---------------|-------------------|----------------|----|----|----------------|----------------|------|------|-----|-----|-----|-----|
| WBK04-11M | General | 4 | 14 | 26 | 14 | 14 | 13.5 | 8.5 | 7 | 1.5 | 5.5 | 6.6 |
| WBK06-11M | General | 6 | 19 | 34 | 19 | 18.5 | 17 | 12 | 9.5 | 2.5 | 7.5 | 8 |
| WBK06-11* | General | 6 | 28 | 35 | 22 | — | 20 | 13 | 9.5 | 3.5 | 5.5 | 6.5 |
| WBK08-11B | High-load type | 8 | 42 | 52 | 34 | — | 25.5 | 15.5 | 12 | 3.5 | 4.5 | 7 |
| WBK08-11* | General | 8 | 35 | 43 | 28 | — | 23 | 14 | 10 | 4 | 7 | 8 |
| WBK08-11C* | Clean environment | 8 | 35 | 43 | 28 | — | 23 | 14 | 10 | 4 | 7 | 8 |
| WBK10-11 | General | 10 | 42 | 52 | 34 | — | 27 | 17 | 12 | 5 | 7.5 | 8.5 |
| WBK10-11C | Clean environment | 10 | 42 | 52 | 34 | — | 27 | 17 | 12 | 5 | 7.5 | 8.5 |
| WBK12-11 | General | 12 | 44 | 54 | 36 | — | 27 | 17 | 12 | 5 | 7.5 | 8.5 |
| WBK12-11C | Clean environment | 12 | 44 | 54 | 36 | — | 27 | 17 | 12 | 5 | 7.5 | 8.5 |
| WBK15-11 | General | 15 | 52 | 63 | 40 | — | 32 | 17 | 11 | 6 | 12 | 14 |
| WBK15-11C | Clean environment | 15 | 52 | 63 | 40 | — | 32 | 17 | 11 | 6 | 12 | 14 |
| WBK20-11 | General | 20 | 68 | 85 | 57 | — | 52 | 30 | 20 | 10 | 10 | 14 |
| WBK25-11 | General | 25 | 79 | 98 | 63 | — | 57 | 30 | 20 | 10 | 13 | 20 |

Notes

1. Tighten set screw after locknut has been adjusted and tightened.
2. Insert brass pad provided with unit into locknut set screw hole, then insert and tighten the set screw.
3. Deep groove ball bearing and snap ring are also provided for simple support side. (except WBK04-11M and WBK06-11M)

Support Unit (Support Units for Light Load and Small Equipment)

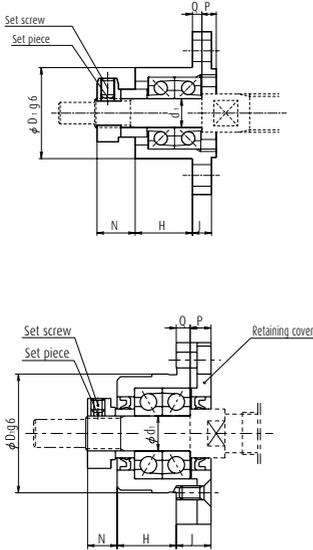

(example 2)

| Reference No. | Tightening torque (reference) [N·cm] | |
|-----------------------|--------------------------------------|-----------|
| | Locknut | Set screw |
| WBK04- ^{01M} | 100 | 69 (M3) |
| WBK06- ^{01M} | 190 | 69 (M3) |
| WBK08- ^{01M} | 230 | 69 (M3) |
| WBK10- ^{01M} | 280 | 147 (M4) |
| WBK12- ^{01M} | 630 | 147 (M4) |
| WBK15- ^{01M} | 790 | 147 (M4) |
| WBK17- ^{01M} | 910 | 147 (M4) |
| WBK20- ^{01M} | 1670 | 147 (M4) |
| WBK25- ^{01M} | 2060 | 490 (M6) |


Unit: mm

| U | P | Q | Counterbore dimensions | | | | | Mass (kg) | Locknut screw M | Attached bearing for support side |
|----|-----|-----|------------------------|----|-----|-----|-----|--------------|--------------------|--------------------------------------|
| | | | J | W | X | Y | Z | | | |
| 0 | 2.6 | 2.4 | 3 | 20 | 3.5 | — | — | 0.02 | M4×0.5 | — |
| 12 | 3 | 2 | 4 | 26 | 4.5 | — | — | 0.04 | M6×0.75 | — |
| 12 | 4.5 | 2.5 | 7 | 28 | 2.9 | 5.5 | 3.5 | 0.1 | M6×0.75 | — |
| 14 | 6 | 4 | 10 | 42 | 4.5 | 8 | 4 | 0.2 | M8×1 | 606ZZ |
| 14 | 5 | 4 | 9 | 35 | 3.4 | 6.5 | 4 | 0.15 | M8×1 | 606ZZ |
| 14 | 5 | 4 | 9 | 35 | 3.4 | 6.5 | 4 | 0.15 | M8×1 | 606VV |
| 17 | 6 | 4 | 10 | 42 | 4.5 | 8 | 4 | 0.2 | M10×1 | 608ZZ |
| 17 | 6 | 4 | 10 | 42 | 4.5 | 8 | 4 | 0.2 | M10×1 | 608VV |
| 19 | 6 | 4 | 10 | 44 | 4.5 | 8 | 4 | 0.25 | M12×1 | 6000ZZ |
| 19 | 6 | 4 | 10 | 44 | 4.5 | 8 | 4 | 0.25 | M12×1 | 6000VV |
| 22 | 8 | 7 | 15 | 50 | 5.5 | 9.5 | 6 | 0.4 | M15×1 | 6002ZZ |
| 22 | 8 | 7 | 15 | 50 | 5.5 | 9.5 | 6 | 0.4 | M15×1 | 6002VV |
| 30 | 14 | 8 | 22 | 70 | 6.6 | 11 | 10 | 1.1 | M20×1 | 6204ZZ |
| 36 | 17 | 10 | 27 | 80 | 9 | 15 | 13 | 1.5 | M25×1.5 | 6205ZZ |

4. Bearings for WBK04-01M and WBK06-01M are equipped with non-contact metal shield.

*For retaining cover side of WBK06-01A, WBK08-01A, and WBK08-01C, there are no seals.

5. Contact NSK if the rotational speed is 50 min⁻¹ and below.

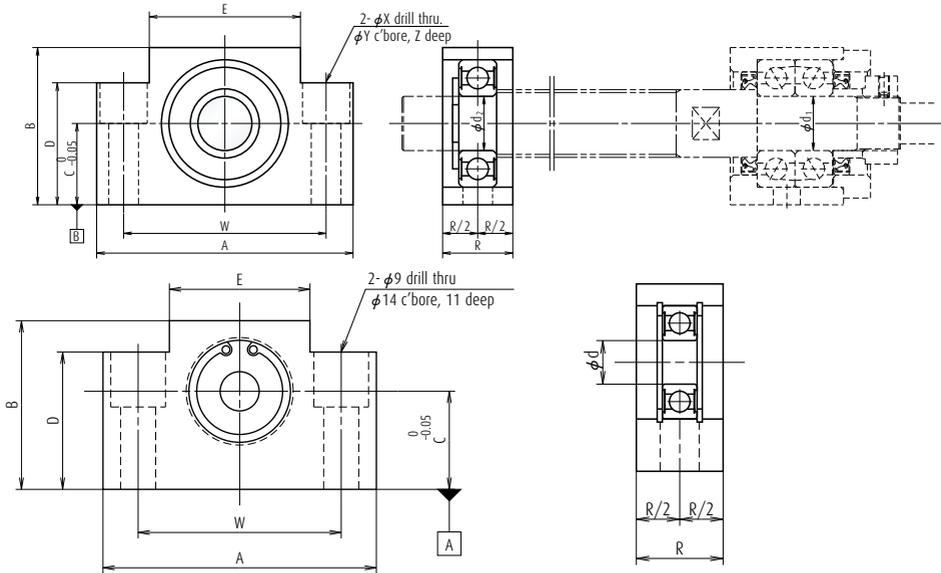

Simple support side support unit (square type)

Unit: mm

| Reference No. | Use | d ₂ | A | B | C | D | E | R | Counterbore dimensions | | | | Mass (kg) |
|---------------------------|-------------------|----------------|-----|----|------|----|----|----|------------------------|-----|----|----|-----------|
| | | | | | | | | | W | X | Y | Z | |
| WBK08S-01 | General | 6 | 52 | 32 | 17 | 26 | 25 | 15 | 38 | 6.6 | 11 | 12 | 0.15 |
| WBK08S-01B | Low type | 6 | 62 | 31 | 15.5 | 31 | — | 16 | 46 | 9 | 14 | 18 | 0.2 |
| WBK08S-01C | Clean environment | 6 | 52 | 32 | 17 | 26 | 25 | 15 | 38 | 6.6 | 11 | 12 | 0.15 |
| WBK10S-01 | General | 8 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.4 |
| WBK10S-01C | Clean environment | 8 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.4 |
| WBK12S-01 | General | 10 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.35 |
| WBK12S-01B | Low type | 10 | 70 | 38 | 20 | 38 | — | 20 | 52 | 9 | 14 | 19 | 0.4 |
| WBK12S-01C | Clean environment | 10 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.35 |
| WBK12SF-01 ^{*2} | General | 12 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.3 |
| WBK12SF-01B ^{*1} | Low type | 12 | 62 | 31 | 15.5 | 31 | — | 18 | 46 | 9 | 14 | 18 | 0.2 |
| WBK15S-01 | General | 15 | 80 | 50 | 30 | 40 | 41 | 20 | 60 | 9 | 14 | 11 | 0.45 |
| WBK15S-01B | Low type | 15 | 80 | 42 | 22 | 42 | — | 20 | 60 | 9 | 14 | 23 | 0.4 |
| WBK15S-01C | Clean environment | 15 | 80 | 50 | 30 | 40 | 41 | 20 | 60 | 9 | 14 | 11 | 0.45 |
| WBK15SF-01 ^{*2} | General | 15 | 70 | 43 | 25 | 35 | 36 | 20 | 52 | 9 | 14 | 11 | 0.3 |
| WBK15SF-01B ^{*1} | Low type | 15 | 70 | 38 | 20 | 38 | — | 18 | 52 | 9 | 14 | 19 | 0.3 |
| WBK17S-01 | General | 17 | 86 | 64 | 39 | 55 | 50 | 23 | 68 | 9 | 14 | 11 | 0.8 |
| WBK20S-01 | General | 20 | 95 | 58 | 30 | 45 | 56 | 26 | 75 | 11 | 17 | 15 | 0.8 |
| WBK20SF-01B | Low type | 20 | 80 | 42 | 22 | 42 | — | 22 | 60 | 11 | 17 | 23 | 0.4 |
| WBK25S-01W | General | 25 | 105 | 68 | 35 | 25 | 66 | 30 | 85 | 11 | — | — | 0.9 |
| WBK25SF-01 ^{*1} | General | 25 | 95 | 58 | 30 | 45 | 56 | 22 | 75 | 11 | 17 | 15 | 0.55 |

Notes

1. Use datum surface B for mounting to machine base.
2. For reference No. 12 or lower numbers, note that the reference numbers and inner dimensions of the bearing are different.
3. WBK ** SF is a type supporting screw shaft OD.
4. See page B400 for bearing reference number and the basic dynamic load rating in the radial direction.
5. *1 is exclusive for FSS type.
6. *2 is exclusive for VFA type.

Support Unit (Support Units for Light Load and Small Equipment)

Specifications of support unit

| Fixed support side support unit | | | | | | Reference No. | Bearing reference No. | Radial direction Basic dynamic load rating C [N] |
|---------------------------------|-------------------|----------------------------------|----------------|-----------------|--------------------------------|---------------|-----------------------|--|
| Reference No. | Use | Axial direction | | | Maximum starting torque [N·cm] | | | |
| | | Basic dynamic load rating Ca [N] | Load limit [N] | Rigidity [N/μm] | | | | |
| WBK04-01M | General | 1 470 | 464 | 39 | 0.2 | — | — | — |
| WBK04-11M | General | 1 470 | 464 | 39 | 0.2 | — | — | — |
| WBK06-01A | General | 2 670 | 1 040 | 28 | 0.49 | — | — | — |
| WBK06-01M | General | 2 760 | 854 | 60 | 0.35 | — | — | — |
| WBK06-11 | General | 2 670 | 1 040 | 28 | 0.49 | — | — | — |
| WBK06-11M | General | 2 760 | 854 | 60 | 0.35 | — | — | — |
| WBK08-01A | General | 4 400 | 1 450 | 49 | 0.88 | WBK08S-01 | 606ZZ | 2 260 |
| WBK08-01B | Low type | 6 600 | 2 730 | 94 | 1.9 | WBK08S-01B | 606ZZ | 2 260 |
| WBK08-01B | Low type | 6 600 | 2 730 | 94 | 1.9 | WBK12SF-01B*1 | 6801ZZ | 1 920 |
| WBK08-01C | Clean environment | 3 100 | 1 100 | 36 | 0.52 | WBK08S-01C | 606VV | 2 260 |
| WBK08-11 | General | 4 400 | 1 450 | 49 | 0.88 | WBK08S-01 | 606ZZ | 2 260 |
| WBK08-11B | High load | 6 600 | 2 730 | 94 | 1.9 | — | 606ZZ | 2 260 |
| WBK08-11C | Clean environment | 3 100 | 1 100 | 36 | 0.52 | WBK08S-01C | 606VV | 2 260 |
| WBK10-01A | General | 6 600 | 2 730 | 94 | 1.9 | WBK10S-01 | 608ZZ | 3 300 |
| WBK10-01A | General | 6 600 | 2 730 | 94 | 1.9 | WBK12SF-01*2 | 6001ZZ | 5 100 |
| WBK10-01B | Low type | 6 600 | 2 730 | 94 | 1.9 | — | 608ZZ | 3 300 |
| WBK10-01C | Clean environment | 4 250 | 1 364 | 50 | 1.1 | WBK10S-01C | 608VV | 3 300 |
| WBK10-11 | General | 6 600 | 2 730 | 94 | 1.9 | WBK10S-01 | 608ZZ | 3 300 |
| WBK10-11C | Clean environment | 4 250 | 1 364 | 50 | 1.1 | WBK10S-01C | 608VV | 3 300 |
| WBK12-01A | General | 7 100 | 3 040 | 104 | 2.1 | WBK12S-01 | 6000ZZ | 4 550 |
| WBK12-01A | General | 7 100 | 3 040 | 104 | 2.1 | WBK15SF-01*2 | 6902ZZ | 4 350 |
| WBK12-01B | Low type | 7 100 | 3 040 | 104 | 2.1 | WBK12S-01B | 6000ZZ | 4 550 |
| WBK12-01B | Low type | 7 100 | 3 040 | 104 | 2.1 | WBK15SF-01B*1 | 6902ZZ | 4 350 |
| WBK12-01C | Clean environment | 4 700 | 2 443 | 57 | 1.2 | WBK12S-01C | 6000VV | 4 550 |
| WBK12-11 | General | 7 100 | 3 040 | 104 | 2.1 | WBK12S-01 | 6000ZZ | 4 550 |
| WBK12-11C | Clean environment | 4 700 | 2 443 | 57 | 1.2 | WBK12S-01C | 6000VV | 4 550 |
| WBK15-01A | General | 7 600 | 3 380 | 113 | 2.4 | WBK15S-01 | 6002ZZ | 5 600 |
| WBK15-01B | Low type | 7 600 | 3 380 | 113 | 2.4 | WBK15S-01B | 6002ZZ | 5 600 |
| WBK15-01B | Low type | 7 600 | 3 380 | 113 | 2.4 | WBK20SF-01B*1 | 6804ZZ | 4 000 |
| WBK15-01C | Clean environment | 5 100 | 2 757 | 63 | 1.3 | WBK15S-01C | 6002VV | 5 600 |
| WBK15-11 | General | 7 600 | 3 380 | 113 | 2.4 | WBK15S-01 | 6002ZZ | 5 600 |
| WBK15-11C | Clean environment | 5 100 | 2 757 | 63 | 1.3 | WBK15S-01C | 6002VV | 5 600 |
| WBK17-01A | General | 13 400 | 5 800 | 120 | 3.5 | WBK17S-01 | 6203ZZ | 9 550 |
| WBK20-01 | General | 17 900 | 8 240 | 155 | 6.2 | WBK20S-01 | 6204ZZ | 12 800 |
| WBK20-01 | General | 17 900 | 8 240 | 155 | 6.2 | WBK25SF-01*1 | 6005ZZ | 10 100 |
| WBK20-11 | General | 17 900 | 8 240 | 155 | 6.2 | WBK20S-01 | 6204ZZ | 12 800 |
| WBK25-01W | General | 20 200 | 10 000 | 192 | 7.2 | WBK25S-01W | 6205ZZ | 14 000 |
| WBK25-11 | General | 20 200 | 10 000 | 192 | 7.2 | WBK25S-01W | 6205ZZ | 14 000 |
| WBK04R-11 | General | 615 | 490 | 6.5 | 0.59 | — | — | — |
| WBK06R-11 | General | 1 280 | 930 | 9 | 0.59 | — | — | — |

1. *1: Exclusive for FSS type.

2. *2: Exclusive for VFA type.


3. Permissible axial load is 0.7 times of limiting axial load.

Accessories

Support kits for ball screws for transfer equipment

Support kits are for RMA type ball screw.

In case of RMA1002 or larger rolled ball screws, please use support units for general use.

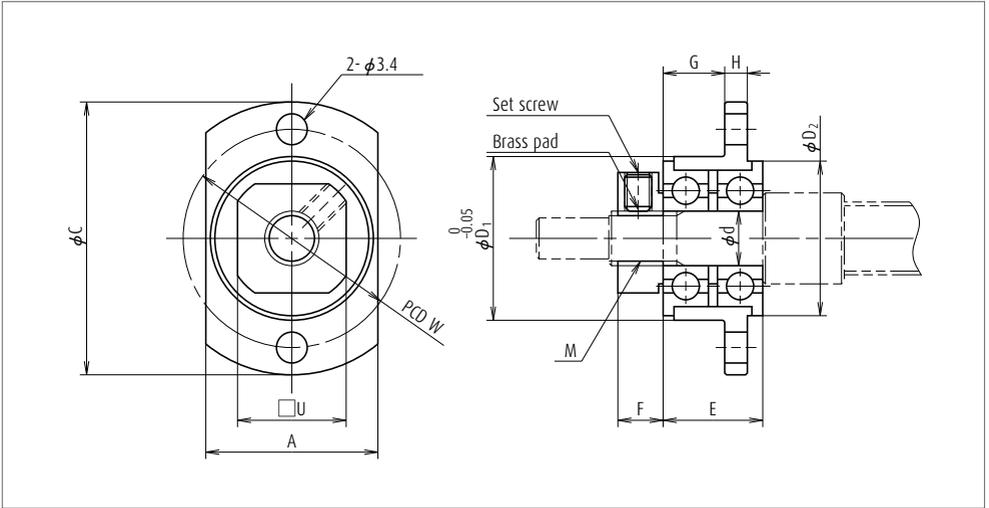

Units: mm

| Reference No. | A | C | d | D ₁ | D ₂ | E | F | G | H | W | U | M | Mass (kg) |
|---------------|----|----|---|----------------|----------------|----|---|-----|-----|----|----|---------|-----------|
| WBK04R-11 | 14 | 25 | 4 | 13 | 12.5 | 9 | 5 | 5 | 2.5 | 19 | 10 | M4×0.5 | 0.13 |
| WBK06R-11 | 19 | 30 | 6 | 18 | 17 | 11 | 5 | 6.8 | 2.5 | 24 | 12 | M6×0.75 | 0.23 |

| Reference No. | Applicable ball screw | Locknut tightening torque (reference) [N·cm] | Set screw tightening torque (reference) [N·cm] |
|---------------|-----------------------|--|--|
| WBK04R-11 | RMA0601 | 100 | 38 (M2.5) |
| WBK06R-11 | RMA0801 | 190 | 69 (M3) |
| WBK06R-11 | RMA0801.5 | 190 | 69 (M3) |
| WBK06R-11 | RMA0802 | 190 | 69 (M3) |


- Notes**
1. Oscillate bearings slowly so that they fall into place in which run-out of mounting surface is minimal, and then tighten locknut.
 2. Support kit is on provisional shaft (bolt) during shipping.
 3. When securing support unit on shaft, insert brass pad that is provided with support unit into lock nut hole, and then tighten set screw.

Support Unit (Support Units for Light Load and Small Equipment)

Spacer

When using a fixed support unit, it may require an optional spacer to have an effective shoulder surface at where the ball thread is threaded to the end of the shoulder. This is common for the R series for transporting ball screws.

Units: mm

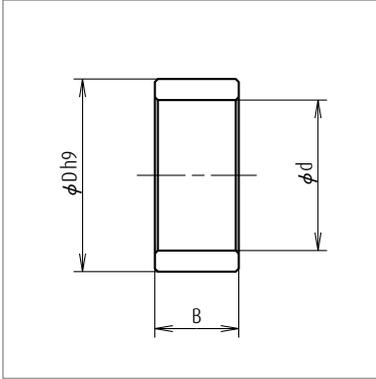


| Reference No. | Internal diameter, d | Outside diameter, d | Width B | Mass (g) | Applicable support unit |
|---------------|----------------------|---------------------|---------|----------|-------------------------|
| WBK06K | 6 | 9.5 | 5.0 | 2 | WBK06- ^{**} |
| WBK08K | 8 | 11.5 | 5.5 | 2 | WBK08- ^{**} |
| WBK10K | 10 | 14.5 | 5.5 | 4 | WBK10- ^{**} |
| WBK12K | 12 | 15.0 | 5.6 | 3 | WBK12- ^{**} |
| WBK15K | 15 | 19.5 | 10.0 | 10 | WBK15- ^{**} |
| WBK17K | 17 | 24.4 | 7.0 | 13 | WBK17- ^{**} |
| WBK20K | 20 | 25.5 | 11.0 | 17 | WBK20- ^{**} |
| WBK25K | 25 | 32.0 | 14.0 | 34 | WBK25- ^{**} |

Accessories

Screw shaft end configuration

Dimensions of the shaft end configurations for light load and small equipment support units are shown in the table below. When using a spacer with a ball screw for transporting equipment, add the width of the spacer (B from the table of spacer dimensions on page B402) to L_1 dimension below.

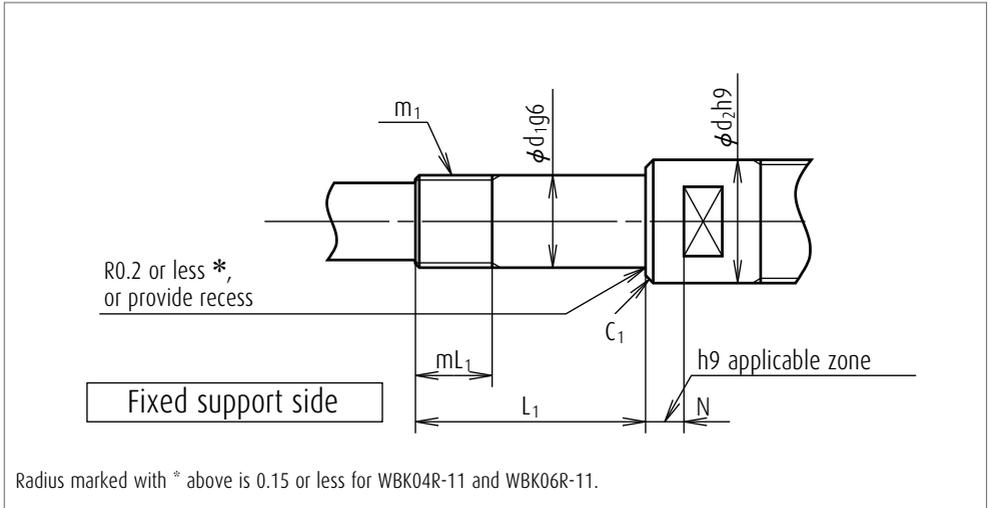


Units: mm

Fixed support side

| Reference No. | Bearing journal | | Locknut thread | | Sealing part | | Chamfer |
|----------------------|-----------------|-------|----------------|--------|--------------|-----|---------|
| | d_1 | L_1 | m_1 | mL_1 | d_2 | N | C_1 |
| WBK06- ^{**} | 6 | 22.5 | M6×0.75 | 7 | 9.5 | 3.5 | 0.2 |
| WBK08- ^{**} | 8 | 27 | M8×1 | 9 | 11.5 | 4 | 0.2 |
| WBK10- ^{**} | 10 | 30 | M10×1 | 10 | 14 | 6 | 0.2 |
| WBK12- ^{**} | 12 | 30 | M12×1 | 10 | 15 | 6 | 0.2 |
| WBK15- ^{**} | 15 | 40 | M15×1 | 15 | 19.5 | 5 | 0.3 |
| WBK17- ^{**} | 17 | 46 | M17×1 | 17 | 24 | 7 | 0.3 |
| WBK20- ^{**} | 20 | 53 | M20×1 | 16 | 25 | 10 | 0.3 |
| WBK25- ^{**} | 25 | 62 | M25×1.5 | 20 | 32 | 14 | 0.5 |
| WBK04R-11 | 4 | 15 | M4×0.5 | 7.5 | — | — | 0.3 |
| WBK06R-11 | 6 | 17 | M6×0.75 | 7.5 | — | — | 0.3 |

Support Unit (Support Units for Light Load and Small Equipment)

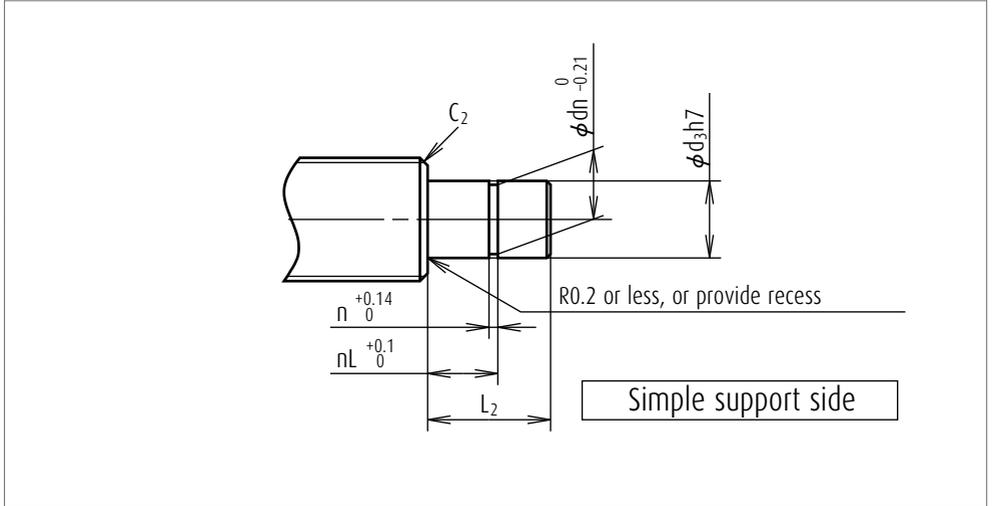

Units: mm


Simple support side

| Reference No. | Bearing journal | | Locknut thread | | | Chamfer |
|---------------------|-----------------|-------|----------------|------|-------|---------|
| | d_3 | L_2 | n | dn | nL | C_2 |
| WBK08S [※] | 6 | 9 | 0.8 | 5.7 | 6.8 | 0.2 |
| WBK10S [※] | 8 | 10 | 0.9 | 7.6 | 7.9 | 0.2 |
| WBK12S [※] | 10 | 22 | 1.15 | 9.6 | 9.15 | 0.5 |
| WBK15S [※] | 15 | 25 | 1.15 | 14.3 | 10.15 | 0.5 |
| WBK17S [※] | 17 | 16 | 1.15 | 16.2 | 13.15 | 0.5 |
| WBK20S [※] | 20 | 19 | 1.35 | 19 | 15.35 | 0.5 |
| WBK25S [※] | 25 | 20 | 1.35 | 23.9 | 16.35 | 0.5 |


Accessories

(2) Dimensions of support unit for ball screws for high-speed and heavy-load machine tools


Support units for high-speed and heavy-load machine tools use the ball screw support bearings NSKHPS BSBD series. This series has very suitable functions and structure as a ball screw support bearing. There are three bearing combinations as shown below.

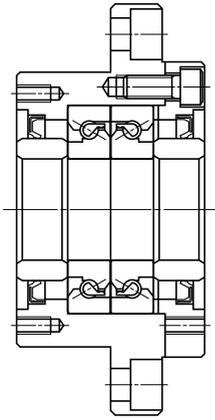

DF combination

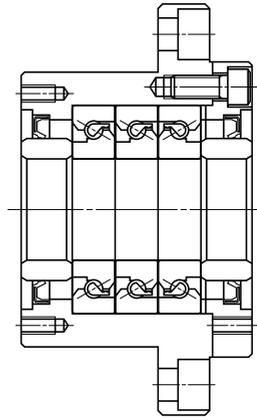


DFD combination

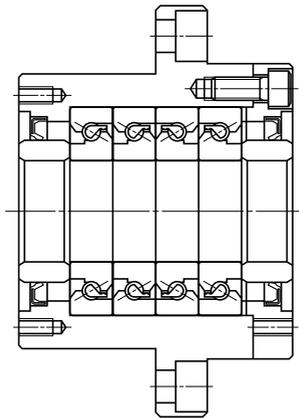

DFF combination

Support Unit (For high-speed and heavy-load machine tools)

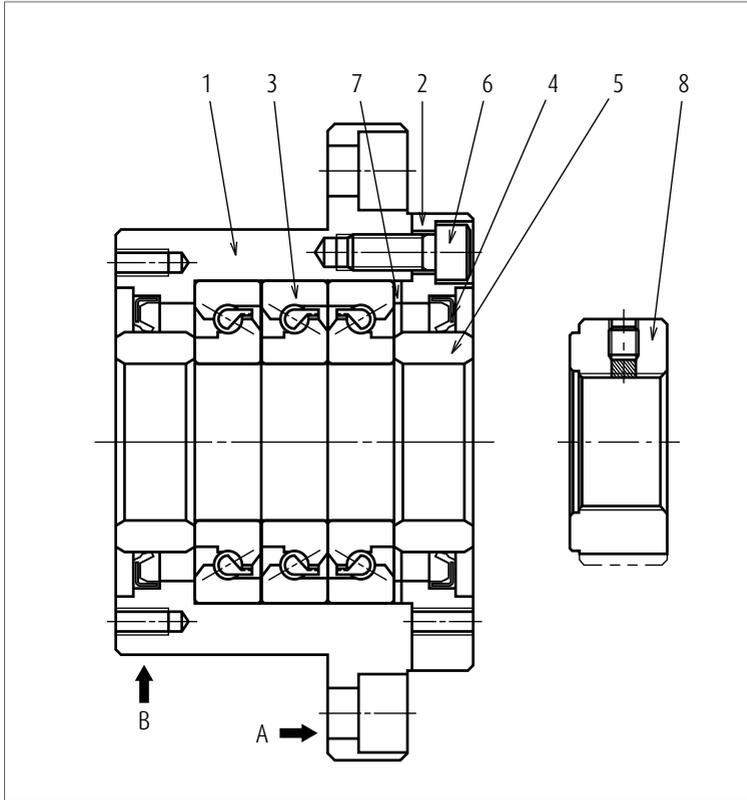


Parts list

| Part No. | Part name | Quantity |
|----------|---|----------|
| 1 | Housing | 1 |
| 2 | Retaining cover | 1 |
| 3 | High accuracy thrust angular contact ball bearing | One set |
| 4 | Dust seal | 2 |
| 5 | Collar | 2 |
| 6 | Preload bolt | 6 or 8 |
| 7 | Shim | One set |
| 8 | Lock nut | 1 |

Notes

- Surface A and B are the datum surfaces to mount a support unit to machine housing.
- NSK support units are precisely preloaded and adjusted. Do not disassemble the components 1, 2, 3, 4, 5, 6 and 7.
- Grease is packed into the bearings.
- Lock nut 8 is exclusively prepared for ball screws. End surface of nut is in strict control being precisely perpendicular to the V thread. Secure lock nut using set screw. Lock nut is also available as accessory. (See page B409.) See page B415 as well for ball screw support bearings NSK TAC C series.


Accessories

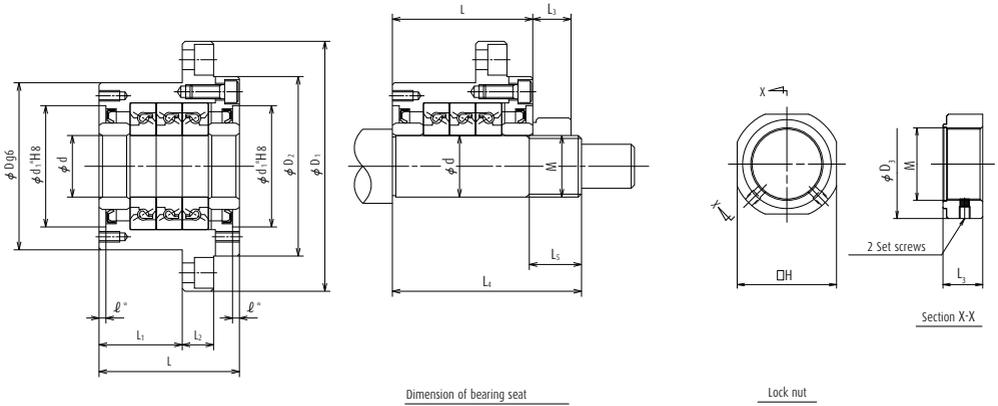

| Support unit No. | Support unit | | | | | | | | | | | | | | | | Basic dynamic load rating C_0 [N] | Limiting axial load [N] | |
|------------------|--------------|----|----------------|----------------|----|----------------|----------------|-----|-----|----|------|-----|------------------|----|----|----|--|----------------------------|---------------------|
| | d | D | D ₁ | D ₂ | L | L ₁ | L ₂ | A | W | X | Y | Z | d ₁ * | ℓ° | V* | P* | | | Q* |
| WBK17DF-31H | 17 | 70 | 106 | 72 | 60 | 32 | 15 | 80 | 88 | 9 | 14 | 8.5 | 45 | 3 | 58 | M5 | 10 | 23 000 | 26 600 |
| WBK20DF-31H | 20 | 70 | 106 | 72 | 60 | 32 | 15 | 80 | 88 | 9 | 14 | 8.5 | 45 | 3 | 58 | M5 | 10 | 23 000 | 26 600 |
| WBK25DF-31H | 25 | 85 | 130 | 90 | 66 | 33 | 18 | 100 | 110 | 11 | 17.5 | 11 | 57 | 4 | 70 | M6 | 12 | 29 900 | 40 500 |
| WBK25DFD-31H | 25 | 85 | 130 | 90 | 81 | 48 | 18 | 100 | 110 | 11 | 17.5 | 11 | 57 | 4 | 70 | M6 | 12 | 48 500 (29 900) | 81 500 (40 500) |
| WBK30DF-31H | 30 | 85 | 130 | 90 | 66 | 33 | 18 | 100 | 110 | 11 | 17.5 | 11 | 57 | 4 | 70 | M6 | 12 | 30 500 | 43 000 |
| WBK30DFD-31H | 30 | 85 | 130 | 90 | 81 | 48 | 18 | 100 | 110 | 11 | 17.5 | 11 | 57 | 4 | 70 | M6 | 12 | 50 000 (30 500) | 86 000 (43 000) |
| WBK35DF-31H | 35 | 95 | 142 | 102 | 66 | 33 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 32 500 | 50 000 |
| WBK35DFD-31H | 35 | 95 | 142 | 102 | 81 | 48 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 53 000 (32 500) | 100 000 (50 000) |
| WBK35DFF-31H | 35 | 95 | 142 | 102 | 96 | 48 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 53 000 | 100 000 |
| WBK40DF-31H | 40 | 95 | 142 | 102 | 66 | 33 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 33 500 | 52 000 |
| WBK40DFD-31H | 40 | 95 | 142 | 102 | 81 | 48 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 54 000 (33 500) | 104 000 (52 000) |
| WBK40DFF-31H | 40 | 95 | 142 | 102 | 96 | 48 | 18 | 106 | 121 | 11 | 17.5 | 11 | 69 | 4 | 80 | M6 | 12 | 54 000 | 104 000 |

- Notes**
- Rigidity
Values in the table are theoretical values obtained from the elastic deformation between ball groove and balls.
 - Starting torque
Starting torque indicates torque due to the preload of the bearing. It does not include seal torque.
 - The tolerance of the shaft bearing seat
We recommend h5 class of the fits tolerance.
 - Values in parentheses of basic dynamic load rating and permissible axial load are the values when axial load is applied in a line.

Support Unit (Support Units for Light Load and Small Equipment)

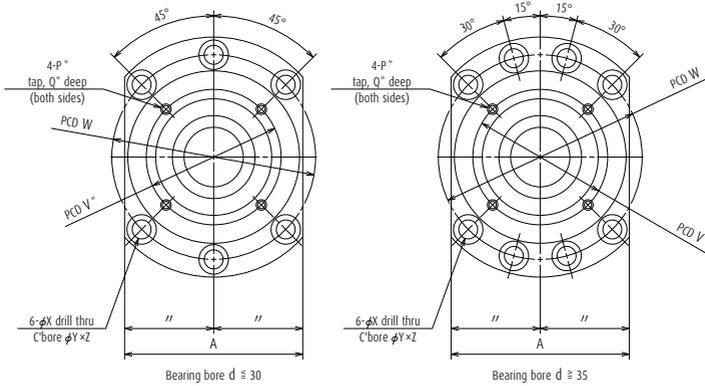

Unit: mm

| Preload | Axial rigidity | Maximum Starting torque | Lock nut | | | | | Screwing torque | Bearing seat for unit | | | Permissible rotational speed | Mass |
|--------------------|----------------|-------------------------|-----------|----|----------------|----------------|----------|-----------------|-----------------------|----------------|----------------------|------------------------------|------|
| | | | Dimension | | | | | | d | L ₄ | L ₅ | | |
| C _s [N] | [N/μm] | [N · cm] | M | H | D ₃ | L ₃ | [N · cm] | d | L ₄ | L ₅ | [min ⁻¹] | [kg] | |
| 1 450 | 630 | 14 | M17×1.0 | 32 | 37 | 18 | 4 100 | 17 | 81 | 23 | 6 900 | 1.9 | |
| 1 450 | 630 | 14 | M17×1.0 | 36 | 40 | 18 | 4 500 | 20 | 81 | 23 | 6 900 | 1.9 | |
| 2 280 | 850 | 21 | M25×1.5 | 41 | 45 | 20 | 8 500 | 25 | 89 | 26 | 5 200 | 3.1 | |
| 3 100 | 1 250 | 28 | M25×1.5 | 41 | 45 | 20 | 8 500 | 25 | 104 | 26 | 5 200 | 3.4 | |
| 2 400 | 890 | 23 | M30×1.5 | 46 | 50 | 20 | 10 100 | 30 | 89 | 26 | 4 900 | 3.0 | |
| 3 260 | 1 310 | 30 | M30×1.5 | 46 | 50 | 20 | 10 100 | 30 | 104 | 26 | 4 900 | 3.3 | |
| 2 750 | 1 030 | 27 | M35×1.5 | 50 | 55 | 22 | 13 800 | 35 | 92 | 30 | 4 100 | 3.4 | |
| 3 740 | 1 500 | 34 | M35×1.5 | 50 | 55 | 22 | 13 800 | 35 | 107 | 30 | 4 100 | 4.3 | |
| 5 490 | 2 060 | 43 | M35×1.5 | 50 | 55 | 22 | 13 800 | 35 | 122 | 30 | 4 100 | 5.0 | |
| 2 860 | 1 080 | 28 | M40×1.5 | 55 | 60 | 22 | 15 500 | 40 | 92 | 30 | 4 100 | 3.6 | |
| 3 900 | 1 590 | 36 | M40×1.5 | 55 | 60 | 22 | 15 500 | 40 | 107 | 30 | 4 100 | 4.2 | |
| 5 730 | 2 150 | 46 | M40×1.5 | 55 | 60 | 22 | 15 500 | 40 | 122 | 30 | 4 100 | 4.7 | |

5. Dimensions with * (asterisk) mark

*Pilot diameter and tapped screws marked with asterisk are used for seal unit installation for NSK standard hollow shaft ball screws. They also can be used for dust cover and damper installation.

6. Grease is packed into bearing. It is not necessary to apply grease before use.

7. Allowable axial load is 0.7 times of load limit.


8. Contact NSK if the rotational speed is 50 min⁻¹ and below.

Accessories

In addition to the support units, NSK has other components for ball screws as shown below.

(3) Lock nuts

Ball screw support bearings must be installed with minimum inclination against ball screw center. NSK lock nuts exclusive for ball screw support bearings help to reduce this inclination.

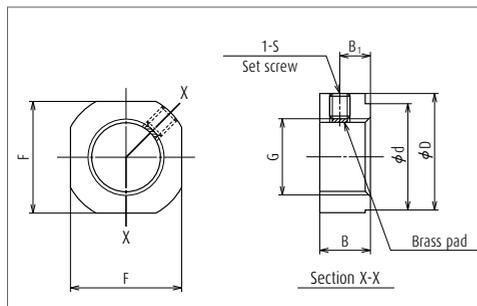

Light load Shapes and dimensions



Light load lock nuts

Light load lock nuts


| Lock nut reference No. | G | D | F | B | d |
|------------------------|---------|------|----|-----|----|
| WBK06L-01 | M6×0.75 | 14.5 | 12 | 5 | 10 |
| WBK08L-01 | M8×1 | 17 | 14 | 6.5 | 13 |
| WBK10L-01 | M10×1 | 20 | 17 | 8 | 16 |
| WBK12L-01 | M12×1 | 22 | 19 | 8 | 17 |
| WBK15L-01 | M15×1 | 25 | 22 | 10 | 21 |
| WBK17L-01 | M17×1 | 29 | 24 | 13 | 24 |
| WBK20L-01 | M20×1 | 35 | 30 | 13 | 26 |
| WBK25L-01 | M25×1.5 | 42 | 36 | 16 | 34 |

Note Insert brass pad and then tighten securing set screw.

High speed and heavy load lock nuts

| Lock nut reference No. | G | D ^{0,-0.1} | B | d ₁ | d ₂ |
|------------------------|---------|---------------------|----|----------------|----------------|
| WBK17L-31H | M17×1 | 37 | 18 | 30 | 18 |
| WBK20L-31H | M20×1 | 40 | 18 | 30 | 21 |
| WBK25L-31H | M25×1.5 | 45 | 20 | 40 | 26 |
| WBK30L-31H | M30×1.5 | 50 | 20 | 40 | 31 |
| WBK35L-31H | M35×1.5 | 55 | 22 | 49 | 36 |
| WBK40L-31H | M40×1.5 | 60 | 22 | 49 | 41 |

Lock nut

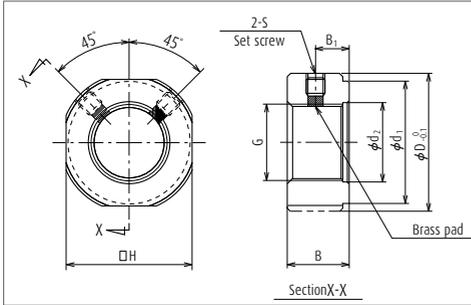

High speed and heavy load Shapes and dimensions



High speed and heavy load lock nuts

Unit: mm

| B ₁ | S | Tightening torque (reference) [N · cm] | Set screw tightening torque (reference) [N · cm] | Mass (g) |
|----------------|----------------------|--|--|----------|
| 2.75 | M3, with a brass pad | 190 | 69 (M3) | 3.8 |
| 4 | M3, with a brass pad | 230 | 69 (M3) | 6.4 |
| 5 | M4, with a brass pad | 280 | 147 (M4) | 11.2 |
| 5 | M4, with a brass pad | 630 | 147 (M4) | 12.8 |
| 6 | M4, with a brass pad | 790 | 147 (M4) | 20.0 |
| 8 | M4, with a brass pad | 910 | 147 (M4) | 33.1 |
| 8 | M4, with a brass pad | 1 670 | 147 (M4) | 50.0 |
| 10 | M6, with a brass pad | 2 060 | 490 (M6) | 87.0 |

Unit: mm


| B ₁ | H | S | Tightening torque (reference) [N · cm] | Set screw tightening torque (reference) [N · cm] | Mass (g) |
|----------------|----|----|--|--|----------|
| 10 | 32 | M6 | 4 100 | 490 (M6) | 100.9 |
| 10 | 36 | M6 | 4 500 | 490 (M6) | 117.3 |
| 11 | 41 | M6 | 8 500 | 490 (M6) | 163.8 |
| 11 | 46 | M6 | 10 100 | 490 (M6) | 186.7 |
| 12 | 50 | M6 | 13 800 | 490 (M6) | 233.4 |
| 12 | 55 | M6 | 15 500 | 490 (M6) | 258.8 |

Accessories


Installation of Ball Screw and Support Unit

The illustrations below show typical installation procedures for a standard ball screw and a support unit.


1) Assembly of support unit

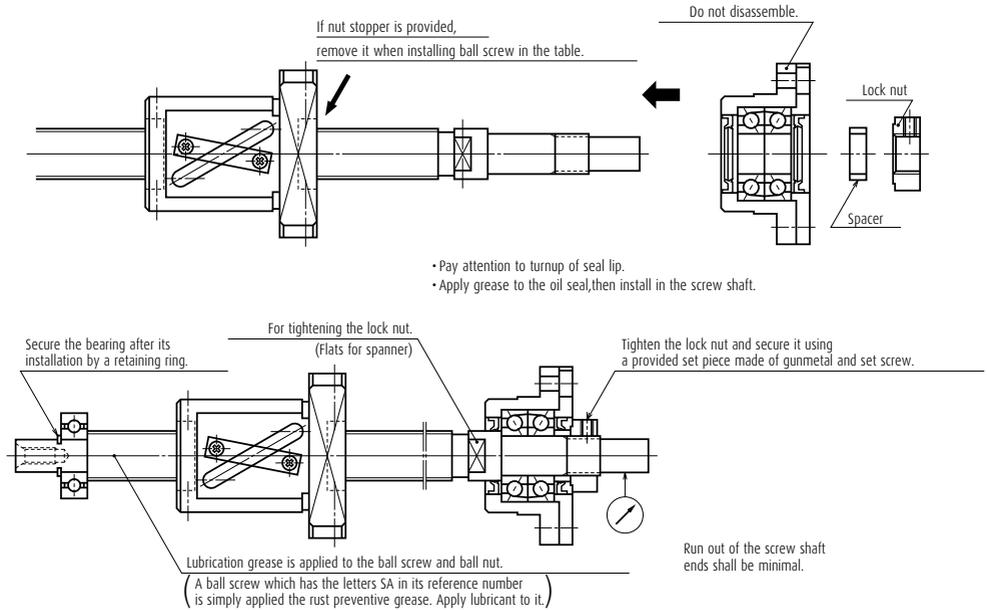


2) Installation of ball nut to the table

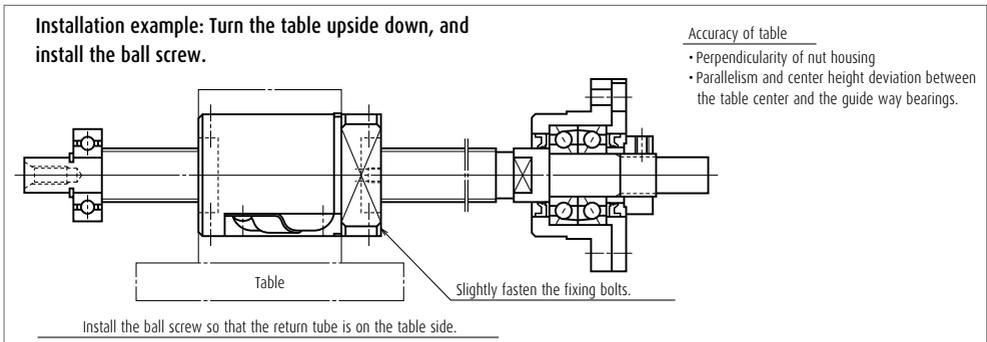


3) Base and the support unit installation on the fixed support side

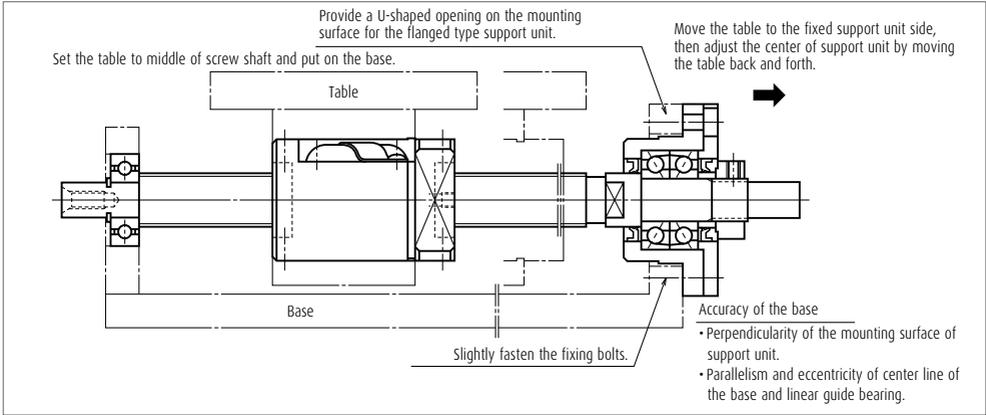

4) Base and bearing installation on simple support side, and confirming assembling accuracy.

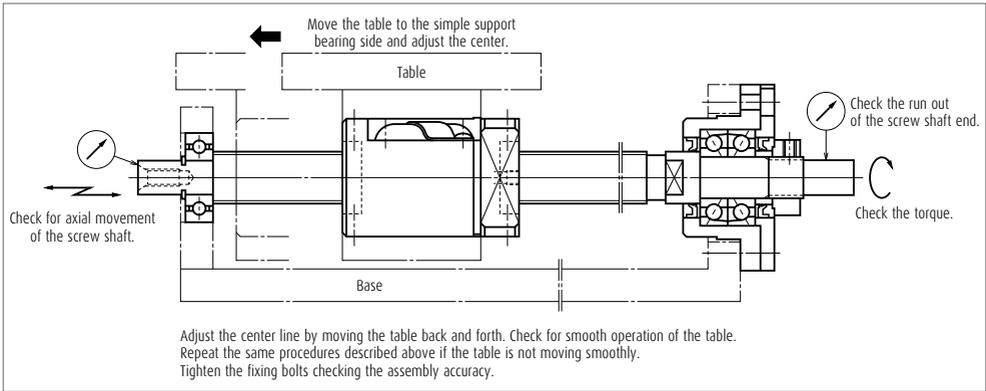

5) Assembly completed.

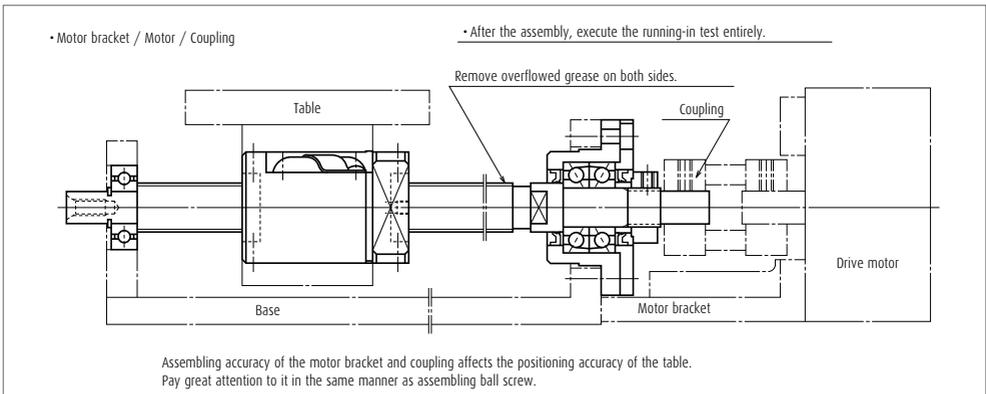

Accessories

(4) Grease unit

NSK has numerous grease types that are exclusive for ball screw lubrication. They come in bellows-shaped tubes, which can be attached to a hand grease pump quickly. For details of grease types, see page D13 and for a hand grease pump and nozzles, see page D19.



NSK greases

Lubricant greases


| Name | Use | Base oil viscosity mm ² /s (40°C) |
|----------------|-------------------------|---|
| NSK Grease AS2 | For heavy load | 130 |
| NSK Grease PS2 | High-speed, light load | 15 |
| NSK Grease LR3 | High-speed, medium load | 30 |
| NSK Grease LG2 | Clean environment | 30 |
| NSK Grease LGU | Clean environment | 100 |

Grease unit, and travel stopper

(5) Travel stopper (made-to-order)

A travel stopper is installed in some cases to prevent the ball nut from overrunning to the end of ball thread due to a malfunction of the safety system of the equipment or by a human error. NSK has several series of shock-absorbing travel stoppers. The travel stopper is not sold as a single item since it is not for general use.

Also, a travel stopper cannot be used for ball screw with the end cap type ball recirculation system, because the stopper would come directly into contact with the component for ball recirculation. Please request NSK for the installation of the travel stoppers when ordering a ball screw.

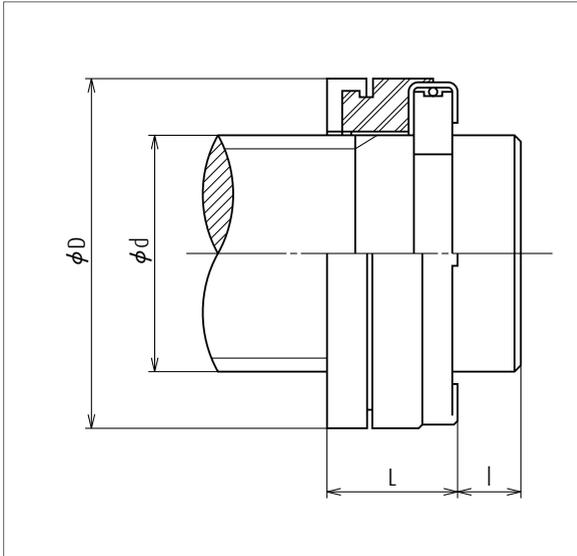

Unit: mm

| Stopper No. | Applicable shaft dia. d | Outer dia. D | Length L | Shaft end width (Min.) l |
|-------------|---------------------------|----------------|------------|----------------------------|
| BSR 20 | 20 | 32 | 16 | 5 |
| BSR 25 | 25 | 38 | 16 | 5 |
| BSR 32 | 32 | 46 | 20 | 6 |
| BSR 40 | 40 | 60 | 22 | 6 |
| BSR 50 | 50 | 72 | 24 | 7 |
| BSR 63 | 63 | 85 | 25 | 7 |

Note This stopper is patented by NSK Ltd.



Shock-absorbing travel stopper

(6) Ball screw support bearings NSKHPS TAC-C series

1) Features

This is highly rigid and accurate ball screw support bearing often used for the machine tools driving mechanism.

(a) High axial rigidity

High-rigidity achieved by higher contact angle at 60 degrees and an increased number of smaller-diameter balls.

(b) Small friction torque

Friction torque is far less than that of tapered or cylindrical roller bearing. This contributes to accurate rotation by a smaller driving power.

(c) Pre-adjusted axial play

Combination bearings are already adjusted to a suitable preload. Universal combination bearing (SU) furnishes certain preload for all combinations (DB, DF, and other).

(d) Simple mounting structure

A duplex combination of bearings can receive axial and radial loads. Therefore, the installation structure is simpler than when both a thrust bearing and a radial bearing are used.

(e) Easy handling

Inner and outer rings are inseparable, and are easy to handle.

(f) Superb polyamide resin retainer

Uses polyamide resin retainer which is superb to friction and furnishes high precision rotations.

High load capacity ball screw support thrust angular contact ball bearing suitable for ball screw support for high-load drive and large machine tools is also available. See CAT. No. 3238 "NSK Ball Screws for High-Load Drive".

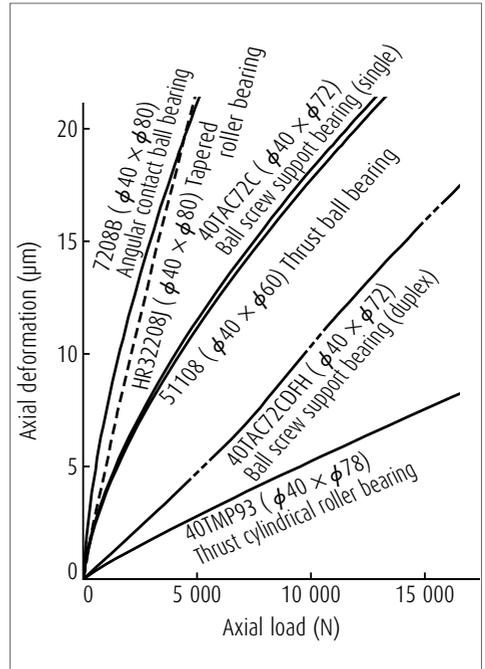


Fig. 1 Axial rigidity of various bearings


Ball screw support bearings NSKTAC C series

Table 2 Comparison with other types of bearings

| Bearing type | Bearing rigidity (See Fig. 1) | Starting torque | Preload adjustment | Installation structure |
|--|----------------------------------|-----------------|--------------------|------------------------|
| Ball screw support bearings | High | Low | Not required | Simple |
| Combined angular contact ball bearing | Low | Low | Not required | Simple |
| Tapered roller bearing | Low | High | Complicated | Simple |
| Thrust ball bearing and radial bearing | High | Low | Complicated | Complicated |
| Thrust cylindrical roller bearing and radial bearing | Extremely high | Extremely high | Complicated | Complicated |

Note Consult NSK when you use these bearings other than the purpose of ball screw support.

2) Composition of reference number

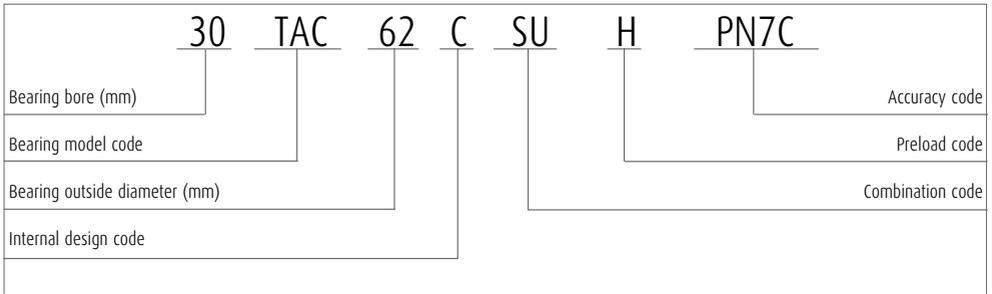

Note As "30 TAC 62 C," any part of the first half of the reference number is referred to as "nominal size" in this catalog.

3) Combinations of bearings

Generally, a set uses more than two pieces (referred to as 'two rows') of bearings and, thus the preload is applied. There are two types of combination:

> Combined bearings

Bearings are adjusted as a single combined set. Since the bearing alignment is pre-set, there is no interchangeability between the bearing set.

> Universal combination bearing (SU)

Single bearings are manufactured under strict control of component accuracy so that they can be universally assembled as a combination of ball screw support bearing set.

(a) Combined bearings

- > Fig. 2 shows examples of combinations. There is "V" mark on the outside surface of the bearing to avoid misarrangement. A complete letter "V" should be formed when all bearings align correctly to form a set.
- > DF combination which easily absorbs misalignment with the ball screw nut is used in general.

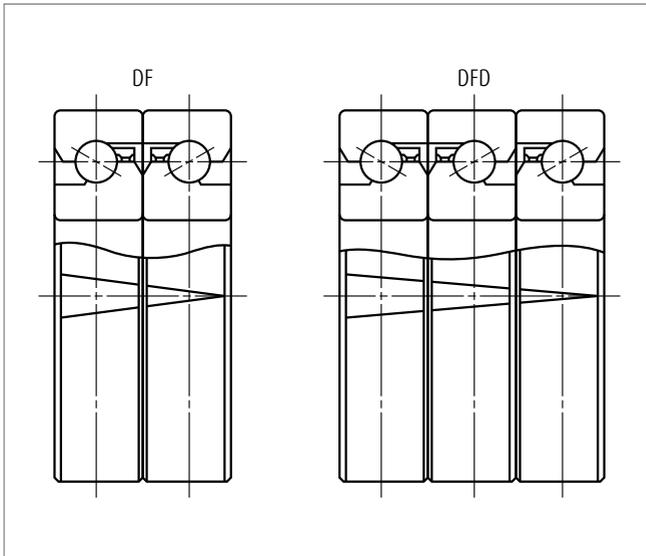


Fig. 2 Examples of combination and "V" mark

(b) Universal combination bearing (SU)

- › Unlike the above case, the marks on the outside surface of bearings do not form a letter "V." The tip of the "V" on each bearing simply indicates the direction to which axial load can be applied.

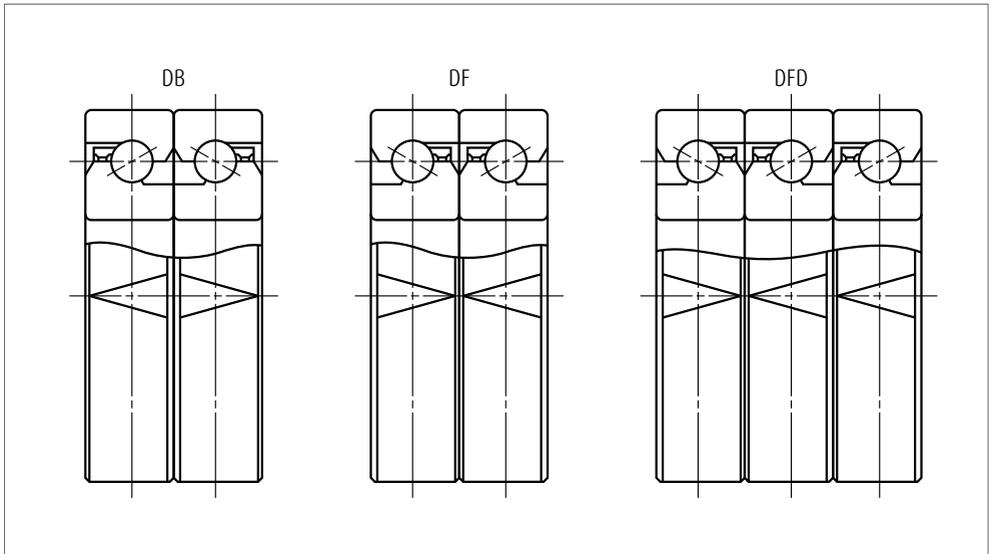


Fig. 3 Example of universal combination (SU) and "V" mark

Accessories

4) Preload, rigidity, starting torque

Table 3 shows preload, rigidity (spring constant), and starting torque with grease lubrication.

(Oil lubrication: Value of starting torque in the table × 1.4)

Please contact NSK for combinations other than those in the table.

5) Accuracy

(a) Accuracy grades

NSK standard PN7C, equivalent to JIS class 4 for radial ball bearings.

(b) Fitting

Recommended values for dimensional tolerances for shaft and housing bore are shown in **Table 5**.

6) Rolling contact fatigue life

The relationship between basic load rating, bearing load, and basic rating life for the rolling bearing is presented in the following formula.

$$L_h = \frac{10^6}{60n} \left(\frac{C_a}{P} \right)^3$$

Where, L_h : Basic rating life (h)

C_a : Basic dynamic load rating (N)

P : Dynamic equivalent load (N)

n : Rotational speed (min^{-1})

Table 3 Preload, rigidity, and starting torque

| Reference No. | Preload code | Duplex combination DF | | |
|---------------|--------------|-----------------------|---------------------------------------|----------------------------|
| | | Preload (N) | Axial rigidity (N/ μm) | Starting torque (N · m) |
| 15TAC47C | H | 1 450 | 630 | 0.09 |
| 17TAC47C | H | 1 450 | 630 | 0.09 |
| 20TAC47C | H | 1 450 | 630 | 0.09 |
| 25TAC62C | H | 2 280 | 850 | 0.15 |
| 30TAC62C | H | 2 400 | 890 | 0.16 |
| 35TAC72C | H | 2 750 | 1 030 | 0.18 |
| 40TAC72C | H | 2 860 | 1 080 | 0.19 |
| 40TAC90C | H | 3 450 | 1 150 | 0.29 |
| 45TAC75C | H | 3 100 | 1 170 | 0.20 |
| 45TAC100C | H | 4 440 | 1 340 | 0.40 |
| 50TAC100C | H | 4 650 | 1 410 | 0.42 |
| 55TAC100C | H | 4 650 | 1 410 | 0.42 |
| 55TAC120C | H | 5 450 | 1 660 | 0.49 |
| 60TAC120C | H | 5 450 | 1 660 | 0.49 |

Table 4 Tolerance: Ball screw support bearings NSKTAC C series


Unit: μm

| Nominal bore or outside diameter (mm) | | Single plane mean bore dia. deviation Δdmp | | Tolerance of bore Δds | | Single plane mean outside dia. deviation ΔDmp | | Tolerance of outside diameter ΔDs | | Tolerance of inner ring width ΔBs | | Axial run out of inner or outer ring Sia or Sea |
|---------------------------------------|---------|--|-------|-------------------------------------|-------|---|-------|---|-------|---|-------|---|
| over | or less | upper | lower | upper | lower | upper | lower | upper | lower | upper | lower | Maximum |
| 10 | 18 | 0 | -4 | 0 | -4 | - | - | - | - | 0 | -120 | 2.5 |
| 18 | 30 | 0 | -5 | 0 | -5 | - | - | - | - | 0 | -120 | 2.5 |
| 30 | 50 | 0 | -6 | 0 | -6 | 0 | -6 | 0 | -6 | 0 | -120 | 2.5 |
| 50 | 80 | 0 | -7 | 0 | -7 | 0 | -7 | 0 | -7 | 0 | -150 | 2.5 |
| 80 | 120 | 0 | -8 | 0 | -8 | 0 | -8 | 0 | -8 | 0 | -200 | 2.5 |

Note The tolerance of the outer ring width is the same as that of the inner ring width of the same bearing.

Ball screw support bearings NSK TAC C series

Dynamic equivalent load $P_a = X F_r + F_a$

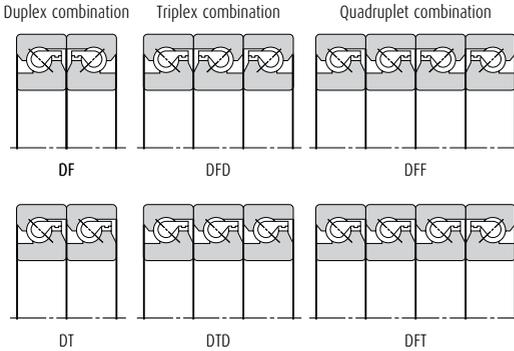

| e = 2.17 | Bearing configuration Combination code | Duplex | | Triplex | | | Quadruplet | | |
|------------------|--|---------|----------|---------|----------|------------|------------|----------|------------|
| | | DF | DT | DFD | DTD | DFT | DFF | DFF | |
| | Number of the row that receives axial load | One row | Two rows | One row | Two rows | Three rows | One row | Two rows | Three rows |
| $F_a/F_r \leq e$ | X | 1.9 | - | 1.43 | 2.33 | - | 1.17 | 1.9 | 2.53 |
| $F_a/F_r \leq e$ | Y | 0.55 | - | 0.77 | 0.35 | - | 0.89 | 0.55 | 0.26 |
| $F_a/F_r > e$ | X | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 | 0.92 |
| $F_a/F_r > e$ | Y | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| Triplex combination DFD | | | Quadruplet combination DFF | | |
|-------------------------|-----------------------|-----------------------|----------------------------|-----------------------|-----------------------|
| Preload (N) | Axial rigidity (N/μm) | Starting torque (N·m) | Preload (N) | Axial rigidity (N/μm) | Starting torque (N·m) |
| 1 970 | 930 | 0.12 | 2 900 | 1 250 | 0.17 |
| 1 970 | 930 | 0.12 | 2 900 | 1 250 | 0.17 |
| 1 970 | 930 | 0.12 | 2 900 | 1 250 | 0.17 |
| 3 100 | 1 250 | 0.20 | 4 560 | 1 690 | 0.30 |
| 3 260 | 1 320 | 0.21 | 4 790 | 1 780 | 0.31 |
| 3 740 | 1 510 | 0.24 | 5 490 | 2 050 | 0.36 |
| 3 900 | 1 590 | 0.25 | 5 730 | 2 140 | 0.37 |
| 4 700 | 1 700 | 0.40 | 6 900 | 2 300 | 0.59 |
| 4 210 | 1 730 | 0.27 | 6 190 | 2 330 | 0.40 |
| 6 050 | 1 990 | 0.54 | 8 890 | 2 670 | 0.80 |
| 6 320 | 2 080 | 0.56 | 9 290 | 2 800 | 0.83 |
| 6 320 | 2 080 | 0.56 | 9 290 | 2 800 | 0.83 |
| 7 420 | 2 450 | 0.66 | 10 900 | 3 330 | 0.97 |
| 7 420 | 2 450 | 0.66 | 10 900 | 3 300 | 0.97 |

Table 5 Tolerance of shaft bearing seat and housing bore


Unit: μm

| Size of shaft or housing bore (mm) | | Tolerance of shaft bearing seat h5 | | Tolerance of housing hole H6 | |
|------------------------------------|---------|------------------------------------|-------|------------------------------|-------|
| over | or less | upper | lower | upper | lower |
| 10 | 18 | 0 | -8 | - | - |
| 18 | 30 | 0 | -9 | - | - |
| 30 | 50 | 0 | -11 | 16 | 0 |
| 50 | 80 | 0 | -13 | 19 | 0 |
| 80 | 120 | 0 | -15 | 22 | 0 |

Accessories

TACC


Bore 15 to 60 mm

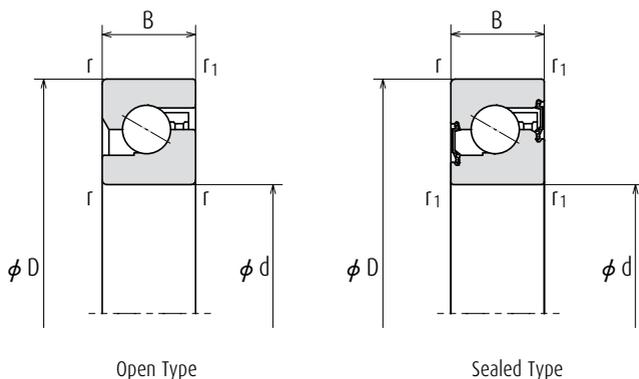

| Contact seal | Non-contact seal | Boundary dimensions (mm) | | | | | Dimensions (mm) | | | | Permissible rotational speed (min ⁻¹) | | Bearing No. |
|--------------|------------------|--------------------------|-----|----|-----------|------------------------|------------------------|------------------------|------------------------|------------------------|---|--------------------|-------------|
| | | d | D | B | r Min. | r ₁ Min. | D _b Max. | d _a Min. | D _a Max. | d _b Min. | Grease lubrication | Oil lubrication | |
| * | * | 15 | 47 | 15 | 1 | 0.6 | 42 | 19.5 | 41 | 19.5 | 6 900 | 9 200 | 15TAC47C |
| * | * | 17 | 47 | 15 | 1 | 0.6 | 42 | 23 | 41 | 23 | 6 900 | 9 200 | 17TAC47C |
| * | * | 20 | 47 | 15 | 1 | 0.6 | 42 | 25 | 41 | 25 | 6 900 | 9 200 | 20TAC47C |
| * | * | 25 | 62 | 15 | 1 | 0.6 | 57 | 31 | 56 | 31 | 5 200 | 6 900 | 25TAC62C |
| * | | 30 | 62 | 15 | 1 | 0.6 | 57 | 36 | 56 | 36 | 4 900 | 6 400 | 30TAC62C |
| * | | 35 | 72 | 15 | 1 | 0.6 | 67 | 42 | 66 | 42 | 4 100 | 5 800 | 35TAC72C |
| * | | 40 | 72 | 15 | 1 | 0.6 | 67 | 47 | 66 | 47 | 4 100 | 5 500 | 40TAC72C |
| * | | 40 | 90 | 20 | 1 | 0.6 | 85 | 48 | 84 | 48 | 3 500 | 4 600 | 40TAC90C |
| * | | 45 | 75 | 15 | 1 | 0.6 | 68 | 54 | 67 | 54 | 3 700 | 4 900 | 45TAC75C |
| * | | 45 | 100 | 20 | 1 | 0.6 | 93 | 55 | 92 | 55 | 3 000 | 4 100 | 45TAC100C |
| * | | 50 | 100 | 20 | 1 | 0.6 | 92 | 60 | 91 | 60 | 3 000 | 3 900 | 50TAC100C |
| * | | 55 | 100 | 20 | 1 | 0.6 | 92 | 63 | 91 | 63 | 3 000 | 3 900 | 55TAC100C |
| * | | 55 | 120 | 20 | 1 | 0.6 | 112 | 63 | 111 | 63 | 2 500 | 3 500 | 55TAC120C |
| * | | 60 | 120 | 20 | 1 | 0.6 | 112 | 70 | 111 | 70 | 2 500 | 3 500 | 60TAC120C |

- Note**
- * Asterisk indicates bearing with contact seal or non-contact seal.
 - Permissible rotation speed is the value with H preload applied. The value is not influenced by bearing layout.
 - Numerical value indicates starting torque with grease lubrication. In the case of oil lubrication, the value in the above table should be multiplied by 1.4.
 - Allowable axial load is 0.7 times of load limit.
 - The installation dimensions above are the recommended values for general machine tools.
Contact NSK if the unit is used under heavy load conditions.

Ball screw support bearings NSK TAC C series

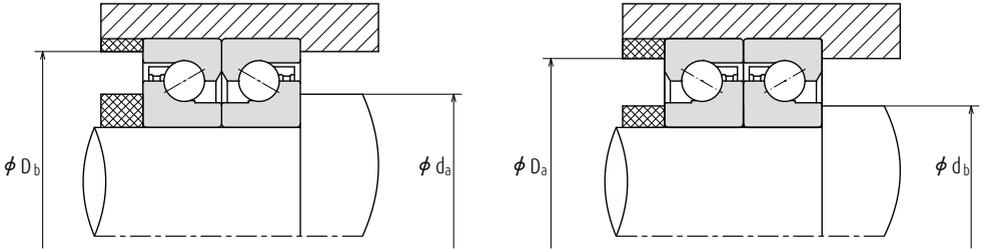

| Basic dynamic load rating C_a | | | Permissible axial load | | | Mass (kg) (Reference) |
|---------------------------------|---|--|--------------------------------|---|--|------------------------------|
| One row sustaining load DF (N) | Two rows sustaining load DT, DFD, DFF (N) | Three row sustaining load DTD, DFT (N) | One row sustaining load DF (N) | Two rows sustaining load DT, DFD, DFF (N) | Three row sustaining load DTD, DFT (N) | |
| 23 000 | 37 500 | 49 500 | 26 600 | 53 000 | 79 500 | 0.146 |
| 23 000 | 37 500 | 49 500 | 26 600 | 53 000 | 79 500 | 0.140 |
| 23 000 | 37 500 | 49 500 | 26 600 | 53 000 | 79 500 | 0.135 |
| 29 900 | 48 500 | 64 500 | 40 500 | 81 500 | 122 000 | 0.252 |
| 30 500 | 50 000 | 66 000 | 43 000 | 86 000 | 129 000 | 0.224 |
| 32 500 | 53 000 | 70 500 | 50 000 | 100 000 | 150 000 | 0.310 |
| 33 500 | 54 000 | 72 000 | 52 000 | 10 400 | 157 000 | 0.275 |
| 62 000 | 101 000 | 134 000 | 89 500 | 179 000 | 269 000 | 0.674 |
| 34 500 | 56 000 | 74 500 | 57 000 | 114 000 | 170 000 | 0.270 |
| 64 500 | 105 000 | 140 000 | 99 000 | 198 000 | 298 000 | 0.842 |
| 66 000 | 107 000 | 142 000 | 104 000 | 208 000 | 310 000 | 0.778 |
| 66 000 | 107 000 | 142 000 | 104 000 | 208 000 | 310 000 | 0.714 |
| 70 500 | 115 000 | 153 000 | 123 000 | 246 000 | 370 000 | 1.23 |
| 70 500 | 115 000 | 153 000 | 123 000 | 246 000 | 370 000 | 1.16 |

Accessories

(7) Ball Screw Support Bearings

NSKHPS BSBD Series

The BSBD series are ball screw support bearings unit that can accurately and quickly position a work piece or a main spindle unit.



BSFs eries

The BSF series bearings have outer ring bolt holes in addition to the BSN series bearings. Direct mounting on housing side is easy. A lubrication hole on each OD surface and on the side of the bearings, allows relubrication as required. When the holes are not used, plugs prevent foreign matter from entering. In addition, an extraction groove on OD surface of outer ring enhances bearing removal.

Note: Bearing with seal and plug are included. Mounting bolts are not included.


BSN series Single product

Features

The bearings are double row, angular contact ball bearings, with a 60° contact angle and a single outer ring. These have the same specs as TAC bearings, the best specs for ball screw support bearing for machine tools. High-performance grease and contact rubber seal are included as standard.

BSNs eries

A double row, angular contact thrust ball bearing in a back-to-back (DB) arrangement with a single outer ring. Already filled with high-performance grease, operation is easy. Lubrication holes allow for relubrication as required. The contact type seal has excellent seal performance, while minimizing effects on friction loss and heat generation.

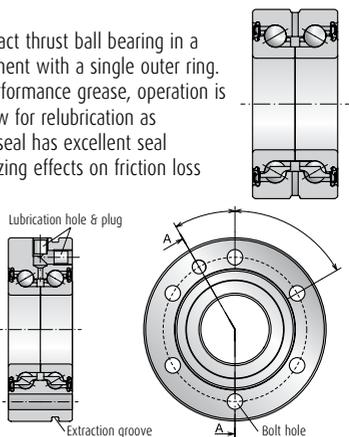

Unit: mm

| Bearing Numbers | Boundry Dimensions (mm) | | | | | | | Contact Angle (°) | Basic Load Rating (kN) | | Limiting ⁽¹⁾ Axial Load (kN) | Preload (N) | Axial Rigidity (N/μm) | Mass (kg) | Allowable rotating speed (min ⁻¹) | Starting torque (N·m) | Recommended nut tightening force (N) |
|-----------------|-------------------------|-----|----|---------|----------------------|------------------------|------------------------|-------------------|--------------------------|--------------------------|---|-------------|-----------------------|-----------|---|-----------------------|--------------------------------------|
| | d | D | B | r (min) | r ₁ (min) | φ d _a (min) | φ d _b (max) | | C _a (Dynamic) | C _{0a} (Static) | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| BSN1242 | 12 | 42 | 25 | 0.6 | 0.3 | 15 | 33 | 60 | 18.5 | 24.0 | 17.6 | 720 | 375 | 0.20 | 8 000 | 0.038 | 4 026 |
| BSN1545 | 15 | 45 | 25 | 0.6 | 0.3 | 19 | 35 | 60 | 19.4 | 26.9 | 19.4 | 675 | 400 | 0.22 | 7 100 | 0.034 | 4 056 |
| BSN1747 | 17 | 47 | 25 | 0.6 | 0.6 | 21 | 37 | 60 | 20.3 | 29.7 | 21.2 | 880 | 450 | 0.23 | 6 700 | 0.05 | 4 432 |
| BSN2052 | 20 | 52 | 28 | 0.6 | 0.6 | 24 | 43 | 60 | 26.4 | 41.0 | 29.3 | 1 885 | 650 | 0.31 | 5 800 | 0.13 | 7 611 |
| BSN2557 | 25 | 57 | 28 | 0.6 | 0.6 | 29 | 48 | 60 | 28.3 | 48.0 | 34.0 | 2 245 | 750 | 0.36 | 5 100 | 0.16 | 8 115 |
| BSN3062 | 30 | 62 | 28 | 0.6 | 0.6 | 34 | 53 | 60 | 30.0 | 55.5 | 38.5 | 2 625 | 850 | 0.40 | 4 500 | 0.19 | 8 650 |
| BSN3072 | 30 | 72 | 38 | 0.6 | 0.6 | 35 | 64 | 60 | 60.5 | 94.0 | 66.5 | 4 855 | 950 | 0.74 | 3 900 | 0.59 | 11 070 |
| BSN3572 | 35 | 72 | 34 | 0.6 | 0.6 | 40 | 62 | 60 | 42.0 | 77.5 | 52.0 | 2 630 | 900 | 0.66 | 3 800 | 0.21 | 13 514 |
| BSN4075 | 40 | 75 | 34 | 0.6 | 0.6 | 46 | 67 | 60 | 44.5 | 88.0 | 58.5 | 3 065 | 1 000 | 0.65 | 3 500 | 0.24 | 14 105 |
| BSN4090 | 40 | 90 | 46 | 0.6 | 0.6 | 46 | 80 | 60 | 78.5 | 135 | 91.0 | 7 220 | 1 200 | 1.38 | 3 100 | 1.02 | 18 704 |
| BSN5090 | 50 | 90 | 34 | 0.6 | 0.6 | 56 | 82 | 60 | 48.0 | 110 | 71.5 | 4 020 | 1 250 | 0.93 | 2 800 | 0.33 | 15 392 |
| BSN50110 | 50 | 110 | 54 | 0.6 | 0.6 | 57 | 98 | 60 | 116 | 219 | 149 | 7 435 | 1 400 | 2.46 | 2 500 | 1.06 | 19 121 |
| BSN60110 | 60 | 110 | 45 | 0.6 | 0.6 | 68 | 100 | 60 | 86.5 | 187 | 126 | 4 780 | 1 300 | 1.82 | 2 400 | 0.50 | 20 848 |

Notes

1. Permissible axial load is 0.7 times of limiting axial load.
2. Starting torque indicates torque due to the preload of the bearing. It does not include seal torque.

BSBD Series Bearings for ball screw support


BSBD Series: Nomenclature

Example: BS F 30 80 DDU H P2B DT

| | | |
|-------------------------------------|----------------|---|
| Series (Ball Screw Support) | Paired bearing | Note: Accuracy P2B: Special class for this series. It indicates the following. Rotation accuracy: ISO class 2 Other: Special |
| F: Flange type N: No Flange type | Accuracy | |
| Bore | Preload | |
| Outer diameter | Seal type | |
| | | |


> Seal

Contact rubber seals are on both sides. Triple lip structure achieves high grease sealing and dust-proof performance.




> Matched DT pairs

A paired product for large external load or when high rigidity and long life are required. Can be used in four rows with no effects on preload individual bearings as distance between mating surfaces has been adjusted.



Distance between mating surfaces has been adjusted.

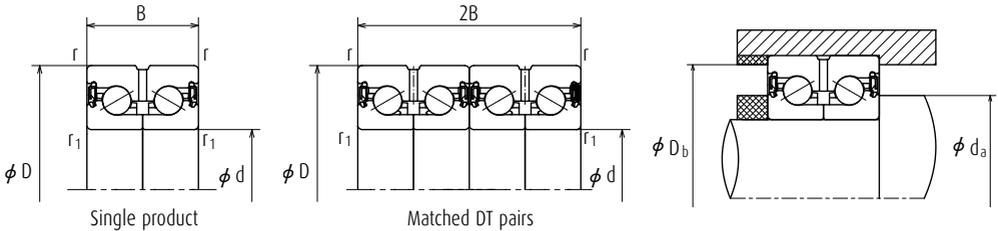

BSN series matched DT pairs

| Bearing Numbers | Boundry Dimensions (mm) | | | | | Dimensions (mm) | | Contact Angle (°) | Basic Load Rating (kN) | | Limiting ⁽¹⁾ Axial Load (kN) | Axial Rigidity (N/μm) | Mass (kg) | Allowable rotating speed (min ⁻¹) | Starting torque (N·m) | Recommended nut tightening force (N) |
|-----------------|-------------------------|-----|-----|-------|----------------|------------------------|------------------------|-------------------|--------------------------|--------------------------|---|-----------------------|-----------|---|-----------------------|--------------------------------------|
| | d | D | 2B | r | r ₁ | φ d _a (min) | φ D _b (max) | | C _a (Dynamic) | C _{oa} (Static) | | | | | | |
| | | | | (min) | (min) | | | | | | | | | | | |
| BSN1747-DT | 17 | 47 | 50 | 0.6 | 0.6 | 21 | 37 | 60 | 33.0 | 59.5 | 42.5 | 790 | 0.46 | 6 700 | 0.10 | 4 432 |
| BSN2052-DT | 20 | 52 | 56 | 0.6 | 0.6 | 24 | 43 | 60 | 43.0 | 82.0 | 58.5 | 1 180 | 0.62 | 5 800 | 0.26 | 7 611 |
| BSN2557-DT | 25 | 57 | 56 | 0.6 | 0.6 | 29 | 48 | 60 | 46.0 | 96.0 | 68.0 | 1 370 | 0.71 | 5 100 | 0.32 | 8 115 |
| BSN3062-DT | 30 | 62 | 56 | 0.6 | 0.6 | 34 | 53 | 60 | 49.0 | 111 | 77.0 | 1 580 | 0.80 | 4 500 | 0.37 | 8 650 |
| BSN3072-DT | 30 | 72 | 76 | 0.6 | 0.6 | 35 | 64 | 60 | 98.0 | 188 | 133 | 1 800 | 1.47 | 3 900 | 1.17 | 11 070 |
| BSN3572-DT | 35 | 72 | 68 | 0.6 | 0.6 | 40 | 62 | 60 | 68.0 | 155 | 104 | 1 630 | 1.32 | 3 800 | 0.41 | 13 514 |
| BSN4075-DT | 40 | 75 | 68 | 0.6 | 0.6 | 46 | 67 | 60 | 72.0 | 176 | 117 | 1 850 | 1.30 | 3 500 | 0.49 | 14 105 |
| BSN4090-DT | 40 | 90 | 92 | 0.6 | 0.6 | 46 | 80 | 60 | 128 | 269 | 182 | 2 300 | 2.76 | 3 100 | 2.03 | 18 704 |
| BSN5090-DT | 50 | 90 | 68 | 0.6 | 0.6 | 56 | 82 | 60 | 78.0 | 220 | 143 | 2 330 | 1.86 | 2 800 | 0.66 | 15 392 |
| BSN50110-DT | 50 | 110 | 108 | 0.6 | 0.6 | 57 | 98 | 60 | 188 | 440 | 299 | 2 690 | 4.92 | 2 500 | 2.11 | 19 121 |


3. Inner rings are likely to separate because of their structure. To remove bearing from shaft, grasp an inner ring to pull it out.

4. The installation dimensions above are the recommended values for general machine tools.

Contact NSK if the unit is used under heavy load conditions.

Accessories

BSBD Series

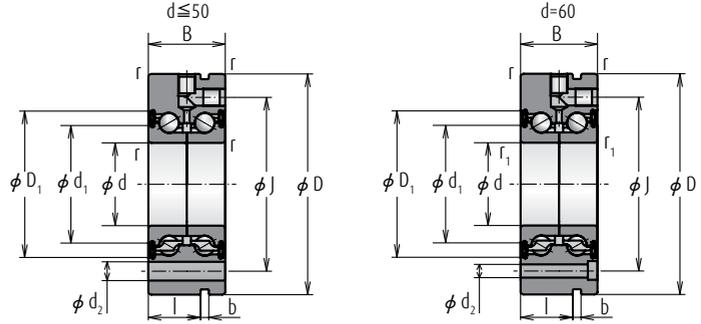

BSF series Single product

(In the case of BSF60145)

| Bearing Numbers | Boundry Dimensions (mm) | | | | | Basic Load Rating (kN) | | Limiting ⁽¹⁾ Axial Load (kN) | Axial Rigidity (N/μm) | Mass (kg) | Allowable rotating speed (min ⁻¹) Grease Lubrication |
|-----------------|-------------------------|-----|----|---------|----------------------|--------------------------|--------------------------|---|-----------------------|-----------|---|
| | d | D | B | r (min) | r ₁ (min) | C _a (Dynamic) | C _{0a} (Static) | | | | |
| BSF1255 | 12 | 55 | 25 | 0.6 | 0.3 | 18.5 | 24.0 | 17.6 | 375 | 0.37 | 8 000 |
| BSF1560 | 15 | 60 | 25 | 0.6 | 0.3 | 19.4 | 26.9 | 19.4 | 400 | 0.44 | 7 100 |
| BSF1762 | 17 | 62 | 25 | 0.6 | 0.6 | 20.3 | 29.7 | 21.2 | 450 | 0.46 | 6 700 |
| BSF2068 | 20 | 68 | 28 | 0.6 | 0.6 | 26.4 | 41.0 | 29.3 | 650 | 0.61 | 5 800 |
| BSF2575 | 25 | 75 | 28 | 0.6 | 0.6 | 28.3 | 48.0 | 34.0 | 750 | 0.73 | 5 100 |
| BSF3080 | 30 | 80 | 28 | 0.6 | 0.6 | 30.0 | 55.5 | 38.5 | 850 | 0.79 | 4 500 |
| BSF30100 | 30 | 100 | 38 | 0.6 | 0.6 | 60.5 | 94 | 66.5 | 950 | 1.71 | 3 900 |
| BSF3590 | 35 | 90 | 34 | 0.6 | 0.6 | 42.0 | 77.5 | 52.0 | 900 | 1.20 | 3 800 |
| BSF40100 | 40 | 100 | 34 | 0.6 | 0.6 | 44.5 | 88.0 | 58.5 | 1 000 | 1.49 | 3 500 |
| BSF40115 | 40 | 115 | 46 | 0.6 | 0.6 | 78.5 | 135 | 91.0 | 1 200 | 2.56 | 3 100 |
| BSF50115 | 50 | 115 | 34 | 0.6 | 0.6 | 48.0 | 110 | 71.5 | 1 250 | 1.89 | 2 800 |
| BSF50140 | 50 | 140 | 54 | 0.6 | 0.6 | 116 | 219 | 149 | 1 400 | 4.46 | 2 500 |
| BSF60145 | 60 | 145 | 45 | 0.6 | 0.6 | 86.5 | 187 | 126 | 1 300 | 4.06 | 2 400 |



BSF series matched pairs

| Bearing Numbers | Boundry Dimensions (mm) | | | | | Basic Load Rating (kN) | | Limiting ⁽¹⁾ Axial Load (kN) | Axial Rigidity (N/μm) | Mass (kg) | Allowable rotating speed (min ⁻¹) Grease Lubrication |
|-----------------|-------------------------|-----|-----|---------|----------------------|--------------------------|--------------------------|---|-----------------------|-----------|---|
| | d | D | 2B | r (min) | r ₁ (min) | C _a (Dynamic) | C _{0a} (Static) | | | | |
| BSF1762-DT | 17 | 62 | 50 | 0.6 | 0.6 | 33.0 | 59.5 | 42.5 | 790 | 0.890 | 6 700 |
| BSF2068-DT | 20 | 68 | 56 | 0.6 | 0.6 | 43.0 | 82.0 | 58.5 | 1 180 | 1.17 | 5 800 |
| BSF2575-DT | 25 | 75 | 56 | 0.6 | 0.6 | 46.0 | 96.0 | 68.0 | 1 370 | 1.46 | 5 100 |
| BSF3080-DT | 30 | 80 | 56 | 0.6 | 0.6 | 49.0 | 111 | 77.0 | 1 580 | 1.58 | 4 500 |
| BSF30100-DT | 30 | 100 | 76 | 0.6 | 0.6 | 98.0 | 188 | 133 | 1 800 | 3.41 | 3 900 |
| BSF3590-DT | 35 | 90 | 68 | 0.6 | 0.6 | 68.0 | 155 | 104 | 1 630 | 2.30 | 3 800 |
| BSF40100-DT | 40 | 100 | 68 | 0.6 | 0.6 | 72.0 | 176 | 117 | 1 850 | 2.88 | 3 500 |
| BSF40115-DT | 40 | 115 | 92 | 0.6 | 0.6 | 128 | 269 | 182 | 2 300 | 5.12 | 3 100 |
| BSF50115-DT | 50 | 115 | 68 | 0.6 | 0.6 | 78.0 | 220 | 143 | 2 330 | 3.78 | 2 800 |
| BSF50140-DT | 50 | 140 | 108 | 0.6 | 0.6 | 188 | 440 | 299 | 2 690 | 8.92 | 2 500 |


Notes

1. Permissible axial load is 0.7 times of limiting axial load.
This is the limiting load of the bearing. It dose not include strength of the mounting bolt.
2. Starting torque indicates torque due to the preload of the bearing. It does not include seal torque.
3. Inner rings are likely to separate because of their structure. To remove bearing from shaft, grasp an inner ring to pull it out.

BSBD Series Bearings for ball screw support

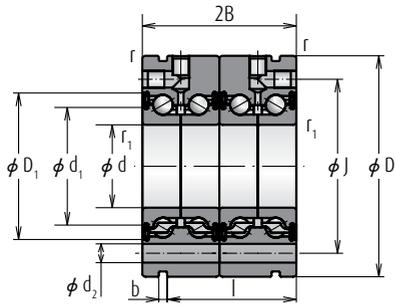

Design I



Design II

| Reference Dimensions (mm) | | | | | | | Design | Fixing Screws | | Preload (N) | Starting torque ⁽²⁾ (N-m) | Recommended nut tightening force (N) |
|---------------------------|----------------|-----|----------------|----|---|----------|--------|---------------|----------|-------------|--------------------------------------|--------------------------------------|
| d | D ₁ | J | d ₂ | l | b | t | | Size | Quantity | | H | |
| 23.7 | 32.7 | 42 | 6.8 | 17 | 3 | 3 × 120° | II | M6 | 3 | 720 | 0.038 | 4 026 |
| 26.7 | 35.7 | 46 | 6.8 | 17 | 3 | 3 × 120° | II | M6 | 3 | 675 | 0.034 | 4 056 |
| 28.1 | 37.7 | 48 | 6.8 | 17 | 3 | 3 × 120° | II | M6 | 3 | 890 | 0.05 | 4 432 |
| 32.6 | 43 | 53 | 6.8 | 19 | 3 | 4 × 90° | II | M6 | 4 | 1 885 | 0.13 | 7 611 |
| 37.6 | 48 | 58 | 6.8 | 19 | 3 | 4 × 90° | II | M6 | 4 | 2 245 | 0.16 | 8 115 |
| 42.6 | 53 | 63 | 6.8 | 19 | 3 | 6 × 60° | II | M6 | 6 | 2 625 | 0.19 | 8 650 |
| 49.1 | 64.4 | 80 | 8.8 | 30 | 3 | 8 × 45° | II | M8 | 8 | 4 855 | 0.59 | 11 070 |
| 53.1 | 62.2 | 75 | 8.8 | 25 | 3 | 4 × 90° | II | M8 | 4 | 2 630 | 0.21 | 13 514 |
| 55.1 | 67.2 | 80 | 8.8 | 25 | 3 | 4 × 90° | II | M8 | 4 | 3 065 | 0.24 | 14 105 |
| 63.1 | 80.1 | 94 | 8.8 | 36 | 3 | 12 × 30° | II | M8 | 12 | 7 220 | 1.02 | 18 704 |
| 70.1 | 82.2 | 94 | 8.8 | 25 | 3 | 6 × 60° | II | M8 | 6 | 4 020 | 0.33 | 15 392 |
| 78.1 | 97.5 | 113 | 11 | 45 | 3 | 12 × 30° | II | M10 | 12 | 7 435 | 1.06 | 19 121 |
| 83.1 | 99.3 | 120 | 8.8 | 35 | 3 | 8 × 45° | II | M8 | 8 | 4 780 | 0.50 | 20 848 |

| Reference Dimensions (mm) | | | | | | | Design | Fixing Screws | | Starting torque ⁽²⁾ (N-m) | Recommended nut tightening force (N) |
|---------------------------|----------------|-----|----------------|----|---|----------|--------|---------------|----------|--------------------------------------|--------------------------------------|
| d | D ₁ | J | d ₂ | l | b | t | | Size | Quantity | H | |
| 28.1 | 37.7 | 48 | 6.8 | 42 | 3 | 6 × 60° | I | M6 | 5 | 0.10 | 4 432 |
| 32.6 | 43 | 53 | 6.8 | 47 | 3 | 8 × 45° | I | M6 | 7 | 0.26 | 7 611 |
| 37.6 | 48 | 58 | 6.8 | 47 | 3 | 8 × 45° | I | M6 | 7 | 0.32 | 8 115 |
| 42.6 | 53 | 63 | 6.8 | 47 | 3 | 12 × 30° | I | M6 | 11 | 0.37 | 8 650 |
| 49.1 | 64.4 | 80 | 8.8 | 68 | 3 | 8 × 45° | II | M8 | 8 | 1.17 | 11 070 |
| 53.1 | 62.2 | 75 | 8.8 | 59 | 3 | 8 × 45° | I | M8 | 7 | 0.41 | 13 514 |
| 55.1 | 67.2 | 80 | 8.8 | 59 | 3 | 8 × 45° | I | M8 | 7 | 0.49 | 14 105 |
| 63.1 | 80.1 | 94 | 8.8 | 82 | 3 | 12 × 30° | II | M8 | 12 | 2.03 | 18 704 |
| 70.1 | 82.2 | 94 | 8.8 | 59 | 3 | 12 × 30° | I | M8 | 11 | 0.66 | 15 392 |
| 78.1 | 97.5 | 113 | 11 | 99 | 3 | 12 × 30° | II | M10 | 12 | 2.11 | 19 121 |

(8) Permissible axial loads

NSK has defined the static limit axial load as the lower of the values based on the following two situations:

1. Ride-over limit axial load (Fig. 4)

Limit load which would cause contact ellipse between ball and raceway groove to go over shoulder of raceway groove.

2. Contact pressure limit axial load (Fig. 5)

Load which contact stress at the center of contact area between ball and raceway groove is high and would cause impression specified at basic static load rating.

NSK determines static permissible axial load taking safety factor of limit axial load into consideration based on its many years of experience so that good bearing performance can be kept.

In the calculation of basic static axial load rating C_{0a} , shoulder height of raceway groove is not taken into account. So, the value may exceed the ride-over load.

Since applicable load is actually under the value of C_{0a} , C_{0a} makes no sense in this case (Fig. 6). Therefore, especially for thrust angular contact ball bearing where axial load is assumed to be used under severe conditions, limit axial loads not C_{0a} are listed in each dimension table as needed.

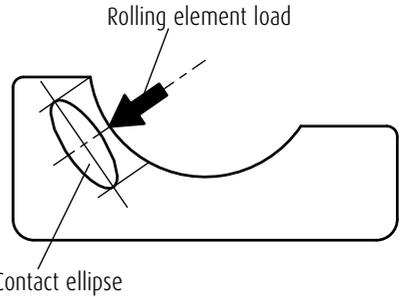


Fig. 4 Ride-over limit axial load

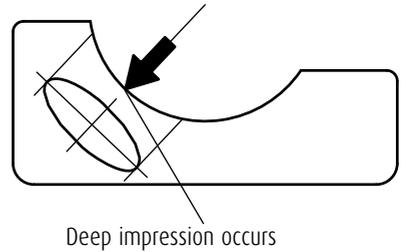


Fig. 5 Contact pressure limit axial load



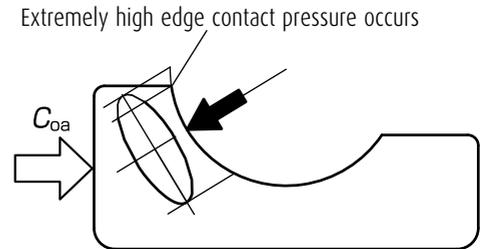


Fig. 6 C_{0a} and limit axial load



B-3-2 Dimension Table and Reference Number of Standard Nut Ball Screws



| | |
|-----------------------------|------|
| End Deflector Type | Page |
| Tube Type..... | B431 |
| Deflector(bridge) Type..... | B437 |
| End Cap Type | B471 |
| | B485 |

B-3-2.1 End Deflector Type Ball Screws

This product is being applied for a patent.

1. Features

▶ Low and less offensive noise

The average noise level is reduced by more than 6 dB compared with our existing products. At low-speed rotation, the ball screws are nearly silent, while their noise is unprecedentedly low at high-speed rotation.

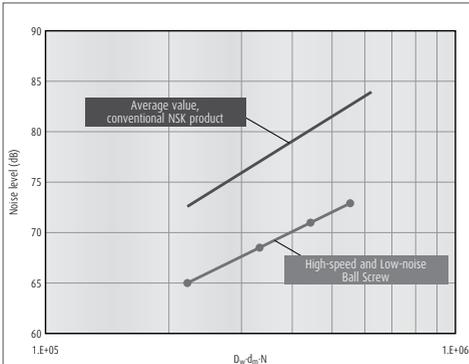


Fig. 1 Comparison of noise level

▶ High-speed operation

Realizes the d-n of 180 000, outstanding for ball screws and far surpassing the 100 000 d-n performance of existing return tube type products. For high-lead ball screws, high-speed operation at over 200 m/min is also possible.

▶ Compact

The external diameter of the ball nut is 30% smaller than our existing models. Compact configurations are possible for low-profile XY tables as well as for other devices and equipment.

▶ Grease fitting provided as standard equipment

The ball screws with shaft diameters equal to or less than $\phi 25$ are equipped with a grease fitting ($M5 \times 0.8$) as a standard. Lubrication ports are provided in 2 places for ease of maintenance. The ball screws can be easily connected to an integrated lubrication system.

2. Specifications

(1) Ball recirculation system

Fig. 2 shows the structure of the end-deflector recirculation system.

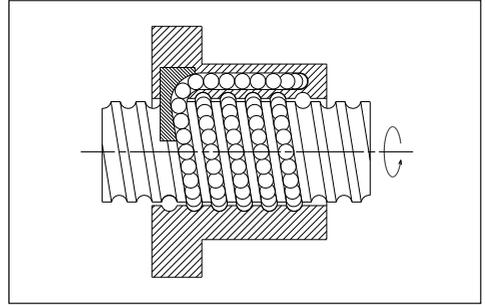


Fig. 2 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|---|
| Accuracy grade | C0, C1, C2, C3, C5, C17 |
| Axial play | Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less |

(3) Accuracy grade and axial play

Allowable d-n value and the criterion of maximum rotational speed are shown below.

Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value : 180 000 or less

Standard of rotational speed : 5 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Seal

A compact and thin plastic seal is used. Nut outside diameter is compact compare with the return tube recirculation system.

(5) Option

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surfaces, ensuring long-term, maintenance-free operation. Please contact NSK when using NSK K1.

3. Design precautions

When designing the shaft end of a ball screw which diameter is 25 mm or less, or 32 mm or over, and the lead is the same as its shaft diameter, one end of the screw must meet either one of the following conditions. If not, we

cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions"(page B83) and "Handling Precautions"(page B103).

4. Product categories

End deflector type ball screws have the model as follows.


Table 2 End-deflector type ball screw product categories

| Nut model | Shape | Flang shape | Nut shape | Preload system |
|-----------|---|------------------|-----------|---|
| BSS |  | Circular II, III | Circular | Non-preload, Slight axial play P-preload (light preload) |


5. Structure of model number and reference number

The following describe the structure of "Model number" and "Reference number for ball screw".


> Model Number

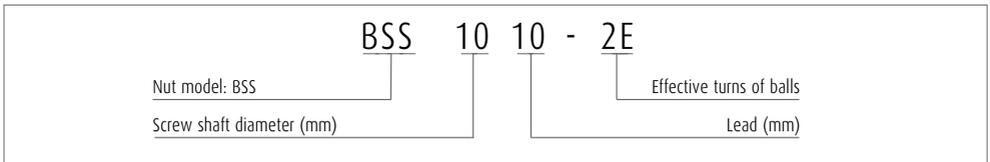

> Reference number for ball screw

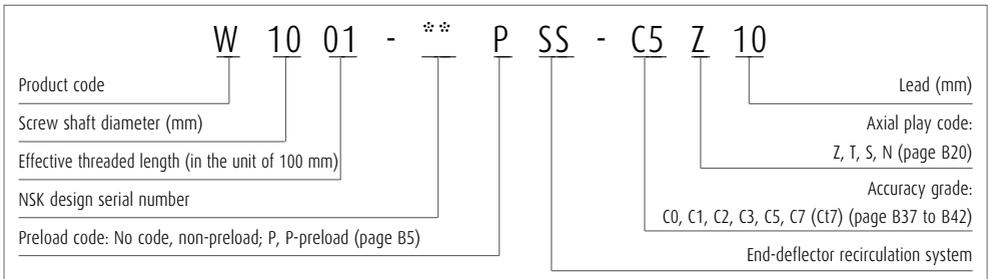


End deflector type

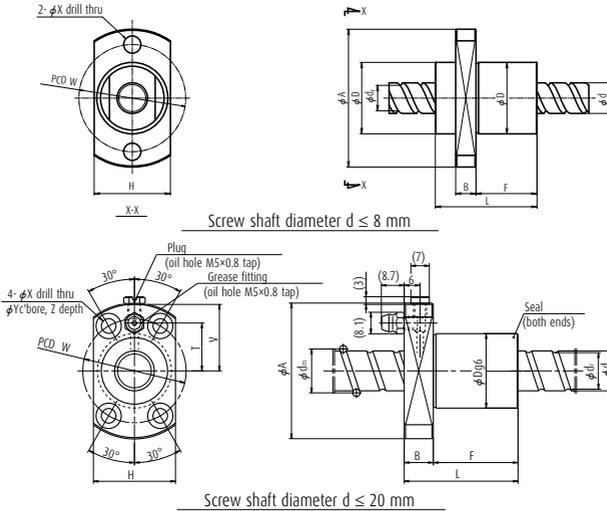

| Model No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls | Basic load rating (N) | | Axial rigidity K (N/μm) |
|------------|-----------------|-----------|-----------------------------|---------------------------------------|-----------------------------|-----------------------------|------------------------|------------------------|-------------------------------|
| | | | | | | | Dynamic C _a | Static C _{0a} | |
| BSS0608-2E | 6 | 8 | 1.2 | 6.2 | 4.9 | 2 | 550 | 715 | 24 |
| BSS0608-4E | 6 | 8 | 1.2 | 6.2 | 4.9 | 2 | 1 180 | 1 760 | 55 |
| BSS0612-2E | 6 | 12 | 1.2 | 6.2 | 4.9 | 2 | 550 | 715 | 22 |
| BSS0612-4E | 6 | 12 | 1.2 | 6.2 | 4.9 | 2 | 1 180 | 1 760 | 51 |
| BSS0810-2E | 8 | 10 | 1.588 | 8.3 | 6.6 | 2 | 910 | 1 260 | 31 |
| BSS0810-4E | 8 | 10 | 1.588 | 8.3 | 6.6 | 2 | 1 950 | 3 080 | 72 |
| BSS0815-2E | 8 | 15 | 1.588 | 8.3 | 6.6 | 2 | 910 | 1 260 | 29 |
| BSS0815-4E | 8 | 15 | 1.588 | 8.3 | 6.6 | 2 | 1 950 | 3 080 | 68 |
| BSS1005-3E | 10 | 5 | 2.000 | 10.3 | 8.2 | 3 | 3 420 | 4 840 | 126 |
| BSS1010-2E | 10 | 10 | 2.000 | 10.3 | 8.2 | 2 | 2 290 | 2 980 | 77 |
| BSS1205-3E | 12 | 5 | 2.000 | 12.3 | 10.2 | 3 | 3 750 | 5 810 | 146 |
| BSS1210-3E | 12 | 10 | 2.000 | 12.3 | 10.2 | 3 | 3 760 | 5 780 | 142 |
| BSS1210-3E | 12 | 20 | 2.000 | 12.3 | 10.2 | 2 | 2 330 | 3 600 | 83 |
| BSS1230-2E | 12 | 30 | 2.000 | 12.3 | 10.2 | 2 | 2 190 | 3 650 | 75 |
| BSS1505-3E | 15 | 5 | 2.778 | 15.5 | 12.6 | 3 | 6 410 | 10 100 | 183 |
| BSS1510-3E | 15 | 10 | 2.778 | 15.5 | 12.6 | 3 | 6 530 | 10 200 | 181 |
| BSS1520-2E | 15 | 20 | 3.175 | 15.5 | 12.2 | 2 | 5 660 | 8 700 | 127 |
| BSS1530-2E | 15 | 30 | 3.175 | 15.5 | 12.2 | 2 | 5 500 | 8 580 | 116 |
| BSS2005-3E | 20 | 5 | 3.175 | 20.5 | 17.2 | 3 | 10 400 | 18 500 | 268 |
| BSS2010-3E | 20 | 10 | 3.175 | 20.5 | 17.2 | 3 | 10 200 | 18 600 | 268 |
| BSS2020-2E | 20 | 20 | 3.175 | 20.5 | 17.2 | 2 | 6 790 | 11 800 | 167 |
| BSS2030-2E | 20 | 30 | 3.175 | 20.5 | 17.2 | 2 | 6 550 | 11 800 | 159 |
| BSS2040-2E | 20 | 40 | 3.175 | 20.5 | 17.2 | 2 | 6 380 | 11 600 | 147 |
| BSS2060-2E | 20 | 60 | 3.175 | 20.5 | 17.2 | 2 | 5 680 | 11 800 | 128 |
| BSS2505-3E | 25 | 5 | 3.175 | 25.5 | 22.2 | 3 | 11 500 | 23 500 | 325 |
| BSS2510-4E | 25 | 10 | 3.175 | 25.5 | 22.2 | 4 | 15 000 | 32 400 | 437 |
| BSS2520-2E | 25 | 20 | 3.175 | 25.5 | 22.2 | 2 | 7 650 | 14 800 | 203 |
| BSS2525-2E | 25 | 25 | 3.175 | 25.5 | 22.2 | 2 | 7 490 | 14 600 | 197 |
| BSS2530-2E | 25 | 30 | 3.175 | 25.5 | 22.2 | 2 | 7 490 | 14 600 | 194 |
| BSS2550-2E | 25 | 50 | 3.175 | 25.5 | 22.2 | 2 | 6 910 | 14 700 | 177 |

Note 1) The axial rigidity K in the table above is a theoretical value derived from elastic displacement between screw grooves and balls when axial load is applied to a ball nut for which preload is set at 3% of the basic dynamic load rating (C_a). For ball screws with shaft diameters less than φ 25, the standard Compact FA PSS type can be available.


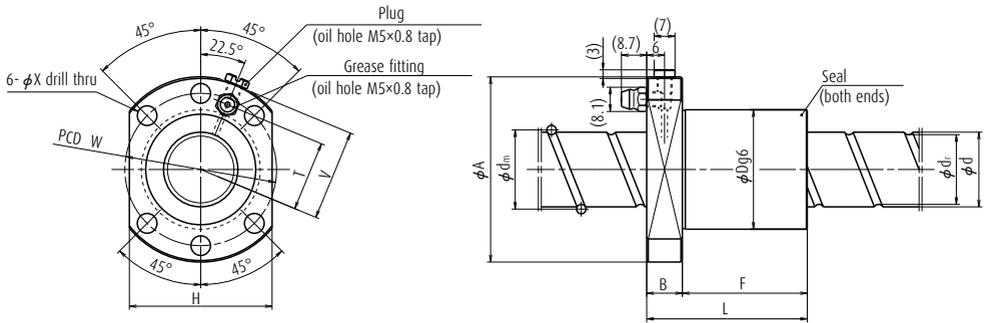


Screw shaft diameter $d = 25$ mm

Unit: mm

| Nut entire length L | Nut diameter D | Flange diameter A | Flange width B | Nut length F | Flange dimension | | Bolt hole PCD W | Basic load rating (N) | | | Oil hole distance T |
|------------------------|-------------------|----------------------|-------------------|-----------------|------------------|------|--------------------|-----------------------|-----|-----|------------------------|
| | | | | | H | V | | X | Y | Z | |
| 16 | 14 | 27 | 4 | 8 | 15 (10) | — | 21 | 3.4 | — | — | — |
| 24 | 14 | 27 | 4 | 16 | 15 (10) | — | 21 | 3.4 | — | — | — |
| 20 | 14 | 27 | 4 | 16 | 15 (10) | — | 21 | 3.4 | — | — | — |
| 32 | 14 | 27 | 4 | 16 | 15 (10) | — | 21 | 3.4 | — | — | — |
| 18 | 18 | 31 | 4 | 10 | 19 (13) | — | 25 | 3.4 | — | — | — |
| 28 | 18 | 31 | 4 | 20 | 19 (13) | — | 25 | 3.4 | — | — | — |
| 22 | 18 | 31 | 4 | 14 | 19 (13) | — | 25 | 3.4 | — | — | — |
| 37 | 18 | 31 | 4 | 29 | 19 (13) | — | 25 | 3.4 | — | — | — |
| 29 | 23 | 43 | 11 | 18 | 26 | 21 | 33 | 4.5 | 8 | 4.5 | 14 |
| 32 | 23 | 43 | 11 | 21 | 26 | 21 | 33 | 4.5 | 8 | 4.5 | 14 |
| 30 | 24 | 44 | 11 | 19 | 27 | 21.5 | 34 | 4.5 | 8 | 4.5 | 14.5 |
| 43 | 24 | 44 | 11 | 32 | 27 | 21.5 | 34 | 4.5 | 8 | 4.5 | 14.5 |
| 50 | 24 | 44 | 11 | 39 | 27 | 21.5 | 34 | 4.5 | 8 | 4.5 | 14.5 |
| 70 | 24 | 44 | 11 | 59 | 27 | 21.5 | 34 | 4.5 | 8 | 4.5 | 14.5 |
| 30 | 28 | 51 | 11 | 19 | 31 | 25 | 39 | 5.5 | 9.5 | 5.5 | 18 |
| 43 | 28 | 51 | 11 | 32 | 31 | 25 | 39 | 5.5 | 9.5 | 5.5 | 18 |
| 51 | 32 | 55 | 11 | 40 | 33 | 27 | 43 | 5.5 | 9.5 | 5.5 | 20 |
| 71 | 32 | 55 | 11 | 60 | 33 | 27 | 43 | 5.5 | 9.5 | 5.5 | 20 |
| 31 | 36 | 62 | 13 | 18 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 45 | 36 | 62 | 13 | 32 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 54 | 36 | 62 | 13 | 41 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 74 | 36 | 62 | 13 | 61 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 92 | 36 | 62 | 13 | 79 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 129 | 36 | 62 | 13 | 116 | 38 | 30.5 | 49 | 6.6 | 11 | 6.5 | 23.5 |
| 32 | 40 | 62 | 12 | 20 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |
| 56 | 40 | 62 | 12 | 44 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |
| 54 | 40 | 62 | 12 | 42 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |
| 63 | 40 | 62 | 12 | 51 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |
| 74 | 40 | 62 | 12 | 62 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |
| 114 | 40 | 62 | 12 | 102 | 48 | 30.5 | 51 | 6.6 | — | — | 23.5 |

2) Dimensions in parentheses are for flat nut configurations.

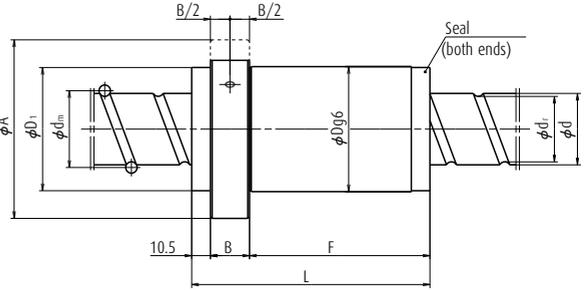

Screw shaft diameter $d \geq 36$ mm

Unit: mm

| Nut entire length L | Nut diameter D | Seal section diameter D ₁ | Flange diameter A | Flange width B | Nut length F | Notched flange G | Bolt hole PCD W | Bolt hole dimension X |
|------------------------|-------------------|---|----------------------|-------------------|-----------------|---------------------|--------------------|--------------------------|
| 55 | 56 | 55 | 86 | 12 | 32.5 | 34 | 71 | 9 |
| 104 | 56 | 55 | 86 | 18 | 75.5 | 34 | 71 | 9 |
| 103 | 56 | 55 | 86 | 18 | 74.5 | 34 | 71 | 9 |
| 122 | 56 | 55 | 86 | 18 | 93.5 | 34 | 71 | 9 |
| 141 | 56 | 55 | 86 | 18 | 112.5 | 34 | 71 | 9 |
| 94 | 56 | 55 | 86 | 18 | 65.5 | 34 | 71 | 9 |
| 153 | 56 | 55 | 86 | 18 | 124.5 | 34 | 71 | 9 |
| 50 | 65 | 64 | 95 | 12 | 27.5 | 36 | 80 | 9 |
| 109 | 65 | 64 | 95 | 22 | 76.5 | 36 | 80 | 9 |
| 120 | 65 | 64 | 95 | 22 | 87.5 | 36 | 80 | 9 |
| 143 | 65 | 64 | 95 | 22 | 110.5 | 36 | 80 | 9 |
| 166 | 65 | 64 | 95 | 22 | 133.5 | 36 | 80 | 9 |
| 99 | 70 | 69 | 100 | 22 | 66.5 | 38.5 | 85 | 9 |
| 108 | 70 | 69 | 100 | 22 | 75.5 | 38.5 | 85 | 9 |
| 127 | 70 | 69 | 100 | 22 | 94.5 | 38.5 | 85 | 9 |
| 146 | 70 | 69 | 100 | 22 | 113.5 | 38.5 | 85 | 9 |
| 145 | 70 | 69 | 100 | 22 | 112.5 | 38.5 | 85 | 9 |
| 134 | 70 | 69 | 100 | 22 | 101.5 | 38.5 | 85 | 9 |
| 110 | 70 | 69 | 100 | 22 | 77.5 | 38.5 | 85 | 9 |
| 184 | 70 | 69 | 100 | 22 | 151.5 | 38.5 | 85 | 9 |
| 99 | 75 | 74 | 110 | 22 | 66.5 | 43 | 93 | 11 |
| 108 | 75 | 74 | 110 | 22 | 75.5 | 43 | 93 | 11 |
| 127 | 75 | 74 | 110 | 22 | 94.5 | 43 | 93 | 11 |
| 146 | 75 | 74 | 110 | 22 | 113.5 | 43 | 93 | 11 |
| 170 | 75 | 74 | 110 | 22 | 137.5 | 43 | 93 | 11 |
| 164 | 75 | 74 | 110 | 22 | 131.5 | 43 | 93 | 11 |
| 89 | 82 | 81 | 118 | 22 | 56.5 | 46 | 100 | 11 |
| 96 | 82 | 81 | 118 | 22 | 63.5 | 46 | 100 | 11 |
| 111 | 82 | 81 | 118 | 22 | 78.5 | 46 | 100 | 11 |
| 126 | 82 | 81 | 118 | 22 | 93.5 | 46 | 100 | 11 |
| 145 | 82 | 81 | 118 | 22 | 112.5 | 46 | 100 | 11 |
| 164 | 82 | 81 | 118 | 22 | 131.5 | 46 | 100 | 11 |
| 130 | 82 | 81 | 118 | 22 | 97.5 | 46 | 100 | 11 |
| 224 | 82 | 81 | 118 | 22 | 191.5 | 46 | 100 | 11 |

B-3-2.2 Return Tube Type Ball Screws

1. Features

Return tube type is a standard way of ball recirculation system for ball screws. It has various combinations of shaft diameter and lead.

2. Specifications

(1) Ball recirculation system

The structure of return tube recirculation system is shown below.

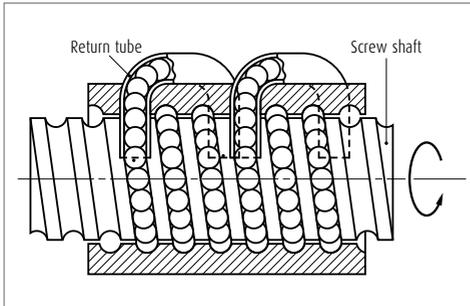


Fig.1 Structure of return tube recirculation system

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | SFT, PFT, ZFT, DFT: C0, C1, C2, C3, C5, Ct7 LSFT, LPFT, LDFT: C1, C2, C3, C5, Ct7 (Ct7 is not included in DFT, LDFT) |
| Axial play | Z, 0 mm (preloaded); T, 0.005 mm or less; S, 0.020 mm or less; N, 0.050 mm or less |

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in Table 1. Please consult NSK for other grades.

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measures must be taken for the high-speed ball screws respectively.

Allowable d-n value :

Standard specification ; 70 000 or less
High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Option

A type equipped with NSK K1 lubrication unit is also available.

(5) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are four different preloaded systems with several models. Since the leads are in the range from 1/2 to the same length of the shaft

Table 2 Return tube type ball screws product categories

| Nut model | Shape | Flange shape | Nut shape | Preload system |
|-----------|-------|---|-------------|---|
| SFT | | Flanged d=16mm or under Rectangle d=20mm or over Circular I, II | Circle dia. | Non-preload, Slight axial play |
| PFT | | | | P-preload (light preload) Spacer ball 1:1 |
| ZFT | | Flanged Circular I, II | Circle dia. | Z-preload (medium preload) |


| Nut model | Shape | Flange shape | Nut shape | Preload system |
|-----------|---|--|---|--|
| DFT |  | Flanged Circular I, II | Circular | D-preload (medium preload) (heavy preload) |
| LSFT |  | Flanged d=20mm or under Rectangle d=25mm or over Circular II | d=20mm or under Circular d=25mm or over Tube- projecting type | Non-preload, Slight axial play |
| LPFT | | | | P-preload (light preload) Spacer ball 1:1 |
| LDFT |  | Flanged Circular II | Circular | D-preload (medium preload) (heavy preload) |

diameter (medium-high helix lead), LSFT, LPFT, LDFT Type ball screws are suitable for high-speed operation.

4. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

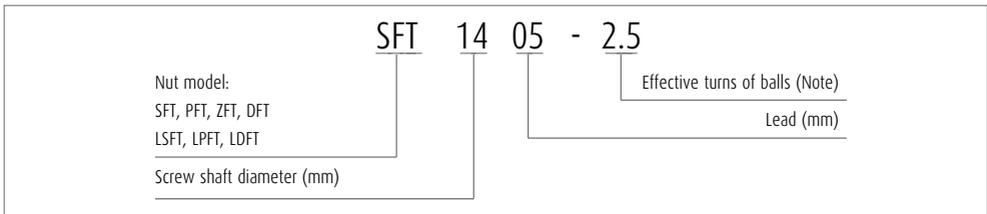


Note: In case of Z-preload, the number here is twice as large as the effective turns of balls.

> Reference number for ball screw

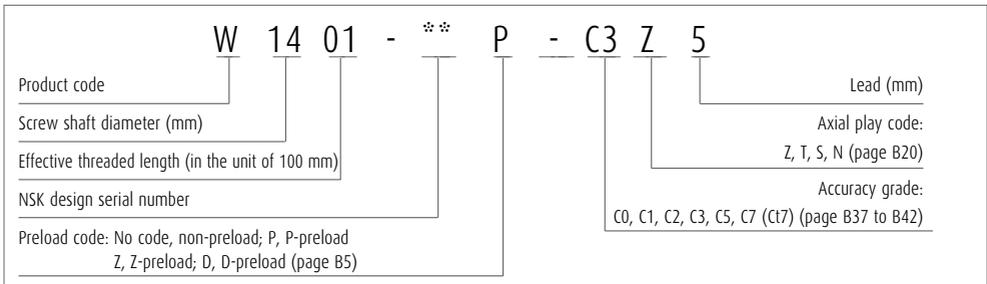


Return tube type

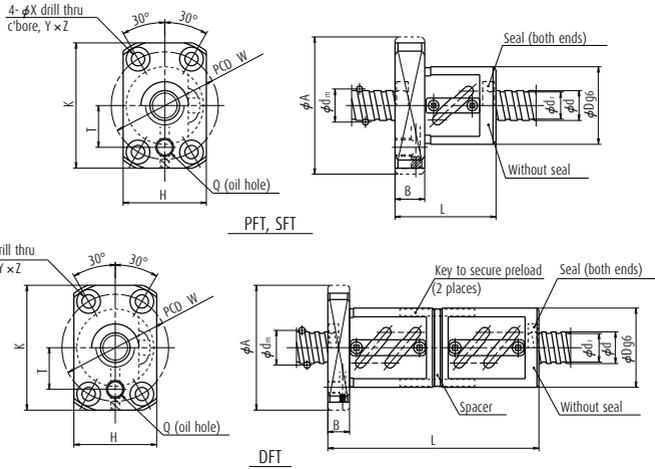

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-----------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|--|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| * PFT 1004-2.5 | P | 10 | 4 | 2.000 | 10.3 | 8.2 | 2.5×1 | 2 020 | 2 210 | 76 |
| SFT 1004-2.5 | Clearance | 10 | 4 | 2.000 | 10.3 | 8.2 | 2.5×1 | 3 210 | 4 420 | 90 |
| PFT 1204-2.5 | P | 12 | 4 | 2.381 | 12.3 | 9.8 | 2.5×1 | 2 780 | 3 140 | 89 |
| PFT 1204-3 | P | 12 | 4 | 2.381 | 12.3 | 9.8 | 1.5×2 | 3 250 | 3 770 | 106 |
| SFT 1204-2.5 | Clearance | 12 | 4 | 2.381 | 12.3 | 9.8 | 2.5×1 | 4 410 | 6 280 | 106 |
| SFT 1204-3 | Clearance | 12 | 4 | 2.381 | 12.3 | 9.8 | 1.5×2 | 5 160 | 7 540 | 126 |
| * PFT 1205-2.5 | P | 12 | 5 | 2.381 | 12.3 | 9.8 | 2.5×1 | 2 770 | 3 130 | 89 |
| PFT 1205-3 | P | 12 | 5 | 2.381 | 12.3 | 9.8 | 1.5×2 | 3 240 | 3 760 | 106 |
| SFT 1205-2.5 | Clearance | 12 | 5 | 2.381 | 12.3 | 9.8 | 2.5×1 | 4 390 | 6 260 | 106 |
| SFT 1205-3 | Clearance | 12 | 5 | 2.381 | 12.3 | 9.8 | 1.5×2 | 5 140 | 7 510 | 126 |
| * LPFT 1210-2.5 | P | 12 | 10 | 2.381 | 12.5 | 10.0 | 2.5×1 | 2 790 | 3 220 | 90 |
| LSFT 1210-2.5 | Clearance | 12 | 10 | 2.381 | 12.5 | 10.0 | 2.5×1 | 4 430 | 6 430 | 110 |
| * PFT 1405-2.5 | P | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×1 | 5 020 | 5 970 | 116 |
| SFT 1405-2.5 | Clearance | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 970 | 11 900 | 140 |
| PFT 1405-5 | P | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×2 | 9 110 | 11 900 | 225 |
| SFT 1405-5 | Clearance | 14 | 5 | 3.175 | 14.5 | 11.2 | 2.5×2 | 14 500 | 23 900 | 274 |
| * LPFT 1408-2.5 | P | 14 | 8 | 3.175 | 14.5 | 11.2 | 2.5×1 | 4 960 | 5 920 | 120 |
| LSFT 1408-2.5 | Clearance | 14 | 8 | 3.175 | 14.5 | 11.2 | 2.5×1 | 7 880 | 11 800 | 140 |
| * LPFT 1510-2.5 | P | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 5 130 | 6 420 | 127 |
| LSFT 1510-2.5 | Clearance | 15 | 10 | 3.175 | 15.5 | 12.2 | 2.5×1 | 8 140 | 12 800 | 150 |
| PFT 1604-3 | P | 16 | 4 | 2.381 | 16.3 | 13.8 | 1.5×2 | 3 740 | 5 130 | 135 |
| SFT 1604-2.5 | Clearance | 16 | 4 | 2.381 | 16.3 | 13.8 | 2.5×1 | 5 070 | 8 500 | 134 |
| DFT 1604-2.5 | D | 16 | 4 | 2.381 | 16.3 | 13.8 | 2.5×1 | 5 070 | 8 500 | 263 |
| PFT 1604-5 | P | 16 | 4 | 2.381 | 16.3 | 13.8 | 2.5×2 | 5 800 | 8 500 | 215 |
| SFT 1604-3 | Clearance | 16 | 4 | 2.381 | 16.3 | 13.8 | 1.5×2 | 5 930 | 10 300 | 160 |
| DFT 1604-3 | D | 16 | 4 | 2.381 | 16.3 | 13.8 | 1.5×2 | 5 930 | 10 300 | 315 |



- Notes**
1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape.
 2. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

Return tube type

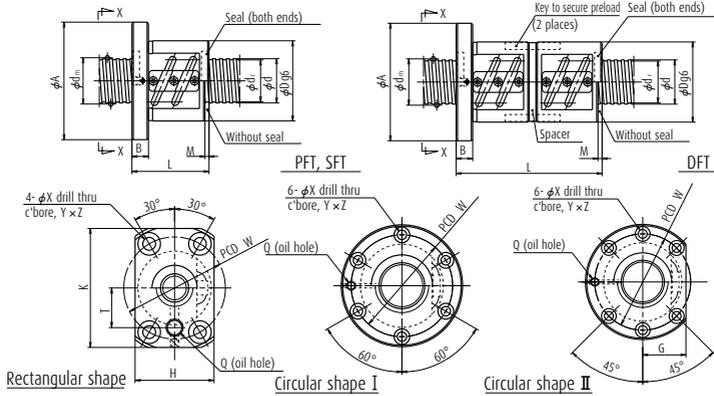

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-----------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|-------------------------------------|-------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _{0a} | Static C _{0a} | |
| PFT 1605-3 | P | 16 | 5 | 3.175 | 16.5 | 13.2 | 1.5×2 | 6 350 | 8 070 | 158 |
| SFT 1605-2.5 | Clearance | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 620 | 13 800 | 158 |
| DFT 1605-2.5 | D | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 620 | 13 800 | 311 |
| PFT 1605-5 | P | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×2 | 9 850 | 13 800 | 258 |
| SFT 1605-3 | Clearance | 16 | 5 | 3.175 | 16.5 | 13.2 | 1.5×2 | 10 100 | 16 100 | 188 |
| DFT 1605-3 | D | 16 | 5 | 3.175 | 16.5 | 13.2 | 1.5×2 | 10 100 | 16 100 | 370 |
| SFT 1605-5 | Clearance | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×2 | 15 600 | 27 600 | 307 |
| DFT 1605-5 | D | 16 | 5 | 3.175 | 16.5 | 13.2 | 2.5×2 | 15 600 | 27 600 | 603 |
| PFT 1606-2.5 | P | 16 | 6 | 3.175 | 16.5 | 13.2 | 2.5×1 | 5 410 | 6 880 | 133 |
| SFT 1606-2.5 | Clearance | 16 | 6 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 590 | 13 800 | 158 |
| DFT 1606-2.5 | D | 16 | 6 | 3.175 | 16.5 | 13.2 | 2.5×1 | 8 590 | 13 800 | 311 |
| SFT 1606-3 | Clearance | 16 | 6 | 3.175 | 16.5 | 13.2 | 1.5×2 | 10 100 | 16 100 | 188 |
| DFT 1606-3 | D | 16 | 6 | 3.175 | 16.5 | 13.2 | 1.5×2 | 10 100 | 16 100 | 370 |
| * LPFT 1616-1.5 | P | 16 | 16 | 3.175 | 16.75 | 13.4 | 1.5×1 | 4 180 | 5 390 | 110 |
| LSFT 1616-1.5 | Clearance | 16 | 16 | 3.175 | 16.75 | 13.4 | 1.5×1 | 5 480 | 8 080 | 100 |
| SFT 2004-2.5 | Clearance | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×1 | 5 730 | 10 900 | 160 |
| DFT 2004-2.5 | D | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×1 | 5 730 | 10 900 | 315 |
| * PFT 2004-5 | P | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 6 550 | 10 900 | 260 |
| SFT 2004-5 | Clearance | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 10 400 | 21 800 | 309 |
| DFT 2004-5 | D | 20 | 4 | 2.381 | 20.3 | 17.8 | 2.5×2 | 10 400 | 21 800 | 608 |
| PFT 2005-3 | P | 20 | 5 | 3.175 | 20.5 | 17.2 | 1.5×2 | 7 140 | 10 300 | 191 |
| SFT 2005-2.5 | Clearance | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×1 | 9 690 | 17 100 | 190 |
| DFT 2005-2.5 | D | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×1 | 9 690 | 17 100 | 376 |
| * PFT 2005-5 | P | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 11 100 | 17 100 | 311 |
| SFT 2005-3 | Clearance | 20 | 5 | 3.175 | 20.5 | 17.2 | 1.5×2 | 11 300 | 20 500 | 227 |
| DFT 2005-3 | D | 20 | 5 | 3.175 | 20.5 | 17.2 | 1.5×2 | 11 300 | 20 500 | 446 |
| SFT 2005-5 | Clearance | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 17 600 | 34 200 | 370 |
| DFT 2005-5 | D | 20 | 5 | 3.175 | 20.5 | 17.2 | 2.5×2 | 17 600 | 34 200 | 726 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

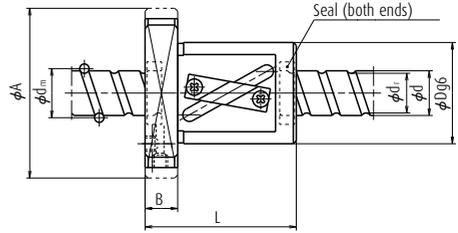

LPFT, LSFT


Unit: mm

Ball nut dimensions

| Nute ntire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Rectangle flanged diameter | | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole length T | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|----------------------------|----|---------------------|---------------------|-----|-----|--------------------|----------------------|---------------|
| | | | | | H | K | | X | Y | Z | | | |
| 52 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 42 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 77 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 57 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 52 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 97 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 57 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 107 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 44 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 44 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 86 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 56 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 110 | 40 | 63 | 11 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 20 | M6×1 |
| 56 | 40 | 63 | 12 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 17 | M6×1 |
| 56 | 40 | 63 | 12 | — | 40 | 55 | — | 5.5 | 9.5 | 5.5 | 51 | 17 | M6×1 |
| 37 | 40 | 63 | 11 | 24 | — | — | 3 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 69 | 40 | 63 | 11 | 24 | — | — | 3 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 49 | 40 | 63 | 11 | 24 | — | — | 3 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 49 | 40 | 63 | 11 | 24 | — | — | 3 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 93 | 40 | 63 | 11 | 24 | — | — | 3 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 52 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 41 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 76 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 56 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 52 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 97 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 56 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |
| 106 | 44 | 67 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 55 | — | M6×1 |



- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; D, Double nut preload (See page B5.)

Return tube type

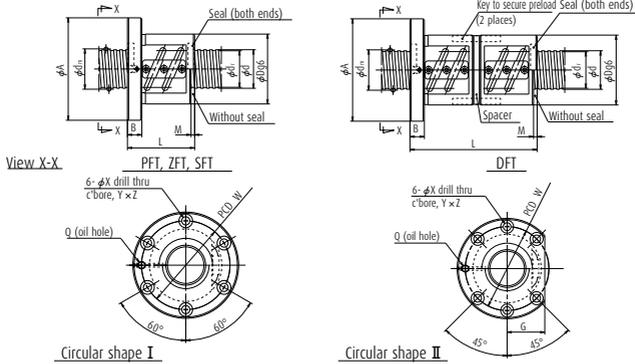

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-----------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|---|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| PFT 2006-2.5 | P | 20 | 6 | 3.969 | 20.5 | 16.4 | 2.5×1 | 8 120 | 10 500 | 164 |
| PFT 2006-3 | P | 20 | 6 | 3.969 | 20.5 | 16.4 | 1.5×2 | 9 500 | 12 600 | 195 |
| SFT 2006-2.5 | Clearance | 20 | 6 | 3.969 | 20.5 | 16.4 | 2.5×1 | 12 900 | 21 000 | 195 |
| DFT 2006-2.5 | D | 20 | 6 | 3.969 | 20.5 | 16.4 | 2.5×1 | 12 900 | 21 000 | 384 |
| SFT 2006-3 | Clearance | 20 | 6 | 3.969 | 20.5 | 16.4 | 1.5×2 | 15 100 | 25 200 | 232 |
| DFT 2006-3 | D | 20 | 6 | 3.969 | 20.5 | 16.4 | 1.5×2 | 15 100 | 25 200 | 456 |
| PFT 2008-2.5 | P | 20 | 8 | 3.969 | 20.5 | 16.4 | 2.5×1 | 8 080 | 10 500 | 164 |
| SFT 2008-2.5 | Clearance | 20 | 8 | 3.969 | 20.5 | 16.4 | 2.5×1 | 12 800 | 20 900 | 195 |
| DFT 2008-2.5 | D | 20 | 8 | 3.969 | 20.5 | 16.4 | 2.5×1 | 12 800 | 20 900 | 384 |
| SFT 2008-3 | Clearance | 20 | 8 | 3.969 | 20.5 | 16.4 | 1.5×2 | 15 000 | 25 100 | 232 |
| DFT 2008-3 | D | 20 | 8 | 3.969 | 20.5 | 16.4 | 1.5×2 | 15 000 | 25 100 | 456 |
| * LPFT 2010-2.5 | P | 20 | 10 | 3.969 | 21.0 | 16.9 | 2.5×1 | 8 350 | 11 000 | 169 |
| LSFT 2010-2.5 | Clearance | 20 | 10 | 3.969 | 21.0 | 16.9 | 2.5×1 | 13 300 | 21 900 | 202 |
| LPFT 2016-2.5 | P | 20 | 16 | 3.969 | 21.0 | 16.9 | 2.5×1 | 8 170 | 10 800 | 169 |
| LSFT 2016-2.5 | Clearance | 20 | 16 | 3.969 | 21.0 | 16.9 | 2.5×1 | 13 000 | 21 600 | 202 |
| * LPFT 2020-1.5 | P | 20 | 20 | 3.969 | 21.0 | 16.9 | 1.5×1 | 6 250 | 8 760 | 137 |
| LSFT 2020-1.5 | Clearance | 20 | 20 | 3.969 | 21.0 | 16.9 | 1.5×1 | 8 190 | 13 100 | 127 |
| SFT 2504-2.5 | Clearance | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×1 | 6 220 | 13 600 | 193 |
| ZFT 2504-5 | Z | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×1 | 6 220 | 13 600 | 379 |
| * PFT 2504-5 | P | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 7 110 | 13 600 | 312 |
| SFT 2504-5 | Clearance | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 11 300 | 27 200 | 374 |
| ZFT 2504-10 | Z | 25 | 4 | 2.381 | 25.3 | 22.8 | 2.5×2 | 11 300 | 27 200 | 735 |
| PFT 2505-3 | P | 25 | 5 | 3.175 | 25.5 | 22.2 | 1.5×2 | 7 940 | 12 800 | 223 |
| SFT 2505-2.5 | Clearance | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×1 | 10 800 | 21 800 | 231 |
| ZFT 2505-5 | Z | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×1 | 10 800 | 21 800 | 454 |
| * PFT 2505-5 | P | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 12 300 | 21 800 | 372 |
| SFT 2505-3 | Clearance | 25 | 5 | 3.175 | 25.5 | 22.2 | 1.5×2 | 12 600 | 25 600 | 271 |
| DFT 2505-3 | D | 25 | 5 | 3.175 | 25.5 | 22.2 | 1.5×2 | 12 600 | 25 600 | 532 |
| PFT 2505-7.5 | P | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×3 | 14 800 | 32 800 | 544 |
| SFT 2505-5 | Clearance | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 19 600 | 43 600 | 447 |
| ZFT 2505-10 | Z | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×2 | 19 600 | 43 600 | 876 |
| SFT 2505-7.5 | Clearance | 25 | 5 | 3.175 | 25.5 | 22.2 | 2.5×3 | 23 500 | 65 600 | 654 |

- Notes**
1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape. It comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. Seals are equipped as a standard for LSFT and LPFT of shaft diameter 20 mm or smaller. The outside dimensions are the same as those of without seals.
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

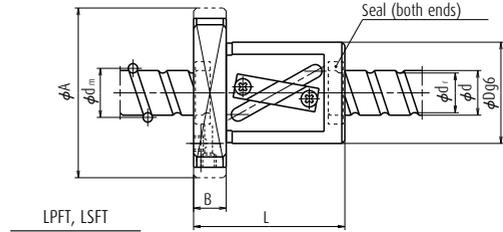

Unit: mm

Ball nut dimensions

| Nute ntire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Rectangle flanged diameter | | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole length T | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|----------------------------|----|---------------------|---------------------|-----|-----|--------------------|----------------------|---------------|
| | | | | | H | K | | X | Y | Z | | | |
| 44 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 56 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 44 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 86 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 56 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 110 | 48 | 71 | 11 | 27 | — | — | 3 | 5.5 | 9.5 | 5.5 | 59 | — | M6×1 |
| 54 | 48 | 75 | 13 | 28 | — | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 54 | 48 | 75 | 13 | 28 | — | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 102 | 48 | 75 | 13 | 28 | — | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 64 | 48 | 75 | 13 | 28 | — | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 120 | 48 | 75 | 13 | 28 | — | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 54 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 54 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 72 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 72 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 63 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 63 | 46 | 74 | 13 | — | 46 | 66 | — | 6.6 | 11 | 6.5 | 59 | 24 | M6×1 |
| 36 | 46 | 69 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 48 | 46 | 69 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 48 | 46 | 69 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 48 | 46 | 69 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 72 | 46 | 69 | 11 | 26 | — | — | 3 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 52 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 40 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 55 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 55 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 52 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 102 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 70 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 55 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 85 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |
| 70 | 50 | 73 | 11 | 28 | — | — | 3 | 5.5 | 9.5 | 5.5 | 61 | — | M6×1 |



5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.

8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)


Return tube type

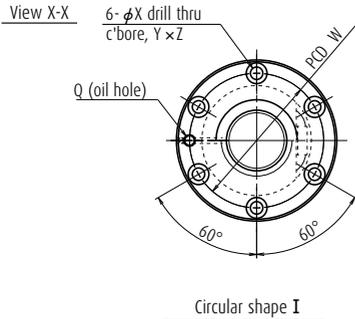


| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|--------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|---|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| PFT 2506-3 | P | 25 | 6 | 3.969 | 25.5 | 21.4 | 1.5×2 | 10 700 | 16 000 | 235 |
| SFT 2506-2.5 | Clearance | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×1 | 14 500 | 26 700 | 235 |
| ZFT 2506-5 | Z | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×1 | 14 500 | 26 700 | 462 |
| * PFT 2506-5 | P | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 16 600 | 26 700 | 383 |
| SFT 2506-3 | Clearance | 25 | 6 | 3.969 | 25.5 | 21.4 | 1.5×2 | 17 000 | 32 000 | 280 |
| DFT 2506-3 | D | 25 | 6 | 3.969 | 25.5 | 21.4 | 1.5×2 | 17 000 | 32 000 | 551 |
| SFT 2506-5 | Clearance | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 26 300 | 53 400 | 456 |
| ZFT 2506-10 | Z | 25 | 6 | 3.969 | 25.5 | 21.4 | 2.5×2 | 26 300 | 53 400 | 896 |
| PFT 2508-2.5 | P | 25 | 8 | 4.762 | 25.5 | 20.5 | 2.5×1 | 11 700 | 15 900 | 203 |
| PFT 2508-3 | P | 25 | 8 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 700 | 18 900 | 234 |
| SFT 2508-2.5 | Clearance | 25 | 8 | 4.762 | 25.5 | 20.5 | 2.5×1 | 18 500 | 31 800 | 242 |
| ZFT 2508-5 | Z | 25 | 8 | 4.762 | 25.5 | 20.5 | 2.5×1 | 18 500 | 31 800 | 476 |
| SFT 2508-3 | Clearance | 25 | 8 | 4.762 | 25.5 | 20.5 | 1.5×2 | 21 700 | 37 900 | 286 |
| DFT 2508-3 | D | 25 | 8 | 4.762 | 25.5 | 20.5 | 1.5×2 | 21 700 | 37 900 | 562 |
| PFT 2510-2.5 | P | 25 | 10 | 4.762 | 25.5 | 20.5 | 2.5×1 | 11 600 | 15 900 | 203 |
| ZFT 2510-3 | Z | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×1 | 11 900 | 18 900 | 291 |
| PFT 2510-3 | P | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 13 600 | 18 900 | 234 |
| SFT 2510-2.5 | Clearance | 25 | 10 | 4.762 | 25.5 | 20.5 | 2.5×1 | 18 500 | 31 700 | 242 |
| DFT 2510-2.5 | D | 25 | 10 | 4.762 | 25.5 | 20.5 | 2.5×1 | 18 500 | 31 700 | 475 |
| SFT 2510-3 | Clearance | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 21 600 | 37 800 | 286 |
| DFT 2510-3 | D | 25 | 10 | 4.762 | 25.5 | 20.5 | 1.5×2 | 21 600 | 37 800 | 562 |
| SFT 2510-3.5 | Clearance | 25 | 10 | 4.762 | 25.5 | 20.5 | 3.5×1 | 24 700 | 44 600 | 330 |
| DFT 2510-3.5 | D | 25 | 10 | 4.762 | 25.5 | 20.5 | 3.5×1 | 24 700 | 44 600 | 649 |

Notes

1. Nut flange for shaft diameter 16 mm or smaller comes in rectangular shape. It comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

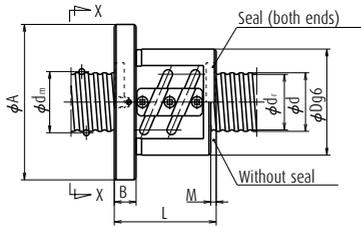

PFT, ZFT, SFT

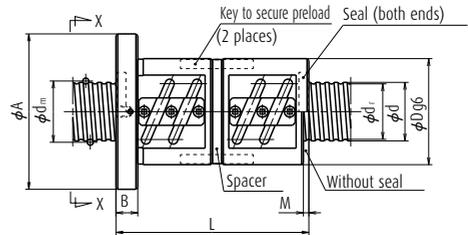

DFT


Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|-----|-----|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 56 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 44 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 62 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 62 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 56 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 110 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 62 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 98 | 53 | 76 | 11 | 29 | 3 | 5.5 | 9.5 | 5.5 | 64 | M6×1 |
| 56 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 69 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 56 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 80 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 69 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 133 | 58 | 85 | 13 | 32 | 5 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 67 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 81 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 81 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 67 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 127 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 81 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 151 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 77 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 147 | 58 | 85 | 15 | 32 | 8 | 6.6 | 11 | 6.5 | 71 | M6×1 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).


Return tube type

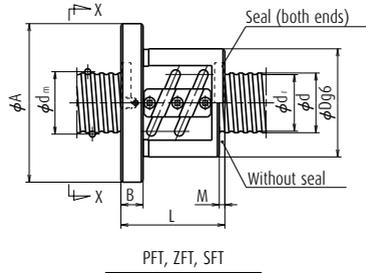

View X-X




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective turns of balls Turns \times Circuits | Basic load rating (N) | | Axial rigidity K (N/ μ m) | Nut entire length L |
|-----------------|----------------|----------------|----------|-----------------|------------------------|-----------------|---|-----------------------|-----------------|---------------------------------|-----------------------|
| | | | | | | | | Dynamic C_a | Static C_{0a} | | |
| LPFT 2516-2.5 | P | 25 | 16 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 11 400 | 16 500 | 210 | 84 |
| LPFT 2516-3 | P | 25 | 16 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 13 400 | 19 500 | 247 | 100 |
| LSFT 2516-2.5 | Clearance | 25 | 16 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 18 100 | 33 000 | 250 | 84 |
| LDFT 2516-2.5 | D | 25 | 16 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 18 100 | 33 000 | 490 | 152 |
| LSFT 2516-3 | Clearance | 25 | 16 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 21 200 | 39 000 | 295 | 100 |
| LDFT 2516-3 | D | 25 | 16 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 21 200 | 39 000 | 577 | 181 |
| * LPFT 2520-2.5 | P | 25 | 20 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 11 700 | 16 300 | 210 | 96 |
| LPFT 2520-3 | P | 25 | 20 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 13 700 | 19 300 | 247 | 116 |
| LSFT 2520-2.5 | Clearance | 25 | 20 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 18 600 | 32 600 | 250 | 96 |
| LDFT 2520-2.5 | D | 25 | 20 | 4.762 | 26.25 | 21.3 | 2.5 \times 1 | 18 600 | 32 600 | 490 | 177 |
| LSFT 2520-3 | Clearance | 25 | 20 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 21 800 | 38 600 | 295 | 116 |
| LDFT 2520-3 | D | 25 | 20 | 4.762 | 26.25 | 21.3 | 1.5 \times 2 | 21 800 | 38 600 | 577 | 217 |
| * LPFT 2525-1.5 | P | 25 | 25 | 4.762 | 26.25 | 21.3 | 1.5 \times 1 | 7 400 | 9 860 | 127 | 90 |
| LDFT 2525-1.5 | D | 25 | 25 | 4.762 | 26.25 | 21.3 | 1.5 \times 1 | 11 700 | 19 700 | 308 | 166 |
| LSFT 2525-1.5 | Clearance | 25 | 25 | 4.762 | 26.25 | 21.3 | 1.5 \times 1 | 11 700 | 19 700 | 157 | 90 |
| SFT 2805-2.5 | Clearance | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5 \times 1 | 11 300 | 24 400 | 252 | 41 |
| ZFT 2805-5 | Z | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5 \times 1 | 11 300 | 24 400 | 495 | 56 |
| PFT 2805-5 | P | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5 \times 2 | 13 000 | 24 400 | 410 | 56 |
| SFT 2805-5 | Clearance | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5 \times 2 | 20 600 | 48 700 | 487 | 56 |
| * ZFT 2805-10 | Z | 28 | 5 | 3.175 | 28.5 | 25.2 | 2.5 \times 2 | 20 600 | 48 700 | 959 | 86 |



- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

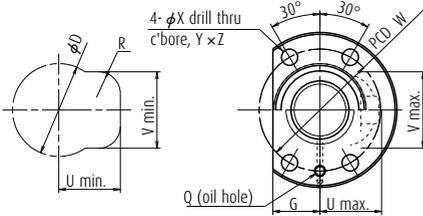

Housing hole and its clearance

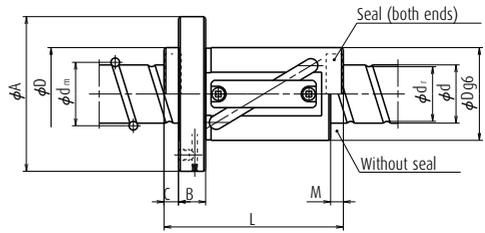

LPFT, LSFT

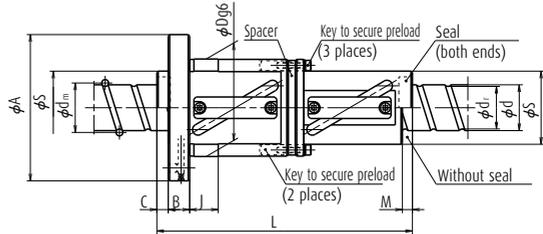

LDFT

Unit: mm

Ball nut dimensions

| Nut diameter | Flanged diameter | Flanged width | Notched flange | Tube projecting type | | | Seal dimension | | Diameter g6 | Bolt hole dimension | | | Bolt hole PCD | Oil hole Q | |
|--------------|------------------|---------------|----------------|----------------------|----|----|----------------|----|-------------|---------------------|-----|----|---------------|------------|------|
| | | | | U | V | R | M | C | | J | X | Y | | | Z |
| D | S | A | B | G | U | V | R | M | C | J | X | Y | Z | W | Q |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 6 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 6 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 6 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | 44 | 89 | 12 | 34 | — | — | — | 6 | 8 | 18 | 6.6 | — | — | 75 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 6 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | 44 | 89 | 12 | 34 | — | — | — | 6 | 8 | 18 | 6.6 | — | — | 75 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 7 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 7 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 7 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 62 | 44 | 89 | 12 | 34 | — | — | — | 7 | 8 | 18 | 6.6 | — | — | 75 | M6×1 |
| 44 | — | 71 | 12 | 23 | 31 | 35 | 12 | 7 | 8 | — | 6.6 | — | — | 57 | M6×1 |
| 62 | 44 | 89 | 12 | 34 | — | — | — | 7 | 8 | 18 | 6.6 | — | — | 75 | M6×1 |
| 44 | — | 71 | 12 | 23 | 32 | 34 | 12 | 10 | 10 | — | 6.6 | — | — | 57 | M6×1 |
| 62 | 44 | 89 | 12 | 34 | — | — | — | 10 | 10 | 18 | 6.6 | — | — | 75 | M6×1 |
| 44 | — | 71 | 12 | 23 | 32 | 34 | 12 | 10 | 10 | — | 6.6 | — | — | 57 | M6×1 |
| 55 | — | 85 | 12 | 31 | — | — | — | 3 | — | — | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 55 | — | 85 | 12 | 31 | — | — | — | 3 | — | — | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 55 | — | 85 | 12 | 31 | — | — | — | 3 | — | — | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 55 | — | 85 | 12 | 31 | — | — | — | 3 | — | — | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 55 | — | 85 | 12 | 31 | — | — | — | 3 | — | — | 6.6 | 11 | 6.5 | 69 | M6×1 |

5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.


6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. The models marked with * (asterisk) are available in the FA or SA type standard ball screws with finished shaft end.


8. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type

View X-X




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|---------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|-------------------------------------|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| PFT 2806-3 | P | 28 | 6 | 3.175 | 28.5 | 25.2 | 1.5×2 | 8 350 | 14 600 | 252 |
| SFT 2806-2.5 | Clearance | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×1 | 11 300 | 24 300 | 252 |
| ZFT 2806-5 | Z | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×1 | 11 300 | 24 300 | 495 |
| * PFT 2806-5 | P | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 12 900 | 24 300 | 410 |
| SFT 2806-3 | Clearance | 28 | 6 | 3.175 | 28.5 | 25.2 | 1.5×2 | 13 200 | 29 200 | 300 |
| DFT 2806-3 | D | 28 | 6 | 3.175 | 28.5 | 25.2 | 1.5×2 | 13 200 | 29 200 | 590 |
| SFT 2806-5 | Clearance | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 487 |
| * ZFT 2806-10 | Z | 28 | 6 | 3.175 | 28.5 | 25.2 | 2.5×2 | 20 600 | 48 700 | 959 |
| PFT 2810-2.5 | P | 28 | 10 | 4.762 | 28.5 | 23.5 | 2.5×1 | 12 300 | 17 900 | 220 |
| ZFT 2810-3 | Z | 28 | 10 | 4.762 | 28.5 | 23.5 | 1.5×1 | 12 600 | 21 400 | 320 |
| PFT 2810-3 | P | 28 | 10 | 4.762 | 28.5 | 23.5 | 1.5×2 | 14 400 | 21 400 | 265 |
| SFT 2810-2.5 | Clearance | 28 | 10 | 4.762 | 28.5 | 23.5 | 2.5×1 | 19 600 | 35 800 | 265 |
| DFT 2810-2.5 | D | 28 | 10 | 4.762 | 28.5 | 23.5 | 2.5×1 | 19 600 | 35 800 | 522 |
| SFT 2810-3 | Clearance | 28 | 10 | 4.762 | 28.5 | 23.5 | 1.5×2 | 22 900 | 42 700 | 314 |
| DFT 2810-3 | D | 28 | 10 | 4.762 | 28.5 | 23.5 | 1.5×2 | 22 900 | 42 700 | 618 |
| SFT 3204-2.5 | Clearance | 32 | 4 | 2.381 | 32.3 | 29.8 | 2.5×1 | 6 850 | 17 500 | 234 |
| ZFT 3204-5 | Z | 32 | 4 | 2.381 | 32.3 | 29.8 | 2.5×1 | 6 850 | 17 500 | 461 |
| PFT 3204-5 | P | 32 | 4 | 2.381 | 32.3 | 29.8 | 2.5×2 | 7 840 | 17 500 | 382 |
| SFT 3204-5 | Clearance | 32 | 4 | 2.381 | 32.3 | 29.8 | 2.5×2 | 12 400 | 35 000 | 454 |
| ZFT 3204-10 | Z | 32 | 4 | 2.381 | 32.3 | 29.8 | 2.5×2 | 12 400 | 35 000 | 892 |
| PFT 3205-3 | P | 32 | 5 | 3.175 | 32.5 | 29.2 | 1.5×2 | 8 850 | 16 800 | 281 |
| SFT 3205-2.5 | Clearance | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×1 | 12 000 | 28 000 | 281 |
| ZFT 3205-5 | Z | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×1 | 12 000 | 28 000 | 552 |
| * PFT 3205-5 | P | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 13 700 | 28 000 | 455 |
| SFT 3205-3 | Clearance | 32 | 5 | 3.175 | 32.5 | 29.2 | 1.5×2 | 14 000 | 33 600 | 333 |
| DFT 3205-3 | D | 32 | 5 | 3.175 | 32.5 | 29.2 | 1.5×2 | 14 000 | 33 600 | 655 |
| PFT 3205-7.5 | P | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×3 | 19 500 | 42 000 | 672 |
| SFT 3205-5 | Clearance | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 543 |
| * ZFT 3205-10 | Z | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×2 | 21 800 | 56 000 | 1 070 |
| SFT 3205-7.5 | Clearance | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×3 | 30 900 | 84 000 | 799 |
| DFT 3205-7.5 | D | 32 | 5 | 3.175 | 32.5 | 29.2 | 2.5×3 | 30 900 | 84 000 | 1 572 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

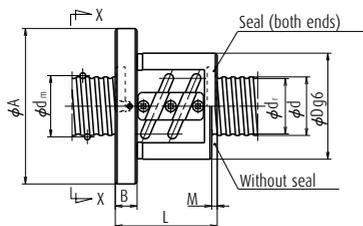

PFT, ZFT, SFT

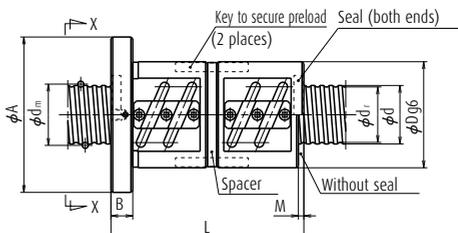

DFT


Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|----|-----|-----------------------|---------------|
| | | | | | | X | Y | Z | | |
| 57 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 45 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 63 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 63 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 57 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 111 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 63 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 99 | 55 | 85 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 69 | M6×1 |
| 68 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 82 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 82 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 68 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 128 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 82 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 152 | 60 | 94 | 15 | 36 | 7 | 9 | 14 | 8.5 | 76 | M6×1 |
| 37 | 54 | 81 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 67 | M6×1 |
| 49 | 54 | 81 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 67 | M6×1 |
| 49 | 54 | 81 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 67 | M6×1 |
| 49 | 54 | 81 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 67 | M6×1 |
| 73 | 54 | 81 | 12 | 31 | 3 | 6.6 | 11 | 6.5 | 67 | M6×1 |
| 53 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 41 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 56 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 56 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 53 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 103 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 71 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 56 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 86 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 71 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |
| 136 | 58 | 85 | 12 | 32 | 3 | 6.6 | 11 | 6.5 | 71 | M6×1 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|---------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|-------------------------------------|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _B | Static C _{0a} | |
| PFT 3206-3 | P | 32 | 6 | 3.969 | 32.5 | 28.4 | 1.5×2 | 11 800 | 20 600 | 285 |
| SFT 3206-2.5 | Clearance | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×1 | 16 000 | 34 700 | 287 |
| ZFT 3206-5 | Z | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×1 | 16 000 | 34 700 | 563 |
| PFT 3206-5 | P | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 18 300 | 34 700 | 468 |
| SFT 3206-3 | Clearance | 32 | 6 | 3.969 | 32.5 | 28.4 | 1.5×2 | 18 800 | 41 200 | 339 |
| DFT 3206-3 | D | 32 | 6 | 3.969 | 32.5 | 28.4 | 1.5×2 | 18 800 | 41 200 | 666 |
| SFT 3206-5 | Clearance | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 29 100 | 69 300 | 555 |
| * ZFT 3206-10 | Z | 32 | 6 | 3.969 | 32.5 | 28.4 | 2.5×2 | 29 100 | 69 300 | 1 090 |
| PFT 3208-3 | P | 32 | 8 | 4.762 | 32.5 | 27.5 | 1.5×2 | 15 100 | 24 700 | 294 |
| SFT 3208-2.5 | Clearance | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×1 | 20 600 | 40 900 | 292 |
| ZFT 3208-5 | Z | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×1 | 20 600 | 40 900 | 573 |
| PFT 3208-5 | P | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×2 | 23 500 | 40 900 | 470 |
| SFT 3208-3 | Clearance | 32 | 8 | 4.762 | 32.5 | 27.5 | 1.5×2 | 24 000 | 49 400 | 349 |
| ZFT 3208-6 | Z | 32 | 8 | 4.762 | 32.5 | 27.5 | 1.5×2 | 24 000 | 49 400 | 686 |
| SFT 3208-5 | Clearance | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×2 | 37 300 | 81 800 | 565 |
| DFT 3208-5 | D | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×2 | 37 300 | 81 800 | 1 102 |
| ZFT 3208-10 | Z | 32 | 8 | 4.762 | 32.5 | 27.5 | 2.5×2 | 31 700 | 82 000 | 1 102 |
| PFT 3210-2.5 | P | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×1 | 18 900 | 27 600 | 255 |
| ZFT 3210-3 | Z | 32 | 10 | 6.35 | 33.0 | 26.4 | 1.5×1 | 19 300 | 32 300 | 365 |
| PFT 3210-3 | P | 32 | 10 | 6.35 | 33.0 | 26.4 | 1.5×2 | 22 100 | 32 300 | 303 |
| SFT 3210-2.5 | Clearance | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×1 | 30 000 | 55 100 | 302 |
| * ZFT 3210-5 | Z | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×1 | 30 000 | 55 100 | 594 |
| PFT 3210-5 | P | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×2 | 34 300 | 55 100 | 494 |
| SFT 3210-3 | Clearance | 32 | 10 | 6.35 | 33.0 | 26.4 | 1.5×2 | 35 100 | 64 500 | 360 |
| DFT 3210-3 | D | 32 | 10 | 6.35 | 33.0 | 26.4 | 1.5×2 | 35 100 | 64 500 | 707 |
| SFT 3210-3.5 | Clearance | 32 | 10 | 6.35 | 33.0 | 26.4 | 3.5×1 | 40 100 | 76 600 | 422 |
| DFT 3210-3.5 | D | 32 | 10 | 6.35 | 33.0 | 26.4 | 3.5×1 | 40 100 | 76 600 | 829 |
| SFT 3210-5 | Clearance | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 585 |
| * DFT 3210-5 | D | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×2 | 54 500 | 110 000 | 1 156 |
| ZFT 3210-10 | Z | 32 | 10 | 6.35 | 33.0 | 26.4 | 2.5×2 | 46 300 | 108 000 | 1 156 |
| PFT 3212-2.5 | P | 32 | 12 | 6.35 | 33.0 | 26.4 | 2.5×1 | 18 800 | 27 500 | 255 |
| ZFT 3212-3 | Z | 32 | 12 | 6.35 | 33.0 | 26.4 | 1.5×1 | 19 300 | 32 200 | 365 |
| PFT 3212-3 | P | 32 | 12 | 6.35 | 33.0 | 26.4 | 1.5×2 | 22 000 | 32 200 | 303 |
| SFT 3212-2.5 | Clearance | 32 | 12 | 6.35 | 33.0 | 26.4 | 2.5×1 | 29 900 | 55 000 | 302 |
| DFT 3212-2.5 | D | 32 | 12 | 6.35 | 33.0 | 26.4 | 2.5×1 | 29 900 | 55 000 | 603 |
| SFT 3212-3 | Clearance | 32 | 12 | 6.35 | 33.0 | 26.4 | 1.5×2 | 35 000 | 64 400 | 360 |
| DFT 3212-3 | D | 32 | 12 | 6.35 | 33.0 | 26.4 | 1.5×2 | 35 000 | 64 400 | 707 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



PFT, ZFT, SFT

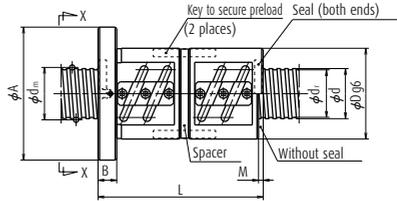

DFT


Unit: mm

Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|----|-----|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 57 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 45 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 63 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 63 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 57 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 111 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 63 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 99 | 62 | 89 | 12 | 34 | 3 | 6.6 | 11 | 6.5 | 75 | M6×1 |
| 71 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 58 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 82 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 82 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 71 | 60 | 100 | 15 | 36 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 111 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 82 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 154 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 130 | 66 | 100 | 15 | 38 | 5 | 9 | 14 | 8.5 | 82 | M6×1 |
| 70 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 87 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 87 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 70 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 100 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 100 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 87 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 167 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 80 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 150 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 100 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 190 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 160 | 74 | 108 | 15 | 41 | 7 | 9 | 14 | 8.5 | 90 | M6×1 |
| 81 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 97 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 97 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 81 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 153 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 97 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |
| 181 | 74 | 108 | 18 | 41 | 9 | 9 | 14 | 8.5 | 90 | M6×1 |


- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type

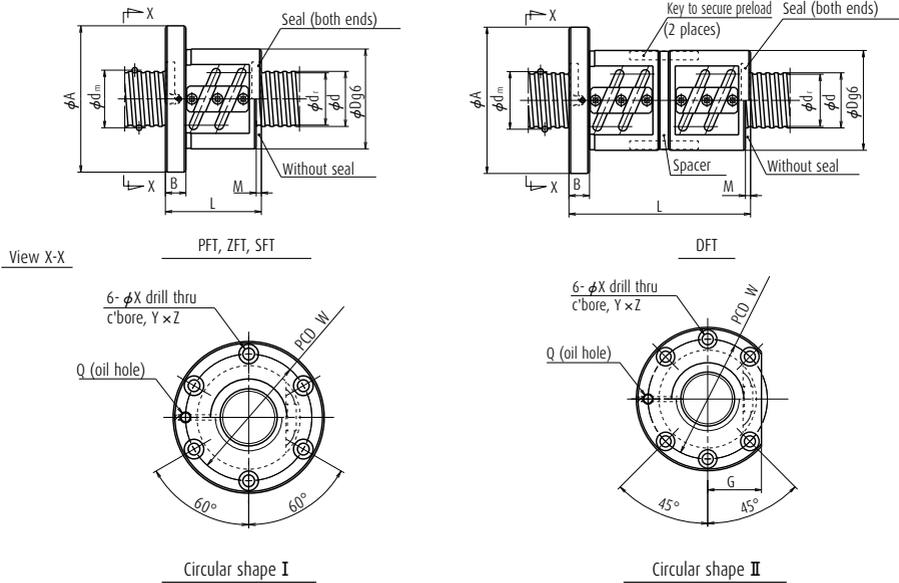




| Model No. | Preload system | Shaft dia. d | Lead I | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) | Nut entire length L |
|-----------------|----------------|--------------|--------|--------------------------|---------------------------------|--------------------------|--|------------------------|------------------------|-------------------------|---------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | |
| LPFT 3220-2.5 | P | 32 | 20 | 4.762 | 33.25 | 28.3 | 2.5×1 | 13 000 | 20 900 | 251 | 99 |
| LPFT 3220-3 | P | 32 | 20 | 4.762 | 33.25 | 28.3 | 1.5×2 | 15 300 | 25 100 | 297 | 119 |
| LSFT 3220-2.5 | Clearance | 32 | 20 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 700 | 41 900 | 300 | 99 |
| LDFT 3220-2.5 | D | 32 | 20 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 700 | 41 900 | 604 | 179 |
| LSFT 3220-3 | Clearance | 32 | 20 | 4.762 | 33.25 | 28.3 | 1.5×2 | 24 200 | 50 200 | 360 | 119 |
| LDFT 3220-3 | D | 32 | 20 | 4.762 | 33.25 | 28.3 | 1.5×2 | 24 200 | 50 200 | 708 | 219 |
| * LPFT 3225-2.5 | P | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 12 900 | 21 100 | 251 | 117 |
| LPFT 3225-3 | P | 32 | 25 | 4.762 | 33.25 | 28.3 | 1.5×2 | 15 100 | 24 900 | 297 | 142 |
| LSFT 3225-2.5 | Clearance | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 300 | 117 |
| LDFT 3225-2.5 | D | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 604 | 218 |
| LSFT 3225-3 | Clearance | 32 | 25 | 4.762 | 33.25 | 28.3 | 1.5×2 | 23 900 | 49 700 | 360 | 142 |
| LDFT 3225-3 | D | 32 | 25 | 4.762 | 33.25 | 28.3 | 1.5×2 | 23 900 | 49 700 | 708 | 268 |
| * LPFT 3232-1.5 | P | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 8 360 | 12 600 | 161 | 109 |
| LSFT 3232-1.5 | Clearance | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 190 | 109 |
| LDFT 3232-1.5 | D | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 376 | 205 |
| ZFT 3605-5 | Z | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×1 | 12 600 | 31 600 | 607 | 59 |
| PFT 3605-5 | P | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×2 | 14 400 | 31 600 | 504 | 59 |
| PFT 3605-7.5 | P | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×3 | 20 400 | 47 500 | 740 | 74 |
| SFT 3605-5 | Clearance | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×2 | 22 900 | 63 300 | 597 | 59 |
| ZFT 3605-10 | Z | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×2 | 22 900 | 63 300 | 1 170 | 89 |
| SFT 3605-7.5 | Clearance | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×3 | 32 400 | 94 900 | 878 | 74 |
| DFT 3605-7.5 | D | 36 | 5 | 3.175 | 36.5 | 33.2 | 2.5×3 | 32 400 | 94 900 | 1 730 | 139 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

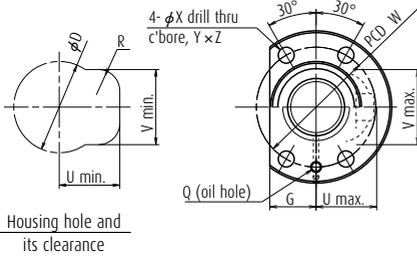

Housing hole and its clearance

LPFT, LSFT

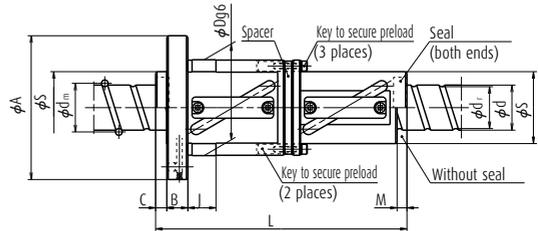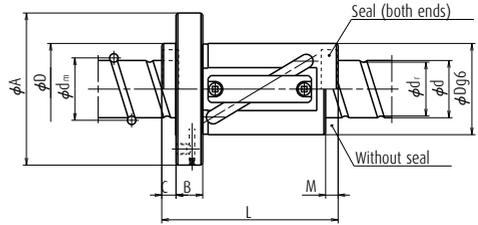

LDFT


Unit: mm

Ball nut dimensions


| Nut diameter | Flanged diameter | | Flanged width B | Notched flange G | Tube projecting type | | | Seal dimension | | Diameter g6 | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|--------------|------------------|-----|-----------------|------------------|----------------------|----|----|----------------|----|-------------|---------------------|----|-----|-----------------|------------|
| | D | S | | | A | U | V | R | M | | C | J | X | | |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 7 | 8 | — | 9 | — | — | 67 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 7 | 8 | — | 9 | — | — | 67 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 7 | 8 | — | 9 | — | — | 67 | M6×1 |
| 68 | 51 | 102 | 15 | 39 | — | — | — | 7 | 8 | 20 | 9 | — | — | 84 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 7 | 8 | — | 9 | — | — | 67 | M6×1 |
| 68 | 51 | 102 | 15 | 39 | — | — | — | 7 | 8 | 20 | 9 | — | — | 84 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 10 | 10 | — | 9 | — | — | 67 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 10 | 10 | — | 9 | — | — | 67 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 10 | 10 | — | 9 | — | — | 67 | M6×1 |
| 68 | 51 | 102 | 15 | 39 | — | — | — | 10 | 10 | 20 | 9 | — | — | 84 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 10 | 10 | — | 9 | — | — | 67 | M6×1 |
| 68 | 51 | 102 | 15 | 39 | — | — | — | 10 | 10 | 20 | 9 | — | — | 84 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 13 | 12 | — | 9 | — | — | 67 | M6×1 |
| 51 | — | 85 | 15 | 26 | 34 | 42 | 12 | 13 | 12 | — | 9 | — | — | 67 | M6×1 |
| 68 | 51 | 102 | 15 | 39 | — | — | — | 13 | 12 | 20 | 9 | — | — | 84 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |
| 65 | — | 100 | 15 | 38 | — | — | — | 3 | — | — | 9 | 14 | 8.5 | 82 | M6×1 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. Dw | Ball circle dia. Dm | Root dia. dr | Effective turns of Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|---------------|----------------|-----------------|-----------|-----------------|------------------------|-----------------|-------------------------------------|-----------------------|------------|-------------------------|
| | | | | | | | | Dynamic Ca | Static C0a | |
| ZFT 3606-5 | Z | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×1 | 17 200 | 39 200 | 625 |
| PFT 3606-5 | P | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×2 | 19 700 | 39 200 | 518 |
| PFT 3606-7.5 | P | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×3 | 27 900 | 58 800 | 763 |
| SFT 3606-5 | Clearance | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×2 | 31 300 | 78 400 | 615 |
| ZFT 3606-10 | Z | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×2 | 31 300 | 78 400 | 1 210 |
| SFT 3606-7.5 | Clearance | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×3 | 44 400 | 118 000 | 905 |
| DFT 3606-7.5 | D | 36 | 6 | 3.969 | 36.5 | 32.4 | 2.5×3 | 44 400 | 118 000 | 1 780 |
| PFT 3610-2.5 | P | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×1 | 20 100 | 30 500 | 278 |
| ZFT 3610-3 | Z | 36 | 10 | 6.35 | 37.0 | 30.4 | 1.5×1 | 20 600 | 36 600 | 404 |
| PFT 3610-3 | P | 36 | 10 | 6.35 | 37.0 | 30.4 | 1.5×2 | 23 600 | 36 600 | 327 |
| SFT 3610-2.5 | Clearance | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×1 | 32 000 | 61 100 | 334 |
| ZFT 3610-5 | Z | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×1 | 32 000 | 61 100 | 657 |
| PFT 3610-5 | P | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×2 | 36 600 | 61 100 | 537 |
| SFT 3610-3 | Clearance | 36 | 10 | 6.35 | 37.0 | 30.4 | 1.5×2 | 37 400 | 73 300 | 397 |
| DFT 3610-3 | D | 36 | 10 | 6.35 | 37.0 | 30.4 | 1.5×2 | 37 400 | 73 300 | 781 |
| PFT 3610-7.5 | P | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×3 | 43 700 | 96 000 | 782 |
| SFT 3610-5 | Clearance | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×2 | 58 000 | 122 000 | 647 |
| DFT 3610-5 | D | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×2 | 58 000 | 122 000 | 1 259 |
| ZFT 3610-10 | Z | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×2 | 49 300 | 123 000 | 1 259 |
| SFT 3610-7.5 | Clearance | 36 | 10 | 6.35 | 37.0 | 30.4 | 2.5×3 | 69 900 | 184 000 | 945 |
| PFT 4005-3 | P | 40 | 5 | 3.175 | 40.5 | 37.2 | 1.5×2 | 9 700 | 21 200 | 337 |
| SFT 4005-2.5 | Clearance | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×1 | 13 200 | 35 300 | 336 |
| ZFT 4005-5 | Z | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×1 | 13 200 | 35 300 | 661 |
| PFT 4005-5 | P | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 15 100 | 35 300 | 548 |
| SFT 4005-3 | Clearance | 40 | 5 | 3.175 | 40.5 | 37.2 | 1.5×2 | 15 400 | 42 300 | 399 |
| DFT 4005-3 | D | 40 | 5 | 3.175 | 40.5 | 37.2 | 1.5×2 | 15 400 | 42 300 | 785 |
| PFT 4005-7.5 | P | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×3 | 21 300 | 52 900 | 806 |
| SFT 4005-5 | Clearance | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 23 900 | 70 500 | 649 |
| * ZFT 4005-10 | Z | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×2 | 23 900 | 70 500 | 1 280 |
| SFT 4005-7.5 | Clearance | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×3 | 33 900 | 106 000 | 956 |
| DFT 4005-7.5 | D | 40 | 5 | 3.175 | 40.5 | 37.2 | 2.5×3 | 33 900 | 106 000 | 1 870 |
| ZFT 4006-5 | Z | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×1 | 18 000 | 43 800 | 679 |
| PFT 4006-5 | P | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×2 | 20 500 | 43 800 | 564 |
| SFT 4006-3 | Clearance | 40 | 6 | 3.969 | 40.5 | 36.4 | 1.5×2 | 21 000 | 52 500 | 411 |
| DFT 4006-3 | D | 40 | 6 | 3.969 | 40.5 | 36.4 | 1.5×2 | 21 000 | 52 500 | 807 |
| PFT 4006-7.5 | P | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×3 | 29 100 | 65 600 | 827 |
| SFT 4006-5 | Clearance | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×2 | 32 600 | 87 500 | 668 |
| ZFT 4006-10 | Z | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×2 | 32 600 | 87 500 | 1 320 |
| SFT 4006-7.5 | Clearance | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×3 | 46 200 | 131 000 | 984 |
| DFT 4006-7.5 | D | 40 | 6 | 3.969 | 40.5 | 36.4 | 2.5×3 | 46 200 | 131 000 | 1 940 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



PFT, ZFT, SFT



DFT

Unit: mm


Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|------|-----|-----------------------|---------------|
| | | | | | | X | Y | Z | | |
| 66 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 66 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 84 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 66 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 102 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 84 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 162 | 65 | 100 | 15 | 38 | 3 | 9 | 14 | 8.5 | 82 | M6×1 |
| 73 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 90 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 90 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 73 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 103 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 103 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 90 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 170 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 133 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 103 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 193 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 163 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 133 | 75 | 120 | 18 | 45 | 7 | 11 | 17.5 | 11 | 98 | M6×1 |
| 56 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 44 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 59 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 59 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 56 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 106 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 74 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 59 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 89 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 74 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 139 | 67 | 101 | 15 | 39 | 3 | 9 | 14 | 8.5 | 83 | Rc1/8 |
| 66 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 66 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 60 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 114 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 84 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 66 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 102 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 84 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |
| 162 | 70 | 104 | 15 | 40 | 3 | 9 | 14 | 8.5 | 86 | Rc1/8 |


- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type

View X-X




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|--------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|----------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| PFT 4008-3 | P | 40 | 8 | 4.762 | 40.5 | 35.5 | 1.5×2 | 16 700 | 31 200 | 352 |
| SFT 4008-2.5 | Clearance | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×1 | 22 700 | 51 500 | 349 |
| ZFT 4008-5 | Z | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×1 | 22 700 | 51 500 | 687 |
| PFT 4008-5 | P | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 25 900 | 51 500 | 570 |
| SFT 4008-3 | Clearance | 40 | 8 | 4.762 | 40.5 | 35.5 | 1.5×2 | 26 500 | 62 500 | 418 |
| DFT 4008-3 | D | 40 | 8 | 4.762 | 40.5 | 35.5 | 1.5×2 | 26 500 | 62 500 | 822 |
| SFT 4008-5 | Clearance | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 41 100 | 103 000 | 675 |
| ZFT 4008-10 | Z | 40 | 8 | 4.762 | 40.5 | 35.5 | 2.5×2 | 41 100 | 103 000 | 1 330 |
| PFT 4010-2.5 | P | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×1 | 21 300 | 34 200 | 307 |
| PFT 4010-3 | P | 40 | 10 | 6.35 | 41 | 34.4 | 1.5×2 | 24 900 | 41 000 | 366 |
| SFT 4010-2.5 | Clearance | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 365 |
| ZFT 4010-5 | Z | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×1 | 33 700 | 68 300 | 717 |
| PFT 4010-5 | P | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×2 | 38 600 | 68 300 | 595 |
| SFT 4010-3 | Clearance | 40 | 10 | 6.35 | 41 | 34.4 | 1.5×2 | 39 500 | 82 000 | 434 |
| ZFT 4010-6 | Z | 40 | 10 | 6.35 | 41 | 34.4 | 1.5×2 | 39 500 | 82 000 | 854 |
| ZFT 4010-7 | Z | 40 | 10 | 6.35 | 41 | 34.4 | 3.5×1 | 45 100 | 97 100 | 988 |
| SFT 4010-3.5 | Clearance | 40 | 10 | 6.35 | 41 | 34.4 | 3.5×1 | 45 100 | 97 100 | 503 |
| PFT 4010-7 | P | 40 | 10 | 6.35 | 41 | 34.4 | 3.5×2 | 43 700 | 96 000 | 813 |
| SFT 4010-5 | Clearance | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 706 |
| * DFT 4010-5 | D | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×2 | 61 200 | 137 000 | 1 376 |
| ZFT 4010-10 | Z | 40 | 10 | 6.35 | 41 | 34.4 | 2.5×2 | 52 000 | 137 000 | 1 376 |
| SFT 4010-7 | Clearance | 40 | 10 | 6.35 | 41 | 34.4 | 3.5×2 | 69 400 | 192 000 | 976 |
| PFT 4012-2.5 | P | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 24 900 | 38 600 | 310 |
| SFT 4012-2.5 | Clearance | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 500 | 77 200 | 373 |
| ZFT 4012-5 | Z | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 500 | 77 200 | 733 |
| PFT 4012-5 | P | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 45 200 | 77 200 | 600 |
| PFT 4012-7.5 | P | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×3 | 54 400 | 116 000 | 872 |
| SFT 4012-5 | Clearance | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 722 |
| * DFT 4012-5 | D | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 71 700 | 154 000 | 1 404 |
| ZFT 4012-10 | Z | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×2 | 61 000 | 155 000 | 1 404 |
| SFT 4012-7.5 | Clearance | 40 | 12 | 7.144 | 41.5 | 34.1 | 2.5×3 | 86 400 | 233 000 | 1 054 |
| ZFT 4016-3 | Z | 40 | 16 | 7.144 | 41.5 | 34.1 | 1.5×1 | 25 400 | 46 200 | 451 |
| SFT 4016-2.5 | Clearance | 40 | 16 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 300 | 77 000 | 373 |
| DFT 4016-2.5 | D | 40 | 16 | 7.144 | 41.5 | 34.1 | 2.5×1 | 39 300 | 77 000 | 733 |
| SFT 4016-3 | Clearance | 40 | 16 | 7.144 | 41.5 | 34.1 | 1.5×2 | 46 000 | 92 400 | 440 |
| DFT 4016-3 | D | 40 | 16 | 7.144 | 41.5 | 34.1 | 1.5×2 | 46 000 | 92 400 | 872 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

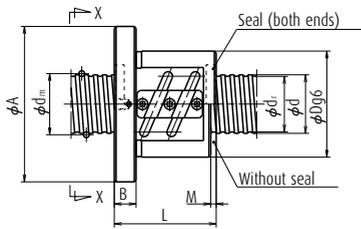

PFT, ZFT, SFT

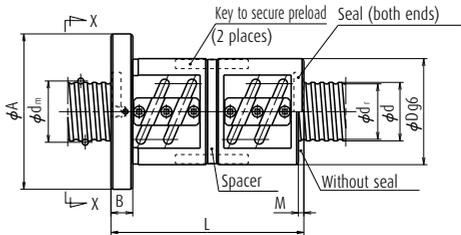

DFT



Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|------|-----|-----------------------|---------------|
| | | | | | | X | Y | Z | | |
| 71 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 58 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 82 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 82 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 71 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 135 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 82 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 130 | 74 | 108 | 15 | 41 | 5 | 9 | 14 | 8.5 | 90 | Rc1/8 |
| 73 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 90 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 73 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 103 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 103 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 90 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 140 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 123 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 83 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 123 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 103 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 193 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 163 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 123 | 82 | 124 | 18 | 47 | 7 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 81 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 81 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 117 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 117 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 153 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 117 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 225 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 189 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 153 | 86 | 128 | 18 | 48 | 9 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 118 | 86 | 128 | 22 | 48 | 14 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 102 | 86 | 128 | 22 | 48 | 14 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 182 | 86 | 128 | 22 | 48 | 14 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 118 | 86 | 128 | 22 | 48 | 14 | 11 | 17.5 | 11 | 106 | Rc1/8 |
| 214 | 86 | 128 | 22 | 48 | 14 | 11 | 17.5 | 11 | 106 | Rc1/8 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For PFT, the basic load ratings differ from the other models as the spacer balls are installed.
- The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).


Return tube type

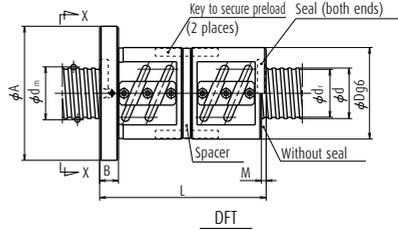

View X-X





Circular shape I





Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) | Nut entire length L |
|---------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|----------------------------|------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | |
| LPFT 4025-2.5 | P | 40 | 25 | 6.35 | 41.75 | 35.1 | 2.5×1 | 21 500 | 35 100 | 315 | 123 |
| LPFT 4025-3 | P | 40 | 25 | 6.35 | 41.75 | 35.1 | 1.5×2 | 25 100 | 41 800 | 347 | 148 |
| LSFT 4025-2.5 | Clearance | 40 | 25 | 6.35 | 41.75 | 35.1 | 2.5×1 | 34 100 | 70 100 | 375 | 123 |
| LDFT 4025-2.5 | D | 40 | 25 | 6.35 | 41.75 | 35.1 | 2.5×1 | 34 100 | 70 100 | 737 | 223 |
| LSFT 4025-3 | Clearance | 40 | 25 | 6.35 | 41.75 | 35.1 | 1.5×2 | 39 900 | 83 600 | 444 | 148 |
| LDFT 4025-3 | D | 40 | 25 | 6.35 | 41.75 | 35.1 | 1.5×2 | 39 900 | 83 600 | 873 | 273 |
| LPFT 4032-2.5 | P | 40 | 32 | 6.35 | 41.75 | 35.1 | 2.5×1 | 21 200 | 35 300 | 315 | 146 |
| LSFT 4032-2.5 | Clearance | 40 | 32 | 6.35 | 41.75 | 35.1 | 2.5×1 | 33 600 | 70 700 | 375 | 146 |
| LDFT 4032-2.5 | D | 40 | 32 | 6.35 | 41.75 | 35.1 | 2.5×1 | 33 600 | 70 700 | 737 | 274 |
| LPFT 4040-1.5 | P | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×1 | 13 400 | 21 000 | 199 | 133 |
| LSFT 4040-1.5 | Clearance | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 200 | 42 000 | 237 | 133 |
| LDFT 4040-1.5 | D | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 200 | 42 000 | 465 | 253 |
| ZFT 4510-5 | Z | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×1 | 36 300 | 78 500 | 784 | 103 |
| PFT 4510-7 | P | 45 | 10 | 6.35 | 46.0 | 39.4 | 3.5×2 | 45 600 | 109 000 | 887 | 123 |
| PFT 4510-7.5 | P | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×3 | 48 400 | 116 000 | 950 | 133 |
| SFT 4510-5 | Clearance | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×2 | 65 800 | 157 000 | 772 | 103 |
| DFT 4510-5 | D | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×2 | 65 800 | 157 000 | 1 520 | 193 |
| SFT 4510-7 | Clearance | 45 | 10 | 6.35 | 46.0 | 39.4 | 3.5×2 | 72 400 | 218 000 | 1 064 | 123 |
| DFT 4510-7.5 | Clearance | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×3 | 93 300 | 235 000 | 1 140 | 133 |
| DFT 4510-7.5 | D | 45 | 10 | 6.35 | 46.0 | 39.4 | 2.5×3 | 93 300 | 235 000 | 2 230 | 253 |
| SFT 4512-2.5 | Clearance | 45 | 12 | 7.144 | 46.5 | 39.1 | 2.5×1 | 41 600 | 88 200 | 412 | 83 |
| ZFT 4512-5 | Z | 45 | 12 | 7.144 | 46.5 | 39.1 | 2.5×1 | 41 600 | 88 200 | 811 | 119 |
| SFT 4512-5 | Clearance | 45 | 12 | 7.144 | 46.5 | 39.1 | 2.5×2 | 75 600 | 176 000 | 798 | 119 |
| DFT 4512-5 | D | 45 | 12 | 7.144 | 46.5 | 39.1 | 2.5×2 | 75 600 | 176 000 | 1 570 | 227 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for PFT, ZFT, and SFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

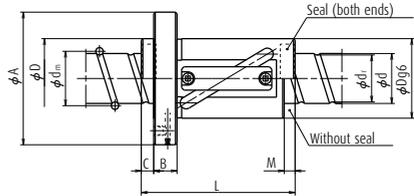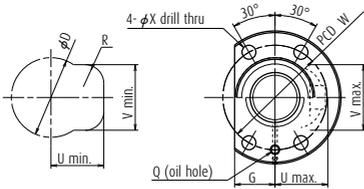

LPFT, LSFT

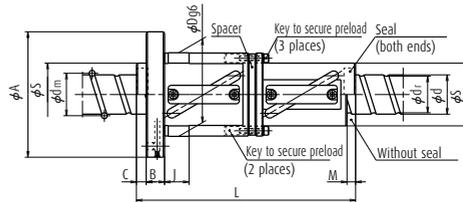

LDFT

Unit: mm


Ball nut dimensions

| Nut diameter | | Flanged diameter A | Flanged width B | Notched flange G | Tube projecting type | | | Seal dimension M | Diameter g6 C | Diameter g6 J | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|--------------|----|-----------------------|--------------------|---------------------|----------------------|----|----|---------------------|------------------|------------------|---------------------|------|----|-----------------------|---------------|
| D | S | | | | U | V | R | | | | X | Y | Z | | |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 10 | 10 | — | 11 | — | — | 84 | Rc1/8 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 10 | 10 | — | 11 | — | — | 84 | Rc1/8 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 10 | 10 | — | 11 | — | — | 84 | Rc1/8 |
| 84 | 64 | 126 | 18 | 48 | — | — | — | 10 | 10 | 22 | 11 | — | — | 104 | Rc1/8 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 10 | 10 | — | 11 | — | — | 84 | Rc1/8 |
| 84 | 64 | 126 | 18 | 48 | — | — | — | 10 | 10 | 22 | 11 | — | — | 104 | Rc1/8 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 13 | 12 | — | 11 | — | — | 84 | M6×1 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 13 | 12 | — | 11 | — | — | 84 | M6×1 |
| 84 | 64 | 126 | 18 | 48 | — | — | — | 13 | 12 | 22 | 11 | — | — | 104 | M6×1 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 16 | 14 | — | 11 | — | — | 84 | M6×1 |
| 64 | — | 106 | 18 | 33 | 42 | 52 | 15 | 16 | 14 | — | 11 | — | — | 84 | M6×1 |
| 84 | 64 | 126 | 18 | 48 | — | — | — | 16 | 14 | 22 | 11 | — | — | 104 | M6×1 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 88 | — | 132 | 18 | 50 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 90 | — | 132 | 18 | 50 | — | — | — | 8 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 90 | — | 132 | 18 | 50 | — | — | — | 8 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 90 | — | 132 | 18 | 50 | — | — | — | 8 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |
| 90 | — | 132 | 18 | 50 | — | — | — | 8 | — | — | 11 | 17.5 | 11 | 110 | Rc1/8 |

5. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

6. For PFT and LPFT, the basic load ratings differ from the other models as the spacer balls are installed.

7. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

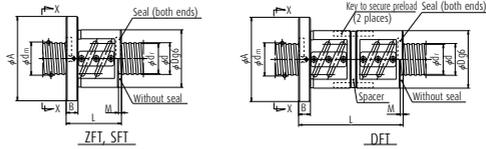

Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|------|-----|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 58 | 80 | 114 | 15 | 43 | 3 | 9 | 14 | 8.5 | 96 | Rc1/8 |
| 83 | 80 | 114 | 15 | 43 | 3 | 9 | 14 | 8.5 | 96 | Rc1/8 |
| 68 | 80 | 114 | 15 | 43 | 3 | 9 | 14 | 8.5 | 96 | Rc1/8 |
| 103 | 80 | 114 | 15 | 43 | 3 | 9 | 14 | 8.5 | 96 | Rc1/8 |
| 62 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 116 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 86 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 68 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 104 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 86 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 164 | 84 | 118 | 15 | 45 | 3 | 9 | 14 | 8.5 | 100 | Rc1/8 |
| 74 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 138 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 85 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 133 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 109 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 205 | 87 | 129 | 18 | 49 | 5 | 11 | 17.5 | 11 | 107 | Rc1/8 |
| 73 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 103 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 90 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 170 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 123 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 133 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 103 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 163 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 133 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 253 | 93 | 135 | 18 | 51 | 7 | 11 | 17.5 | 11 | 113 | Rc1/8 |
| 87 | 100 | 146 | 22 | 55 | 8 | 14 | 20 | 13 | 122 | Rc1/8 |
| 123 | 100 | 146 | 22 | 55 | 8 | 14 | 20 | 13 | 122 | Rc1/8 |
| 123 | 100 | 146 | 22 | 55 | 8 | 14 | 20 | 13 | 122 | Rc1/8 |
| 231 | 100 | 146 | 22 | 55 | 8 | 14 | 20 | 13 | 122 | Rc1/8 |
| 195 | 100 | 146 | 22 | 55 | 8 | 14 | 20 | 13 | 122 | Rc1/8 |
| 104 | 100 | 146 | 22 | 55 | 14 | 14 | 20 | 13 | 122 | Rc1/8 |
| 152 | 100 | 146 | 22 | 55 | 14 | 14 | 20 | 13 | 122 | Rc1/8 |
| 200 | 100 | 146 | 22 | 55 | 14 | 14 | 17.5 | 11 | 122 | Rc1/8 |
| 152 | 100 | 146 | 22 | 55 | 14 | 14 | 20 | 13 | 122 | Rc1/8 |
| 280 | 100 | 146 | 22 | 55 | 14 | 14 | 20 | 13 | 122 | Rc1/8 |
| 200 | 100 | 146 | 22 | 55 | 14 | 14 | 17.5 | 11 | 122 | Rc1/8 |
| 147 | 100 | 146 | 28 | 55 | 17 | 14 | 20 | 13 | 122 | Rc1/8 |
| 127 | 100 | 146 | 28 | 55 | 17 | 14 | 20 | 13 | 122 | Rc1/8 |
| 227 | 100 | 146 | 28 | 55 | 17 | 14 | 20 | 13 | 122 | Rc1/8 |
| 147 | 100 | 146 | 28 | 55 | 17 | 14 | 20 | 13 | 122 | Rc1/8 |
| 267 | 100 | 146 | 28 | 55 | 17 | 14 | 20 | 13 | 122 | Rc1/8 |

4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.


5. The models marked with * (asterisk) are available in the SA type standard ball screws with finished shaft end.

6. Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5.)

Return tube type




ZFT, SFT

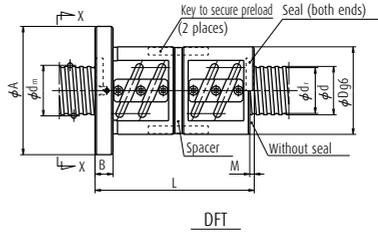


DFT

View X-X





Circular shape I





Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) | Nut entire length L |
|---------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|----------------------------|------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | | |
| LPFT 5025-2.5 | P | 50 | 25 | 7.938 | 52.25 | 44 | 2.5×1 | 32 300 | 55 100 | 388 | 129 |
| LPFT 5025-3 | P | 50 | 25 | 7.938 | 52.25 | 44 | 1.5×2 | 37 800 | 65 700 | 450 | 154 |
| LSFT 5025-2.5 | Clearance | 50 | 25 | 7.938 | 52.25 | 44 | 2.5×1 | 51 300 | 110 000 | 462 | 129 |
| LDFT 5025-2.5 | D | 50 | 25 | 7.938 | 52.25 | 44 | 2.5×1 | 51 300 | 110 000 | 905 | 229 |
| LSFT 5025-3 | Clearance | 50 | 25 | 7.938 | 52.25 | 44 | 1.5×2 | 60 100 | 131 000 | 547 | 154 |
| LDFT 5025-3 | D | 50 | 25 | 7.938 | 52.25 | 44 | 1.5×2 | 60 100 | 131 000 | 1 070 | 279 |
| LPFT 5032-2.5 | P | 50 | 32 | 7.938 | 52.25 | 44 | 2.5×1 | 32 000 | 54 700 | 388 | 151 |
| LPFT 5032-3 | P | 50 | 32 | 7.938 | 52.25 | 44 | 1.5×2 | 37 500 | 65 300 | 450 | 183 |
| LSFT 5032-2.5 | Clearance | 50 | 32 | 7.938 | 52.25 | 44 | 2.5×1 | 50 900 | 109 000 | 462 | 151 |
| LDFT 5032-2.5 | D | 50 | 32 | 7.938 | 52.25 | 44 | 2.5×1 | 50 900 | 109 000 | 905 | 279 |
| LSFT 5032-3 | Clearance | 50 | 32 | 7.938 | 52.25 | 44 | 1.5×2 | 59 500 | 131 000 | 547 | 183 |
| LDFT 5032-3 | D | 50 | 32 | 7.938 | 52.25 | 44 | 1.5×2 | 59 500 | 131 000 | 1 070 | 343 |
| LPFT 5040-2.5 | P | 50 | 40 | 7.938 | 52.25 | 44 | 2.5×1 | 31 600 | 55 200 | 388 | 178 |
| LSFT 5040-2.5 | Clearance | 50 | 40 | 7.938 | 52.25 | 44 | 2.5×1 | 50 200 | 110 000 | 462 | 178 |
| LDFT 5040-2.5 | D | 50 | 40 | 7.938 | 52.25 | 44 | 2.5×1 | 50 200 | 110 000 | 922 | 338 |
| LPFT 5050-1.5 | P | 50 | 50 | 7.938 | 52.25 | 44 | 1.5×1 | 20 000 | 32 800 | 245 | 161 |
| LSFT 5050-1.5 | Clearance | 50 | 50 | 7.938 | 52.25 | 44 | 1.5×1 | 31 700 | 65 700 | 290 | 161 |
| LDFT 5050-1.5 | D | 50 | 50 | 7.938 | 52.25 | 44 | 1.5×1 | 31 700 | 65 700 | 572 | 312 |
| ZFT 5510-5 | Z | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×1 | 38 700 | 96 000 | 929 | 103 |
| SFT 5510-5 | Clearance | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×2 | 70 200 | 192 000 | 916 | 103 |
| ZFT 5510-10 | Z | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×2 | 70 200 | 192 000 | 1 800 | 163 |
| DFT 5510-5 | D | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×2 | 70 200 | 192 000 | 1 800 | 193 |
| SFT 5510-7.5 | Clearance | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×3 | 99 500 | 288 000 | 1 350 | 133 |
| DFT 5510-7.5 | D | 55 | 10 | 6.35 | 56.0 | 49.4 | 2.5×3 | 99 500 | 288 000 | 2 650 | 253 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

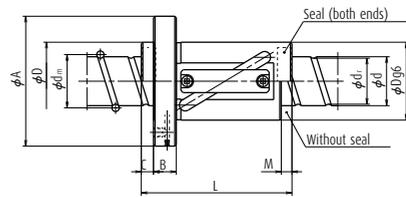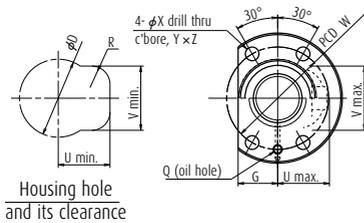

LPFT, LSFT

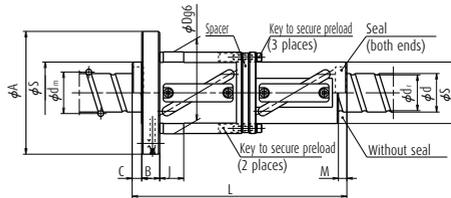

LDFT


Unit: mm

Ball nut dimensions

| Nut diameter | | Flanged diameter A | Flanged width B | Notched flange G | Tube projecting type | | | Seal dimension M | Diameter g6 J | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q | |
|--------------|----|-----------------------|--------------------|---------------------|----------------------|----|----|---------------------|------------------|---------------------|----|------|-----------------------|---------------|-------|
| D | S | | | | U | V | R | | | C | X | Y | | | Z |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 11 | 11 | — | 14 | — | — | 102 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 11 | 11 | — | 14 | — | — | 102 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 11 | 11 | — | 14 | — | — | 102 | Rc1/8 |
| 106 | 80 | 152 | 22 | 56 | — | — | — | 11 | 11 | 25 | 14 | — | — | 128 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 11 | 11 | — | 14 | — | — | 102 | Rc1/8 |
| 106 | 80 | 152 | 22 | 56 | — | — | — | 11 | 11 | 25 | 14 | — | — | 128 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 14 | 12 | — | 14 | — | — | 102 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 14 | 12 | — | 14 | — | — | 102 | Rc1/8 |
| 106 | 80 | 152 | 22 | 56 | — | — | — | 14 | 12 | 25 | 14 | — | — | 128 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 14 | 12 | — | 14 | — | — | 102 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 14 | 12 | — | 14 | — | — | 102 | Rc1/8 |
| 106 | 80 | 152 | 22 | 56 | — | — | — | 17 | 14 | 25 | 14 | — | — | 128 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 21 | 16 | — | 14 | — | — | 102 | Rc1/8 |
| 80 | — | 126 | 22 | 41 | 52 | 64 | 19 | 21 | 16 | — | 14 | — | — | 102 | Rc1/8 |
| 106 | 80 | 152 | 22 | 56 | — | — | — | 21 | 16 | 25 | 14 | — | — | 128 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |
| 102 | — | 144 | 18 | 54 | — | — | — | 7 | — | — | 11 | 17.5 | 11 | 122 | Rc1/8 |


- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_0) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- For LPFT, the basic load ratings differ from the other models as the spacer balls are installed.
- Preload system: P, Oversize ball preload; Z, Offset preload; D, Double nut preload (See page B5).

Return tube type

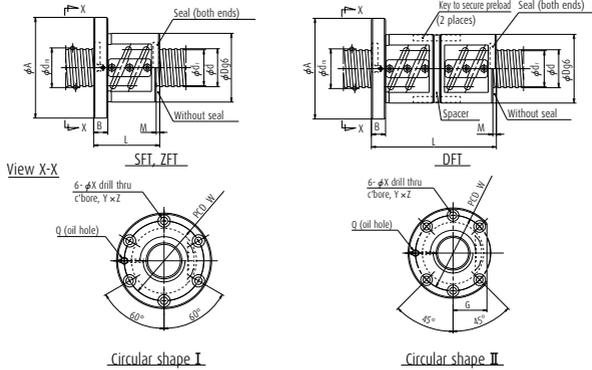


| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) | Nut entire length L |
|---------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|-------------------------|------------------------|----------------------------|------------------------|
| | | | | | | | | Dynamic C _{0a} | Static C _{0a} | | |
| SFT 6310-2.5 | Clearance | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×1 | 41 100 | 111 000 | 528 | 77 |
| ZFT 6310-5 | Z | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×1 | 41 100 | 111 000 | 1 038 | 107 |
| PFT 6310-7.5 | P | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×3 | 56 400 | 166 000 | 1 250 | 137 |
| SFT 6310-5 | Clearance | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×2 | 74 600 | 221 000 | 1 020 | 107 |
| ZFT 6310-10 | Z | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×2 | 74 600 | 221 000 | 2 000 | 167 |
| SFT 6310-7.5 | Clearance | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×3 | 106 000 | 332 000 | 1 500 | 137 |
| DFT 6310-7.5 | D | 63 | 10 | 6.35 | 64.0 | 57.4 | 2.5×3 | 106 000 | 332 000 | 2 950 | 257 |
| ZFT 6312-5 | Z | 63 | 12 | 7.938 | 64.5 | 56.2 | 2.5×1 | 47 400 | 137 000 | 1 060 | 123 |
| SFT 6312-2.5 | Clearance | 63 | 12 | 7.938 | 64.5 | 56.2 | 2.5×1 | 47 400 | 137 000 | 542 | 87 |
| SFT 6312-5 | Clearance | 63 | 12 | 7.938 | 64.5 | 56.2 | 2.5×2 | 86 000 | 273 000 | 1 050 | 123 |
| DFT 6312-5 | D | 63 | 12 | 7.938 | 64.5 | 56.2 | 2.5×2 | 86 000 | 273 000 | 2 060 | 231 |
| SFT 6316-2.5 | Clearance | 63 | 16 | 9.525 | 65.0 | 55.2 | 2.5×1 | 79 500 | 228 000 | 713 | 110 |
| DFT 6316-2.5 | D | 63 | 16 | 9.525 | 65.0 | 55.2 | 2.5×1 | 79 500 | 228 000 | 1 400 | 206 |
| PFT 6316-5 | P | 63 | 16 | 9.525 | 65.0 | 55.2 | 2.5×2 | 90 900 | 228 000 | 1 136 | 158 |
| SFT 6316-5 | Clearance | 63 | 16 | 9.525 | 65.0 | 55.2 | 2.5×2 | 144 000 | 455 000 | 1 380 | 158 |
| DFT 6316-5 | D | 63 | 16 | 9.525 | 65.0 | 55.2 | 2.5×2 | 144 000 | 455 000 | 2 710 | 302 |
| SFT 6320-2.5 | Clearance | 63 | 20 | 9.525 | 65.0 | 55.2 | 2.5×1 | 93 400 | 227 000 | 713 | 127 |
| DFT 6320-2.5 | D | 63 | 20 | 9.525 | 65.0 | 55.2 | 2.5×1 | 93 400 | 227 000 | 1 400 | 227 |
| PFT 6320-5 | P | 63 | 20 | 9.525 | 65.0 | 55.2 | 2.5×2 | 90 900 | 228 000 | 1 132 | 187 |
| SFT 6320-5 | Clearance | 63 | 20 | 9.525 | 65.0 | 55.2 | 2.5×2 | 170 000 | 453 000 | 1 380 | 187 |
| DFT 6320-5 | D | 63 | 20 | 9.525 | 65.0 | 55.2 | 2.5×2 | 170 000 | 453 000 | 2 710 | 347 |
| LPFT 6340-2.5 | P | 63 | 40 | 7.938 | 65.25 | 57 | 2.5×1 | 35 300 | 69 200 | 466 | 178 |
| LPFT 6340-3 | P | 63 | 40 | 7.938 | 65.25 | 57 | 1.5×2 | 41 300 | 83 100 | 551 | 218 |
| LSFT 6340-2.5 | Clearance | 63 | 40 | 7.938 | 65.25 | 57 | 2.5×1 | 56 000 | 138 000 | 560 | 178 |
| LDFT 6340-2.5 | D | 63 | 40 | 7.938 | 65.25 | 57 | 2.5×1 | 56 000 | 138 000 | 1 100 | 339 |
| LSFT 6340-3 | Clearance | 63 | 40 | 7.938 | 65.25 | 57 | 1.5×2 | 65 500 | 166 000 | 667 | 218 |
| LDFT 6340-3 | D | 63 | 40 | 7.938 | 65.25 | 57 | 1.5×2 | 65 500 | 166 000 | 1 310 | 419 |
| LPFT 6350-1.5 | P | 63 | 50 | 7.938 | 65.25 | 57 | 1.5×1 | 22 400 | 41 100 | 285 | 161 |
| LPFT 6350-2.5 | P | 63 | 50 | 7.938 | 65.25 | 57 | 2.5×1 | 34 800 | 69 600 | 478 | 211 |
| LSFT 6350-1.5 | Clearance | 63 | 50 | 7.938 | 65.25 | 57 | 1.5×1 | 35 600 | 82 200 | 346 | 161 |
| LDFT 6350-1.5 | D | 63 | 50 | 7.938 | 65.25 | 57 | 1.5×1 | 35 600 | 82 200 | 678 | 311 |
| LSFT 6350-2.5 | Clearance | 63 | 50 | 7.938 | 65.25 | 57 | 2.5×1 | 55 300 | 139 000 | 560 | 211 |
| LDFT 6350-2.5 | D | 63 | 50 | 7.938 | 65.25 | 57 | 2.5×1 | 55 300 | 139 000 | 1 120 | 411 |

- Notes**
1. Nut flange for shaft diameter 20 mm or larger comes in circular shape I and circular shape II. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for ZFT, SFT, and DFT, the nut length "L" is shortened by dimension "M".
 3. If there is no seal for LSFT and LDFT of shaft diameter 25 mm or larger, the nut length "L" is shortened by dimension "M" and "C".
 4. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

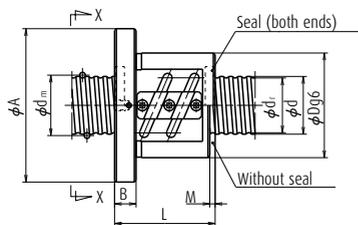

SFT

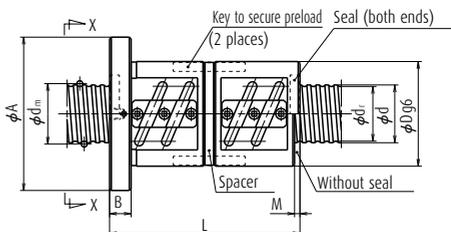

DFT

Unit: mm


Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|----|------|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 107 | 130 | 176 | 22 | 66 | 7 | 14 | 20 | 13 | 152 | Rc1/8 |
| 197 | 130 | 176 | 22 | 66 | 7 | 14 | 20 | 13 | 152 | Rc1/8 |
| 137 | 130 | 176 | 22 | 66 | 7 | 14 | 20 | 13 | 152 | Rc1/8 |
| 257 | 130 | 176 | 22 | 66 | 7 | 14 | 20 | 13 | 152 | Rc1/8 |
| 123 | 136 | 182 | 22 | 68 | 8 | 14 | 20 | 13 | 158 | Rc1/8 |
| 231 | 136 | 182 | 22 | 68 | 8 | 14 | 20 | 13 | 158 | Rc1/8 |
| 159 | 136 | 182 | 22 | 68 | 8 | 14 | 20 | 13 | 158 | Rc1/8 |
| 303 | 136 | 182 | 22 | 68 | 8 | 14 | 20 | 13 | 158 | Rc1/8 |
| 158 | 143 | 204 | 28 | 77 | 10 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 302 | 143 | 204 | 28 | 77 | 10 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 206 | 143 | 204 | 28 | 77 | 10 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 398 | 143 | 204 | 28 | 77 | 10 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 187 | 143 | 204 | 28 | 77 | 17 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 347 | 143 | 204 | 28 | 77 | 17 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 247 | 143 | 204 | 28 | 77 | 17 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 467 | 143 | 204 | 28 | 77 | 17 | 18 | 26 | 17.5 | 172 | Rc1/8 |
| 129 | 160 | 220 | 28 | 82 | 8 | 18 | 26 | 17.5 | 188 | Rc1/8 |
| 237 | 160 | 220 | 28 | 82 | 8 | 18 | 26 | 17.5 | 188 | Rc1/8 |
| 165 | 160 | 220 | 28 | 82 | 8 | 18 | 26 | 17.5 | 188 | Rc1/8 |
| 309 | 160 | 220 | 28 | 82 | 8 | 18 | 26 | 17.5 | 188 | Rc1/8 |
| 162 | 170 | 243 | 32 | 91 | 10 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 306 | 170 | 243 | 32 | 91 | 10 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 210 | 170 | 243 | 32 | 91 | 10 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 402 | 170 | 243 | 32 | 91 | 10 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 191 | 170 | 243 | 32 | 91 | 17 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 351 | 170 | 243 | 32 | 91 | 17 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 251 | 170 | 243 | 32 | 91 | 17 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 471 | 170 | 243 | 32 | 91 | 17 | 22 | 32 | 21.5 | 205 | Rc1/8 |
| 170 | 200 | 290 | 36 | 109 | 10 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 314 | 200 | 290 | 36 | 109 | 10 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 218 | 200 | 290 | 36 | 109 | 10 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 410 | 200 | 290 | 36 | 109 | 10 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 199 | 200 | 290 | 36 | 109 | 12 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 379 | 200 | 290 | 36 | 109 | 12 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 259 | 200 | 290 | 36 | 109 | 12 | 26 | 39 | 25.5 | 243 | Rc1/8 |
| 499 | 200 | 290 | 36 | 109 | 12 | 26 | 39 | 25.5 | 243 | Rc1/8 |

4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

5. Preload system: D; Double nut preload (See page B5.)


Return tube type

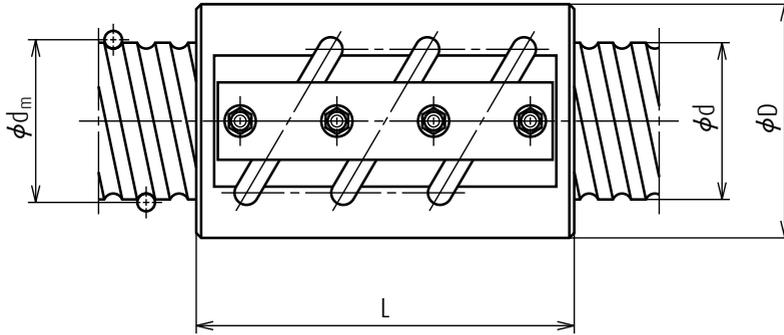

| Model No. | Axial play (Max.) | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | |
|---------------|----------------------|-----------------|-----------|-----------------------------|---------------------------------------|-----------------------------|---|------------------------|------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} |
| GSCT14025-5 | 0.25 | 140 | 25 | 15.875 | 143 | 126.0 | 2.5×2 | 321 000 | 1 390 000 |
| GSCT14025-7.5 | 0.25 | 140 | 25 | 15.875 | 143 | 126.0 | 2.5×3 | 427 000 | 2 090 000 |
| GSCT14032-5 | 0.35 | 140 | 32 | 22.225 | 144 | 121.0 | 2.5×2 | 504 000 | 1 960 000 |
| GSCT14032-7.5 | 0.35 | 140 | 32 | 22.225 | 144 | 121.0 | 2.5×3 | 669 000 | 2 930 000 |
| GSCT14040-5 | 0.35 | 140 | 40 | 22.225 | 144 | 121.0 | 2.5×2 | 503 000 | 1 950 000 |
| GSCT14040-7.5 | 0.35 | 140 | 40 | 22.225 | 144 | 121.0 | 2.5×3 | 668 000 | 2 930 000 |
| GSCT14050-5 | 0.40 | 140 | 50 | 25.4 | 145 | 119.0 | 2.5×2 | 607 000 | 2 230 000 |
| GSCT14050-7.5 | 0.40 | 160 | 50 | 25.4 | 145 | 119.0 | 2.5×3 | 807 000 | 3 340 000 |
| GSCT16032-5 | 0.35 | 160 | 32 | 22.225 | 164 | 141.0 | 2.5×2 | 540 000 | 2 240 000 |
| GSCT16032-7.5 | 0.35 | 160 | 32 | 22.225 | 164 | 141.0 | 2.5×3 | 717 000 | 3 360 000 |
| GSCT16040-5 | 0.35 | 160 | 40 | 22.225 | 164 | 141.0 | 2.5×2 | 539 000 | 2 240 000 |
| GSCT16040-7.5 | 0.35 | 160 | 40 | 22.225 | 164 | 141.0 | 2.5×3 | 716 000 | 3 360 000 |
| GSCT16050-5 | 0.40 | 160 | 50 | 25.4 | 165 | 139.0 | 2.5×2 | 639 000 | 2 550 000 |
| GSCT16050-7.5 | 0.40 | 160 | 50 | 25.4 | 165 | 139.0 | 2.5×3 | 849 000 | 3 820 000 |
| GSCT20032-5 | 0.35 | 200 | 32 | 22.225 | 204 | 181.0 | 2.5×2 | 601 000 | 2 810 000 |
| GSCT20032-7.5 | 0.35 | 200 | 32 | 22.225 | 204 | 181.0 | 2.5×3 | 798 000 | 4 220 000 |
| GSCT20040-5 | 0.35 | 200 | 40 | 22.225 | 204 | 181.0 | 2.5×2 | 600 000 | 2 810 000 |
| GSCT20040-7.5 | 0.35 | 200 | 40 | 22.225 | 204 | 181.0 | 2.5×3 | 797 000 | 4 220 000 |
| GSCT20050-5 | 0.40 | 200 | 50 | 25.4 | 205 | 179.0 | 2.5×2 | 711 000 | 3 190 000 |
| GSCT20050-7.5 | 0.40 | 100 | 50 | 25.4 | 205 | 179.0 | 2.5×3 | 944 000 | 4 790 000 |
| GSCT25040-5 | 0.40 | 250 | 40 | 25.4 | 255 | 229.0 | 2.5×2 | 781 000 | 3 990 000 |
| GSCT25040-7.5 | 0.40 | 250 | 40 | 25.4 | 255 | 229.0 | 2.5×3 | 1 040 000 | 5 990 000 |
| GSCT25050-5 | 0.51 | 250 | 50 | 31.75 | 256 | 223.0 | 2.5×2 | 973 000 | 4 990 000 |
| GSCT25050-7.5 | 0.51 | 250 | 50 | 31.75 | 256 | 223.0 | 2.5×3 | 1 290 000 | 7 490 000 |

- Notes**
1. Precision grade is equivalent to C10 grade of JIS B1192 (see page B37).
 2. The entire nut length (L) is the size without seal. The size with a seal is longer by the size of "MS."

Nut model: GSCT (non-preload)

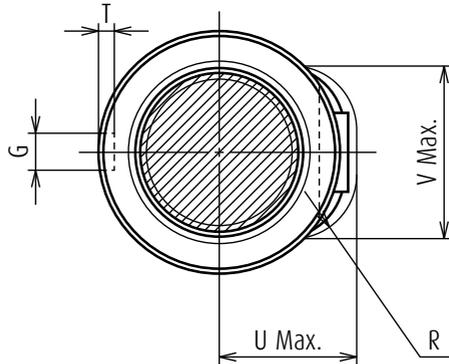

Unit: mm

| Ball nut dimensions | | | | | | | |
|------------------------|-------------------|---------------|----|---------------------------|-----|----|------------------------|
| Nut entire length L | Nut diameter D | Key dimension | | Tube projecting dimension | | | Seal dimension (MS) |
| | | G | T | U | V | R | |
| 200 | 210 | 32 | 11 | 115 | 154 | 50 | 40 |
| 275 | 210 | 32 | 11 | 115 | 154 | 50 | 40 |
| 252 | 220 | 32 | 11 | 135 | 163 | 60 | 48 |
| 348 | 220 | 32 | 11 | 135 | 163 | 60 | 48 |
| 306 | 220 | 32 | 11 | 135 | 163 | 60 | 58 |
| 426 | 220 | 32 | 11 | 135 | 163 | 60 | 58 |
| 377 | 225 | 32 | 11 | 141 | 167 | 70 | 70 |
| 527 | 225 | 32 | 11 | 141 | 167 | 70 | 70 |
| 252 | 245 | 36 | 12 | 141 | 180 | 60 | 48 |
| 348 | 245 | 36 | 12 | 141 | 180 | 60 | 48 |
| 306 | 245 | 36 | 12 | 141 | 180 | 60 | 58 |
| 426 | 245 | 36 | 12 | 141 | 180 | 60 | 58 |
| 377 | 250 | 36 | 12 | 147 | 185 | 70 | 70 |
| 527 | 250 | 36 | 12 | 147 | 185 | 70 | 70 |
| 252 | 295 | 45 | 15 | 162 | 216 | 70 | 48 |
| 348 | 295 | 45 | 15 | 162 | 216 | 70 | 48 |
| 306 | 295 | 45 | 15 | 162 | 216 | 70 | 58 |
| 426 | 295 | 45 | 15 | 162 | 216 | 70 | 58 |
| 377 | 300 | 45 | 15 | 168 | 221 | 70 | 70 |
| 527 | 300 | 45 | 15 | 168 | 221 | 70 | 70 |
| 312 | 355 | 50 | 17 | 194 | 266 | 70 | 58 |
| 432 | 355 | 50 | 17 | 194 | 266 | 70 | 58 |
| 385 | 370 | 50 | 17 | 206 | 274 | 90 | 70 |
| 535 | 370 | 50 | 17 | 206 | 274 | 90 | 70 |

B-3-2.3 Deflector(bridge) Type Ball Screws

1. Features

The deflector(bridge) type has the smallest ball nut compared to the other recirculation systems, and suitable for fine lead operation.

2. Specifications

(1) Ball recirculation system

It has a small ball nut outside diameter, and suits for small lead ball screws. **Fig.1** shows the structure of the deflector(bridge) recirculation system.

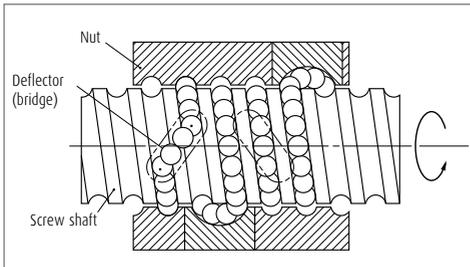


Fig. 1 Structure of deflector(bridge) recirculation system

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | C0, C1, C2, C3, C5, C7 (Ct7 is not included in DFD) |
| Axial play | Z, 0 mm (preloaded); T, 0.005 mm or less S, 0.020 mm or less; N, 0.050 mm or less |

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

(3) Allowable d-n value and the criterion of maximum rotational speed

The allowable d-n value and criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. Basic measure must be taken for the high speed ball screws respectively.

Allowable d-n value:

Standard specification ; 84 000 or less

High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

Note: Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

Table 2 Deflector(bridge) type ball screw product categories

| Nut model | Shape | Flange shape | Preload system |
|-----------|-------|---|--|
| MSFD | | Flanged Circular III | Non-preload, Slight axial play |
| MPFD | | | P-preload (light preload) no spacer ball |
| SFD | | Screw shaft diameter of 16 mm or smaller: Flanged Screw shaft diameter of 20 mm or smaller: Rectangle Circulara, II | Non-preload, Slight axial play |
| ZFD | | Flanged Circular I, II | Z-preload (medium preload) |
| DFD | | Flanged Circular I, II | D-preload (medium preload) (heavy preload) |

3. Product categories

There are four different preload systems (Table 2). Synthetic resin that shows superb characteristics against wear is used in the recirculation deflector (bridge) for MSFD, MPFD, and has enhanced the smooth recirculation of balls.

This product is being applied for a patent.

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.


- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

5. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model Number

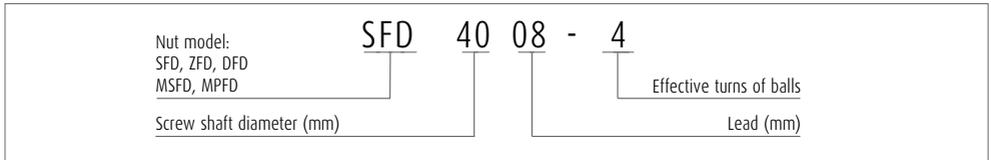


Note: In case of ZFD, the number here is twice as large as the effective turns of balls.

> Reference number for ball screw

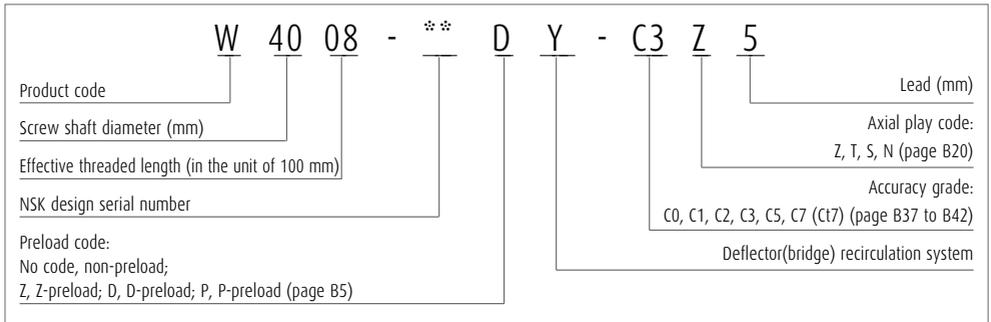


Deflector(bridge) type

View X-X




Lead $l = 0.5$ mm



Lead $l > 1$ mm

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | |
|----------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} |
| MSFD0400.5-3 | Clearance | 4 | 0.5 | 0.400 | 4.1 | 3.6 | 1×3 | 205 | 280 |
| MPFD0400.5-3 | P | 4 | 0.5 | 0.400 | 4.1 | 3.6 | 1×3 | 205 | 280 |
| MSFD 0401-2 | Clearance | 4 | 1 | 0.800 | 4.2 | 3.2 | 1×2 | 370 | 370 |
| * MPFD 0401-2 | P | 4 | 1 | 0.800 | 4.2 | 3.2 | 1×2 | 370 | 370 |
| MSFD0600.5-3 | Clearance | 6 | 0.5 | 0.400 | 6.1 | 5.6 | 1×3 | 240 | 430 |
| MPFD0600.5-3 | P | 6 | 0.5 | 0.400 | 6.1 | 5.6 | 1×3 | 240 | 430 |
| MSFD 0601-3 | Clearance | 6 | 1 | 0.800 | 6.2 | 5.2 | 1×3 | 680 | 920 |
| * MPFD 0601-3 | P | 6 | 1 | 0.800 | 6.2 | 5.2 | 1×3 | 680 | 920 |
| MSFD 0602-3 | Clearance | 6 | 2 | 0.800 | 6.2 | 5.2 | 1×3 | 675 | 920 |
| MPFD 0602-3 | P | 6 | 2 | 0.800 | 6.2 | 5.2 | 1×3 | 675 | 920 |
| MSFD0800.5-3 | Clearance | 8 | 0.5 | 0.400 | 8.1 | 7.6 | 1×3 | 275 | 595 |
| MPFD0800.5-3 | P | 8 | 0.5 | 0.400 | 8.1 | 7.6 | 1×3 | 275 | 595 |
| MSFD 0801-3 | Clearance | 8 | 1 | 0.800 | 8.2 | 7.2 | 1×3 | 790 | 1 290 |
| * MPFD 0801-3 | P | 8 | 1 | 0.800 | 8.2 | 7.2 | 1×3 | 790 | 1 290 |
| MSFD0801.5-3 | Clearance | 8 | 1.5 | 1.000 | 8.3 | 7.0 | 1×3 | 1 270 | 1 970 |
| * MPFD0801.5-3 | P | 8 | 1.5 | 1.000 | 8.3 | 7.0 | 1×3 | 1 270 | 1 970 |
| MSFD 0802-3 | Clearance | 8 | 2 | 1.200 | 8.3 | 6.9 | 1×3 | 1 560 | 2 200 |
| * MPFD 0802-3 | P | 8 | 2 | 1.200 | 8.3 | 6.9 | 1×3 | 1 560 | 2 200 |
| MSFD 1001-3 | Clearance | 10 | 1 | 0.800 | 10.2 | 9.2 | 1×3 | 880 | 1 660 |
| MPFD 1001-3 | P | 10 | 1 | 0.800 | 10.2 | 9.2 | 1×3 | 880 | 1 660 |
| MSFD 1002-3 | Clearance | 10 | 2 | 1.200 | 10.3 | 8.9 | 1×3 | 1 800 | 2 970 |
| * MPFD 1002-3 | P | 10 | 2 | 1.200 | 10.3 | 8.9 | 1×3 | 1 800 | 2 970 |
| MSFD1002.5-3 | Clearance | 10 | 2.5 | 1.588 | 10.4 | 8.6 | 1×3 | 2 500 | 3 630 |
| * MPFD1002.5-3 | P | 10 | 2.5 | 1.588 | 10.4 | 8.6 | 1×3 | 2 500 | 3 630 |
| MSFD 1201-3 | Clearance | 12 | 1 | 0.800 | 12.2 | 11.2 | 1×3 | 940 | 1 980 |
| MPFD 1201-3 | P | 12 | 1 | 0.800 | 12.2 | 11.2 | 1×3 | 940 | 1 980 |
| MSFD 1202-3 | Clearance | 12 | 2 | 1.200 | 12.3 | 10.9 | 1×3 | 1 960 | 3 620 |
| * MPFD 1202-3 | P | 12 | 2 | 1.200 | 12.3 | 10.9 | 1×3 | 1 960 | 3 620 |
| MSFD1202.5-3 | Clearance | 12 | 2.5 | 1.588 | 12.4 | 10.6 | 1×3 | 2 790 | 4 530 |
| * MPFD1202.5-3 | P | 12 | 2.5 | 1.588 | 12.4 | 10.6 | 1×3 | 2 790 | 4 530 |
| MSFD 1203-3 | Clearance | 12 | 3 | 2.000 | 12.5 | 10.2 | 1×3 | 3 680 | 5 400 |
| MPFD 1203-3 | P | 12 | 3 | 2.000 | 12.5 | 10.2 | 1×3 | 3 680 | 5 400 |
| MSFD 1402-3 | Clearance | 14 | 2 | 1.200 | 14.3 | 12.9 | 1×3 | 2 100 | 4 260 |
| MPFD 1402-3 | P | 14 | 2 | 1.200 | 14.3 | 12.9 | 1×3 | 2 100 | 4 260 |
| MSFD 1403-3 | Clearance | 14 | 3 | 2.000 | 14.5 | 12.2 | 1×3 | 4 010 | 6 480 |
| MPFD 1403-3 | P | 14 | 3 | 2.000 | 14.5 | 12.2 | 1×3 | 4 010 | 6 480 |

- Notes**
1. If the shaft OD is less than 6 mm or the lead is less than 1 mm, a seal is not installed in the nut. (See page B68 for dust protection.)
 2. Ball nuts with shaft diameters under 14 mm do not have oil holes.
 3. Right turn screw is standard. Please consult NSK for left turn screw.

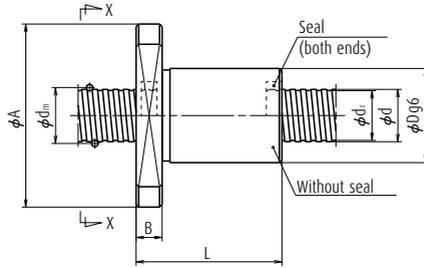


Unit: mm


| Axial rigidity K (N/μm) | Ball nut dimensions | | | | | | |
|-------------------------------|---------------------------|----------------------|--------------------------|-----------------------|---------------------------|-----------------------------|-----------------------|
| | Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Flanged dimension A | Bolt hole dimension A | Bolt hole PCD W |
| 30 | 13 | 10 | 22 | 3 | 11 | 3.4 | 16 |
| 47 | 13 | 10 | 22 | 3 | 11 | 3.4 | 16 |
| 22 | 12 | 10 | 20 | 3 | 14 | 2.9 | 15 |
| 34 | 12 | 10 | 20 | 3 | 14 | 2.9 | 15 |
| 42 | 13 | 12 | 24 | 3 | 13 | 3.4 | 18 |
| 66 | 13 | 12 | 24 | 3 | 13 | 3.4 | 18 |
| 49 | 15 | 12 | 24 | 3.5 | 16 | 3.4 | 18 |
| 76 | 15 | 12 | 24 | 3.5 | 16 | 3.4 | 18 |
| 49 | 17 | 13 | 25 | 4 | 17 | 3.4 | 19 |
| 76 | 17 | 13 | 25 | 4 | 17 | 3.4 | 19 |
| 54 | 13 | 14 | 27 | 3 | 15 | 3.4 | 21 |
| 85 | 13 | 14 | 27 | 3 | 15 | 3.4 | 21 |
| 64 | 16 | 14 | 27 | 4 | 18 | 3.4 | 21 |
| 99 | 16 | 14 | 27 | 4 | 18 | 3.4 | 21 |
| 76 | 22 | 15 | 28 | 4 | 19 | 3.4 | 22 |
| 117 | 22 | 15 | 28 | 4 | 19 | 3.4 | 22 |
| 73 | 26 | 16 | 29 | 4 | 20 | 3.4 | 23 |
| 113 | 26 | 16 | 29 | 4 | 20 | 3.4 | 23 |
| 77 | 16 | 16 | 29 | 4 | 20 | 3.4 | 23 |
| 120 | 16 | 16 | 29 | 4 | 20 | 3.4 | 23 |
| 91 | 28 | 18 | 35 | 5 | 22 | 4.5 | 27 |
| 138 | 28 | 18 | 35 | 5 | 22 | 4.5 | 27 |
| 90 | 32 | 19 | 36 | 5 | 23 | 4.5 | 28 |
| 140 | 32 | 19 | 36 | 5 | 23 | 4.5 | 28 |
| 88 | 16 | 18 | 31 | 4 | 22 | 3.4 | 25 |
| 137 | 16 | 18 | 31 | 4 | 22 | 3.4 | 25 |
| 108 | 28 | 20 | 37 | 5 | 24 | 4.5 | 29 |
| 168 | 28 | 20 | 37 | 5 | 24 | 4.5 | 29 |
| 107 | 32 | 21 | 38 | 5 | 25 | 4.5 | 30 |
| 167 | 32 | 21 | 38 | 5 | 25 | 4.5 | 30 |
| 107 | 36 | 22 | 39 | 5 | 26 | 4.5 | 31 |
| 166 | 36 | 22 | 39 | 5 | 26 | 4.5 | 31 |
| 122 | 29 | 22 | 41 | 6 | 26 | 5.5 | 32 |
| 191 | 29 | 22 | 41 | 6 | 26 | 5.5 | 32 |
| 127 | 37 | 24 | 43 | 6 | 28 | 5.5 | 34 |
| 196 | 37 | 24 | 43 | 6 | 28 | 5.5 | 34 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- The models marked with * (asterisk) are available in the MA type standard ball screw with finished shaft end.
- Preload system: P; Oversize ball preload (See page B5.)


Deflector(bridge) type




SFD, ZFD

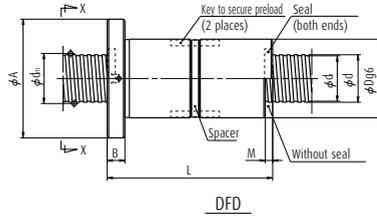

DFD





Circular shape I



Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-----------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| MSFD 1602-4 | Clearance | 16 | 2 | 1.588 | 16.4 | 14.6 | 1×4 | 4 150 | 8 450 | 185 |
| * MPFD 1602-4 | P | 16 | 2 | 1.588 | 16.4 | 14.6 | 1×4 | 4 150 | 8 450 | 288 |
| MSFD 1602.5-4 | Clearance | 16 | 2.5 | 1.588 | 16.4 | 14.6 | 1×4 | 4 150 | 8 450 | 185 |
| * MPFD 1602.5-4 | P | 16 | 2.5 | 1.588 | 16.4 | 14.6 | 1×4 | 4 150 | 8 450 | 288 |
| MSFD 2002-4 | Clearance | 20 | 2 | 1.588 | 20.4 | 18.6 | 1×4 | 4 620 | 10 900 | 225 |
| MPFD 2002-4 | P | 20 | 2 | 1.588 | 20.4 | 18.6 | 1×4 | 4 620 | 10 900 | 351 |
| SFD 2005-3 | Clearance | 20 | 5 | 3.175 | 20.75 | 17.4 | 1×3 | 10 100 | 17 400 | 196 |
| ZFD 2005-6 | Z | 20 | 5 | 3.175 | 20.75 | 17.4 | 1×3 | 10 100 | 17 400 | 382 |
| SFD 2005-4 | Clearance | 20 | 5 | 3.175 | 20.75 | 17.4 | 1×4 | 13 000 | 23 300 | 255 |
| DFD 2005-4 | D | 20 | 5 | 3.175 | 20.75 | 17.4 | 1×4 | 13 000 | 23 300 | 509 |
| SFD 2006-3 | Clearance | 20 | 6 | 3.969 | 21 | 16.9 | 1×3 | 13 100 | 20 500 | 196 |
| ZFD 2006-6 | Z | 20 | 6 | 3.969 | 21 | 16.9 | 1×3 | 13 100 | 20 500 | 382 |
| SFD 2006-4 | Clearance | 20 | 6 | 3.969 | 21 | 16.9 | 1×4 | 16 800 | 27 400 | 255 |
| DFD 2006-4 | D | 20 | 6 | 3.969 | 21 | 16.9 | 1×4 | 16 800 | 27 400 | 498 |
| MSFD 2502-4 | Clearance | 25 | 2 | 1.588 | 25.4 | 23.6 | 1×4 | 5 100 | 13 900 | 273 |
| MPFD 2502-4 | P | 25 | 2 | 1.588 | 25.4 | 23.6 | 1×4 | 5 100 | 13 900 | 425 |
| SFD 2505-3 | Clearance | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 245 |
| * ZFD 2505-6 | Z | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×3 | 11 600 | 22 900 | 480 |
| SFD 2505-4 | Clearance | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×4 | 14 800 | 30 500 | 323 |
| DFD 2505-4 | D | 25 | 5 | 3.175 | 25.75 | 22.4 | 1×4 | 14 800 | 30 500 | 630 |
| SFD 2506-3 | Clearance | 25 | 6 | 3.969 | 26 | 21.9 | 1×3 | 15 200 | 27 300 | 245 |
| ZFD 2506-6 | Z | 25 | 6 | 3.969 | 26 | 21.9 | 1×3 | 15 200 | 27 300 | 470 |
| SFD 2506-4 | Clearance | 25 | 6 | 3.969 | 26 | 21.9 | 1×4 | 19 400 | 36 400 | 323 |
| DFD 2506-4 | D | 25 | 6 | 3.969 | 26 | 21.9 | 1×4 | 19 400 | 36 400 | 626 |
| ZFD 2510-4 | Z | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×2 | 13 300 | 21 200 | 323 |
| SFD 2510-3 | Clearance | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×3 | 18 900 | 31 800 | 245 |
| DFD 2510-3 | D | 25 | 10 | 4.762 | 26.25 | 21.3 | 1×3 | 18 900 | 31 800 | 479 |

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

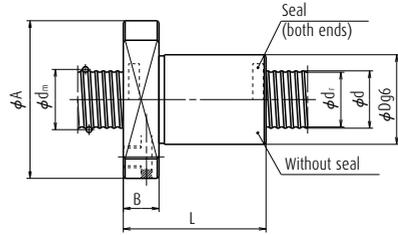

MSFD, MPFD




Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange | | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole dimension T | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|----------------|----|---------------------|---------------------|-----|-----|--------------------|-------------------------|---------------|
| | | | | G | H | | X | Y | Z | | | |
| 40 | 25 | 44 | 10 | — | 29 | — | 5.5 | — | — | 35 | 16 | M6×1 |
| 40 | 25 | 44 | 10 | — | 29 | — | 5.5 | — | — | 35 | 16 | M6×1 |
| 44 | 25 | 44 | 10 | — | 29 | — | 5.5 | — | — | 35 | 16 | M6×1 |
| 44 | 25 | 44 | 10 | — | 29 | — | 5.5 | — | — | 35 | 16 | M6×1 |
| 40 | 30 | 49 | 10 | — | 34 | — | 5.5 | — | — | 40 | 18.5 | M6×1 |
| 40 | 30 | 49 | 10 | — | 34 | — | 5.5 | — | — | 40 | 18.5 | M6×1 |
| 46 | 35 | 58 | 11 | 22.5 | — | 5 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 66 | 35 | 58 | 11 | 22.5 | — | 5 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 51 | 35 | 58 | 11 | 22.5 | — | 5 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 91 | 41 | 64 | 11 | 25 | — | 5 | 5.5 | 9.5 | 5.5 | 52 | — | M6×1 |
| 52 | 35 | 58 | 11 | 22.5 | — | 6 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 76 | 35 | 58 | 11 | 22.5 | — | 6 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 60 | 35 | 58 | 11 | 22.5 | — | 6 | 5.5 | 9.5 | 5.5 | 46 | — | M6×1 |
| 108 | 42 | 65 | 11 | 25 | — | 6 | 5.5 | 9.5 | 5.5 | 53 | — | M6×1 |
| 40 | 36 | 55 | 10 | — | 40 | — | 5.5 | — | — | 46 | 21.5 | M6×1 |
| 40 | 36 | 55 | 10 | — | 40 | — | 5.5 | — | — | 46 | 21.5 | M6×1 |
| 46 | 40 | 63 | 11 | 24 | — | 5 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 66 | 40 | 63 | 11 | 24 | — | 5 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 51 | 40 | 63 | 11 | 24 | — | 5 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 91 | 46 | 69 | 11 | 26 | — | 5 | 5.5 | 9.5 | 5.5 | 57 | — | M6×1 |
| 52 | 40 | 63 | 11 | 24 | — | 6 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 76 | 40 | 63 | 11 | 24 | — | 6 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 60 | 40 | 63 | 11 | 24 | — | 6 | 5.5 | 9.5 | 5.5 | 51 | — | M6×1 |
| 108 | 47 | 70 | 11 | 27 | — | 6 | 5.5 | 9.5 | 5.5 | 58 | — | M6×1 |
| 88 | 42 | 69 | 15 | 26 | — | 10 | 6.6 | 11 | 6.5 | 55 | — | M6×1 |
| 80 | 42 | 69 | 15 | 26 | — | 10 | 6.6 | 11 | 6.5 | 55 | — | M6×1 |
| 140 | 47 | 74 | 15 | 28 | — | 10 | 6.6 | 11 | 6.5 | 60 | — | M6×1 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- The models marked with * (asterisk) are available in the MA type standard ball screw with finished shaft end.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

Deflector(bridge) type

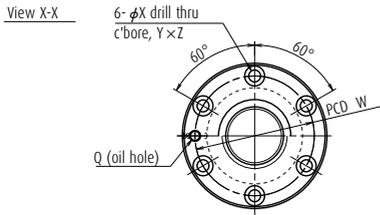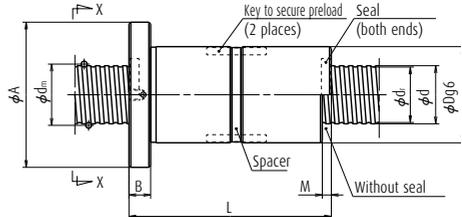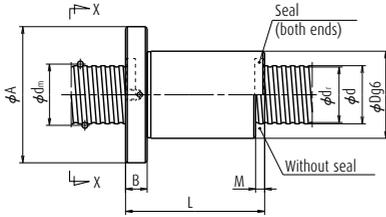


Circular shape I



Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|--------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| MSFD 3202-6 | Clearance | 32 | 2 | 1.588 | 32.4 | 30.6 | 1×6 | 8 030 | 27 100 | 494 |
| MPPD 3202-6 | P | 32 | 2 | 1.588 | 32.4 | 30.6 | 1×6 | 8 030 | 27 100 | 769 |
| SFD 3205-3 | Clearance | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×3 | 13 100 | 30 500 | 304 |
| ZFD 3205-6 | Z | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×3 | 13 100 | 30 500 | 598 |
| SFD 3205-4 | Clearance | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×4 | 16 800 | 40 600 | 409 |
| * ZFD 3205-8 | Z | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×4 | 16 800 | 40 600 | 784 |
| SFD 3205-6 | Clearance | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×6 | 23 800 | 60 900 | 588 |
| DFD 3205-6 | D | 32 | 5 | 3.175 | 32.75 | 29.4 | 1×6 | 23 800 | 60 900 | 1 160 |
| SFD 3206-3 | Clearance | 32 | 6 | 3.969 | 33 | 28.9 | 1×3 | 17 700 | 37 400 | 314 |
| ZFD 3206-6 | Z | 32 | 6 | 3.969 | 33 | 28.9 | 1×3 | 17 700 | 37 400 | 608 |
| SFD 3206-4 | Clearance | 32 | 6 | 3.969 | 33 | 28.9 | 1×4 | 22 600 | 49 900 | 412 |
| ZFD 3206-8 | Z | 32 | 6 | 3.969 | 33 | 28.9 | 1×4 | 22 600 | 49 900 | 804 |
| SFD 3206-6 | Clearance | 32 | 6 | 3.969 | 33 | 28.9 | 1×6 | 32 100 | 74 800 | 598 |
| DFD 3206-6 | D | 32 | 6 | 3.969 | 33 | 28.9 | 1×6 | 32 100 | 74 800 | 1 190 |
| SFD 3208-3 | Clearance | 32 | 8 | 4.762 | 33.25 | 28.3 | 1×3 | 21 600 | 41 700 | 304 |
| ZFD 3208-6 | Z | 32 | 8 | 4.762 | 33.25 | 28.3 | 1×3 | 21 600 | 41 700 | 588 |
| SFD 3208-4 | Clearance | 32 | 8 | 4.762 | 33.25 | 28.3 | 1×4 | 27 700 | 55 600 | 392 |
| ZFD 3208-8 | Z | 32 | 8 | 4.762 | 33.25 | 28.3 | 1×4 | 27 700 | 55 600 | 774 |
| SFD 3210-3 | Clearance | 32 | 10 | 6.35 | 33.75 | 27.1 | 1×3 | 30 500 | 52 500 | 300 |
| * ZFD 3210-6 | Z | 32 | 10 | 6.35 | 33.75 | 27.1 | 1×3 | 30 500 | 52 500 | 588 |
| SFD 3210-4 | Clearance | 32 | 10 | 6.35 | 33.75 | 27.1 | 1×4 | 39 000 | 70 000 | 392 |
| DFD 3210-4 | D | 32 | 10 | 6.35 | 33.75 | 27.1 | 1×4 | 39 000 | 70 000 | 773 |

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPPD, the nut length is the same as those with seal.
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPPD.

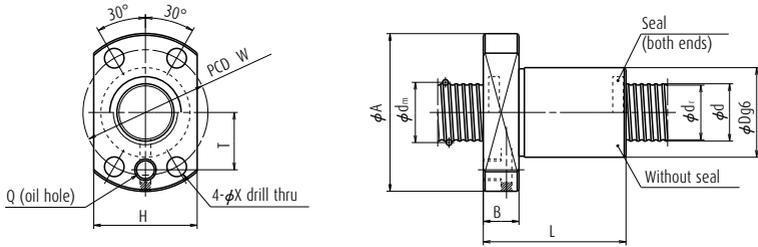


MSFD, MPFD

Unit: mm


| Ball nut dimensions | | | | | | | | | | | | |
|------------------------|-------------------|-----------------------|--------------------|----------------|----|---------------------|---------------------|----|-----|--------------------|-------------------------|---------------|
| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange | | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole dimension T | Oil hole Q |
| | | | | G | H | | X | Y | Z | | | |
| 50 | 42 | 65 | 10 | — | 46 | — | 6.6 | — | — | 54 | 26.5 | M6×1 |
| 50 | 42 | 65 | 10 | — | 46 | — | 6.6 | — | — | 54 | 26.5 | M6×1 |
| 47 | 48 | 75 | 12 | 29 | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 67 | 48 | 75 | 12 | 29 | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 52 | 48 | 75 | 12 | 29 | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 77 | 48 | 75 | 12 | 29 | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 62 | 48 | 75 | 12 | 29 | — | 5 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 112 | 53 | 80 | 12 | 30 | — | 5 | 6.6 | 11 | 6.5 | 66 | — | M6×1 |
| 53 | 48 | 75 | 12 | 29 | — | 6 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 77 | 48 | 75 | 12 | 29 | — | 6 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 61 | 48 | 75 | 12 | 29 | — | 6 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 90 | 48 | 75 | 12 | 29 | — | 6 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 73 | 48 | 75 | 12 | 29 | — | 6 | 6.6 | 11 | 6.5 | 61 | — | M6×1 |
| 133 | 54 | 81 | 12 | 31 | — | 6 | 6.6 | 11 | 6.5 | 67 | — | M6×1 |
| 67 | 50 | 84 | 15 | 32 | — | 8 | 9 | 14 | 8.5 | 66 | — | M6×1 |
| 99 | 50 | 84 | 15 | 32 | — | 8 | 9 | 14 | 8.5 | 66 | — | M6×1 |
| 76 | 50 | 84 | 15 | 32 | — | 8 | 9 | 14 | 8.5 | 66 | — | M6×1 |
| 116 | 50 | 84 | 15 | 32 | — | 8 | 9 | 14 | 8.5 | 66 | — | M6×1 |
| 80 | 54 | 88 | 15 | 34 | — | 10 | 9 | 14 | 8.5 | 70 | — | M6×1 |
| 120 | 54 | 88 | 15 | 34 | — | 10 | 9 | 14 | 8.5 | 70 | — | M6×1 |
| 90 | 54 | 88 | 15 | 34 | — | 10 | 9 | 14 | 8.5 | 70 | — | M6×1 |
| 160 | 54 | 88 | 15 | 34 | — | 10 | 9 | 14 | 8.5 | 70 | — | M6×1 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
- The models marked with * (asterisk) are available in the SS type standard ball screw with finished shaft end.
- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)


Deflector(bridge) type




SFD, ZFD

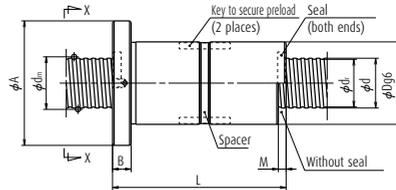

DFD



Circular shape I




Circular shape II


| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|---|------------------------|------------------------|-------------------------------|
| | | | | | | | | Dynamic C ₀ | Static C _{0a} | |
| MSFD 4002-6 | Clearance | 40 | 2 | 1.588 | 40.4 | 38.6 | 1×6 | 8 720 | 33 900 | 588 |
| MPFD 4002-6 | P | 40 | 2 | 1.588 | 40.4 | 38.6 | 1×6 | 8 720 | 33 900 | 916 |
| SFD 4005-4 | Clearance | 40 | 5 | 3.175 | 40.75 | 37.4 | 1×4 | 18 700 | 52 200 | 490 |
| ZFD 4005-8 | Z | 40 | 5 | 3.175 | 40.75 | 37.4 | 1×4 | 18 700 | 52 200 | 960 |
| SFD 4005-6 | Clearance | 40 | 5 | 3.175 | 40.75 | 37.4 | 1×6 | 26 500 | 78 300 | 725 |
| ZFD 4005-12 | Z | 40 | 5 | 3.175 | 40.75 | 37.4 | 1×6 | 26 500 | 78 300 | 1 410 |
| SFD 4006-4 | Clearance | 40 | 6 | 3.969 | 41.0 | 36.9 | 1×4 | 25 100 | 63 500 | 490 |
| ZFD 4006-8 | Z | 40 | 6 | 3.969 | 41.0 | 36.9 | 1×4 | 25 100 | 63 500 | 970 |
| SFD 4006-6 | Clearance | 40 | 6 | 3.969 | 41.0 | 36.9 | 1×6 | 35 600 | 92 500 | 725 |
| ZFD 4006-12 | Z | 40 | 6 | 3.969 | 41.0 | 36.9 | 1×6 | 35 600 | 92 500 | 1 431 |
| SFD 4008-4 | Clearance | 40 | 8 | 4.762 | 41.25 | 36.3 | 1×4 | 32 000 | 75 000 | 500 |
| ZFD 4008-8 | Z | 40 | 8 | 4.762 | 41.25 | 36.3 | 1×4 | 32 000 | 75 000 | 990 |
| SFD 4008-6 | Clearance | 40 | 8 | 4.762 | 41.25 | 36.3 | 1×6 | 45 400 | 113 000 | 735 |
| DFD 4008-6 | D | 40 | 8 | 4.762 | 41.25 | 36.3 | 1×6 | 45 400 | 113 000 | 1 460 |
| SFD 4010-3 | Clearance | 40 | 10 | 6.35 | 41.75 | 35.1 | 1×3 | 35 300 | 69 800 | 372 |
| ZFD 4010-6 | Z | 40 | 10 | 6.35 | 41.75 | 35.1 | 1×3 | 35 300 | 69 800 | 735 |
| SFD 4010-4 | Clearance | 40 | 10 | 6.35 | 41.75 | 35.1 | 1×4 | 45 200 | 93 100 | 490 |
| ZFD 4010-8 | Z | 40 | 10 | 6.35 | 41.75 | 35.1 | 1×4 | 45 200 | 93 100 | 970 |
| SFD 5005-4 | Clearance | 50 | 5 | 3.175 | 50.75 | 47.4 | 1×4 | 20 700 | 66 700 | 593 |
| ZFD 5005-8 | Z | 50 | 5 | 3.175 | 50.75 | 47.4 | 1×4 | 20 700 | 66 700 | 1 170 |
| SFD 5005-6 | Clearance | 50 | 5 | 3.175 | 50.75 | 47.4 | 1×6 | 29 300 | 100 000 | 872 |
| ZFD 5005-12 | Z | 50 | 5 | 3.175 | 50.75 | 47.4 | 1×6 | 29 300 | 100 000 | 1 720 |
| SFD 5006-4 | Clearance | 50 | 6 | 3.969 | 51.0 | 46.9 | 1×4 | 27 900 | 81 600 | 598 |
| ZFD 5006-8 | Z | 50 | 6 | 3.969 | 51.0 | 46.9 | 1×4 | 27 900 | 81 600 | 1 190 |
| SFD 5006-6 | Clearance | 50 | 6 | 3.969 | 51.0 | 46.9 | 1×6 | 39 600 | 122 000 | 892 |
| ZFD 5006-12 | Z | 50 | 6 | 3.969 | 51.0 | 46.9 | 1×6 | 39 600 | 122 000 | 1 750 |

- Notes**
- Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 - If there is no seal for SFD, ZFD, and DFD, the nut length "L" is shortened by dimension "M". For MSFD and MPFD, the nut length is the same as those with seal.
 - The right turn screw is standard. "L" is added to the end of the model code for the left turn screw. Please consult NSK for MSFD and MPFD.

Deflector(bridge) type




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|----------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| SFD 5008-4 | Clearance | 50 | 8 | 4.762 | 51.25 | 46.3 | 1×4 | 35 300 | 94 700 | 598 |
| ZFD 5008-8 | Z | 50 | 8 | 4.762 | 51.25 | 46.3 | 1×4 | 35 300 | 94 700 | 1 180 |
| SFD 5008-6 | Clearance | 50 | 8 | 4.762 | 51.25 | 46.3 | 1×6 | 50 000 | 142 000 | 887 |
| DFD 5008-6 | D | 50 | 8 | 4.762 | 51.25 | 46.3 | 1×6 | 50 000 | 142 000 | 1 740 |
| SFD 5010-3 | Clearance | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×3 | 40 200 | 91 500 | 461 |
| ZFD 5010-6 | Z | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×3 | 40 200 | 91 500 | 914 |
| SFD 5010-4 | Clearance | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×4 | 51 500 | 122 000 | 608 |
| ZFD 5010-8 | Z | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×4 | 51 500 | 122 000 | 1 200 |
| SFD 5010-6 | Clearance | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×6 | 72 900 | 183 000 | 902 |
| DFD 5010-6 | D | 50 | 10 | 6.35 | 51.75 | 45.1 | 1×6 | 72 900 | 183 000 | 1 770 |
| SFD 5012-3 | Clearance | 50 | 12 | 7.938 | 52.25 | 44 | 1×3 | 52 800 | 109 000 | 461 |
| ZFD 5012-6 | Z | 50 | 12 | 7.938 | 52.25 | 44 | 1×3 | 52 800 | 109 000 | 906 |
| SFD 5012-4 | Clearance | 50 | 12 | 7.938 | 52.25 | 44 | 1×4 | 67 600 | 145 000 | 608 |
| DFD 5012-4 | D | 50 | 12 | 7.938 | 52.25 | 44 | 1×4 | 67 600 | 146 000 | 1 200 |
| SFD 5020-3 | Clearance | 50 | 20 | 7.938 | 52.25 | 44 | 1×3 | 52 400 | 109 000 | 461 |
| DFD 5020-3 | D | 50 | 20 | 7.938 | 52.25 | 44 | 1×3 | 52 400 | 109 000 | 908 |
| SFD 6306-4 | Clearance | 63 | 6 | 3.969 | 64.0 | 59.9 | 1×4 | 30 800 | 104 000 | 735 |
| ZFD 6306-8 | Z | 63 | 6 | 3.969 | 64.0 | 59.9 | 1×4 | 30 800 | 104 000 | 1 430 |
| SFD 6306-6 | Clearance | 63 | 6 | 3.969 | 64.0 | 59.9 | 1×6 | 43 600 | 156 000 | 1 180 |
| ZFD 6306-12 | Z | 63 | 6 | 3.969 | 64.0 | 59.9 | 1×6 | 43 600 | 156 000 | 2 110 |
| SFD 6308-4 | Clearance | 63 | 8 | 4.762 | 64.25 | 59.3 | 1×4 | 39 600 | 124 000 | 745 |
| ZFD 6308-8 | Z | 63 | 8 | 4.762 | 64.25 | 59.3 | 1×4 | 39 600 | 124 000 | 1 460 |
| SFD 6308-6 | Clearance | 63 | 8 | 4.762 | 64.25 | 59.3 | 1×6 | 56 200 | 186 000 | 1 100 |
| DFD 6308-6 | D | 63 | 8 | 4.762 | 64.25 | 59.3 | 1×6 | 56 200 | 186 000 | 2 150 |
| SFD 6310-4 | Clearance | 63 | 10 | 6.35 | 64.75 | 58.1 | 1×4 | 58 700 | 162 000 | 764 |
| ZFD 6310-8 | Z | 63 | 10 | 6.35 | 64.75 | 58.1 | 1×4 | 58 700 | 162 000 | 1 510 |
| SFD 6310-6 | Clearance | 63 | 10 | 6.35 | 64.75 | 58.1 | 1×6 | 83 200 | 244 000 | 1 130 |
| DFD 6310-6 | D | 63 | 10 | 6.35 | 64.75 | 58.1 | 1×6 | 83 200 | 244 000 | 2 210 |
| ZFD 6312-6 | Z | 63 | 12 | 7.938 | 65.25 | 57 | 1×3 | 59 900 | 143 000 | 1 120 |
| SFD 6312-4 | Clearance | 63 | 12 | 7.938 | 65.25 | 57 | 1×4 | 76 800 | 191 000 | 755 |
| DFD 6312-4 | D | 63 | 12 | 7.938 | 65.25 | 57 | 1×4 | 76 800 | 191 000 | 1 480 |
| SFD 6312-6 | Clearance | 63 | 12 | 7.938 | 65.25 | 57 | 1×6 | 109 000 | 286 000 | 1 110 |
| DFD 6312-6 | D | 63 | 12 | 7.938 | 65.25 | 57 | 1×6 | 109 000 | 286 000 | 2 180 |
| SFD 6320-3 | Clearance | 63 | 20 | 9.525 | 65.75 | 56 | 1×3 | 98 400 | 231 000 | 735 |
| DFD 6320-3 | D | 63 | 20 | 9.525 | 65.75 | 56 | 1×3 | 98 400 | 231 000 | 1 440 |

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.



SFD

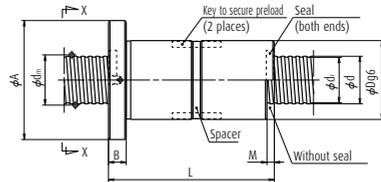

DFD

Unit: mm

Ball nut dimensions


| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|------|------|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 79 | 70 | 112 | 18 | 43 | 8 | 11 | 17.5 | 11 | 90 | Rc1/8 |
| 119 | 70 | 112 | 18 | 43 | 8 | 11 | 17.5 | 11 | 90 | Rc1/8 |
| 96 | 70 | 112 | 18 | 43 | 8 | 11 | 17.5 | 11 | 90 | Rc1/8 |
| 171 | 72 | 114 | 18 | 44 | 8 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 83 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 123 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 93 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 143 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 114 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 205 | 72 | 114 | 18 | 44 | 10 | 11 | 17.5 | 11 | 92 | Rc1/8 |
| 99 | 75 | 121 | 22 | 47 | 12 | 14 | 20 | 13 | 97 | Rc1/8 |
| 147 | 75 | 121 | 22 | 47 | 12 | 14 | 20 | 13 | 97 | Rc1/8 |
| 111 | 75 | 121 | 22 | 47 | 12 | 14 | 20 | 13 | 97 | Rc1/8 |
| 195 | 75 | 121 | 22 | 47 | 12 | 14 | 20 | 13 | 97 | Rc1/8 |
| 146 | 75 | 121 | 28 | 47 | 20 | 14 | 20 | 13 | 97 | Rc1/8 |
| 253 | 75 | 121 | 28 | 47 | 20 | 14 | 20 | 13 | 97 | Rc1/8 |
| 67 | 80 | 122 | 18 | 47 | 6 | 11 | 17.5 | 11 | 100 | Rc1/8 |
| 96 | 80 | 122 | 18 | 47 | 6 | 11 | 17.5 | 11 | 100 | Rc1/8 |
| 79 | 80 | 122 | 18 | 47 | 6 | 11 | 17.5 | 11 | 100 | Rc1/8 |
| 121 | 80 | 122 | 18 | 47 | 6 | 11 | 17.5 | 11 | 100 | Rc1/8 |
| 79 | 82 | 124 | 18 | 47 | 8 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 119 | 82 | 124 | 18 | 47 | 8 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 96 | 82 | 124 | 18 | 47 | 8 | 11 | 17.5 | 11 | 102 | Rc1/8 |
| 175 | 85 | 127 | 18 | 48 | 8 | 11 | 17.5 | 11 | 105 | Rc1/8 |
| 97 | 85 | 131 | 22 | 50 | 10 | 14 | 20 | 13 | 107 | Rc1/8 |
| 147 | 85 | 131 | 22 | 50 | 10 | 14 | 20 | 13 | 107 | Rc1/8 |
| 118 | 85 | 131 | 22 | 50 | 10 | 14 | 20 | 13 | 107 | Rc1/8 |
| 214 | 85 | 131 | 22 | 50 | 10 | 14 | 20 | 13 | 107 | Rc1/8 |
| 147 | 90 | 136 | 22 | 52 | 12 | 14 | 20 | 13 | 112 | Rc1/8 |
| 111 | 90 | 136 | 22 | 52 | 12 | 14 | 20 | 13 | 112 | Rc1/8 |
| 195 | 90 | 136 | 22 | 52 | 12 | 14 | 20 | 13 | 112 | Rc1/8 |
| 136 | 90 | 136 | 22 | 52 | 12 | 14 | 20 | 13 | 112 | Rc1/8 |
| 248 | 90 | 136 | 22 | 52 | 12 | 14 | 20 | 13 | 112 | Rc1/8 |
| 146 | 95 | 153 | 28 | 59 | 20 | 18 | 26 | 17.5 | 123 | Rc1/8 |
| 253 | 95 | 153 | 28 | 59 | 20 | 18 | 26 | 17.5 | 123 | Rc1/8 |

- The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_d) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
- It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.


- Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

Deflector(bridge) type

View X-X




Circular shape I




Circular shape II

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| SFD 8010-4 | Clearance | 80 | 10 | 6.35 | 81.75 | 75.1 | 1×4 | 65 100 | 209 000 | 931 |
| DFD 8010-4 | D | 80 | 10 | 6.35 | 81.75 | 75.1 | 1×4 | 65 100 | 209 000 | 1 840 |
| SFD 8010-6 | Clearance | 80 | 10 | 6.35 | 81.75 | 75.1 | 1×6 | 92 200 | 313 000 | 1 370 |
| DFD 8010-6 | D | 80 | 10 | 6.35 | 81.75 | 75.1 | 1×6 | 92 200 | 313 000 | 2 710 |
| SFD 8012-4 | Clearance | 80 | 12 | 7.938 | 82.25 | 74 | 1×4 | 87 400 | 254 000 | 941 |
| DFD 8012-4 | D | 80 | 12 | 7.938 | 82.25 | 74 | 1×4 | 87 400 | 254 000 | 1 860 |
| SFD 8012-6 | Clearance | 80 | 12 | 7.938 | 82.25 | 74 | 1×6 | 124 000 | 381 000 | 1 392 |
| DFD 8012-6 | D | 80 | 12 | 7.938 | 82.25 | 74 | 1×6 | 124 000 | 381 000 | 2 730 |
| SFD 8020-3 | Clearance | 80 | 20 | 9.525 | 82.75 | 73 | 1×3 | 114 000 | 312 000 | 931 |
| DFD 8020-3 | D | 80 | 20 | 9.525 | 82.75 | 73 | 1×3 | 114 000 | 312 000 | 1 830 |
| SFD 8020-4 | Clearance | 80 | 20 | 9.525 | 82.75 | 73 | 1×4 | 146 000 | 416 000 | 1 230 |
| DFD 8020-4 | D | 80 | 20 | 9.525 | 82.75 | 73 | 1×4 | 146 000 | 416 000 | 2 410 |
| SFD 10010-6 | Clearance | 100 | 10 | 6.35 | 101.75 | 95.1 | 1×6 | 102 000 | 400 000 | 1 670 |
| DFD 10010-6 | D | 100 | 10 | 6.35 | 101.75 | 95.1 | 1×6 | 102 000 | 400 000 | 3 270 |
| SFD 10012-6 | Clearance | 100 | 12 | 7.938 | 102.25 | 94 | 1×6 | 138 000 | 490 000 | 1 680 |
| DFD 10012-6 | D | 100 | 12 | 7.938 | 102.25 | 94 | 1×6 | 138 000 | 490 000 | 3 320 |
| SFD 10020-4 | Clearance | 100 | 20 | 9.525 | 102.75 | 93 | 1×4 | 161 000 | 525 000 | 1 470 |
| DFD 10020-4 | Z | 100 | 20 | 9.525 | 102.75 | 93 | 1×4 | 161 000 | 525 000 | 2 890 |

- Notes**
1. Nut comes in circular shape I and circular shape II for shaft diameter 20 mm or larger. Select a flange that is suitable for the space available for nut installation.
 2. If there is no seal the nut length "L" is shortened by dimension "M".
 3. The right turn screw is standard. "L" is added to the end of the model code for the left turn screw.

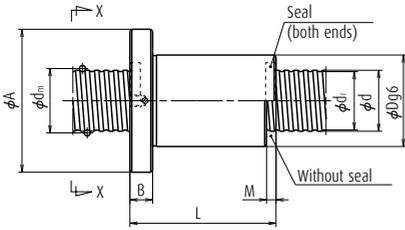

SFD

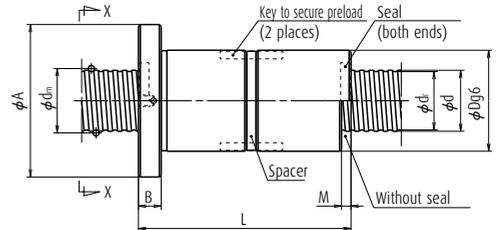

DFD

Unit: mm

Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Notched flange G | Seal dimension M | Bolt hole dimension | | | Bolt hole PCD W | Oil hole Q |
|------------------------|-------------------|-----------------------|--------------------|---------------------|---------------------|---------------------|----|------|--------------------|---------------|
| | | | | | | X | Y | Z | | |
| 97 | 105 | 151 | 22 | 57 | 10 | 14 | 20 | 13 | 127 | Rc1/8 |
| 172 | 105 | 151 | 22 | 57 | 10 | 14 | 20 | 13 | 127 | Rc1/8 |
| 118 | 105 | 151 | 22 | 57 | 10 | 14 | 20 | 13 | 127 | Rc1/8 |
| 214 | 105 | 151 | 22 | 57 | 10 | 14 | 20 | 13 | 127 | Rc1/8 |
| 111 | 110 | 156 | 22 | 59 | 12 | 14 | 20 | 13 | 132 | Rc1/8 |
| 195 | 110 | 156 | 22 | 59 | 12 | 14 | 20 | 13 | 132 | Rc1/8 |
| 136 | 110 | 156 | 22 | 59 | 12 | 14 | 20 | 13 | 132 | Rc1/8 |
| 248 | 110 | 156 | 22 | 59 | 12 | 14 | 20 | 13 | 132 | Rc1/8 |
| 146 | 115 | 173 | 28 | 66 | 20 | 18 | 26 | 17.5 | 143 | Rc1/8 |
| 253 | 115 | 173 | 28 | 66 | 20 | 18 | 26 | 17.5 | 143 | Rc1/8 |
| 168 | 115 | 173 | 28 | 66 | 20 | 18 | 26 | 17.5 | 143 | Rc1/8 |
| 297 | 115 | 173 | 28 | 66 | 20 | 18 | 26 | 17.5 | 143 | Rc1/8 |
| 118 | 125 | 171 | 22 | 64 | 10 | 14 | 20 | 13 | 147 | Rc1/8 |
| 214 | 125 | 171 | 22 | 64 | 10 | 14 | 20 | 13 | 147 | Rc1/8 |
| 142 | 130 | 188 | 28 | 71 | 12 | 18 | 26 | 17.5 | 158 | Rc1/8 |
| 254 | 130 | 188 | 28 | 71 | 12 | 18 | 26 | 17.5 | 158 | Rc1/8 |
| 172 | 135 | 205 | 32 | 79 | 20 | 22 | 32 | 21.5 | 169 | Rc1/8 |
| 301 | 135 | 205 | 32 | 79 | 20 | 22 | 32 | 21.5 | 169 | Rc1/8 |

4. The axial rigidity K in the table above is a theoretical value obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a) with non-preload, 10% with D-preload, and 5% with P-preload. Refer to "Technical Description" (page B37) if the axial load and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.
5. It is recommended to use with seals when the shaft diameter is 16 mm or over and an oil hole is provided on the ball nut.
6. Preload system: Z, Offset preload; P, Oversize ball preload; D, Double nut preload (See page B5.)

B-3-2.4 End Cap Type Ball Screws

1. Features

The end cap recirculation system is suitable for high-helix lead and multiple start threads. Since the leads are 1 to 3 times larger than their screw shaft diameter, it makes them more suitable for high-speed operation.

2. Specifications

(1) Ball recirculation system

The structure of end cap recirculation system is shown in **Fig. 1**.

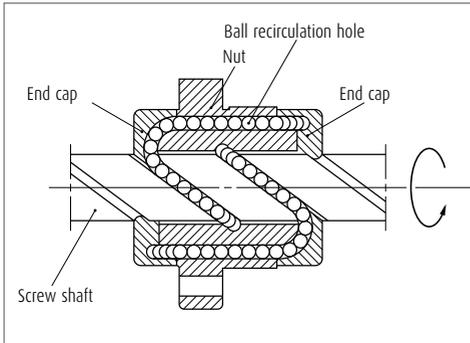


Fig. 1 Structure of end cap recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are shown in **Table 1**. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | LSFC, LPFC: C1, C2, C3, C5, C17 USFC, UPFC: C3, C5, C17 (Three times lead or over are C5, C17) |
| Axial play | Z, 0 mm (preloaded); T, 0.005 mm or less S, 0.020 mm or less; N, 0.050 mm or less |

(3) Allowable d-n value and the criterion of maximum rotational speed

The allowable d-n value and criterion of maximum rotational speed are shown below. Please consult NSK for high-speed specification. Basic measure must be taken for the high speed ball screws respectively.

Allowable d-n value:

Standard specification ; 80 000 or less

High-speed specification ; 100 000 or less

Standard of rotational speed : 3 000 min⁻¹

※Please also review the critical speed. Refer to "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Other specifications

Please consult NSK for other specifications not listed in the dimension tables.

3. Product categories

There are two different preload systems with several models (**Table 2**).

Table 2 End cap type ball screws product categories

| Nut model | Shape | Flang shape | Nut shape | Preload system |
|-----------|-------|----------------------|-----------|--|
| LSFC | | Flanged Circular III | Circular | Non-preload, Slight axial play |
| LPFC | | Flanged Circular III | Circular | P-preload (light preload) no spacer ball |
| USFC | | Flanged Rectangular | Circular | Non-preload, Slight axial play |
| UPFC | | Flanged Rectangular | Circular | P-preload (light preload) no spacer ball |

4. Design Precautions

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.


Special bearings which have higher-load carrying capacity are available.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model Number

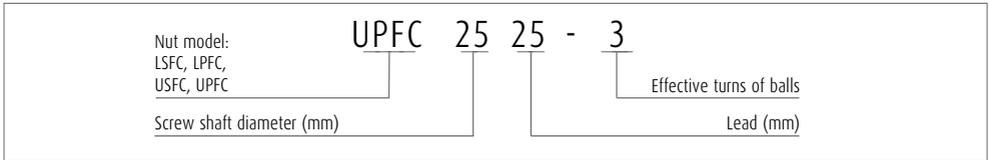



End cap type

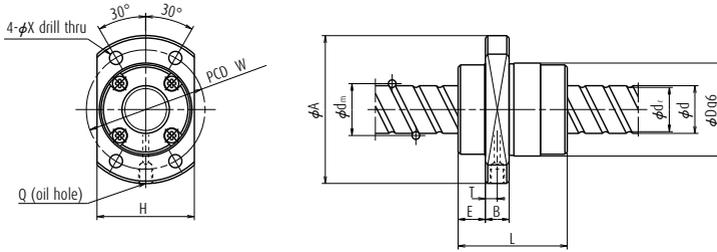

LSFC, LPFC

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|----------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|----------------------------|
| | | | | | | | | Dynamic C _a | Static C _{0a} | |
| USFC1220-1.5 | Clearance | 12 | 20 | 2.381 | 12.5 | 9.9 | 1.7×1 | 2 960 | 4 370 | 66 |
| UPFC1220-1.5 | P | 12 | 20 | 2.381 | 12.5 | 9.9 | 1.7×1 | 2 960 | 4 370 | 103 |
| USFC1520-1.5 | Clearance | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 97 |
| * UPFC1520-1.5 | P | 15 | 20 | 3.175 | 15.5 | 12.2 | 1.7×1 | 5 660 | 8 700 | 151 |
| USFC 1540-1 | Clearance | 15 | 40 | 3.175 | 15.75 | 12.2 | 0.7×2 | 3 960 | 6 070 | 62 |
| UPFC 1540-1 | P | 15 | 40 | 3.175 | 15.75 | 12.2 | 0.7×2 | 3 960 | 6 070 | 97 |
| USFC 1540-2 | Clearance | 15 | 40 | 3.175 | 15.75 | 12.2 | 0.7×4 | 7 190 | 12 100 | 121 |
| UPFC 1540-2 | P | 15 | 40 | 3.175 | 15.75 | 12.2 | 0.7×4 | 7 190 | 12 100 | 188 |
| LSFC 1616-3 | Clearance | 16 | 16 | 2.778 | 16.65 | 13.7 | 1.7×2 | 7 120 | 12 300 | 172 |
| LPFC 1616-3 | P | 16 | 16 | 2.778 | 16.65 | 13.7 | 1.7×2 | 7 120 | 12 300 | 268 |
| LSFC 1616-6 | Clearance | 16 | 16 | 2.778 | 16.65 | 13.7 | 1.7×4 | 12 900 | 24 700 | 334 |
| LPFC 1616-6 | P | 16 | 16 | 2.778 | 16.65 | 13.7 | 1.7×4 | 12 900 | 24 700 | 520 |
| USFC 1632-1 | Clearance | 16 | 32 | 3.175 | 16.75 | 13.4 | 0.7×2 | 4 320 | 6 760 | 74 |
| * UPFC 1632-1 | P | 16 | 32 | 3.175 | 16.75 | 13.4 | 0.7×2 | 4 320 | 6 760 | 116 |
| USFC 1632-3 | Clearance | 16 | 32 | 3.175 | 16.75 | 13.4 | 1.7×2 | 9 270 | 16 600 | 176 |
| UPFC 1632-3 | P | 16 | 32 | 3.175 | 16.75 | 13.4 | 1.7×2 | 9 270 | 16 600 | 273 |
| USFC 1632-6 | Clearance | 16 | 32 | 3.175 | 16.75 | 13.4 | 1.7×4 | 16 800 | 33 300 | 340 |
| UPFC 1632-6 | P | 16 | 32 | 3.175 | 16.75 | 13.4 | 1.7×4 | 16 800 | 33 300 | 530 |
| USFC 1650-1 | Clearance | 16 | 50 | 3.175 | 16.75 | 13.4 | 0.7×2 | 3 960 | 7 060 | 65 |
| UPFC 1650-1 | P | 16 | 50 | 3.175 | 16.75 | 13.4 | 0.7×2 | 3 960 | 7 060 | 102 |
| USFC 1650-2 | Clearance | 16 | 50 | 3.175 | 16.75 | 13.4 | 0.7×4 | 7 200 | 14 100 | 126 |
| UPFC 1650-2 | P | 16 | 50 | 3.175 | 16.75 | 13.4 | 0.7×4 | 7 200 | 14 100 | 197 |
| LSFC 2020-3 | Clearance | 20 | 20 | 3.175 | 20.75 | 17.4 | 1.7×2 | 11 100 | 21 200 | 238 |
| LPFC 2020-3 | P | 20 | 20 | 3.175 | 20.75 | 17.4 | 1.7×2 | 11 100 | 21 200 | 370 |
| LSFC 2020-6 | Clearance | 20 | 20 | 3.175 | 20.75 | 17.4 | 1.7×4 | 20 100 | 42 500 | 462 |
| LPFC 2020-6 | P | 20 | 20 | 3.175 | 20.75 | 17.4 | 1.7×4 | 20 100 | 42 500 | 718 |
| USFC 2040-1 | Clearance | 20 | 40 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 870 | 8 420 | 89 |
| * UPFC 2040-1 | P | 20 | 40 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 870 | 8 420 | 138 |
| USFC 2040-3 | Clearance | 20 | 40 | 3.175 | 20.75 | 17.4 | 1.7×2 | 10 400 | 21 000 | 211 |
| UPFC 2040-3 | P | 20 | 40 | 3.175 | 20.75 | 17.4 | 1.7×2 | 10 400 | 21 000 | 328 |
| USFC 2040-6 | Clearance | 20 | 40 | 3.175 | 20.75 | 17.4 | 1.7×4 | 18 900 | 42 100 | 409 |
| UPFC 2040-6 | P | 20 | 40 | 3.175 | 20.75 | 17.4 | 1.7×4 | 18 900 | 42 100 | 636 |
| USFC 2060-1 | Clearance | 20 | 60 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 460 | 8 630 | 78 |
| UPFC 2060-1 | P | 20 | 60 | 3.175 | 20.75 | 17.4 | 0.7×2 | 4 460 | 8 630 | 121 |
| USFC 2060-2 | Clearance | 20 | 60 | 3.175 | 20.75 | 17.4 | 0.7×4 | 8 090 | 17 300 | 151 |
| UPFC 2060-2 | P | 20 | 60 | 3.175 | 20.75 | 17.4 | 0.7×4 | 8 090 | 17 300 | 235 |

Notes 1. For the LSFC and USFC type ball screws, the axial rigidity K in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C_a). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C_a) and an axial load is applied to it. Refer to the "Technical Description" (page B37) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

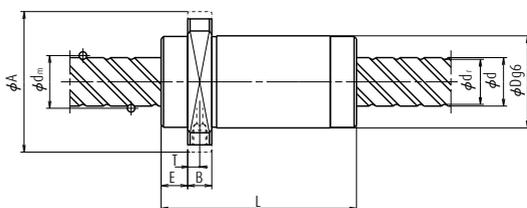

USFC, UPFC


Unit: mm

Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Flanged dimension | | End cap dimension E | Bolt hole dimension X | Bolt hole PCD W | Oil hole Q | Oil hole position T |
|------------------------|-------------------|-----------------------|--------------------|-------------------|----|------------------------|--------------------------|--------------------|---------------|------------------------|
| | | | | H | K | | | | | |
| 44 | 26 | 44 | 10 | 28 | 40 | 9 | 4.5 | 35 | M6×1 | 5 |
| 44 | 26 | 44 | 10 | 28 | 40 | 9 | 4.5 | 35 | M6×1 | 5 |
| 45 | 34 | 55 | 10 | 36 | 50 | 11 | 5.5 | 45 | M6×1 | 5 |
| 45 | 34 | 55 | 10 | 36 | 50 | 11 | 5.5 | 45 | M6×1 | 5 |
| 40 | 32 | 53 | 10 | 33 | 48 | 12 | 5.5 | 43 | M6×1 | 5 |
| 40 | 32 | 53 | 10 | 33 | 48 | 12 | 5.5 | 43 | M6×1 | 5 |
| 40 | 32 | 53 | 10 | 33 | 48 | 12 | 5.5 | 43 | M6×1 | 5 |
| 40 | 32 | 53 | 10 | 33 | 48 | 12 | 5.5 | 43 | M6×1 | 5 |
| 38 | 32 | 53 | 10 | 34 | — | 10 | 4.5 | 42 | M6×1 | 5 |
| 38 | 32 | 53 | 10 | 34 | — | 10 | 4.5 | 42 | M6×1 | 5 |
| 38 | 32 | 53 | 10 | 34 | — | 10 | 4.5 | 42 | M6×1 | 5 |
| 38 | 32 | 53 | 10 | 34 | — | 10 | 4.5 | 42 | M6×1 | 5 |
| 34 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 34 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 66 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 66 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 66 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 66 | 34 | 55 | 10 | 36 | 50 | 10.5 | 5.5 | 45 | M6×1 | 5 |
| 50 | 34 | 55 | 10 | 36 | 50 | 12 | 5.5 | 45 | M6×1 | 5 |
| 50 | 34 | 55 | 10 | 36 | 50 | 12 | 5.5 | 45 | M6×1 | 5 |
| 50 | 34 | 55 | 10 | 36 | 50 | 12 | 5.5 | 45 | M6×1 | 5 |
| 50 | 34 | 55 | 10 | 36 | 50 | 12 | 5.5 | 45 | M6×1 | 5 |
| 46 | 39 | 62 | 10 | 41 | — | 11.5 | 5.5 | 50 | M6×1 | 5 |
| 46 | 39 | 62 | 10 | 41 | — | 11.5 | 5.5 | 50 | M6×1 | 5 |
| 46 | 39 | 62 | 10 | 41 | — | 11.5 | 5.5 | 50 | M6×1 | 5 |
| 46 | 39 | 62 | 10 | 41 | — | 11.5 | 5.5 | 50 | M6×1 | 5 |
| 41 | 38 | 58 | 10 | 40 | 52 | 11 | 5.5 | 48 | M6×1 | 5.5 |
| 41 | 38 | 58 | 10 | 40 | 52 | 11 | 5.5 | 48 | M6×1 | 5.5 |
| 81 | 38 | 58 | 10 | 40 | 52 | 11 | 5.5 | 48 | M6×1 | 5.5 |
| 81 | 38 | 58 | 10 | 40 | 52 | 11 | 5.5 | 48 | M6×1 | 5.5 |
| 81 | 38 | 58 | 10 | 40 | 52 | 11 | 5.5 | 48 | M6×1 | 5.5 |
| 58 | 38 | 58 | 10 | 40 | 52 | 12.3 | 5.5 | 48 | M6×1 | 5 |
| 58 | 38 | 58 | 10 | 40 | 52 | 12.3 | 5.5 | 48 | M6×1 | 5 |
| 58 | 38 | 58 | 10 | 40 | 52 | 12.3 | 5.5 | 48 | M6×1 | 5 |

2. The right turn screw is the standard. Please consult NSK for the left turn screw.
3. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
4. Preload system: P; Oversize ball preload (See page B5.)

End cap type


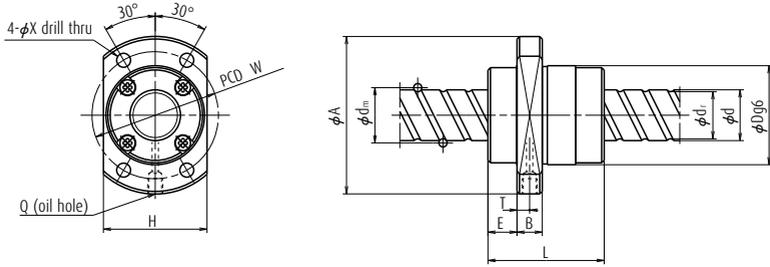


LSFC, LPFC

| Model No. | Preload system | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Axial rigidity K (N/μm) |
|---------------|----------------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--|------------------------|------------------------|-------------------------------|
| | | | | | | | | Dynamic C ₃ | Static C _{0a} | |
| LSFC 2525-3 | Clearance | 25 | 25 | 3.969 | 26.0 | 21.9 | 1.7×2 | 16 600 | 33 200 | 293 |
| LPFC 2525-3 | P | 25 | 25 | 3.969 | 26.0 | 21.9 | 1.7×2 | 16 600 | 33 200 | 456 |
| LSFC 2525-6 | Clearance | 25 | 25 | 3.969 | 26.0 | 21.9 | 1.7×4 | 30 100 | 66 400 | 568 |
| LPFC 2525-6 | P | 25 | 25 | 3.969 | 26.0 | 21.9 | 1.7×4 | 30 100 | 66 400 | 883 |
| USFC 2550-1 | Clearance | 25 | 50 | 3.969 | 26.0 | 21.9 | 0.7×2 | 7 280 | 13 200 | 109 |
| * UPFC 2550-1 | P | 25 | 50 | 3.969 | 26.0 | 21.9 | 0.7×2 | 7 280 | 13 200 | 170 |
| USFC 2550-3 | Clearance | 25 | 50 | 3.969 | 26.0 | 21.9 | 1.7×2 | 15 600 | 33 700 | 264 |
| UPFC 2550-3 | P | 25 | 50 | 3.969 | 26.0 | 21.9 | 1.7×2 | 15 600 | 33 700 | 412 |
| USFC 2550-6 | Clearance | 25 | 50 | 3.969 | 26.0 | 21.9 | 1.7×4 | 28 300 | 67 500 | 512 |
| UPFC 2550-6 | P | 25 | 50 | 3.969 | 26.0 | 21.9 | 1.7×4 | 28 300 | 67 500 | 796 |
| USFC 2580-1 | Clearance | 25 | 80 | 3.969 | 26.0 | 21.9 | 0.7×2 | 6 560 | 13 800 | 94 |
| UPFC 2580-1 | P | 25 | 80 | 3.969 | 26.0 | 21.9 | 0.7×2 | 6 560 | 13 800 | 147 |
| USFC 2580-2 | Clearance | 25 | 80 | 3.969 | 26.0 | 21.9 | 0.7×4 | 11 900 | 27 600 | 184 |
| UPFC 2580-2 | P | 25 | 80 | 3.969 | 26.0 | 21.9 | 0.7×4 | 11 900 | 27 600 | 285 |
| LSFC 3232-3 | Clearance | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.7×2 | 24 100 | 50 700 | 366 |
| LPFC 3232-3 | P | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.7×2 | 24 100 | 50 700 | 570 |
| LSFC 3232-6 | Clearance | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.7×4 | 43 800 | 101 000 | 709 |
| LPFC 3232-6 | P | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.7×4 | 43 800 | 101 000 | 1 104 |
| USFC 3264-1 | Clearance | 32 | 64 | 4.762 | 33.25 | 28.3 | 0.7×2 | 10 300 | 21 400 | 143 |
| UPFC 3264-1 | P | 32 | 64 | 4.762 | 33.25 | 28.3 | 0.7×2 | 10 300 | 21 400 | 222 |
| USFC 3264-3 | Clearance | 32 | 64 | 4.762 | 33.25 | 28.3 | 1.7×2 | 22 000 | 51 100 | 329 |
| UPFC 3264-3 | P | 32 | 64 | 4.762 | 33.25 | 28.3 | 1.7×2 | 22 000 | 51 100 | 512 |
| USFC 3264-6 | Clearance | 32 | 64 | 4.762 | 33.25 | 28.3 | 1.7×4 | 39 900 | 102 000 | 636 |
| UPFC 3264-6 | P | 32 | 64 | 4.762 | 33.25 | 28.3 | 1.7×4 | 39 900 | 102 000 | 991 |
| LSFC 4040-3 | Clearance | 40 | 40 | 6.350 | 41.75 | 35.2 | 1.7×2 | 38 600 | 85 100 | 455 |
| LPFC 4040-3 | P | 40 | 40 | 6.350 | 41.75 | 35.2 | 1.7×2 | 38 600 | 85 100 | 708 |
| LSFC 4040-6 | Clearance | 40 | 40 | 6.350 | 41.75 | 35.2 | 1.7×4 | 70 100 | 170 000 | 880 |
| LPFC 4040-6 | P | 40 | 40 | 6.350 | 41.75 | 35.2 | 1.7×4 | 70 100 | 170 000 | 1 370 |
| LSFC 5050-3 | Clearance | 50 | 50 | 7.938 | 52.25 | 44.1 | 1.7×2 | 57 700 | 133 000 | 560 |
| LPFC 5050-3 | P | 50 | 50 | 7.938 | 52.25 | 44.1 | 1.7×2 | 57 700 | 133 000 | 871 |
| LSFC 5050-6 | Clearance | 50 | 50 | 7.938 | 52.25 | 44.1 | 1.7×4 | 105 000 | 266 000 | 1 084 |
| LPFC 5050-6 | P | 50 | 50 | 7.938 | 52.25 | 44.1 | 1.7×4 | 105 000 | 266 000 | 1 688 |

Notes

- For the LSFC and USFC type ball screws, the axial rigidity K in the table above is the theoretical values obtained from the elastic deformation between screw groove and ball when the axial load is 30% of the basic dynamic load rating (C₃). For the LPFC and UPFC type, the rigidity is the theoretical value when the preload is 10% of the basic dynamic load rating (C₃) and an axial load is applied to it. Refer to the "Technical Description" (page B37) if the rigidity and preload differ from the conditions above, or when the deformation of the ball nut body must be considered.

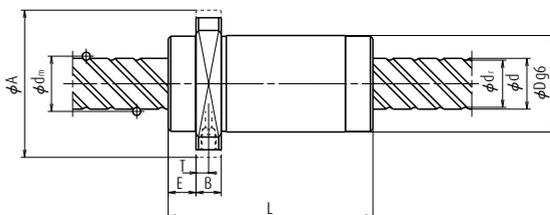

USFC, UPFC

Unit: mm

Ball nut dimensions

| Nut entire length L | Nut diameter D | Flanged diameter A | Flanged width B | Flanged dimension | | End cap dimension E | Bolt hole dimension X | Bolt hole PCD W | Oil hole Q | Oil hole position T |
|------------------------|-------------------|-----------------------|--------------------|-------------------|----|------------------------|--------------------------|--------------------|---------------|------------------------|
| | | | | H | K | | | | | |
| 55 | 47 | 74 | 12 | 49 | — | 13 | 6.6 | 60 | M6×1 | 6 |
| 55 | 47 | 74 | 12 | 49 | — | 13 | 6.6 | 60 | M6×1 | 6 |
| 55 | 47 | 74 | 12 | 49 | — | 13 | 6.6 | 60 | M6×1 | 6 |
| 55 | 47 | 74 | 12 | 49 | — | 13 | 6.6 | 60 | M6×1 | 6 |
| 50 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 50 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 100 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 100 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 100 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 100 | 46 | 70 | 12 | 48 | 63 | 13 | 6.6 | 58 | M6×1 | 7 |
| 75 | 46 | 70 | 12 | 48 | 63 | 14.5 | 6.6 | 58 | M6×1 | 6 |
| 75 | 46 | 70 | 12 | 48 | 63 | 14.5 | 6.6 | 58 | M6×1 | 6 |
| 75 | 46 | 70 | 12 | 48 | 63 | 14.5 | 6.6 | 58 | M6×1 | 6 |
| 75 | 46 | 70 | 12 | 48 | 63 | 14.5 | 6.6 | 58 | M6×1 | 6 |
| 70 | 58 | 92 | 12 | 60 | — | 16 | 9 | 74 | M6×1 | 5.5 |
| 70 | 58 | 92 | 12 | 60 | — | 16 | 9 | 74 | M6×1 | 5.5 |
| 70 | 58 | 92 | 12 | 60 | — | 16 | 9 | 74 | M6×1 | 5.5 |
| 70 | 58 | 92 | 12 | 60 | — | 16 | 9 | 74 | M6×1 | 5.5 |
| 62 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 62 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 126 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 126 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 126 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 126 | 58 | 92 | 12 | 60 | 82 | 15.5 | 9 | 74 | M6×1 | 7.5 |
| 85 | 73 | 114 | 15 | 75 | — | 19.5 | 11 | 93 | M6×1 | 6.5 |
| 85 | 73 | 114 | 15 | 75 | — | 19.5 | 11 | 93 | M6×1 | 6.5 |
| 85 | 73 | 114 | 15 | 75 | — | 19.5 | 11 | 93 | M6×1 | 6.5 |
| 85 | 73 | 114 | 15 | 75 | — | 19.5 | 11 | 93 | M6×1 | 6.5 |
| 107 | 90 | 135 | 20 | 92 | — | 21.5 | 14 | 112 | M6×1 | 7 |
| 107 | 90 | 135 | 20 | 92 | — | 21.5 | 14 | 112 | M6×1 | 7 |
| 107 | 90 | 135 | 20 | 92 | — | 21.5 | 14 | 112 | M6×1 | 7 |
| 107 | 90 | 135 | 20 | 92 | — | 21.5 | 14 | 112 | M6×1 | 7 |

2. The right turn screw is the standard. Please consult NSK for the left turn screw.
3. The models marked with * (asterisk) are available in the FA type standard ball screws with finished shaft end.
4. Preload system: P; Oversize ball preload (See page B5.)

B-3-3 Dimension Table and Reference Number of Application-Oriented Ball Screws

| | Page |
|--|------|
| 1. HMD Type for High-Speed Machine Tools | B495 |
| 2. HMS Type for High-Speed Machine Tools | B499 |
| 3. HMC Type for High-Speed Machine Tools | B503 |
| 4. BSL Type for Miniature Lathes | B509 |
| 5. For High-Load Drives | |
| 5.1 HTF-SRC Type | B513 |
| 5.2 HTF-SRD Type | B517 |
| 5.3 HTF Type | B521 |
| 6. For Contaminated Environments | |
| 6.1 VSS Type | B533 |
| 6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention | B537 |
| 7. TW Series for Twin-Drive Systems | B541 |
| 8. For High Precision Machine Tools | |
| 8.1 Hollow Shaft Ball Screws | B542 |
| 8.2 Nut Cooling Ball Screws | B547 |
| 9. ND Series for Nut-Rotatable Drives | B551 |
| 10. Σ Series for Robots | B559 |
| 11. Ball Screw with L1 Seal designed for B571 Minimal Grease Splatter | B571 |
| 12. Equipped with "NSK K1" Lubrication Unit | B575 |
| 12. Special Ball Screws | B581 |

➤ Features and application examples of application-oriented ball screws

| Applications | | Shape | Features | Applications | Page |
|---------------------------|--------------|---|---|--|------|
| High-Speed Machine Tools | HMD Type |  | High-speed operation: 64 to 120 m/min Rigidity: 5% greater than the HMC series. High-load carrying capacity: 7% greater than the HMC type New recirculation system reduces the noise level by 5 dB or more compared with the HMC type | High-speed machining centers High-speed combined machine tools Die mold processing machine | B495 |
| High-Speed Machine Tools | HMS Type |  | Fine lead: 5 to 12 mm High-speed operation: 25 to 50 m/min Easy replacement: Dimensional interchangeability with tube type ball screws New recirculation system reduces the noise level by 5 dB or more compared with the Tube type. | Machining centers Die mold processing machine NC lathes Combined machine tools | B499 |
| High-Speed Machine Tools | HMC Type |  | High-speed: 40 to 120 m/min Rigidity: 30% greater than existing tube type ball screws High-Load carrying capacity: 14% greater than existing tube type ball screws Noise reduced by small-diameter balls | High-speed machining centers High-speed combined machine tools Die mold processing machines | B503 |
| Small Lathes | BSL Type |  | Compact nut: 50% less ball nut volume than NSK existing products. High-dust protection by thin plastic seal Special high-load capacity ball screw support bearings are available. | Small lathes Multi-axis lathes Small machining centers | B509 |
| High-Load Drives | HTF-SRC Type |  | High-load capacity High-speed operation by high-speed rotation: 930 mm/sec Even load distribution to balls in the ball nut for high-load drive Improved durability by NSK S1 | Injection axis of injection molding machines Servo press machines Press brake Bending machines | B513 |
| High-Load Drives | HTF-SRD Type |  | High-load capacity High-speed operation by large screw lead: 1 600 mm/sec Improved durability by NSK S1 | Clamping axis of injection molding machines Die cast machines Punch presses Lifting and lowering devices | B517 |
| High-Load Drives | HTF Type |  | High-load capacity Even load distribution to the balls in a ball nut for high-load drive Improved durability by NSK S1 Provide a wide range of screw diameter and lead combinations. | Injection molding machines Press machines Press fitting machines Lifting and lowering machines | B521 |
| Contaminated Environments | VSS Type |  | High dust-resistant performance: Reduces particle penetration rate to less than 1/15 (compared with standard seal). More than four times longer service life than standard seal under contaminated environments. | Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines Transfer equipment | B533 |

| Applications | | Shape | Features | Applications | Page |
|--|--------------------------|---|---|--|------|
| Contaminated Environments and Grease Retention | Ball Screw with X1 Seals |  | Highly dustproof: Particle penetration ratio reduced to less than 1/30 of existing standard seals. Superior grease retention: Can reduce lubricant consumption, also effective at suppressing grease splattering. | Machining centers Combined machine tools NC lathes Woodworking machines Laser cutting machines Graphite milling machines Tire molding machines | B537 |
| Twin-Drive Systems | TW Series |  | Controlled screw lead accuracy and variation of preload torque for twin drive. Improved axial rigidity, expected life and controllability by the paired up two ball-screw driving systems | Machining centers Combined machine tools Large-size machine tools | B541 |
| High-Precision Machine Tools | Hollow Shaft Ball Screws |  | Suppress thermal deformation by cooling the shaft center Prevent the machine base from deforming due to thermal expansion. NSK special support units and seal units are available. | High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes | B542 |
| High-Precision Machine Tools | Nut Cooling Ball Screws |  | Due to the simple nut cooling setup, cooling is achieved simply by attaching piping to the thermal displacement control nut. Cooling just as effective as core cooling Insulation to prevent heat from affecting the table. | High-precision die processing machines High-precision combined machine tools High-precision machining centers High-precision lathes Large machine tools | B547 |
| Nut-Rotatable Ball Screws | NDT and NDD Type |  | Angular contact support bearings are integrated into the ball nut. Two or more ball nuts can be installed in a single ball screw shaft. The NDD type ball screws can surpass the critical speed. A special vibration damper enables long-stroke-high-speed operation. | Woodworking machines Laser cutting machines Electronic component mounting devices Liquid crystal display transfer equipment Transfer equipment | B551 |
| Robots | Σ Series |  | A ball screw and a ball spline are made in one shaft, combining a drive and guide system. A ball screw nut, a ball spline nut and support bearings are combined to the unit. Hollow shaft has an effect for weight saving. The hollow can be used for wiring and piping. | SCALA type robots Electronic-component mounting systems | B559 |
| Ball Screw with L1 Seal designed for Minimal Grease Splatter | |  | Amount of splattered grease : 1/10 or less (compared with standard seal) Reduced grease-splattering helps maintaining machines and working environment clean. It can be fitted to Compact FA Series and High Speed SS Series later. | Electronic component mounting devices Semiconductor/Liquid crystal display manufacturing equipment Food processing/ Medical equipment Transfer equipment | B571 |
| Equipped with "NSK K1" Lubrication Unit | |  | Long-term, maintenance-free operation Maintains lubrication efficiency for a prolonged time in contaminated environments Does not pollute the environment Made of compatible material with the FDA regulations is also available. | Automotive manufacturing machines Woodworking machines Laser cutting machines Semiconductor/Liquid crystal display manufacturing equipment Food processing/Medical equipment | B575 |

B-3-3.1 HMD Type for High-Speed Machine Tools

This product is being applied for a patent. The newly developed ball recirculation components, the end-deflector and middle-deflector, have greatly contributed for the substantial improvements in the maximum rotational speed and noise level compared to the HMC type.

1. Features

> High speed

The permissible rotational speed (d-n value) has greatly increased to 160 000 compared with 135 000 of the HMC type.

> Low noise

Noise reduced by 5 dB or more compared with the HMC type ball screws for high-speed machine tools.

> Nut mounting dimensions

The ball nut diameters are the same as those of the HMC type.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the middle-deflector recirculation system of the HMD type.

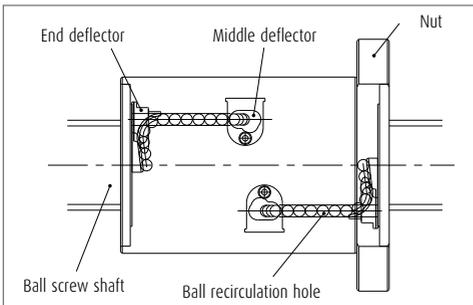


Fig. 1 Structure of middle-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C3, C5 |
| Axial play | 0 mm (preloaded) |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 160 000 or less

Criterion of maximum rotational speed: 4 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

> For twin-drive systems (See page B541.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

> Hollow shaft ball screw (See page B542.)

> Nut cooling ball screw (See page B547.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMD type.

(5) Seal

Compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMD type has a model as follows.


Table 2 HMD type product categories

| Nut model | Shape | Flange shape | Nut shape | Preload system |
|-----------|---|------------------------|-----------|-------------------------------|
| EM |  | Flanged Circular II | Circular | Z-Preload (medium preload) |


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

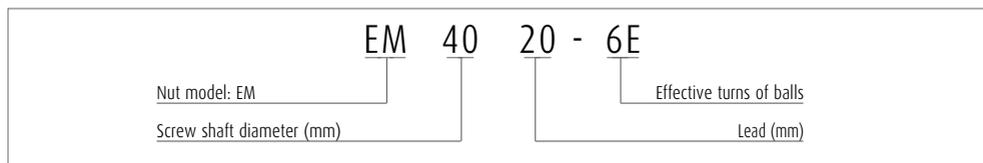

> Reference number for ball screw

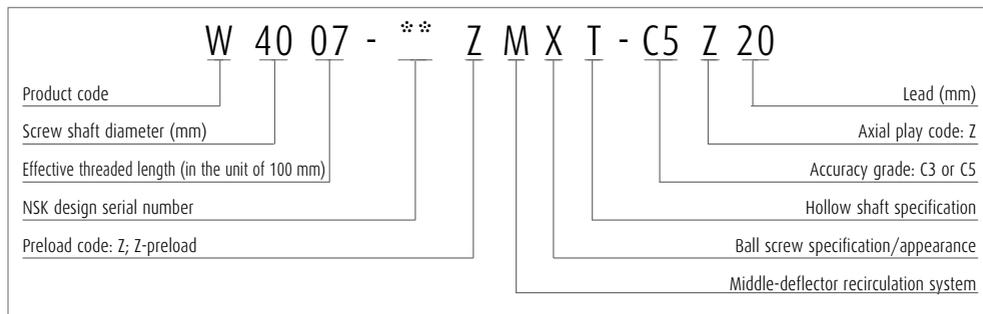


6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


HMD Type for high-speed machine tools

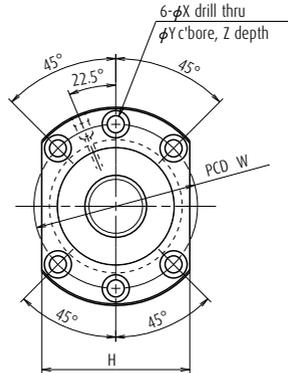

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-----------|-----------------|-----------|-----------------------------|------------------------|------------------------|-------------------------------|
| | | | | Dynamic C _a | Static C _{0a} | |
| EM4016-4E | 40 | 16 | 34.1 | 66 900 | 131 000 | 1 020 |
| EM4020-6E | 40 | 20 | 34.4 | 77 900 | 166 000 | 1 340 |
| EM4025-6E | 40 | 25 | 34.1 | 91 300 | 191 000 | 1 370 |
| EM4030-6E | 40 | 30 | 34.1 | 90 400 | 190 000 | 1 350 |
| EM4516-4E | 45 | 16 | 39.1 | 69 900 | 146 000 | 1 060 |
| EM4520-6E | 45 | 20 | 39.4 | 83 200 | 187 000 | 1 470 |
| EM4525-6E | 45 | 25 | 39.1 | 95 700 | 214 000 | 1 510 |
| EM5016-4E | 50 | 16 | 44.1 | 72 700 | 161 000 | 1 150 |
| EM5020-6E | 50 | 20 | 44.4 | 85 700 | 205 000 | 1 600 |
| EM5025-6E | 50 | 25 | 44.1 | 103 000 | 232 000 | 1 620 |
| EM5030-6E | 50 | 30 | 44.1 | 102 000 | 235 000 | 1 630 |
| EM6316-4E | 63 | 16 | 55.2 | 131 00 | 338 000 | 1 600 |

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

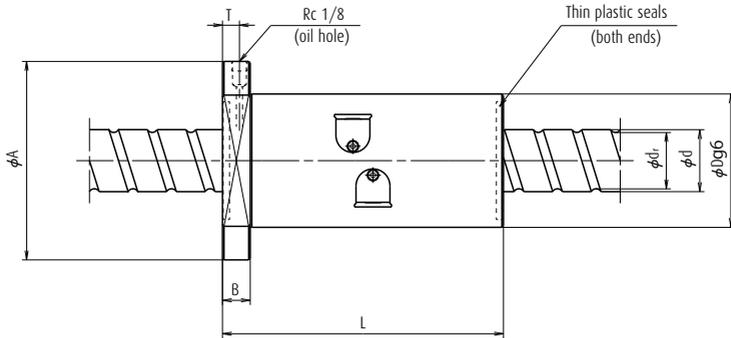

Unit: mm

| Ball nut dimensions | | | | | | | | Bolt hole PCD | Oil hole position | Max. feeding speed |
|---------------------|------------------|------------------|----------------------|-------------|----|----------------|------|------------------|----------------------|-----------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Flange size | | Bolt hole size | | | | |
| | | | | H | X | Y | Z | | | |
| | | | | | | | | W | T | Q |
| 160 | 86 | 128 | 18 | 96 | 11 | 17.5 | 11 | 106 | 11 | 64 |
| 150 | 86 | 128 | 18 | 96 | 11 | 17.5 | 11 | 106 | 11 | 80 |
| 182 | 86 | 128 | 18 | 96 | 11 | 17.5 | 11 | 106 | 11 | 100 |
| 213 | 86 | 128 | 18 | 96 | 11 | 17.5 | 11 | 106 | 11 | 120 |
| 160 | 92 | 134 | 18 | 102 | 11 | 17.5 | 11 | 112 | 11 | 56 |
| 150 | 92 | 134 | 18 | 102 | 11 | 17.5 | 11 | 112 | 11 | 70 |
| 182 | 92 | 134 | 18 | 102 | 11 | 17.5 | 11 | 112 | 11 | 88 |
| 160 | 98 | 140 | 18 | 107 | 11 | 17.5 | 11 | 118 | 11 | 51 |
| 150 | 98 | 140 | 18 | 107 | 11 | 17.5 | 11 | 118 | 11 | 64 |
| 182 | 98 | 140 | 18 | 107 | 11 | 17.5 | 11 | 118 | 11 | 80 |
| 213 | 98 | 140 | 18 | 107 | 11 | 17.5 | 11 | 118 | 11 | 96 |
| 170 | 122 | 180 | 28 | 138 | 18 | 26 | 17.5 | 150 | 14 | 40 |

B-3-3.2 HMS Type for High-Speed Machine Tools

1. Features

> High speed

The permissible rotational speed (d-n value) has greatly increased to 160 000 compared with 100 000 for tube type screws.

> Low noise

By adopting SRC recirculation system, noise reduced by 5 dB or more compared with tube type screws.

> Nut mounting dimensions

The ball nut diameters are the same as those of tube type screws.

2. Specifications

(1) Recirculation system

Fig.1 shows the structure of the SRC recirculation system of the HMS type.

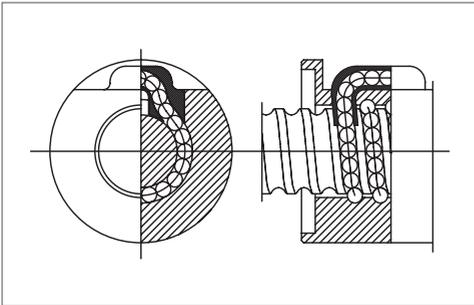


Fig. 1 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C3, C5 |
| Axial play | 0 mm (preloaded) |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 160 000 or less

Criterion of maximum rotational speed: 5 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

> For twin-drive systems (See page B541.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

> Hollow shaft ball screw (See page B542.)

> Nut cooling ball screw (See page B547.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. We recommend using core forced cooling or nut cooling for the HMS type.

3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HMS type has a model as follows.


Table 2 HMD type product categories

| Nut model | Shape | Flange shape | Nut shape | Preload system |
|-----------|---|------------------------|-----------|-------------------------------|
| ZFRC |  | Flanged Circular II | Circular | Z-Preload (medium preload) |

5. Structure of model number and reference number


The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

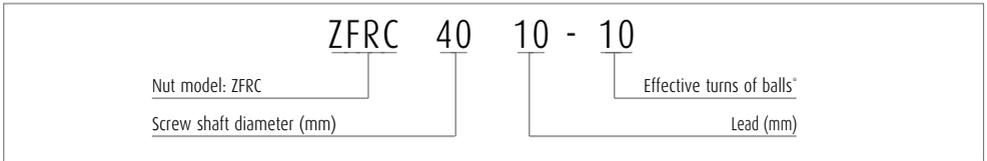

* In the case of Z-preload, the amount shown is twice the effective turn of balls.

> Reference number for ball screw

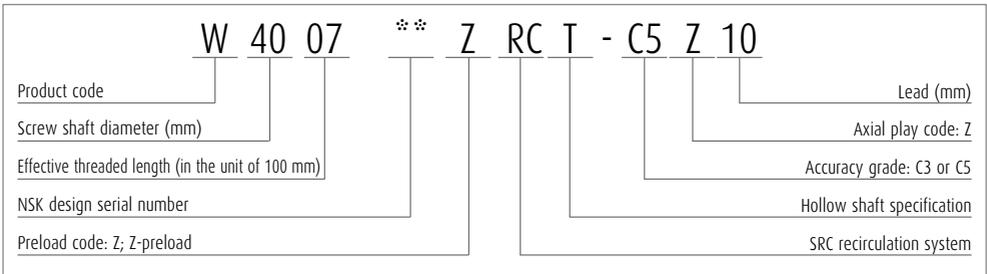


6. Handling Precautions

Maximum operating temperature: 60°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


HMS Type for high-speed machine tools



| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns Turns × rows | Basic load rating (N) | | Axial rigidity K (N/μm) |
|-------------|-----------------|-----------|-----------------------------|---------------------------------------|------------------------|------------------------|-------------------------------|
| | | | | | Dynamic C _a | Static C _{0a} | |
| ZFRC3205-10 | 40 | 5 | 29.2 | 2.5×2 | 18 500 | 56 100 | 840 |
| ZFRC3210-10 | 40 | 10 | 26.4 | 2.5×2 | 46 300 | 108 000 | 920 |
| ZFRC4010-10 | 40 | 10 | 34.4 | 2.5×2 | 52 000 | 137 000 | 1 090 |
| ZFRC4012-10 | 40 | 12 | 34.1 | 2.5×2 | 61 000 | 155 000 | 1 110 |
| ZFRC4508-10 | 45 | 8 | 40.5 | 2.5×2 | 37 300 | 118 000 | 1 160 |
| ZFRC4510-10 | 45 | 10 | 39.4 | 2.5×2 | 54 200 | 155 000 | 1 210 |
| ZFRC4512-10 | 45 | 12 | 39.1 | 2.5×2 | 64 200 | 177 000 | 1 230 |
| ZFRC5010-10 | 50 | 10 | 44.4 | 2.5×2 | 57 700 | 175 000 | 1 320 |
| ZFRC5012-10 | 50 | 12 | 43.2 | 2.5×2 | 77 600 | 214 000 | 1 360 |
| ZFRC6312-14 | 63 | 12 | 56.2 | 3.5×2 | 115 000 | 386 000 | 2 250 |

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screws.
2. Rigidity listed under the column K is the value when a 5% of basic dynamic load rating is applied as the preload.

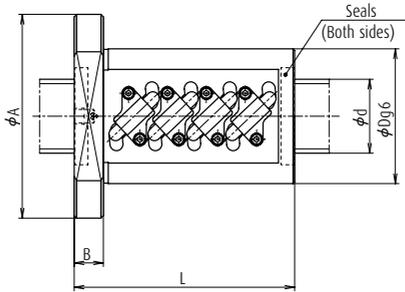

Unit: mm

| Ball nut dimensions | | | | | | | | Bolt hole PCD W | Oil hole position Q | Max. feeding speed (m/min) |
|---------------------|---------------|------------------|-------------------|------------------|----------------|------|-----|--------------------|------------------------|-------------------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Groove size H | Bolt hole size | | | | | |
| | | | | | X | Y | Z | | | |
| 89 | 58 | 85 | 12 | 32 | 6.6 | 11 | 6.5 | 71 | M6×1 | 25 |
| 163 | 74 | 108 | 15 | 41 | 9 | 14 | 8.5 | 90 | M6×1 | 50 |
| 166 | 82 | 124 | 18 | 47 | 11 | 17.5 | 11 | 102 | Rc1/8 | 40 |
| 192 | 86 | 128 | 18 | 48 | 11 | 17.5 | 11 | 106 | Rc1/8 | 48 |
| 136 | 82 | 124 | 18 | 47 | 11 | 17.5 | 11 | 102 | Rc1/8 | 28 |
| 166 | 88 | 132 | 18 | 50 | 11 | 17.5 | 11 | 110 | Rc1/8 | 35 |
| 192 | 90 | 132 | 18 | 50 | 11 | 17.5 | 11 | 110 | Rc1/8 | 42 |
| 166 | 93 | 135 | 18 | 51 | 11 | 17.5 | 11 | 113 | Rc1/8 | 32 |
| 198 | 100 | 146 | 22 | 55 | 14 | 20 | 13 | 122 | Rc1/8 | 38 |
| 244 | 115 | 161 | 22 | 61 | 14 | 20 | 13 | 137 | Rc1/8 | 30 |

B-3-3.3 HMC Type for High-Speed Machine Tools

This product is being applied for a patent.

1. Features

- › High-speed traveling

High helix leads of 16 mm to 36 mm are used. Furthermore, the ball recirculation return tube is reinforced to make a high-speed traveling of 40 to 120 m/min. possible.

- › High rigidity, high load carrying capacity

Double start thread increases the number of effective turns of balls, and a smaller ball size increases the number of the balls. Together they contribute to have high rigidity and high load carrying capacity, despite the high helix lead.

- › Compact nut

The size of nut diameter and length were reduced.

2. Specifications

(1) Recirculation system

The ball recirculation circuits and grooves are suited for high-speed operation. Structure of recirculation system is shown in Fig. 1.

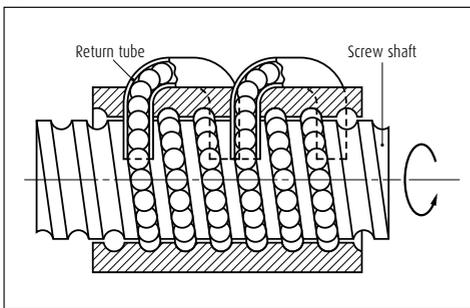


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grade and axial play

Standard accuracy grades and axial play are shown in Table 1. Please consult NSK for other grade.

Table 1 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C3, C5 |
| Axial play | 0 mm (preloaded) |

(3) Options

- › Equipped with NSK K1 lubrication unit

Optional NSK K1 lubrication unit, molded from

resin and impregnated with lubrication oil, is available. Please consult NSK when using NSK K1.

- › For twin-drive systems (See page B541.)

Upon request, the variations in lead accuracy and preload torque between two ball screws of a pair of the TW series are controlled for the further improvement of the reliability.

- › Hollow shaft ball screw specifications (See page B542.)

The temperature rise and measures against thermal expansion of ball screw driving mechanism are the most challenging for high-speed machine tools. For the HMD type ball screws, we recommend to utilize the hollow for forced cooling system.

- › For a vertical axis ball screw

For a vertical axis ball screw, which constantly supports the load of vertical axis system, a high load capacity ball screw is required. A high load capacity type with compact design is available for the nut models **II** and **III** in the dimension tables. For details, please consult NSK.

(4) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: HZC, HDC; 100 000 or less
HZF, HDF; 135 000 or less

Criterion of maximum rotational speed: 3 750 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

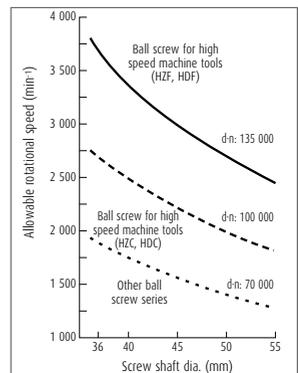


Fig. 2 Comparison of permissible rotational speed

(5) Other specifications

For other specifications not listed in the dimension tables such as high-speed, high-load capacity, and NSK K1 installed type, please consult NSK.

3. Design precautions

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

HMC type has two different preload systems with several models (**Table 2**).


Table 2 HMC type product categories

| Nut model | Shape | Flange shape | Preload system |
|------------|---|-----------------------|-------------------------------|
| HZC HZF |  | Flanged Circular I | Z-Preload (medium preload) |
| HDC HDF |  | Flanged Circular I | D-preload (medium preload) |


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".


> Model number

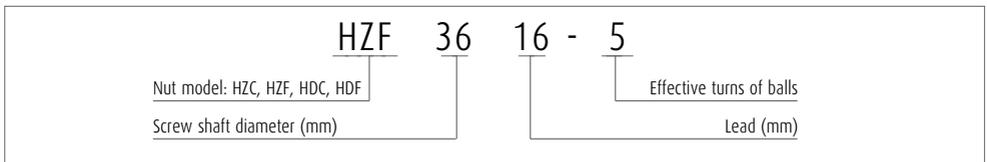

> Reference number for ball screw

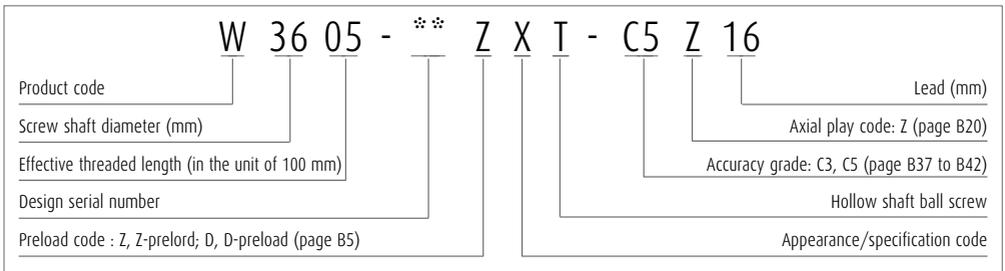


HMC Type for high-speed machine tools

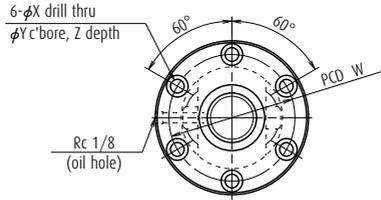


| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls | Nut model | Basic load rating (N) | | Axial rigidity K (N/μm) | |
|-------------|-----------------|-----------|-----------------------------|--------------------------------|--------------|------------------------|------------------------|----------------------------|--------------------|
| | | | | | | Dynamic C ₃ | Static C _{0a} | 5% C ₃ | 10% C ₃ |
| HZF3616-5 | 36 | 16 | 31.5 | 5 | II | 47 000 | 102 000 | 1 130 | 1 420 |
| HZC3616-5 | 36 | 16 | 31.5 | 5 | II | 47 000 | 102 000 | 1 130 | 1 420 |
| HZF3620-3.5 | 36 | 20 | 30.4 | 3.5 | I | 51 100 | 98 600 | 830 | 1 050 |
| HZC3620-3.5 | 36 | 20 | 30.4 | 3.5 | I | 51 100 | 98 600 | 830 | 1 050 |
| HZF4016-5 | 40 | 16 | 35.5 | 5 | II | 49 500 | 113 000 | 1 230 | 1 550 |
| HZC4016-5 | 40 | 16 | 35.5 | 5 | II | 49 500 | 113 000 | 1 230 | 1 550 |
| HZF4020-3.5 | 40 | 20 | 34.4 | 3.5 | I | 53 600 | 107 000 | 900 | 1 130 |
| HZC4020-3.5 | 40 | 20 | 34.4 | 3.5 | I | 53 600 | 107 000 | 900 | 1 130 |
| HZF4020-5 | 40 | 20 | 34.4 | 5 | II | 72 900 | 154 000 | 1 260 | 1 590 |
| HZC4020-5 | 40 | 20 | 34.4 | 5 | II | 72 900 | 154 000 | 1 260 | 1 590 |
| HZF4516-5 | 45 | 16 | 40.5 | 5 | II | 51 400 | 126 000 | 1 340 | 1 690 |
| HZF4516-7.5 | 45 | 16 | 40.5 | 7.5 | II | 72 800 | 189 000 | 1 960 | 2 470 |
| HZF4520-3.5 | 45 | 20 | 39.4 | 3.5 | I | 57 300 | 121 000 | 990 | 1 240 |
| HZC4520-3.5 | 45 | 20 | 39.4 | 3.5 | I | 57 300 | 121 000 | 990 | 1 240 |
| HZF4520-5 | 45 | 20 | 39.4 | 5 | II | 77 900 | 172 000 | 1 380 | 1 740 |
| HZC4520-5 | 45 | 20 | 39.4 | 5 | II | 77 900 | 172 000 | 1 380 | 1 740 |
| HZF4525-3.5 | 45 | 25 | 39.1 | 3.5 | I | 65 900 | 137 000 | 1 010 | 1 280 |
| HZC4525-3.5 | 45 | 25 | 39.1 | 3.5 | I | 65 900 | 137 000 | 1 010 | 1 280 |
| HZF5020-3.5 | 50 | 20 | 44.4 | 3.5 | I | 59 000 | 132 000 | 1 080 | 1 360 |
| HZC5020-3.5 | 50 | 20 | 44.4 | 3.5 | I | 59 000 | 132 000 | 1 080 | 1 360 |
| HZF5020-5 | 50 | 20 | 44.4 | 5 | II | 80 200 | 189 000 | 1 520 | 1 910 |
| HZC5020-5 | 50 | 20 | 44.4 | 5 | II | 80 200 | 189 000 | 1 520 | 1 910 |
| HZF5025-3.5 | 50 | 25 | 44.1 | 3.5 | I | 70 700 | 152 000 | 1 100 | 1 390 |
| HZC5025-3.5 | 50 | 25 | 44.1 | 3.5 | I | 70 700 | 152 000 | 1 100 | 1 390 |
| HZF5025-5 | 50 | 25 | 44.1 | 5 | II | 96 100 | 217 000 | 1 540 | 1 940 |
| HZC5025-5 | 50 | 25 | 44.1 | 5 | II | 96 100 | 217 000 | 1 540 | 1 940 |
| HZF5030-3.5 | 50 | 30 | 44.1 | 3.5 | I | 70 200 | 152 000 | 1 100 | 1 390 |
| HZC5030-3.5 | 50 | 30 | 44.1 | 3.5 | I | 70 200 | 152 000 | 1 100 | 1 390 |
| HZF5520-3.5 | 55 | 20 | 49.4 | 3.5 | I | 62 100 | 146 000 | 1 150 | 1 450 |
| HZF5520-5 | 55 | 20 | 49.4 | 5 | II | 84 300 | 207 000 | 1 630 | 2 050 |
| HZF5525-3.5 | 55 | 25 | 49.1 | 3.5 | I | 73 100 | 165 000 | 1 190 | 1 560 |
| HZF5525-5 | 55 | 25 | 49.1 | 5 | II | 99 300 | 236 000 | 1 680 | 2 120 |
| HZF5530-3.5 | 55 | 30 | 49.1 | 3.5 | I | 72 700 | 167 000 | 1 190 | 1 560 |

Notes

- Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
- Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.

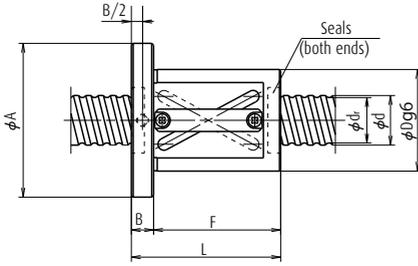

Nut model I (offset preload)

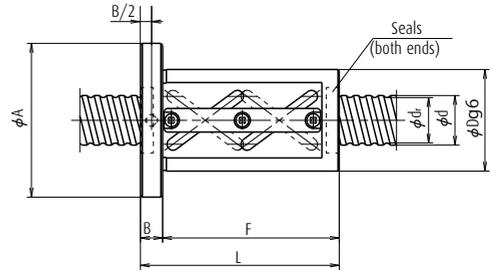


Nut model II (offset preload)

Unit: mm

| Ball nut dimensions | | | | | | | | Bolt hole PCD W | Max. feeding speed (m/min) |
|---------------------|------------|---------------|----------------|--------------|----------------|------|----|-----------------|----------------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Nut length H | Bolt hole size | | | | |
| | | | | | X | Y | Z | | |
| 134 | 78 | 120 | 18 | 116 | 11 | 17.5 | 11 | 98 | 60 |
| 134 | 71 | 113 | 18 | 116 | 11 | 17.5 | 11 | 91 | 44 |
| 121 | 94 | 136 | 18 | 103 | 11 | 17.5 | 11 | 114 | 75 |
| 121 | 78 | 120 | 18 | 103 | 11 | 17.5 | 11 | 98 | 56 |
| 134 | 79 | 121 | 18 | 116 | 11 | 17.5 | 11 | 99 | 54 |
| 134 | 76 | 118 | 18 | 116 | 11 | 17.5 | 11 | 96 | 40 |
| 121 | 96 | 138 | 18 | 103 | 11 | 17.5 | 11 | 116 | 67 |
| 121 | 82 | 124 | 18 | 103 | 11 | 17.5 | 11 | 102 | 50 |
| 161 | 96 | 138 | 18 | 143 | 11 | 17.5 | 11 | 116 | 67 |
| 161 | 82 | 124 | 18 | 143 | 11 | 17.5 | 11 | 102 | 50 |
| 134 | 82 | 124 | 18 | 116 | 11 | 17.5 | 11 | 102 | 48 |
| 187 | 82 | 124 | 22 | 165 | 14 | 20 | 13 | 104 | 48 |
| 122 | 98 | 140 | 18 | 104 | 11 | 17.5 | 11 | 118 | 60 |
| 122 | 88 | 130 | 18 | 144 | 11 | 17.5 | 11 | 108 | 44 |
| 162 | 98 | 140 | 18 | 104 | 11 | 17.5 | 11 | 118 | 60 |
| 162 | 88 | 130 | 18 | 140 | 11 | 17.5 | 11 | 108 | 44 |
| 141 | 101 | 143 | 18 | 123 | 11 | 17.5 | 11 | 121 | 75 |
| 141 | 92 | 134 | 18 | 123 | 11 | 17.5 | 11 | 112 | 56 |
| 122 | 101 | 143 | 18 | 104 | 11 | 17.5 | 11 | 121 | 54 |
| 122 | 95 | 137 | 18 | 104 | 11 | 17.5 | 11 | 115 | 40 |
| 162 | 101 | 143 | 18 | 144 | 11 | 17.5 | 11 | 121 | 54 |
| 162 | 95 | 137 | 18 | 144 | 11 | 17.5 | 11 | 115 | 40 |
| 141 | 103 | 145 | 18 | 123 | 11 | 17.5 | 11 | 123 | 67 |
| 141 | 98 | 140 | 18 | 123 | 11 | 17.5 | 11 | 118 | 50 |
| 191 | 103 | 145 | 18 | 173 | 11 | 17.5 | 11 | 123 | 67 |
| 191 | 98 | 140 | 18 | 173 | 11 | 17.5 | 11 | 118 | 50 |
| 159 | 103 | 145 | 18 | 141 | 11 | 17.5 | 11 | 123 | 81 |
| 159 | 98 | 140 | 18 | 141 | 11 | 17.5 | 11 | 118 | 60 |
| 122 | 103 | 145 | 18 | 104 | 11 | 17.5 | 11 | 123 | 49 |
| 162 | 103 | 145 | 18 | 144 | 11 | 17.5 | 11 | 123 | 49 |
| 141 | 105 | 147 | 18 | 123 | 11 | 17.5 | 11 | 125 | 61 |
| 191 | 105 | 147 | 18 | 173 | 11 | 17.5 | 11 | 125 | 61 |
| 159 | 105 | 147 | 18 | 141 | 11 | 17.5 | 11 | 125 | 73 |


HMC Type for high-speed machine tools

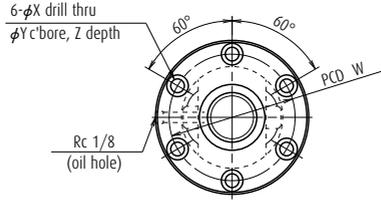

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls | Nut model | Basic load rating (N) | | Axial rigidity K (N/μm) | |
|-------------|-----------------|-----------|-----------------------------|--------------------------------|--------------|------------------------|------------------------|----------------------------|-------------------|
| | | | | | | Dynamic C _a | Static C _{oa} | 5%C _a | 10%C _a |
| HDF3620-5 | 36 | 20 | 30.4 | 5 | III | 69 400 | 139 000 | 1 160 | 1 460 |
| HDC3620-5 | 36 | 20 | 30.4 | 5 | III | 69 400 | 139 000 | 1 160 | 1 460 |
| HDF4025-5 | 40 | 25 | 34.1 | 5 | III | 85 000 | 176 000 | 1 320 | 1 660 |
| HDC4025-5 | 40 | 25 | 34.1 | 5 | III | 85 000 | 176 000 | 1 320 | 1 660 |
| HDF4030-5 | 40 | 30 | 34.1 | 5 | III | 84 600 | 175 000 | 1 320 | 1 660 |
| HDC4030-5 | 40 | 30 | 34.1 | 5 | III | 84 600 | 175 000 | 1 320 | 1 660 |
| HDF4032-7.5 | 40 | 32 | 34.4 | 7.5 | III | 104 000 | 232 000 | 1 920 | 2 420 |
| HDC4032-7.5 | 40 | 32 | 34.4 | 7.5 | III | 104 000 | 232 000 | 1 920 | 2 420 |
| HDF4036-4.5 | 40 | 36 | 34.4 | 4.5 | III | 66 500 | 137 000 | 1 170 | 1 480 |
| HDF4525-5 | 45 | 25 | 39.1 | 5 | III | 89 600 | 195 000 | 1 430 | 1 800 |
| HDC4525-5 | 45 | 25 | 39.1 | 5 | III | 89 600 | 195 000 | 1 430 | 1 800 |
| HDF4530-5 | 45 | 30 | 39.1 | 5 | III | 91 800 | 197 000 | 1 430 | 1 800 |
| HDC4530-5 | 45 | 30 | 39.1 | 5 | III | 91 800 | 197 000 | 1 430 | 1 800 |
| HDF4532-7.5 | 45 | 32 | 39.4 | 7.5 | III | 108 000 | 259 000 | 2 090 | 2 630 |
| HDC4532-7.5 | 45 | 32 | 39.4 | 7.5 | III | 108 000 | 259 000 | 2 090 | 2 630 |
| HDF4536-4.5 | 45 | 36 | 39.4 | 4.5 | III | 69 200 | 155 000 | 1 280 | 1 620 |
| HDF5030-5 | 50 | 30 | 44.1 | 5 | III | 95 500 | 216 000 | 1 540 | 1 940 |
| HDC5030-5 | 50 | 30 | 44.1 | 5 | III | 95 500 | 216 000 | 1 540 | 1 940 |
| HDF5032-7.5 | 50 | 32 | 44.4 | 7.5 | III | 112 000 | 285 000 | 2 270 | 2 860 |
| HDC5032-7.5 | 50 | 32 | 44.4 | 7.5 | III | 112 000 | 285 000 | 2 270 | 2 860 |
| HDF5530-5 | 55 | 30 | 49.1 | 5 | III | 98 700 | 235 000 | 1 680 | 2 120 |
| HDF5532-7.5 | 55 | 32 | 49.4 | 7.5 | III | 118 000 | 312 000 | 2 420 | 3 050 |

Notes

1. Ball screws of 32 or 36 mm lead have triple start threads. Others have double start threads.
2. Rigidity listed under the column 5%Ca is the value when a 5% of basic dynamic load rating is applied as the preload. Similarly, those listed under the column 10%Ca means a 10% of basic dynamic load rating is applied.

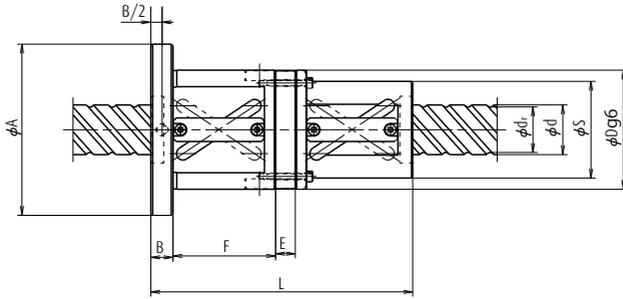

Nut model III (double nut spacer, preload)
 (the figure indicates use of double start threads)

Unit: mm

| Ball nut dimensions | | | | | | | | | | Bolt hole PCD W | Max. feeding speed (m/min) |
|---------------------|----------|----|---------------|----------------|--------------|---------------------|----------------|------|-----|-----------------|----------------------------|
| Nut length L | Nut dia. | | Flange dia. A | Flange width B | Nut length F | Spacer dimensions E | Bolt hole size | | | | |
| | D | S | | | | | X | Y | Z | | |
| 191 | 94 | 76 | 136 | 18 | 77 | 5 | 11 | 17.5 | 114 | 114 | 75 |
| 191 | 78 | 60 | 120 | 18 | 77 | 5 | 11 | 17.5 | 98 | 98 | 56 |
| 228.5 | 98 | 80 | 140 | 18 | 91 | 13.5 | 11 | 17.5 | 118 | 118 | 84 |
| 228.5 | 86 | 68 | 128 | 18 | 91 | 13.5 | 11 | 17.5 | 106 | 106 | 63 |
| 248 | 98 | 80 | 140 | 18 | 104 | 8 | 11 | 17.5 | 11 | 118 | 101 |
| 248 | 86 | 68 | 128 | 18 | 104 | 8 | 11 | 17.5 | 11 | 106 | 75 |
| 265 | 96 | 78 | 142 | 22 | 109 | 11 | 14 | 20 | 13 | 118 | 108 |
| 265 | 82 | 64 | 128 | 22 | 109 | 11 | 14 | 20 | 13 | 106 | 80 |
| 200 | 96 | 78 | 138 | 18 | 83 | 4 | 11 | 17.5 | 11 | 116 | 120 |
| 228.5 | 101 | 83 | 143 | 18 | 91 | 13.5 | 11 | 17.5 | 11 | 121 | 75 |
| 228.5 | 92 | 74 | 134 | 18 | 91 | 13.5 | 11 | 17.5 | 11 | 112 | 56 |
| 248 | 101 | 83 | 143 | 18 | 104 | 8 | 11 | 17.5 | 11 | 121 | 90 |
| 248 | 92 | 74 | 134 | 18 | 104 | 8 | 11 | 17.5 | 11 | 112 | 67 |
| 266 | 98 | 80 | 144 | 22 | 109 | 11 | 14 | 20 | 13 | 120 | 96 |
| 266 | 88 | 70 | 134 | 22 | 109 | 11 | 14 | 20 | 13 | 110 | 71 |
| 200 | 98 | 80 | 140 | 18 | 83 | 4 | 11 | 17.5 | 11 | 118 | 108 |
| 249 | 103 | 85 | 145 | 18 | 104 | 8 | 11 | 17.5 | 11 | 123 | 81 |
| 249 | 98 | 80 | 140 | 18 | 104 | 8 | 11 | 17.5 | 11 | 118 | 60 |
| 266 | 101 | 83 | 147 | 22 | 109 | 11 | 14 | 20 | 13 | 123 | 86 |
| 266 | 95 | 77 | 141 | 22 | 109 | 11 | 14 | 20 | 13 | 117 | 64 |
| 249 | 105 | 87 | 147 | 18 | 104 | 8 | 11 | 17.5 | 11 | 125 | 73 |
| 266 | 103 | 85 | 149 | 22 | 109 | 11 | 14 | 20 | 13 | 125 | 78 |

B-3-3.4 BSL Type for Miniature Lathes

1. Features

- › Prompt delivery

Screw shaft configuration and ball nut shape are standardized for prompt delivery.

- › High speed and low noise

Adoption of end-deflector recirculation system realized high-speed operation with low noise.

- › Excellent dust resistance

Thin plastic seal and specially designed ball grooves prevent the entry of foreign matters.

2. Specifications

(1) Recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation and compact ball nut. The structure of recirculation system is shown in **Fig.1**.

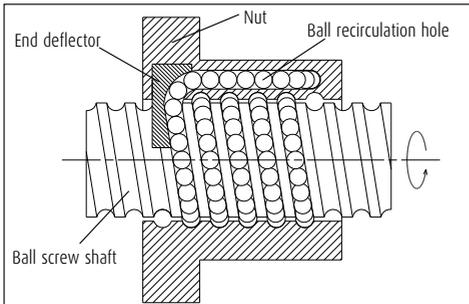


Fig. 1 Structure of end-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C5 |
| Axial play | 0 mm (preloaded) |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 180 000 or less

Criterion of maximum rotational speed: 4 000 min⁻¹

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Options

Optional NSK K1 lubrication unit, molded from resin and impregnated with lubrication oil, supplies fresh oil onto ball rolling surface, ensuring long-term, maintenance-free operation. Please consult NSK when using NSK K1.

3. Design Precautions

When designing the screw shaft end, one end of the shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- Cut the ball groove through to the shaft end.
- The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

Special bearings which have higher-load carrying capacity are available.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The BSL type has a model as follows.


Table 2 BSL type product categories

| Nut model | Shape | Flange shape | Preload system |
|-----------|---|--------------|-------------------------------|
| BSL |  | Circular III | P-Preload (Slight preload) |


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

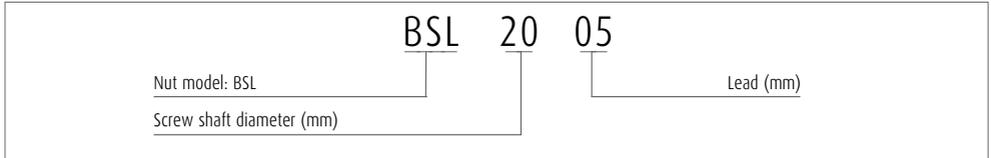

> Reference number for ball screw

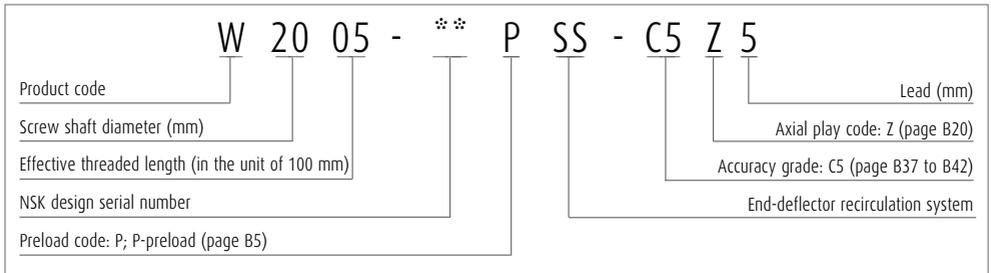


6. Handling Precautions

Maximum operating temperature: 80°C

If using NSK K1, operating temperature should not exceed 50°C.

Refer to "Designing Precautions" (page B83).


BSL Type for small lathes

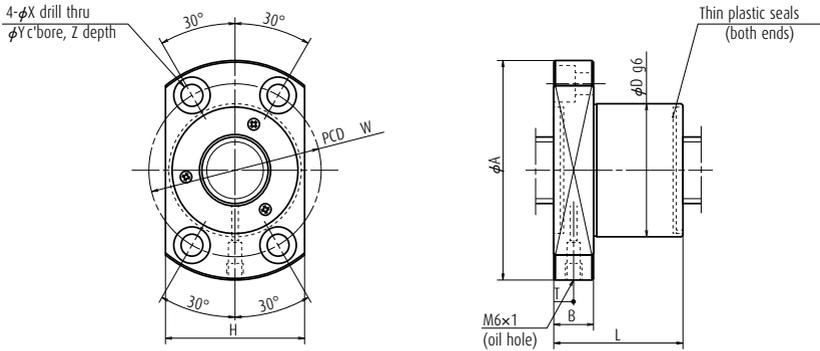

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Basic load rating (N) | | Ball nut dimensions | | | | | | | | | | |
|-----------|-----------------|-----------|-----------------------------|---------------------------|---------------------------|---------------------|----|----|----|----|----------------------|-----|----|-----|----------|----------------|
| | | | | Dynamic C _a | Static C _{0a} | External dimensions | | | | | Bolt hole dimensions | | | | Oil hole | |
| | | | | | | D | A | H | B | L | W | X | Y | Z | T | d ₁ |
| BSL2005 | 20 | 5 | 17.2 | 10 500 | 16 200 | 36 | 63 | 38 | 12 | 37 | 49 | 6.6 | 11 | 6.5 | 6.5 | 15 |
| BSL2006 | 20 | 6 | 16.4 | 14 000 | 20 000 | 40 | 65 | 42 | 12 | 45 | 51 | 6.6 | 11 | 6.5 | 6.7 | 15 |
| BSL2505 | 25 | 5 | 22.2 | 11 700 | 20 400 | 40 | 65 | 42 | 12 | 38 | 51 | 6.6 | 11 | 6.5 | 7.1 | 20 |
| BSL2506 | 25 | 6 | 21.4 | 15 700 | 25 400 | 43 | 69 | 45 | 12 | 45 | 55 | 6.6 | 11 | 6.5 | 6.3 | 20 |
| BSL2508 | 25 | 8 | 20.5 | 20 100 | 29 900 | 46 | 72 | 48 | 12 | 55 | 58 | 6.6 | 11 | 6.5 | 6.5 | 20 |
| BSL2510 | 25 | 10 | 20.5 | 20 000 | 29 800 | 46 | 72 | 48 | 12 | 65 | 58 | 6.6 | 11 | 6.5 | 6 | 20 |
| BSL3210 | 32 | 10 | 26.4 | 32 500 | 51 800 | 61 | 93 | 63 | 18 | 68 | 76 | 9 | 14 | 8.5 | 10 | 25 |
| BSL3212 | 32 | 12 | 26.4 | 32 400 | 51 600 | 61 | 93 | 63 | 18 | 77 | 76 | 9 | 14 | 8.5 | 10 | 25 |

Notes

1. The right turn screw is the standard. Please consult NSK for left turn screw.
2. Shaft dimensions are for reference.

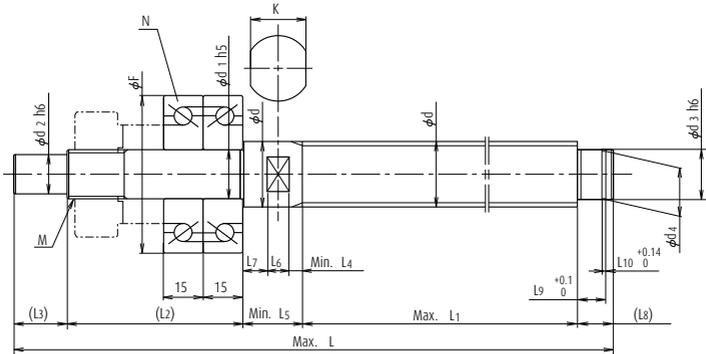

Unit: mm

Shaft configuration and dimensions (reference)

| Shaft dimension | | | | | | | | | | | | | | | | | | | Exclusive bearing N | | Basic dynamic load rating C_a | Permissible axial load (N) |
|-----------------|-------|------------------|----------|--------------|-------|-------|--------------|--------------|-------|-------|-------|-------|----------|----|---------|--------------------------|----|--------|---------------------|--|---------------------------------|----------------------------|
| d_2 | d_3 | d_4 | L (max.) | L_1 (max.) | L_2 | L_3 | L_4 (min.) | L_5 (min.) | L_6 | L_7 | L_8 | L_9 | L_{10} | K | M | Bearing reference number | F | | | | | |
| 12 | 15 | $14.3^{+0.11}_0$ | 500 | 500 | 66 | 20 | 3 | 20 | 8 | 9 | 14 | 10.15 | 1.15 | 17 | M15×1.0 | 15TAC47C | 47 | 21 900 | 26 600 | | | |
| 12 | 15 | $14.3^{+0.11}_0$ | 500 | 500 | 66 | 20 | 4 | 21 | 8 | 9 | 14 | 10.15 | 1.15 | 17 | M15×1.0 | 15TAC47C | 47 | 21 900 | 26 600 | | | |
| 15 | 20 | $19^{+0.21}_0$ | 700 | 700 | 71 | 27 | 3 | 27 | 10 | 14 | 19 | 15.35 | 1.35 | 22 | M20×1.0 | 20TAC62C | 62 | 28 500 | 40 500 | | | |
| 15 | 20 | $19^{+0.21}_0$ | 700 | 700 | 71 | 27 | 4 | 28 | 10 | 14 | 19 | 15.35 | 1.35 | 22 | M20×1.0 | 20TAC62C | 62 | 28 500 | 40 500 | | | |
| 15 | 20 | $19^{+0.21}_0$ | 700 | 700 | 71 | 27 | 5 | 29 | 10 | 14 | 19 | 15.35 | 1.35 | 22 | M20×1.0 | 20TAC62C | 62 | 28 500 | 40 500 | | | |
| 15 | 20 | $19^{+0.21}_0$ | 700 | 700 | 71 | 27 | 5 | 29 | 10 | 14 | 19 | 15.35 | 1.35 | 22 | M20×1.0 | 20TAC62C | 62 | 28 500 | 40 500 | | | |
| 20 | 25 | $23.9^{+0.21}_0$ | 1 000 | 800 | 71 | 33 | 6 | 33 | 12 | 15 | 20 | 16.35 | 1.35 | 27 | M25×1.5 | 25TAC62C | 62 | 28 500 | 40 500 | | | |
| 20 | 25 | $23.9^{+0.21}_0$ | 1 000 | 800 | 71 | 33 | 7 | 34 | 12 | 15 | 20 | 16.35 | 1.35 | 27 | M25×1.5 | 25TAC62C | 62 | 28 500 | 40 500 | | | |

3. Shaft length L_1 and shaft entire length L are the maximum length.
 When L becomes the same length as the L_1 , the thread is all screw specification.

B-3-3.5.1 HTF-SRC Type for High-Load Drives

1. Features

> High-speed operation and low noise

The SRC recirculation system contributes to more than twice the feed speed (d·n value: 140 000 and 160 000) and the noise level of less than 8 to 10 dB (half to 1/3 of noise) compared with the HTF type.

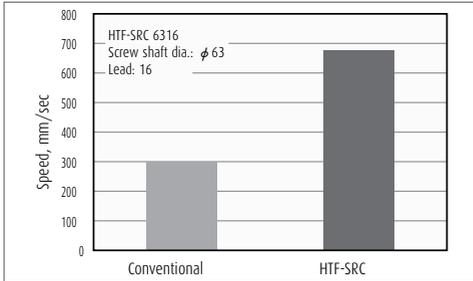


Fig. 1 Feed speed comparison

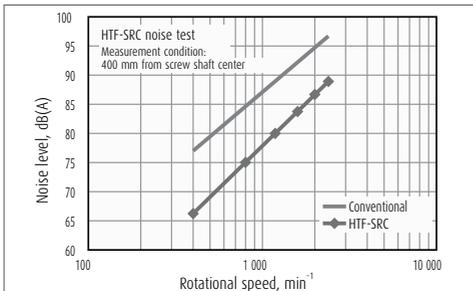


Fig. 2 Noise level comparison

2. Specifications

(1) Recirculation system

The SRC recirculation system picks up balls in the direction they are moving, and thus contributed to high-speed, low-noise operation. Structure of the recirculation system is as follows.

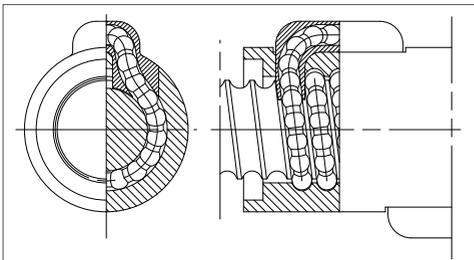


Fig. 3 Structure of SRC recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | Ct7 |
| Axial play | S,0.020 mm or less; N,0.050 mm or less |

(3) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d·n value and the criterion of maximum rotational speed

| | | |
|---------------------------------------|-------------------------|------------------------|
| Lead | 14, 16 mm | 20, 25 mm [☆] |
| Allowable d·n value | 160 000 or less | 140 000 or less |
| Criterion of maximum rotational speed | 3 225 min ⁻¹ | |

d·n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

☆ Allowable d · n value for HTF-SRC5020: 160 000

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design Precautions

The HTF-SRC type is designed to distribute the load uniformly to the load balls for high-load drive mechanism.

We recommend installing the ball screws in the way shown below for the full use of this characteristic.

In addition, we will make full analysis when you use the HTF-SRC type under extreme conditions such as application of extremely high load or operating in short stroke.

Contact NSK about operating conditions (See page B531). When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions.

If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

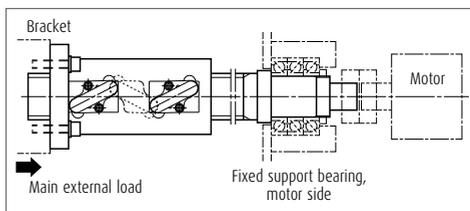


Fig. 4 Recommended installing direction of high-load drive ball screw

4. Product categories

The HTF-SRC type has a model as follows.

Table 3 HTF-SRC type product categories

| Nut model | Shape | Flange shape | Preload system |
|-----------|---|-----------------------|----------------------------------|
| HTF-SRC |  | Flanged Circular I | Non-preload Slight axial play |

5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

- > Model number

| | | | |
|----------------------------|----|----|--------------------------|
| HTF-SRC 63 20 - 7.5 | | | |
| Nut model: HTF-SRC | 63 | 20 | Effective turns of balls |
| Screw shaft diameter (mm) | | | Lead (mm) |

- > Reference number for ball screw

| | | | | | | | |
|---|---|--------------------------|--------------------------|--|--|----------------------------------|-----------|
| W 63 04 - [※] RC SP - C7 S 20 | | | | | | | |
| Product code | 63 | 04 | [※] | RC | SP | C7 | S 20 |
| Screw shaft diameter (mm) | Effective threaded length (in the unit of 100 mm) | NSK design serial number | SRC recirculation system | Accuracy grade: C7 (Ct7) (page B37 to B42) | Ball retaining pieces NSK S1 specification | Axial play code: S, N (page B20) | Lead (mm) |

6. Handling Precautions


Maximum operating temperature: 70°C
(at outside diameter of ball nut)

The lubricant deteriorates, operating temperature

is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.

HTF-SRC Type for high-load drives

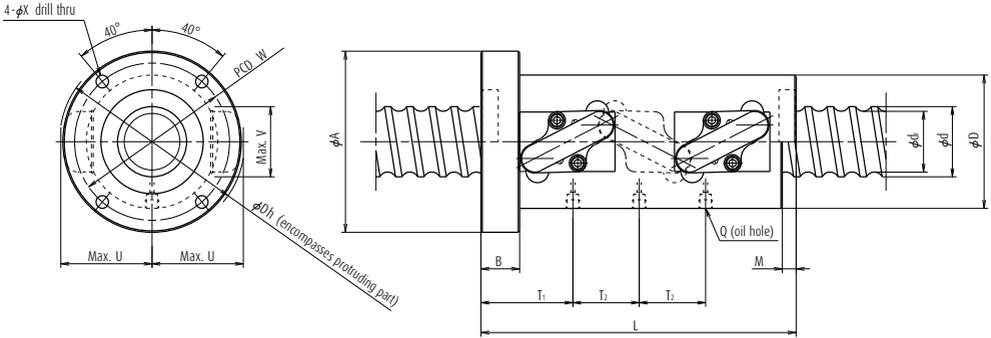


Nut model I

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls Turns × Circuits | Nut model | Basic load rating (kN) | | Allowable axial load (kN) |
|-------------------|-----------------|-----------|-----------------------------|---|--------------|---------------------------|---------------------------|---------------------------------|
| | | | | | | Dynamic C _a | Static C _{oa} | |
| HTF-SRC5014-7.5 | 50 | 14 | 41.6 | 2.5×3 | I | 264 | 623 | 73.1 |
| HTF-SRC5016-7.5 | 50 | 16 | 39 | 2.5×3 | I | 383 | 818 | 91.1 |
| HTF-SRC5020-7.5 | 50 | 20 | 39 | 2.5×3 | I | 383 | 818 | 91.0 |
| HTF-SRC6316-7.5 | 63 | 16 | 52 | 2.5×3 | I | 429 | 1 050 | 119 |
| HTF-SRC6316-10 | 63 | 16 | 52 | 2.5×4 | II | 549 | 1 410 | 159 |
| HTF-SRC6316-10.5 | 63 | 16 | 52 | 3.5×3 | I | 562 | 1 450 | 167 |
| HTF-SRC6316-14 | 63 | 16 | 52 | 3.5×4 | II | 720 | 1 930 | 215 |
| HTF-SRC6320-7.5 | 63 | 20 | 49 | 2.5×3 | I | 572 | 1 280 | 147 |
| HTF-SRC6320-10 | 63 | 20 | 49 | 2.5×4 | II | 732 | 1 710 | 196 |
| HTF-SRC6325-10.5 | 63 | 25 | 49 | 3.5×3 | I | 750 | 1 770 | 170 |
| HTF-SRC8016-10.5 | 80 | 16 | 69 | 3.5×3 | I | 627 | 1 870 | 221 |
| HTF-SRC8016-14 | 80 | 16 | 69 | 3.5×4 | II | 802 | 2 490 | 295 |
| HTF-SRC8020-10.5 | 80 | 20 | 66 | 3.5×3 | I | 838 | 2 300 | 267 |
| HTF-SRC8025-7.5 | 80 | 20 | 63 | 2.5×3 | I | 790 | 1 960 | 221 |
| HTF-SRC10020-10.5 | 100 | 20 | 86 | 3.5×3 | I | 936 | 2 910 | 346 |
| HTF-SRC10020-14 | 100 | 20 | 86 | 3.5×4 | II | 1 200 | 3 890 | 461 |
| HTF-SRC10025-10.5 | 100 | 25 | 83 | 3.5×3 | I | 1 200 | 3 430 | 408 |
| HTF-SRC10025-14 | 100 | 25 | 83 | 3.5×4 | II | 1 540 | 4 580 | 544 |
| HTF-SRC12020-7.5 | 120 | 20 | 106 | 2.5×3 | I | 776 | 2 550 | 304 |
| HTF-SRC12020-10 | 120 | 20 | 106 | 2.5×4 | II | 994 | 3 400 | 406 |
| HTF-SRC12025-10.5 | 120 | 25 | 103 | 3.5×3 | I | 1 300 | 4 200 | 498 |
| HTF-SRC12025-14 | 120 | 25 | 103 | 3.5×4 | II | 1 660 | 5 600 | 664 |

Notes

1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
2. The ball nut length with no seals is shorter by M than that length of a ball nut with seals.
3. Please consult NSK if load exceeds the allowable axial load.
4. The allowable axial load is determined in accordance with the mounting conditions of ball screws recommended by NSK (See page B514). If your mounting conditions differ from those provided, please consult NSK.

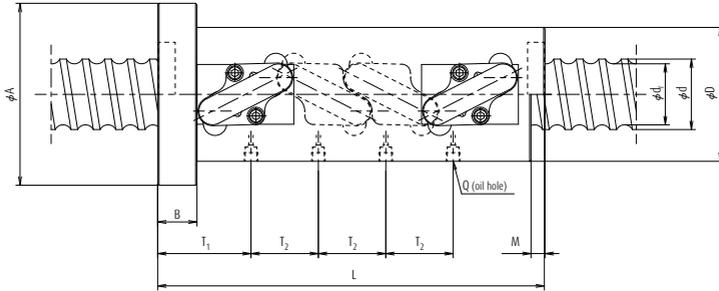

Nut model II

Unit: mm

| Ball nut dimensions | | | | | | | | | | Oil hole Q | Oil hole position | | Max. feeding speed (mm/sec) |
|---------------------|---------------|---------------------|----------------------|--------------------|-----------------------|------------------------|----------------------------|----|-----|---------------|----------------------|----------------|--------------------------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Seal width M | Bolt hole PCD W | Bolt hole size X | Protruding tube dimensions | | | | T ₁ | T ₂ | |
| | | | | | | | U | V | Dh | | | | |
| 202 | 80 | 114 | 28 | 10 | 97 | 9 | 54.5 | 46 | 111 | M6×1 | 69 | 42 | 750 |
| 228 | 95 | 129 | 28 | 10 | 112 | 9 | 66 | 50 | 134 | Rc1/8 | 74.5 | 48 | 860 |
| 268 | 95 | 129 | 28 | 10 | 112 | 9 | 66 | 50 | 134 | Rc1/8 | 83.5 | 60 | 1 070 |
| 228 | 105 | 139 | 28 | 10 | 122 | 9 | 72.5 | 50 | 148 | Rc1/8 | 74.5 | 48 | 680 |
| 276 | 105 | 139 | 28 | 10 | 122 | 9 | 72.5 | 50 | 148 | Rc1/8 | 74.5 | 48 | 680 |
| 276 | 105 | 139 | 28 | 10 | 122 | 9 | 72.5 | 50 | 148 | Rc1/8 | 74.5 | 64 | 680 |
| 340 | 105 | 139 | 28 | 10 | 122 | 9 | 72.5 | 50 | 148 | Rc1/8 | 74.5 | 64 | 680 |
| 279 | 117 | 157 | 32 | 12 | 137 | 11 | 80 | 62 | 163 | Rc1/8 | 90 | 60 | 740 |
| 339 | 117 | 157 | 32 | 12 | 137 | 11 | 80 | 62 | 163 | Rc1/8 | 90 | 60 | 740 |
| 405 | 117 | 157 | 32 | 12 | 137 | 11 | 81.5 | 61 | 167 | Rc1/8 | 101.75 | 100 | 930 |
| 278 | 120 | 154 | 32 | 10 | 137 | 9 | 80 | 60 | 165 | Rc1/8 | 78.5 | 64 | 540 |
| 342 | 120 | 154 | 32 | 10 | 137 | 9 | 80 | 60 | 165 | Rc1/8 | 78.5 | 64 | 540 |
| 339 | 130 | 170 | 32 | 12 | 150 | 11 | 88 | 64 | 180 | Rc1/8 | 90 | 80 | 590 |
| 347 | 145 | 185 | 40 | 17 | 165 | 11 | 99.5 | 73 | 202 | Rc1/8 | 111.75 | 75 | 730 |
| 339 | 145 | 185 | 32 | 12 | 165 | 11 | 97 | 78 | 199 | Rc1/8 | 90 | 80 | 470 |
| 419 | 145 | 185 | 32 | 12 | 165 | 11 | 97 | 78 | 199 | Rc1/8 | 90 | 80 | 470 |
| 422 | 159 | 199 | 40 | 17 | 179 | 11 | 108 | 79 | 220 | Rc1/8 | 111.75 | 100 | 590 |
| 522 | 159 | 199 | 40 | 17 | 179 | 11 | 108 | 79 | 220 | Rc1/8 | 111.75 | 100 | 590 |
| 287 | 173 | 213 | 40 | 12 | 193 | 11 | 109.5 | 88 | 229 | Rc1/8 | 98 | 60 | 390 |
| 347 | 173 | 213 | 40 | 12 | 193 | 11 | 109.5 | 88 | 229 | Rc1/8 | 98 | 60 | 390 |
| 421 | 173 | 213 | 40 | 17 | 193 | 11 | 116 | 92 | 238 | Rc1/8 | 111.25 | 100 | 490 |
| 521 | 173 | 213 | 40 | 17 | 193 | 11 | 116 | 92 | 238 | Rc1/8 | 111.25 | 100 | 490 |

B-3-3.5.2 HTF-SRD Type for High-Load Drives

This product is being applied for a patent.

1. Features

- High-speed operation and low noise

Used with end deflectors, HTF-SRD type ball screws achieve the maximum feed speed of 1 600 mm/s. The ball nut body surface is completely round, thus enabling well balanced ball nut rotation.

Double start thread structure which has more recirculation circuits, and large diameter balls contribute to have high load carrying capacity.

- Low noise and compact design

End deflector system using a ball scooping mechanism in the direction of screw spiral offers smoother ball recirculation system, thus contributing to less than half the noise level compared with existing ball screws equipped with a return tube.

Compact, high-performance seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

Also, compact, thin plastic seal is available. Nut outside diameter is compact compare with the return tube recirculation system.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed, low-noise operation, and compact ball nut. The structure of recirculation parts are as follows.

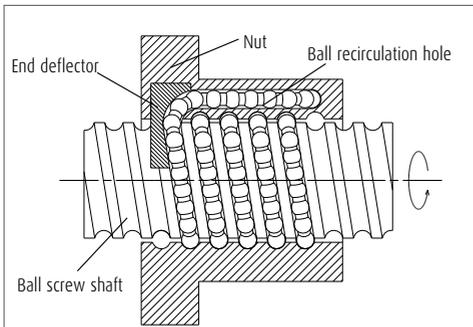


Fig. 1 Structure of End-deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | Ct7 |
| Axial play | S,0.020 mm or less; N,0.050 mm or less |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Table 2 Allowable d-n value and the criterion of maximum rotational speed

| | |
|---------------------------------------|-------------------------|
| Allowable d-n value | 120 000 or less |
| Criterion of maximum rotational speed | 2 400 min ⁻¹ |

Note: Please also review the critical speed.

See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

3. Design Precautions

The HTF-SRD type is designed to distribute the load uniformly to the load balls for high-load drive mechanism.

We recommend installing the ball screws in the way shown below for the full use of this characteristic.

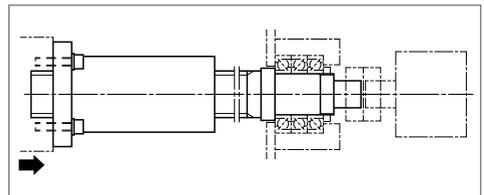


Fig. 2 Recommended installing direction of high-load drives ball screw

In addition, we will make full analysis when you use the HTF-SRD type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (see page B531).

When designing the screw shaft end, one end of the screw shaft must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF-SRD type has a model as follows.


Table 3 HTF-SRD type product categories

| Nut model | Shape | Flange shape | Preload system |
|-----------|---|--------------|----------------------------------|
| HTF-SRD |  | Circular III | Non-preload Slight axial play |


5. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

- > Model number

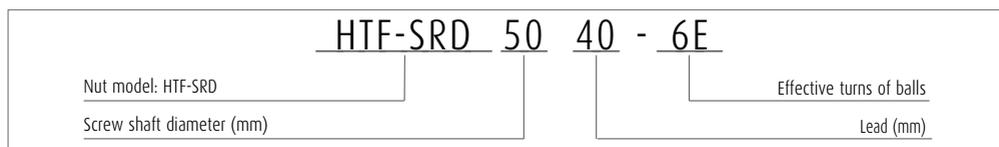

- > Reference number for ball screw

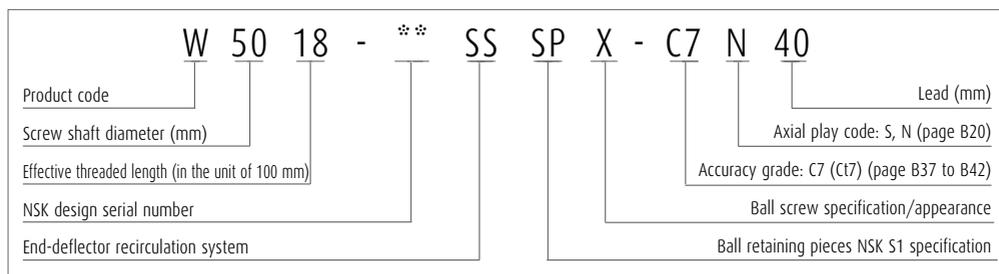


6. Handling Precautions

Maximum operating temperature: 70°C
(at outside diameter of ball nut)
The lubricant deteriorates, operating temperature

is recommended 60°C and under.
Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.


HTF-SRD Type for high-load drives

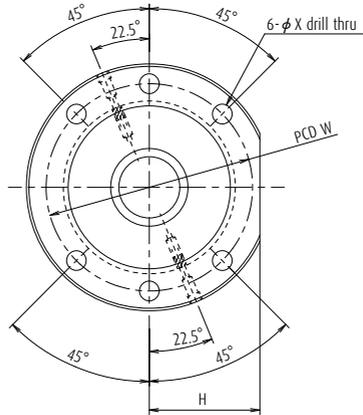

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls | Basic load rating (kN) | | Allowable axial load (kN) |
|-----------------|-----------------|-----------|-----------------------------|-----------------------------|---------------------------|---------------------------|---------------------------------|
| | | | | | Dynamic C _a | Static C _{0a} | |
| HTF-SRD5040-6E | 50 | 40 | 39 | 6 | 243 | 491 | 67.6 |
| HTF-SRD5040-8E | 50 | 40 | 39 | 8 | 319 | 679 | 92 |
| HTF-SRD6332-4E | 63 | 32 | 49 | 4 | 292 | 590 | 72.6 |
| HTF-SRD6340-6E | 63 | 40 | 49 | 6 | 363 | 768 | 106 |
| HTF-SRD6340-8E | 63 | 40 | 49 | 8 | 476 | 1 060 | 144 |
| HTF-SRD8050-6E | 80 | 50 | 63 | 6 | 502 | 1 180 | 163 |
| HTF-SRD8050-8E | 80 | 50 | 63 | 8 | 658 | 1 630 | 224 |
| HTF-SRD10060-6E | 100 | 60 | 83 | 6 | 583 | 1 490 | 211 |
| HTF-SRD10060-8E | 100 | 60 | 83 | 8 | 765 | 2 060 | 288 |
| HTF-SRD12070-6E | 120 | 70 | 103 | 6 | 630 | 1 810 | 259 |
| HTF-SRD12070-8E | 120 | 70 | 103 | 8 | 826 | 2 520 | 352 |

Notes

1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
2. Please consult NSK if load exceeds the allowable axial load.
3. The allowable axial load is determined in accordance with the mounting conditions of ball screws recommended by NSK (See page B517). If your mounting conditions differ from those provided, please consult NSK.

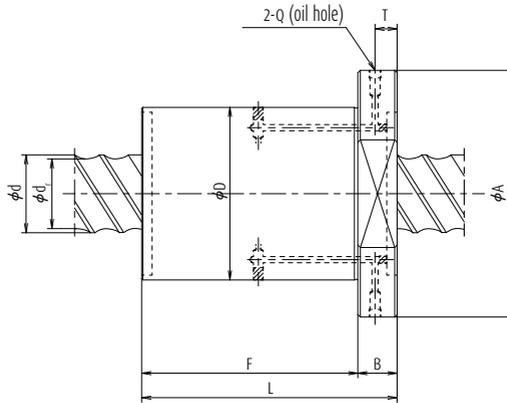

Unit: mm

| Ball nut dimensions | | | | | | | | | Max. feeding speed (mm/sec) |
|---------------------|------------|---------------|--------------|----------------|--------------|-----------------|------------------|---------------------|-----------------------------|
| Nut entire length L | Nut dia. D | Flange dia. A | Notch size H | Flange width B | Nut length F | Bolt hole PCD W | Bolt hole size X | Oil hole position T | |
| 159 | 115 | 165 | 72.5 | 28 | 131 | 140 | 14 | 16 | 1 600 |
| 199 | 115 | 165 | 72.5 | 28 | 171 | 140 | 14 | 16 | 1 600 |
| 176 | 140 | 190 | 85 | 32 | 144 | 165 | 14 | 18 | 1 000 |
| 163 | 140 | 200 | 32 | 32 | 131 | 170 | 18 | 18 | 1 250 |
| 203 | 140 | 200 | 32 | 32 | 171 | 170 | 18 | 18 | 1 250 |
| 194 | 175 | 250 | 110 | 40 | 154 | 210 | 22 | 18 | 1 250 |
| 244 | 175 | 250 | 110 | 40 | 204 | 210 | 22 | 18 | 1 250 |
| 225 | 195 | 270 | 122 | 40 | 185 | 235 | 22 | 20 | 1 200 |
| 285 | 195 | 270 | 122 | 40 | 245 | 235 | 22 | 20 | 1 200 |
| 260 | 210 | 285 | 130 | 50 | 210 | 250 | 22 | 25 | 1 160 |
| 330 | 210 | 285 | 130 | 50 | 280 | 250 | 22 | 25 | 1 160 |

B-3-3.5.3 HTF Type for High-Load Drives

This product is being applied for a patent.

1. Features

> High load carrying capacity

Has an ideal design to bear heavy load. It significantly enhances load rating as well as maximum permissible load.

> Respond to various shaft end configuration

Additional ball screw shaft machining is not required. HTF type responds to various shaft ends that convey high torque.

HTF type can be used with: involute spline (JIS B 1603), straight sided spline (JIS B 1601), key seat, etc.

2. Specifications

(1) Ball recirculation system

Structure of recirculation system is shown in Fig. 1.

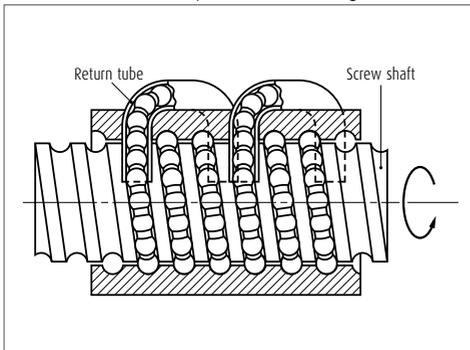


Fig. 1 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|--|
| Accuracy grade | C7 |
| Axial play | S,0.020 mm or less; N,0.050 mm or less |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below. For higher-speed operation, HTF-SRC type is recommend (See page 513).

Table 2 Allowable d-n value and the criterion of maximum rotational speed

| Lead | | -20 mm | 25 mm | 30 - 32 mm |
|---------------------------------------|--------------------------|-------------------------|----------------|----------------|
| Allowable d-n value | Standard specification | 70 000 or less | 70 000 or less | 50 000 or less |
| Allowable d-n value | High-speed specification | 10 0000 or less | - | - |
| Criterion of maximum rotational speed | | 3 125 min ⁻¹ | | |

d-n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

Note: Please also review the critical speed. See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) Ball retaining piece NSK S1

The NSK S1, resin retainers between the balls, significantly extend ball screw durability to the moment load.

(5) Other

Please consult NSK for special requests, such as the addition of a recirculation circuit to increase the load capacity, or the arrangement of all recirculation circuits on the same phase of ball nut circumference.

3. Design precautions

For designing shaft end configuration, you should take into account that the HTF type ball screws are dedicated to high-load drives. The HTF type is designed to distribute the load uniformly to the load balls for high load drive mechanism. We recommend installing the ball screws in the way shown in Fig. 2 for the full use of this characteristic. In addition, we will make full analysis when you use the HTF type under extreme conditions such as application of extremely high load or operating in short stroke. Contact NSK about operating conditions (See page B531). When designing the screw shaft end, the one end shall be cut-through and shaft end dimension must be less than the root diameter

of ball groove. If not, the nut cannot be assembled. For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

4. Product categories

The HTF type has a model as follows.

Table 3 HTF-SRD type product categories

| Nut model | Shape | Flange shape | Preload system |
|-----------|---|-----------------------|------------------------------------|
| HTF |  | Flanged Circular I | Non-preloaded Slight axial play |


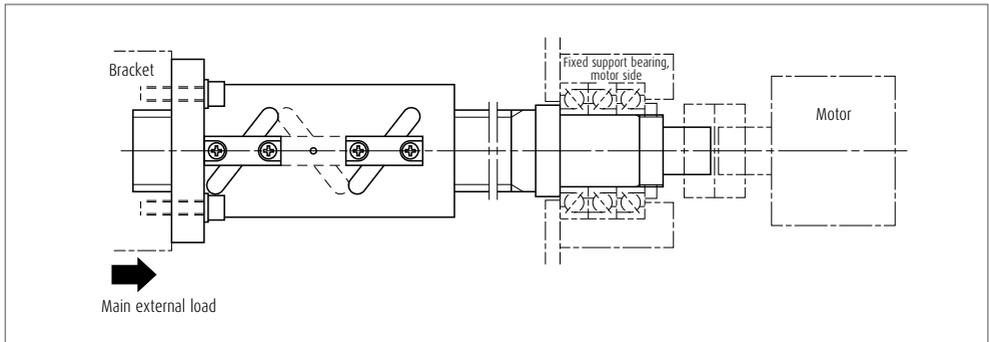


Fig. 2 Recommended installing direction of ball screws for high-load drives


5. Structure of model number and reference number

A structure of "Model number" and "Reference number for ball screw" are as follows.

> Model number

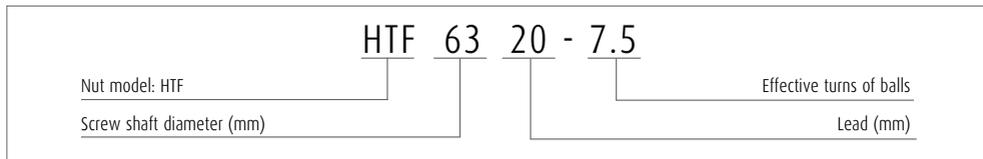

> Reference number for ball screw

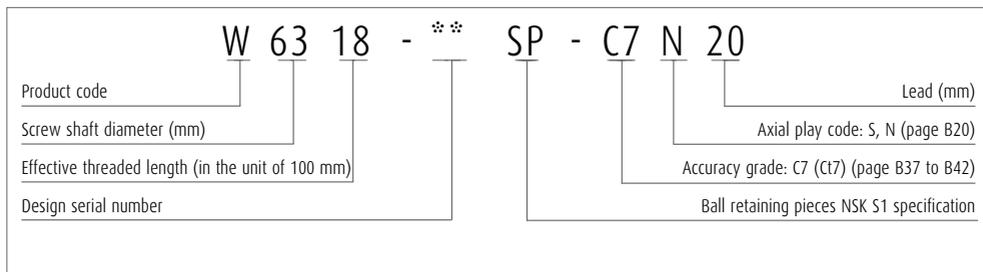


6. Handling precautions


Maximum operating temperature : 70°C (at outside diameter of all nut)

The lubricant deteriorates, operating temperature is recommended 60°C and under.

Please consult NSK in the case of a short stroke operation less than or equal to four times the length of the ball screw lead.



HTF Type for high-load drives

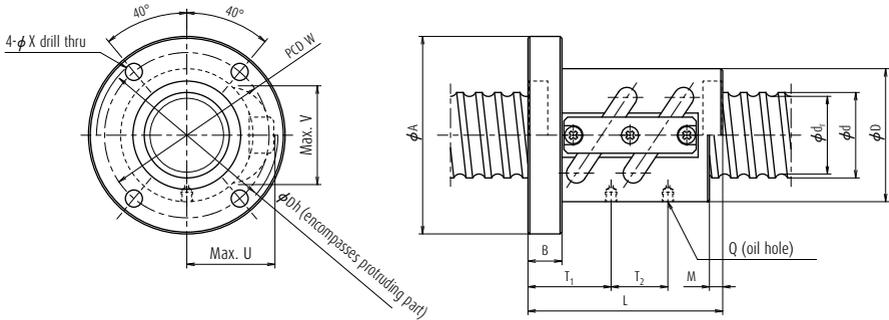



Nut model I

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls Turns × Circuits | Nut model | Basic load rating (kN) | | Allowable axial load (kN) |
|-------------|-----------------|-----------|-----------------------------|---|--------------|---------------------------|---------------------------|---------------------------------|
| | | | | | | Dynamic C _a | Static C _{0a} | |
| HTF3210-5 | 32 | 10 | 25.6 | 2.5×2 | I | 88.7 | 169 | 20.3 |
| HTF3610-5 | 36 | 10 | 29.6 | 2.5×2 | I | 96.1 | 191 | 23.4 |
| HTF3612-5 | 36 | 12 | 29 | 2.5×2 | I | 112 | 228 | 28.3 |
| HTF4010-7.5 | 40 | 10 | 33.6 | 2.5×3 | II | 149 | 344 | 39.6 |
| HTF4012-7.5 | 40 | 12 | 33 | 2.5×3 | II | 184 | 422 | 48.0 |
| HTF4510-7.5 | 45 | 10 | 38.6 | 2.5×3 | II | 158 | 386 | 45.3 |
| HTF4510-10 | 45 | 10 | 38.6 | 2.5×4 | III | 203 | 514 | 60.4 |
| HTF4512-7.5 | 45 | 12 | 38 | 2.5×3 | II | 195 | 473 | 55.0 |



See HTF-SRC type (page B511) regarding shaft diameter 50 - 120 mm. Consult NSK for shaft diameter and lead except HTF-SRC type.

| | | | | | | | | |
|---------------|-----|----|-----|-------|-----|-------|-------|-----|
| HTF14020-7.5 | 140 | 20 | 126 | 2.5×3 | II | 829 | 3 000 | 361 |
| HTF14020-10 | 140 | 20 | 126 | 2.5×4 | III | 1 060 | 4 000 | 481 |
| HTF14025-7.5 | 140 | 25 | 124 | 2.5×3 | II | 1 050 | 3 610 | 423 |
| HTF14025-10 | 140 | 25 | 124 | 2.5×4 | III | 1 350 | 4 810 | 564 |
| HTF14025-10.5 | 140 | 25 | 124 | 3.5×3 | II | 1 380 | 4 910 | 595 |
| HTF14025-14 | 140 | 25 | 124 | 3.5×4 | III | 1 770 | 6 540 | 793 |

- Notes**
1. The right hand screw is the standard. "L" is added to the end of the model code for the left turn screw.
 2. If there is no seal, the nut length is shorter by the lengths of "M" than those with a seal.

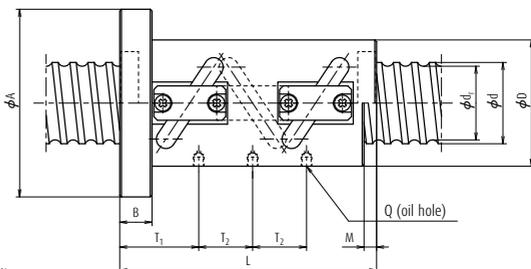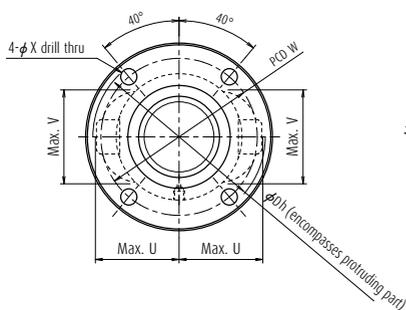

Nut model II

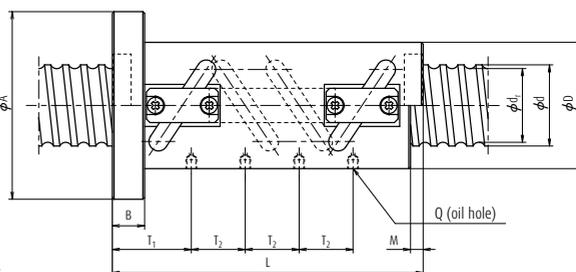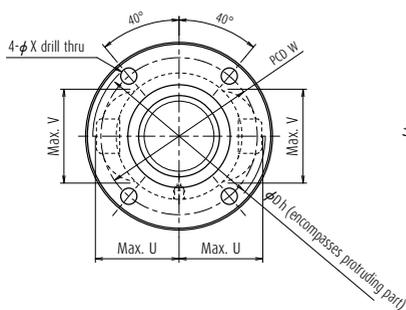

Nut model III



Unit: mm

| Ball nut dimensions | | | | | | | | | | | | | Max. feeding speed (mm/sec) |
|---------------------|------------|---------------|----------------|--------------|-----------------|------------------|----------------------------|----|-----|------------|--------------------|----------------|-----------------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Seal width M | Bolth ole PCD W | Bolt hole size X | Protruding tube dimensions | | | Oil hole Q | Oil hole positions | | |
| | | | | | | | U | V | Dh | | T ₁ | T ₂ | |
| 103 | 58 | 92 | 18 | 7 | 75 | 9 | 40.5 | 42 | 82 | M6×1 | 36.5 | 30 | 520 |
| 103 | 62 | 96 | 18 | 7 | 79 | 9 | 43 | 45 | 87 | M6×1 | 36.5 | 30 | 460 |
| 123 | 66 | 100 | 22 | 8 | 83 | 9 | 46.5 | 46 | 94 | M6×1 | 44 | 36 | 550 |
| 143 | 66 | 100 | 18 | 7 | 83 | 9 | 45 | 48 | 91 | M6×1 | 46.5 | 30 | 410 |
| 171 | 70 | 104 | 22 | 8 | 87 | 9 | 47.5 | 50 | 96 | M6×1 | 56 | 36 | 500 |
| 143 | 70 | 104 | 18 | 7 | 87 | 9 | 47 | 52 | 95 | M6×1 | 46.5 | 30 | 370 |
| 173 | 70 | 104 | 18 | 7 | 87 | 9 | 47 | 52 | 95 | M6×1 | 46.5 | 30 | 370 |
| 171 | 72 | 106 | 22 | 8 | 89 | 9 | 49.5 | 54 | 100 | M6×1 | 56 | 36 | 440 |

| | | | | | | | | | | | | | |
|-----|-----|-----|----|----|-----|----|-------|-----|-----|-------|--------|-----|-----|
| 281 | 204 | 250 | 40 | 12 | 226 | 14 | 122.5 | 148 | 248 | Rc1/8 | 96 | 60 | 230 |
| 341 | 204 | 250 | 40 | 12 | 226 | 14 | 122.5 | 148 | 248 | Rc1/8 | 96 | 60 | 230 |
| 338 | 204 | 250 | 40 | 17 | 226 | 14 | 127.5 | 153 | 258 | Rc1/8 | 109.25 | 75 | 200 |
| 413 | 204 | 250 | 40 | 17 | 226 | 14 | 127.5 | 153 | 258 | Rc1/8 | 109.25 | 75 | 200 |
| 413 | 204 | 250 | 40 | 17 | 226 | 14 | 127.5 | 153 | 258 | Rc1/8 | 109.25 | 100 | 200 |
| 513 | 204 | 250 | 40 | 17 | 226 | 14 | 127.5 | 153 | 258 | Rc1/8 | 109.25 | 100 | 200 |

- Please consult NSK if load exceeds the allowable axial load.
- The allowable axial load is determined in accordance with the mounting conditions of ball screws recommended by NSK (see page B520). If your mounting conditions differ from those provided, please consult NSK.

HTF Type for high-load drives

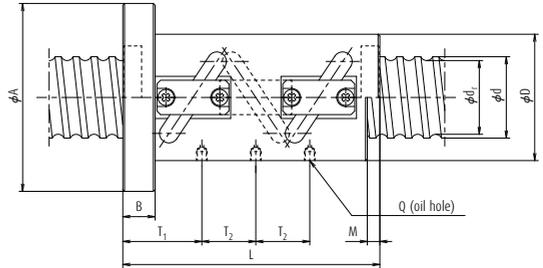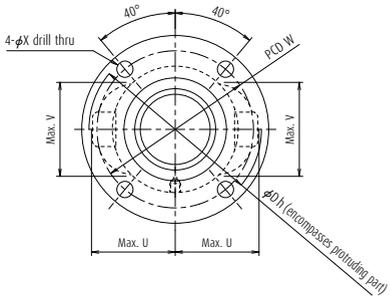


Nut model II

| Model No. | Shaft dia. d | Lead l | Root dia. d _r | Effective turns of balls Turns × Circuits | Nut model | Basic load rating (kN) | | Allowable axial load (kN) |
|---------------|-----------------|-----------|-----------------------------|---|--------------|---------------------------|---------------------------|---------------------------------|
| | | | | | | Dynamic C _a | Static C _{0a} | |
| HTF14030-7.5 | 140 | 30 | 121 | 2.5×3 | II | 1 310 | 4 110 | 487 |
| HTF14030-10 | 140 | 30 | 121 | 2.5×4 | III | 1 670 | 5 490 | 649 |
| HTF14030-10.5 | 140 | 30 | 121 | 3.5×3 | II | 1 710 | 5 710 | 678 |
| HTF14032-7.5 | 140 | 32 | 118 | 2.5×3 | II | 1 590 | 4 740 | 549 |
| HTF14032-10 | 140 | 32 | 118 | 2.5×4 | III | 2 040 | 6 320 | 732 |
| HTF14032-10.5 | 140 | 32 | 118 | 3.5×3 | II | 2 080 | 6 420 | 757 |
| HTF16025-7.5 | 160 | 25 | 144 | 2.5×3 | II | 1 140 | 4 140 | 495 |
| HTF16025-10 | 160 | 25 | 144 | 2.5×4 | III | 1 450 | 5 520 | 660 |
| HTF16030-7.5 | 160 | 30 | 141 | 2.5×3 | II | 1 400 | 4 760 | 564 |
| HTF16030-10 | 160 | 30 | 141 | 2.5×4 | III | 1 790 | 6 340 | 752 |
| HTF16030-10.5 | 160 | 30 | 141 | 3.5×3 | II | 1 830 | 6 520 | 788 |
| HTF16032-7.5 | 160 | 32 | 138 | 2.5×3 | II | 1 660 | 5 370 | 636 |
| HTF16032-10 | 160 | 32 | 138 | 2.5×4 | III | 2 130 | 7 160 | 848 |
| HTF16032-10.5 | 160 | 32 | 138 | 3.5×3 | II | 2 180 | 7 460 | 885 |
| HTF20030-7.5 | 200 | 30 | 181 | 2.5×3 | II | 1 550 | 5 960 | 718 |
| HTF20030-10 | 200 | 30 | 181 | 2.5×4 | III | 1 980 | 7 950 | 958 |
| HTF20032-7.5 | 200 | 32 | 178 | 2.5×3 | II | 1 840 | 6 840 | 809 |
| HTF20032-10 | 200 | 32 | 178 | 2.5×4 | III | 2 360 | 9 120 | 1 080 |

Notes

1. The right hand screw is the standard. "L" is added to the end of the model code for the left turn screw.
2. If there is no seal, the nut length is shorter by the lengths of "M" than those with a seal.

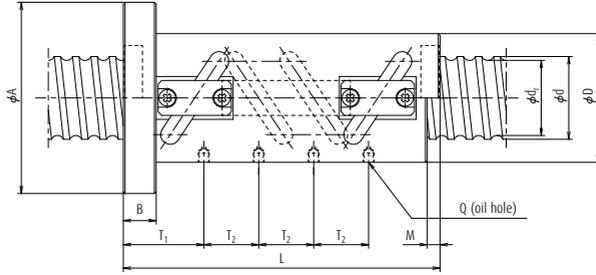

Nut model III

Unit: mm

| Ball nut dimensions | | | | | | | | | | | | | Max. feeding speed (mm/sec) |
|---------------------|------------|---------------|----------------|--------------|-----------------|------------------|----------------------------|-----|-----|------------|--------------------|----------------|-----------------------------|
| Nut length L | Nut dia. D | Flange dia. A | Flange width B | Seal width M | Bolth ole PCD W | Bolt hole size X | Protruding tube dimensions | | | Oil hole Q | Oil hole positions | | |
| | | | | | | | U | V | Dh | | T ₁ | T ₂ | |
| 411 | 222 | 282 | 50 | 22 | 252 | 18 | 139 | 160 | 281 | Rc1/8 | 134.5 | 90 | 170 |
| 501 | 222 | 282 | 50 | 22 | 252 | 18 | 139 | 160 | 281 | Rc1/8 | 134.5 | 90 | 170 |
| 501 | 222 | 282 | 50 | 22 | 252 | 18 | 139 | 160 | 281 | Rc1/8 | 134.5 | 120 | 170 |
| 465 | 222 | 296 | 70 | 22 | 259 | 22 | 148 | 163 | 299 | Rc1/8 | 166.5 | 96 | 190 |
| 561 | 222 | 296 | 70 | 22 | 259 | 22 | 148 | 163 | 299 | Rc1/8 | 166.5 | 96 | 190 |
| 561 | 222 | 296 | 70 | 22 | 259 | 22 | 148 | 163 | 299 | Rc1/8 | 166.5 | 128 | 190 |
| 338 | 234 | 280 | 40 | 17 | 256 | 14 | 138 | 173 | 279 | Rc1/8 | 109.25 | 75 | 180 |
| 413 | 234 | 280 | 40 | 17 | 256 | 14 | 138 | 173 | 279 | Rc1/8 | 109.25 | 75 | 180 |
| 411 | 234 | 294 | 50 | 22 | 264 | 18 | 148 | 177 | 299 | Rc1/8 | 134.5 | 90 | 150 |
| 501 | 234 | 294 | 50 | 22 | 264 | 18 | 148 | 177 | 299 | Rc1/8 | 134.5 | 90 | 150 |
| 501 | 234 | 294 | 50 | 22 | 264 | 18 | 148 | 177 | 299 | Rc1/8 | 134.5 | 120 | 150 |
| 465 | 234 | 308 | 70 | 22 | 271 | 22 | 152 | 181 | 307 | Rc1/8 | 166.5 | 96 | 160 |
| 561 | 234 | 308 | 70 | 22 | 271 | 22 | 152 | 181 | 307 | Rc1/8 | 166.5 | 96 | 160 |
| 561 | 234 | 308 | 70 | 22 | 271 | 22 | 152 | 181 | 307 | Rc1/8 | 166.5 | 128 | 160 |
| 411 | 290 | 350 | 50 | 22 | 320 | 18 | 178 | 212 | 359 | Rc1/8 | 134.5 | 90 | 120 |
| 501 | 290 | 350 | 50 | 22 | 320 | 18 | 178 | 212 | 359 | Rc1/8 | 134.5 | 90 | 120 |
| 465 | 290 | 364 | 70 | 22 | 327 | 22 | 182 | 215 | 367 | Rc1/8 | 166.5 | 96 | 130 |
| 561 | 290 | 364 | 70 | 22 | 327 | 22 | 182 | 215 | 367 | Rc1/8 | 166.5 | 96 | 130 |

3. Please consult NSK if load exceeds the allowable axial load.

4. The allowable axial load is determined in accordance with the mounting conditions of ball screws recommended by NSK (see page B520). If your mounting conditions differ from those provided, please consult NSK.

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Made-to-order ball screw

| | | |
|---------------|-------------------|------------------|
| Company name: | Date: | NSK sales office |
| Section: | Person in charge: | |
| Address: | | |

Name of machine*1 : Electric injection molding machine; 30-ton capacity Application*2 : Clamping axis


Drawing/rough sketch attached?: Yes No

*1 Please specify capacity of the machine in case of injection molding machine or press.
 *2 Please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

| | | | |
|----------------------|---|---|--|
| Operating conditions | <input checked="" type="checkbox"/> Shaft rotation — Moving nut <input type="checkbox"/> Shaft rotation — Moving shaft <input type="checkbox"/> Nut rotation — Moving nut <input type="checkbox"/> Nut rotation — Moving shaft | <input checked="" type="checkbox"/> Normal operation <input type="checkbox"/> Back drive operation <input type="checkbox"/> Oscillation | Degree of vibration/impact <input type="checkbox"/> Smooth operation without impact <input checked="" type="checkbox"/> Normal operation <input type="checkbox"/> Operation associated with impact or vibration |
| Direction of load*3 | <input type="checkbox"/> C-C <input checked="" type="checkbox"/> T-T <input type="checkbox"/> T-C <input type="checkbox"/> C-T <input type="checkbox"/> Other (Refer to figures below.) | Mounting orientation | <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical (Indicate the direction of gravity) |
| Lubricant | <input checked="" type="checkbox"/> Grease (Brand name: <i>High-load grease with an extreme pressure additive</i>) <input type="checkbox"/> Oil (Maker: _____) | How to replenish lubricant | <input checked="" type="checkbox"/> Grease gun <input type="checkbox"/> Automatic (_____ cm ³ / _____ cycles) |
| Request for oil hole | <input checked="" type="checkbox"/> NSK recommended <input type="checkbox"/> Your request | NSK S1 necessary? | <input checked="" type="checkbox"/> NSK recommended <input type="checkbox"/> Not necessary |
| Necessity of seals | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | Environment | Temperature (<u>40</u> deg) Particles / <input type="checkbox"/> Yes (Size of particle: a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient: _____) <input checked="" type="checkbox"/> No particle. |
| Surface treatment | <input checked="" type="checkbox"/> Not required <input type="checkbox"/> Low-temperature chrome plating <input type="checkbox"/> Fluoride low-temperature chrome plating <input type="checkbox"/> Other | Quantity in mass-production | /Month /Year /Lot Quantity used per machine <u>1</u> pcs./machine |

*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)




2. Specifications

| | | | | | | | |
|----------------|-------------------------|--------------------------|---------|-------------------|-------|--------------------------------------|-----------------------|
| Shaft diameter | φ <u>140</u> mm | Lead | 32 mm | Accuracy grade | C17 | Axial play | 0.050 or less mm max. |
| Nut model No. | HTF <u>14032-7.5-S1</u> | Effective turns of balls | 2.5 × 3 | Direction of turn | right | Thread length / Overall shaft length | 1000 / 1500 |


Special note / Requests _____

See nut stroke on the drawing

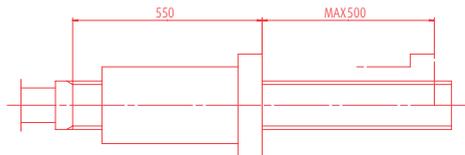

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

3. Load chart

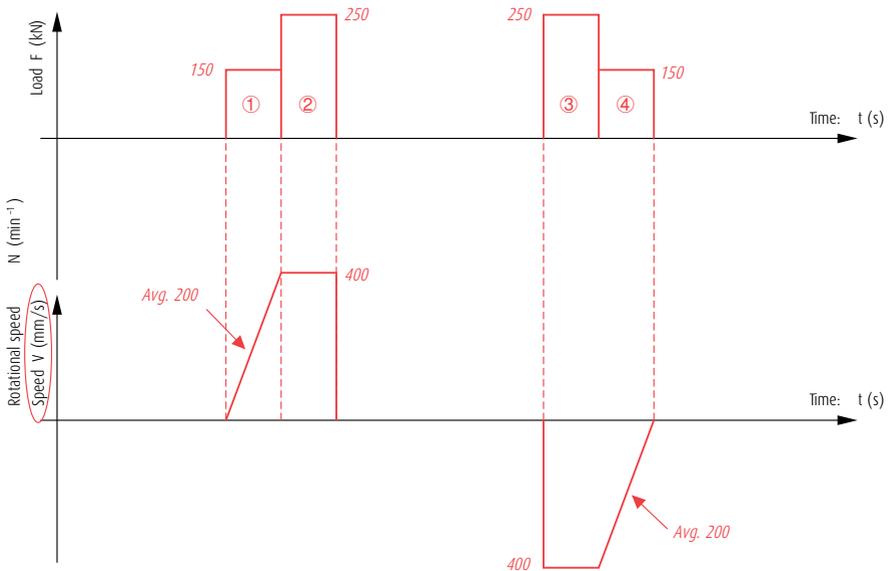

| | Axial load F (kN) * | Rotational speed or Average speed | | Time t (s) | Stroke St (mm) | Remarks |
|----|------------------------|-----------------------------------|----------|---------------|-------------------|---------|
| | | N (min ⁻¹) | V (mm/s) | | | |
| 1 | 150 | | 200 | 0.5 | 100 | |
| 2 | 250 | | 400 | 0.5 | 200 | |
| 3 | 250 | | 400 | 0.5 | 200 | |
| 4 | 150 | | 200 | 0.5 | 100 | |
| 5 | | | | Total: 2.0 | Total: 600 | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |

Dynamic axial load (Max.):*

250 (kN)

Static axial load (Max.)*(at 0 mm/s):

(kN)

Stroke in normal use:

300 (mm)

Maximum stroke: 500 (mm)

Cycle time:

2.0 (s)

Required life: 2500h

*If you use multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine

Yes

N/A

Planning to check endurance (Date: *From the middle of December 2013*)

No (Reason:)

Endurance of the ball screw

- (1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
- (2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

Made-to-order ball screw

| | | |
|---------------|-------------------|------------------|
| Company name: | Date: | NSK sales office |
| Section: | Person in charge: | |
| Address: | | |

Name of machine*1 : _____ Application*2 : _____


Drawing/rough sketch attached?: Yes No

*1 Please specify capacity of the machine in case of injection molding machine or press.
 *2 Please indicate the axis. (Examples: injection axis and clamping axis)

1. Use conditions

| | | | | |
|-----------------------------|--|---|----------------------------|---|
| Operating conditions | <input type="checkbox"/> Shaft rotation – Moving nut <input type="checkbox"/> Shaft rotation – Moving shaft <input type="checkbox"/> Nut rotation – Moving nut <input type="checkbox"/> Nut rotation – Moving shaft | <input type="checkbox"/> Normal operation <input type="checkbox"/> Back drive operation <input type="checkbox"/> Oscillation | Degree of vibration/impact | <input type="checkbox"/> Smooth operation without impact <input type="checkbox"/> Normal operation <input type="checkbox"/> Operation associated with impact or vibration |
| Direction of load*3 | <input type="checkbox"/> C-C <input type="checkbox"/> F-T <input type="checkbox"/> F-C <input type="checkbox"/> C-T <input type="checkbox"/> Other (Refer to figures below.) | | Mounting orientation | <input type="checkbox"/> Horizontal <input type="checkbox"/> Vertical (Indicate the direction of gravity) |
| Lubricant | <input type="checkbox"/> Grease (Brand name: _____) <input type="checkbox"/> Oil (Maker: _____) | | How to replenish lubricant | <input type="checkbox"/> Grease gun <input type="checkbox"/> Automatic (_____ cm ³ / _____ cycles) |
| Request for oil hole | <input type="checkbox"/> NSK recommended <input type="checkbox"/> Your request | | | |
| Necessity of seals | <input type="checkbox"/> Yes <input type="checkbox"/> No | | NSK S1 necessary? | <input type="checkbox"/> NSK recommended <input type="checkbox"/> Not necessary |
| Environment | Temperature (deg) | Particles / <input type="checkbox"/> Yes (Size of particle : a) -0.1, b) over 0.1-0.3, c) over 0.3- , d) Ingredient: _____) <input type="checkbox"/> No particle. | | |
| Surface treatment | <input type="checkbox"/> Not required <input type="checkbox"/> Low-temperature chrome plating <input type="checkbox"/> Fluoride low-temperature chrome plating <input type="checkbox"/> Other | | | |
| Quantity in mass-production | /Month | /Year | /Lot | Quantity used per machine _____ pcs./machine |

*3 Please specify loading direction code on the figures below. (Shaft fixed: , Main load:)




2. Specifications

| | | | | | | | |
|----------------|--------|----|--------------------------|----|-------------------|--------------------------------------|---------|
| Shaft diameter | ϕ | mm | Lead | mm | Accuracy grade | Axial play | mm max. |
| Nut model No. | | | Effective turns of balls | | Direction of turn | Thread length / Overall shaft length | / |

Special note / Requests _____

NSK Technical Data Sheet for NSK High-Load Drive Ball Screws

3. Load chart

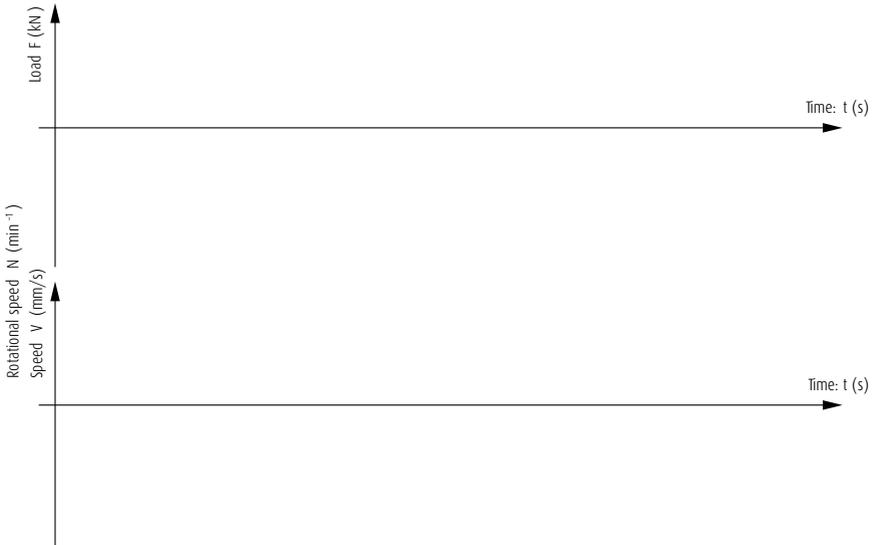

| | Axial load* F (kN) | Rotational speed or Average speed | | Time t (s) | Stroke St (mm) | Remarks |
|----|-----------------------|-----------------------------------|----------|---------------|-------------------|---------|
| | | N (min ⁻¹) | V (mm/s) | | | |
| 1 | | | | | | |
| 2 | | | | | | |
| 3 | | | | | | |
| 4 | | | | | | |
| 5 | | | | | | |
| 6 | | | | | | |
| 7 | | | | | | |
| 8 | | | | | | |
| 9 | | | | | | |
| 10 | | | | | | |

Dynamic axial load (Max.)*: (kN) Static axial load (Max.)*(at 0 mm/s): (kN)
 Stroke in normal use: (mm) Maximum stroke: (mm)
 Cycle time: (s) Required life:

*If you use multiple ball screws in an axis, fill out the axial load per ball screw.

4. Plan to conduct the endurance test of the ball screw?

Actual data on the machine

Yes
 N/A

Planning to check endurance (Date: _____)
 No (Reason: _____)

Endurance of the ball screw

- (1) Mounting accuracy, load conditions, and lubricating conditions are the main factors affecting the ball screw fatigue life. Therefore, we recommend evaluating the influence of those factors on actual use of your machines.
- (2) A temperature rise caused by operational and environmental conditions may reduce the effectiveness of lubricant.

B-3-3.6.1 VSS Type for Contaminated Environments

1. Features

> High dust-resistance

Specially profiled screw shaft grooves and high performance seals prevent the entry of fine contaminants. Reduces particle penetration rate to less than 1/15 of existing standard products.

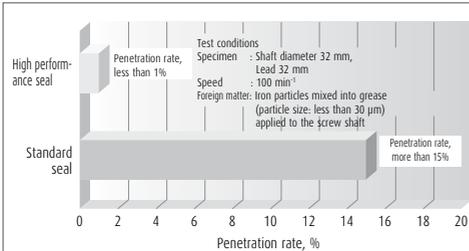


Fig. 1 Particle penetration rate

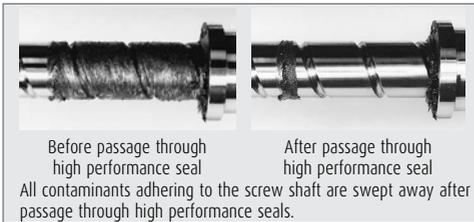


Fig. 2 Contamination before and after particle penetration test

> Long life

High performance seals extend ball screw durability under severely contaminated environments with iron powder. Extreme durability tests under contaminated environments show the durability of the VSS type extends more than four times longer than our existing type with a standard seal.

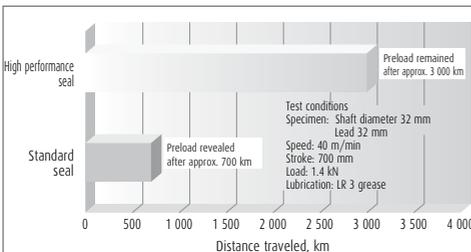


Fig. 3 Extreme durability test results using iron particles

> High speed

For ultimate smoothness of ball recirculation, the internal ball recirculation system enables high-speed operation at a maximum of d-n 150000. Large lead specifications allow high-speeds of 150 m/min.

> Low-noise

Reduces noise level by more than 6 dB compared with our conventional tube-type ball screws, thereby providing low-noise and good noise tone features.

> Compact size

Ball nut external diameter is up to 25% smaller than our conventional models.

2. Specifications

(1) Ball recirculation system

End-deflector recirculation system has features of high-speed operation with low-noise, and compact ball nut. The structure of recirculation system is shown in Fig. 4.

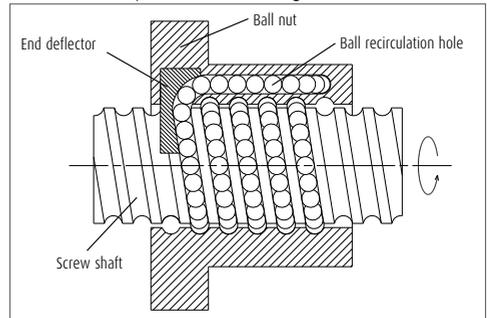


Fig. 4 Structure of end deflector recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Accuracy grade and axial play

| | |
|----------------|---|
| Accuracy grade | C5 |
| Axial play | Z, 0 mm (preloaded) T, 0.005 mm or less; S, 0.020 mm or less |

(3) Allowable d-n value and the criterion of maximum rotational speed

Allowable d-n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Allowable d-n value: 150 000 or less

Criterion of maximum rotational speed: 3 000 min⁻¹

Note: Please also review critical speed.

See "Technical Description: Permissible Rotational Speed" (page B47) for details.

(4) High performance seal

High performance seal (Japanese patents: 3646452, 3692203) with special lip that contacts screw shaft cross-section and prevents entry of fine contaminants.

(5) Lubrication unit

Incorporates NSK K1 lubrication unit to sufficiently lubricate the high performance seal lip, reduce friction, and improve durability.

(6) optional

Non-contact metal protector that traces the ball screw grooves and safeguards the seal against high-temperature foreign matter.

3. Design precaution

When designing the screw shaft end, one end of the screw must meet either one of the following conditions. If not, we cannot install the ball nut on the screw shaft.

- > Cut the ball groove through to the shaft end.
- > The diameters of bearing journals and the gear or pulley seat must be less than the root diameter of ball groove "dr" specified on the dimension table.


High performance seals may increase torque, which may in turn increase temperature. Please consult with NSK prior to usage under severe service conditions.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).


4. Structure of model number and reference number

The followings describe the structure of "Model number" and "Reference number for ball screw".

> Model number

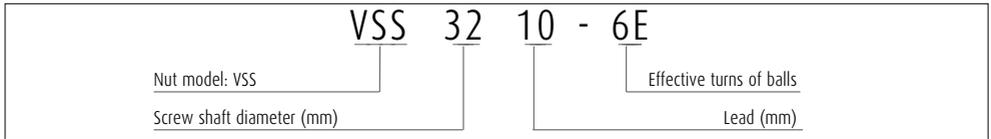

> Reference number for ball screw

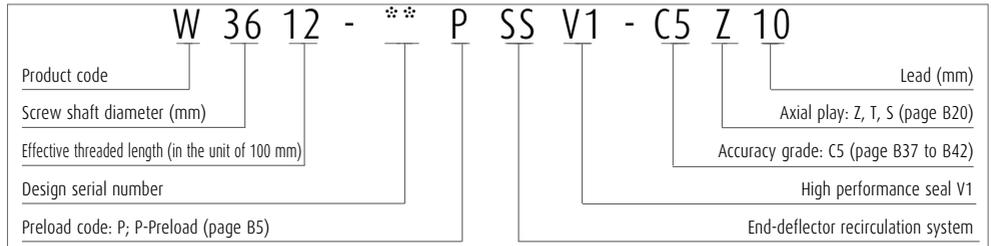

5. Handling Precautions

Maximum operating temperature: 50°C


Maximum momentary operating temperature: 80°C

Chemical precautions: Never expose the ball screw to grease-removing organic solvents such as hexane or thinner. Never immerse the ball screw in kerosene or rust preventive oils which contain kerosene.


The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

VSS Type for contaminated environments

View X-X

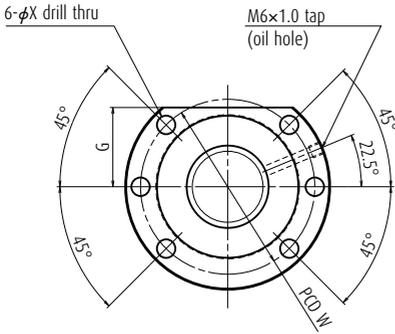


Screw shaft diameter $d = 32$ mm

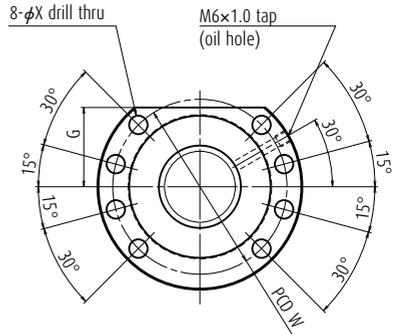

Screw shaft diameter $d \geq 40$ mm

| Model No. | Shaft dia. d | Lead l | Root dia. d_r | Effective turns of balls Turns \times Circuits | Basic load rating (N) | | Axial rigidity K (N/ μ m) |
|------------|-------------------|-------------|--------------------|--|-----------------------|--------------------|---|
| | | | | | Dynamic C_a | Static C_{oa} | |
| VSS3210-6E | 32 | 10 | 27.2 | 6 | 50 900 | 110 000 | 682 |
| VSS3216-5E | 32 | 16 | 27.2 | 5 | 44 300 | 90 800 | 563 |
| VSS3220-5E | 32 | 20 | 27.2 | 5 | 43 900 | 91 200 | 561 |
| VSS3232-4E | 32 | 32 | 27.2 | 4 | 28 900 | 59 300 | 387 |
| VSS4040-4E | 40 | 40 | 34.4 | 4 | 38 600 | 84 800 | 472 |
| VSS5050-4E | 50 | 50 | 44.4 | 4 | 42 600 | 105 000 | 559 |

- Notes**
1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.
 2. Rigidity in the table is theoretical value obtained from the elastic deformation between screw groove and ball when the preload is 1.5% of the basic dynamic load rating, and axial load is applied to it. Refer to "Technical Description" (page B37) if axial load and preload differs from the conditions above, or when considering change in the deformation of the ball nut itself.
 3. Products with axial play may have a partially negative play (preloaded condition) depending on screw length. Refer to "Manufacturing range of effective screw length in combination of accuracy grade and axial play" (page B20).

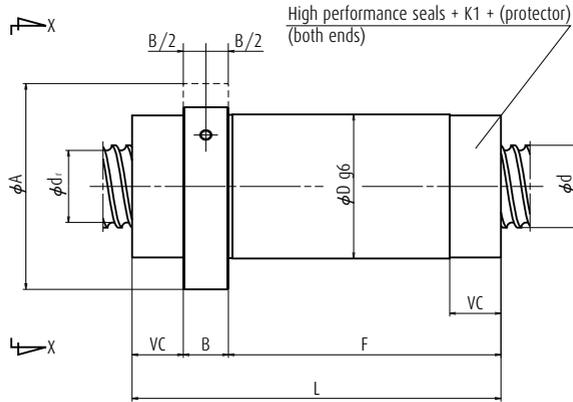

Unit: mm

Ball nut dimensions

| Nut entire length L | Nut outside diameter D | Flange outside diameter A | Flange width B | Nut length F | Notch size G | Seal installation dimensions VC | Bolt hole PCD W | Bolt hole dimensions X | Maximum shaft length |
|------------------------|---------------------------|------------------------------|-------------------|-----------------|-----------------|------------------------------------|--------------------|---------------------------|----------------------|
| 132 | 56 | 86 | 18 | 89.5 | 34 | 24.5 | 71 | 9 | 2 800 |
| 150 | 56 | 86 | 18 | 107.5 | 34 | 24.5 | 71 | 9 | 2 800 |
| 169 | 56 | 86 | 18 | 126.5 | 34 | 24.5 | 71 | 9 | 2 800 |
| 122 | 56 | 86 | 18 | 79.5 | 34 | 24.5 | 71 | 9 | 2 800 |
| 144 | 70 | 100 | 22 | 94 | 38.5 | 27.5 | 85 | 9 | 3 800 |
| 164 | 82 | 118 | 22 | 114.5 | 46.0 | 27.5 | 100 | 11 | 5 000 |

B-3-3.6.2 Ball Screw with X1 Seals for Contaminated Environments and Grease Retention

1. Features

> Highly dustproof

Particle penetration ratio reduced to less than 1/30 of existing standard seals, thus contributing to longer service life for machine tools.

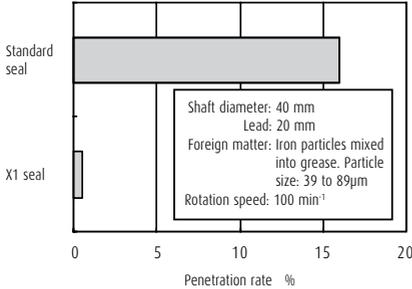


Fig. 1 Results of particle penetration rate test

> Superior grease retention

Automatically adding grease makes it possible to reduce the amount used and keep it from spattering.

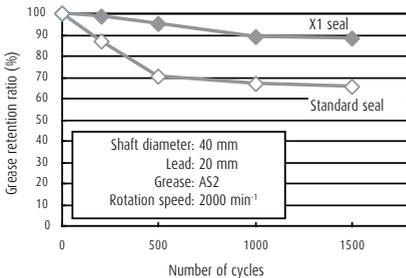


Fig. 2 Results of grease leakage test

> Contact seal with low torque

Optimizing the seal shape reduces torque and enhances seal performance.

2. Specifications

(1) Structure

The ball screw with X1 seals has a double seal structure combining a dustproof seal and a grease-retaining seal.




Fig. 3 Seal structure

(2) Scope of application in NSK Ball Screw series

This series is standard for the following two types.

Ball screws for high-speed machine tools

HMS type Nut model: ZFRC
HMD type Nut model: EM

For specifications other than the above, please consult NSK. Table 1 shows the minimum nut outer diameter on which X1 seals can be mounted.

Table 1 The minimum nut outer diameter on which X1 seals can be mounted

| | |
|-----------------------|-------|
| Shaft diameter: 40 mm | 70 mm |
| Shaft diameter: 45 mm | 75 mm |
| Shaft diameter: 50 mm | 82 mm |

(3) Accuracy grade / axial play

Table 2 shows standard tolerance classes and axial clearances. Please consult NSK for tolerance classes other than those in the table.

Table 2 Accuracy grade and axial play

| | |
|----------------|------------------|
| Accuracy grade | C3, C5 |
| Axial play | 0 mm (preloaded) |

(4) Design-related precautions

When designing the screw shaft end, assume that the end of the screw shaft is cut.

The temperature will increase somewhat when torque is applied if an X1 seal is attached.

Please consult NSK if it is to be used strict operating conditions.

Maximum overall shaft length is 2900 mm.

For general precautions regarding ball screws, refer to "Design Precautions" (page B83 and "Handling Precautions" (page B103).



Fig. 4 External appearance

3. Example of reference number

A structure of "Reference number for ball screw" is as follows.

Note: "X1" is added at the end of "nut model code" and "Specifications number".

> Reference number for ball screw

W4010-^{*}^{*}ZMX1-C5Z16

X1 seal equipped type ball screw code

4. Precautions for use


Temperature range for use: Maximum temperature: 60°C
(at outside diameter of ball nut)

Chemicals that should not come to contact:

Do not leave ball screw in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. Sealing performance is affected by usage environment and lubrication conditions. Dust covers and other measures to keep machinery free of dust are recommended.

Ball Screw with X1 Seals for Contaminated Environments and Grease Retention

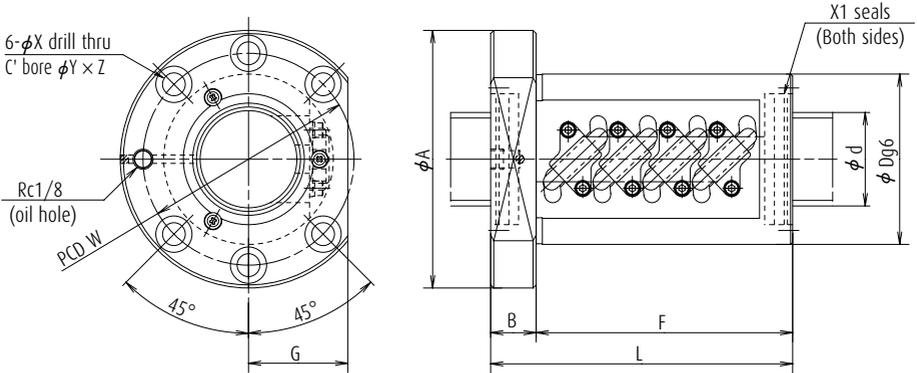


HMS type (Nut model : ZFRC)

Applicable dimensions for HMS type

Unit: mm

| Model No. | Shaft dia. d | Lead l | Basic load rating (N) | | Nut dimensions | | | | | | | | | |
|-------------|-----------------|-----------|-----------------------|--------------------|----------------|-----|----|-----|-----|----|------------|------|----|-----|
| | | | Dynamic C_a | Static C_{0a} | L | F | B | D | A | G | Bolt holes | | | |
| | | | | | | | | | | | X | Y | Z | W |
| ZFRC4010-10 | 40 | 10 | 61 200 | 137 000 | 173 | 151 | 22 | 82 | 124 | 47 | 11 | 17.5 | 11 | 102 |
| ZFRC4012-10 | 40 | 12 | 71 700 | 154 000 | 197 | 175 | 22 | 86 | 128 | 48 | 11 | 17.5 | 11 | 106 |
| ZFRC4508-10 | 45 | 8 | 44 000 | 118 000 | 146 | 124 | 22 | 82 | 124 | 47 | 11 | 17.5 | 11 | 102 |
| ZFRC5010-10 | 50 | 10 | 68 100 | 174 000 | 174 | 151 | 23 | 93 | 135 | 51 | 11 | 17.5 | 11 | 113 |
| ZFRC5012-10 | 50 | 12 | 91 500 | 218 000 | 200 | 177 | 23 | 100 | 146 | 55 | 14 | 20 | 13 | 122 |

Note 1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.

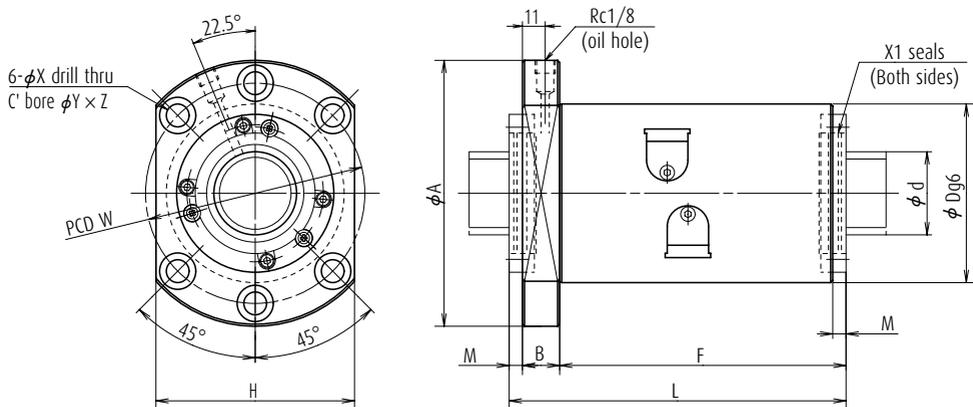

HMD type (Nut model: EM)

Applicable dimensions for HMD type

Unit: mm

| Model No. | Shaft dia. d | Lead l | Basic load rating (N) | | Nut dimensions | | | | | | | | | | |
|-----------|-----------------|-----------|-----------------------|--------------------|----------------|-------|-----|----|----|-----|-----|------------|------|----|-----|
| | | | Dynamic C_a | Static C_{oa} | L | F | M | B | D | A | H | Bolt holes | | | |
| | | | | | | | | | | | | X | Y | Z | W |
| EM4016-4E | 40 | 16 | 66 900 | 131 000 | 172 | 148 | 6 | 18 | 86 | 128 | 96 | 11 | 17.5 | 11 | 106 |
| EM4020-6E | 40 | 20 | 77 900 | 166 000 | 164 | 139 | 7 | 18 | 86 | 128 | 96 | 11 | 17.5 | 11 | 106 |
| EM4516-4E | 45 | 16 | 69 900 | 146 000 | 173 | 148.5 | 6.5 | 18 | 92 | 134 | 102 | 11 | 17.5 | 11 | 112 |
| EM4520-6E | 45 | 20 | 83 200 | 187 000 | 164 | 139 | 7 | 18 | 92 | 134 | 102 | 11 | 17.5 | 11 | 112 |
| EM5016-4E | 50 | 16 | 72 200 | 161 000 | 173 | 148.5 | 6.5 | 18 | 98 | 140 | 107 | 11 | 17.5 | 11 | 118 |
| EM5020-6E | 50 | 20 | 85 700 | 205 000 | 164 | 139 | 7 | 18 | 98 | 140 | 107 | 11 | 17.5 | 11 | 118 |

Note

1. The right hand screw is the standard. For specifications on left hand screws, contact NSK.

B-3-3.7 TW Series for Twin-Drive Systems

1. Features

Variations in the lead accuracy and preload torque between two ball screws, which consist of a unit of TW Series, are controlled, resulting in improved travel accuracy and ball screw operating lifetime.

Fig. 1 shows measured variation in lead accuracy while **Fig. 2** displays an example of variation in thermal expansion between the two ball screws. **Fig. 3** is a schematic diagram comparing the travel accuracy between the TW Series and conventional model.

> High rigidity and long lifetime

Twin-drive systems are superior to single-drive systems in system rigidity, supporting the design of long-life feeding mechanism even if they make the shaft diameter one size smaller.

> High responsiveness to positioning commands

Twin-drive systems permit the use of screw shaft diameters that are one size smaller, thereby reducing screw shaft inertia by up to 50%, offering high responsiveness to positioning commands.

> Improved high-speed capability and noise level

Twin-drive systems allow the use of smaller screw diameters, resulting in no increase in the level of noise. The end-deflector recirculation system significantly improves high-speed capability and noise level compared with the existing model, offering high-speed feeding of up to 1 200 mm/min (shaft dia. 40 mm, lead 30 mm, rotational speed 4 000 min⁻¹).

2. Specifications

Table 1 Specifications of twin-drive systems

| Recirculation systems | End-deflector recirculation system, Return tube system, Deflector (bridge type) system |
|-----------------------|--|
| Shaft dia. | φ 32 – 63 mm |
| Lead | 10 – 30 mm |
| Accuracy grade | C5 |
| Screw shaft length | 3 m or less |

(3) Optional specifications

- > Hollow shaft ball screw and nut cooling ball screw
- > Provides high accuracy through the use of forced cooling. Please refer to ball screws for high precision machine tools (page B542 to B550) for more details.

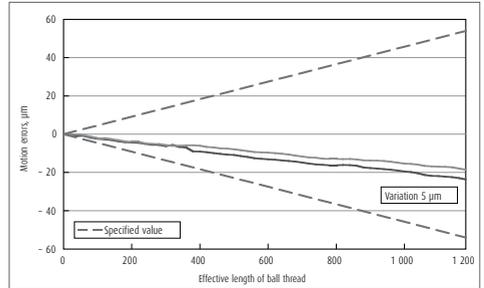


Fig. 1 Example of measured variation in lead accuracy

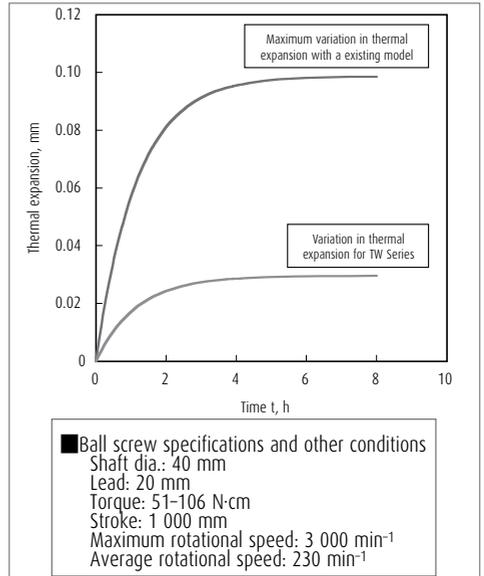


Fig. 2 Calculation example of the variation of thermal expansion

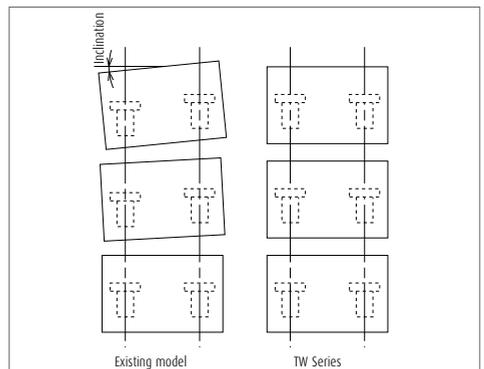


Fig. 3 Schematic diagram of travel accuracy

B-3-3.8.1 Hollow Shaft Ball Screw for High Precision Machine Tools

The increase in speed of the feeding mechanism for highly accurate positioning may require some measures against thermal expansion of the ball screw (forced cooling using hollow ball screw). NSK standardized hollowed screw shafts and shaft ends configuration (sealing section and support bearing seat). NSK recommends this as the most effective measure against thermal expansion.

1. Features

- > Stable positioning accuracy

Suppresses expansion of the ball screw shaft by rising temperature, and provides stable, precise positioning.

- > Prevents displacement of various sections

Minimizes deformation of the ball screw support bearings as well as of the machine base which is caused by thermal expansion of ball screw. Forced cooling keeps the heat from spreading to other sections, and prevents the processing table from deforming due to heat.

- > Reduces warm-up time

Temperature does not rise high, therefore cuts machine warm-up period.

- > Maintains lubricant's effect

Removes heat from the ball screw, deterring lubricant deterioration.


- > Easy designing for installation

Use support bearing unit exclusive for NSK ball screws (high speed and high load capacity for machine tools, see page B405) and seal unit (page B545) to standardized shaft end. This makes designing of mounting ball screw easy. NSK also provides nut cooling ball screws. The level of temperature rise for nut cooling ball

3. Model example of dimension table

A model number that indicates specification factors is structured as shown below.

- > Example of model

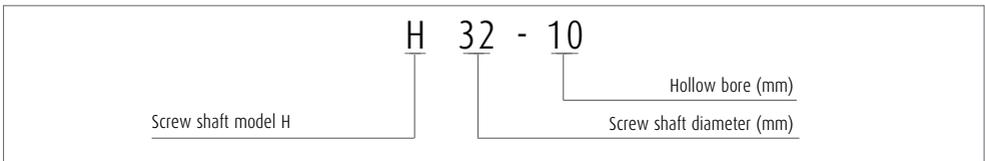

screw is equal to the hollow shaft ball screw thanks to the optimized nut internal design for cooling. Please refer to nut cooling ball screws (page B545) for more details.

2. Design precautions

Refer to HMC type, end-deflector recirculation system, return tube recirculation system, and deflector(bridge type) recirculation system for ball screw specifications. If the overall ball screw length exceeds 3 000 mm, contact NSK. For general precautions regarding ball screw, refer to "Design Precautions" (page B83) and "Handling precautions" (page B103).



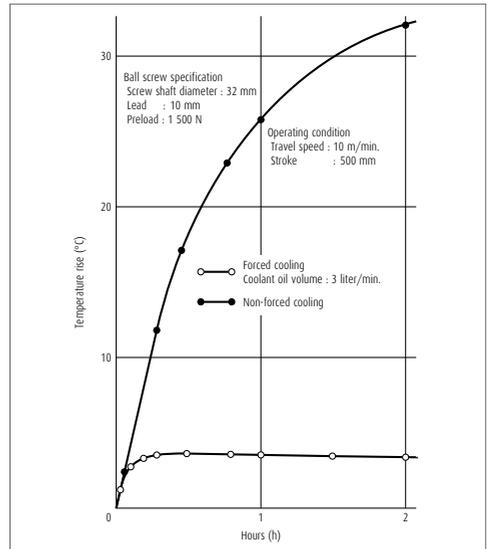


Fig. 1 Effect of forced cooling by hollow shaft ball screw



Hollow shaft ball screw

4. Installation example and standard dimensions

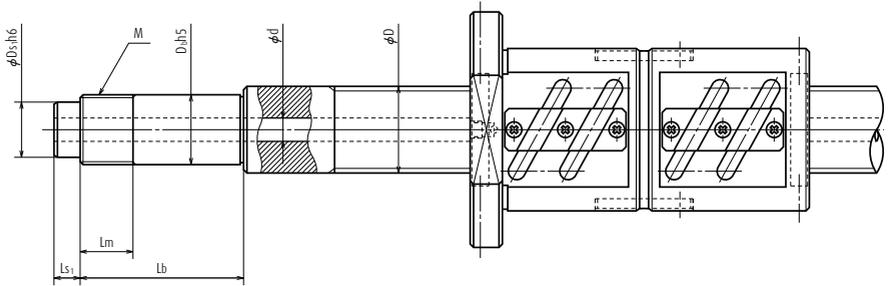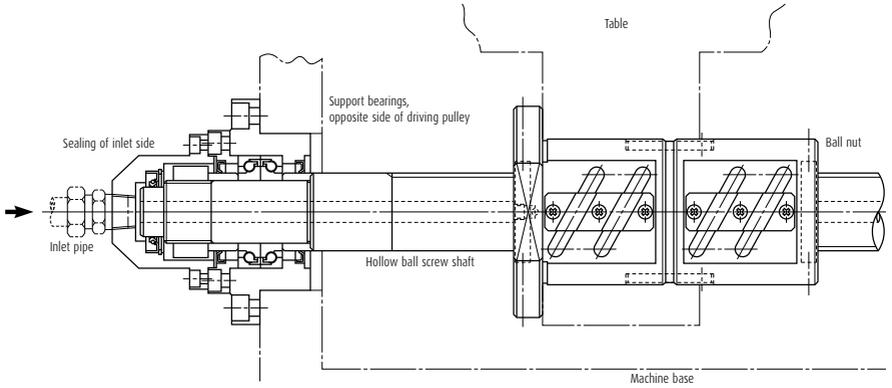

| Model No. | Screw shaft | | Bearing seat | | | Sealing | | | | | | |
|-----------|---------------|-------------|----------------|----------|----|---------|-----------------|-----------------|-----------------|-----------------|----|----|
| | Diameter D | Hollow d | Diameter Db | Lock nut | | | Inlet | | Outlet | | | |
| | | | | M | Lm | Lb | Ds ₁ | Ls ₁ | Ds ₂ | Ls ₂ | La | ds |
| H32-10 | 32 | 10 | 25 | M25×1.5 | 26 | 89 | 20 | 15 | 32 | 60 | 25 | 6 |
| H32-10 | 32 | 10 | 25 | M25×1.5 | 26 | 104 | 20 | 15 | 32 | 60 | 25 | 6 |
| H32-10 | 32 | 10 | 25 | M25×1.5 | 26 | 119 | 20 | 15 | 32 | 60 | 25 | 6 |
| H40-12 | 40 | 12 | 30 | M30×1.5 | 26 | 89 | 25 | 15 | 40 | 60 | 25 | 7 |
| H40-12 | 40 | 12 | 30 | M30×1.5 | 26 | 104 | 25 | 15 | 40 | 60 | 25 | 7 |
| H40-12 | 40 | 12 | 30 | M30×1.5 | 26 | 119 | 25 | 15 | 40 | 60 | 25 | 7 |
| H50-15 | 50 | 15 | 40 | M40×1.5 | 30 | 92 | 32 | 15 | 50 | 65 | 27 | 8 |
| H50-15 | 50 | 15 | 40 | M40×1.5 | 30 | 107 | 32 | 15 | 50 | 65 | 27 | 8 |
| H50-15 | 50 | 15 | 40 | M40×1.5 | 30 | 122 | 32 | 15 | 50 | 65 | 27 | 8 |

- Notes**
1. Please consult NSK for other models.
 2. See B420 for bearing combination symbols.

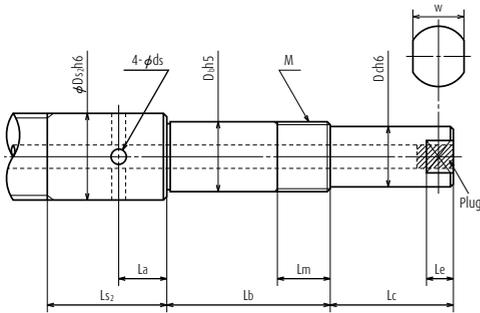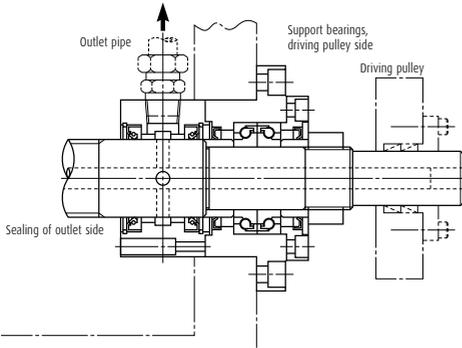

Unit: mm


| Drive side | | Spanner flats | | Applicable support unit | Used bearing | Equipped seal unit | |
|------------|----|---------------|----|-------------------------|-----------------------------------|--------------------|---------------------|
| Dc | Lc | w | Le | | | Shaft end | Shaft outer surface |
| 20 | 40 | 17 | 8 | WBK25DF-31H | 25TAC62CSUHPN7C DF combination | WSK20A-01 | WSK32B-01 |
| 20 | 40 | 17 | 8 | WBK25DFD-31H | 25TAC62CSUHPN7C DFD combination | WSK20A-01 | WSK32B-01 |
| 20 | 40 | 17 | 8 | | (25TAC62CSUHPN7C DFF combination) | WSK20A-01 | WSK32B-01 |
| 25 | 50 | 22 | 10 | WBK30DF-31H | 30TAC62CSUHPN7C DF combination | WSK25A-01 | WSK40B-01 |
| 25 | 50 | 22 | 10 | WBK30DFD-31H | 30TAC62CSUHPN7C DFD combination | WSK25A-01 | WSK40B-01 |
| 25 | 50 | 22 | 10 | | (30TAC62CSUHPN7C DFF combination) | WSK25A-01 | WSK40B-01 |
| 35 | 70 | 30 | 13 | WBK40DF-31H | 40TAC72CSUHPN7C DF combination | WSK32A-01 | WSK50B-01 |
| 35 | 70 | 30 | 13 | WBK40DFD-31H | 40TAC72CSUHPN7C DFD combination | WSK32A-01 | WSK50B-01 |
| 35 | 70 | 30 | 13 | WBK40DFD-31H | 40TAC72CSUHPN7C DFF combination | WSK32A-01 | WSK50B-01 |

Hollow shaft ball screw: Seal units

5. Seal units for hollow ball screw shaft (available by order)


This is an exclusive joint for coolant of the hollow ball screw shaft.

A Type (for shaft end)

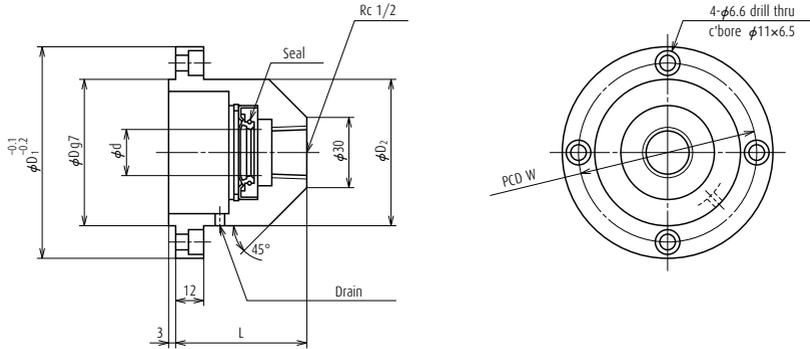

| Reference No. | d | D | D ₁ | D ₂ | L | W | Fixing bolt |
|---------------|----|----|----------------|----------------|----|----|-------------|
| WSK20A-01 | 20 | 57 | 85 | 57 | 56 | 70 | M6 |
| WSK25A-01 | 25 | 57 | 85 | 57 | 56 | 70 | M6 |
| WSK32A-01 | 32 | 69 | 95 | 67 | 61 | 80 | M6 |

B Type
(for shaft outer surface)

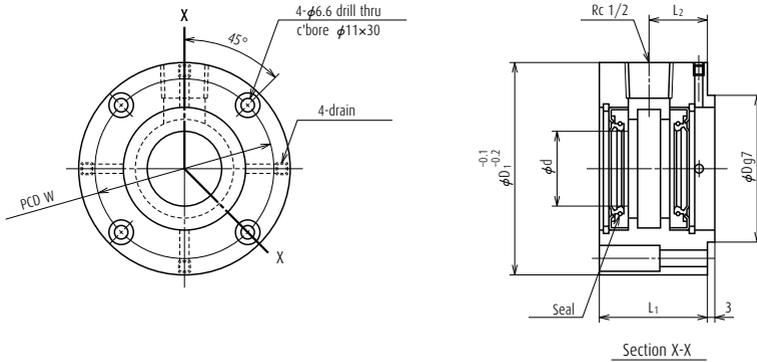

Unit: mm

| Reference No. | d | D | D ₁ | D ₂ | L | W | Fixing bolt |
|---------------|----|----|----------------|----------------|----|----|-------------|
| WSK32B-01 | 32 | 57 | 85 | 46 | 25 | 70 | M6 |
| WSK40B-01 | 40 | 57 | 85 | 46 | 25 | 70 | M6 |
| WSK50B-01 | 50 | 69 | 95 | 49 | 27 | 80 | M6 |

Handling precautions

- > Use NSK support unit (high speed and high load capacity for machine tools on page B405) for installation in order to maintain the eccentricity between screw shaft and seal unit.
- > Apply grease to the lip section for protection at the time of installation to the ball screw.
- > Make certain that the drain holes (one for A Type, four for B Type) of the seal unit directly face downward when the unit is installed.

B-3-3.8.2 Nut Cooling Ball Screws for High Precision Machine Tools

Nut cooling ball screws are easily cooled with a ball nut cooling system and are ideal for use in high-speed and high-precision machine tools that have nut cooling systems.

Using nut cooling ball screws makes it possible to cool long ball screws that are difficult to cool with hollow-core cooling, and they accommodate the broad high-precision needs of machine tools both small and large.

1. Features

> Cooling effects

By optimizing the cooling structure inside the nut, cooling capacity equivalent to hollow shaft cooling has been achieved. The nut in contact with the table is cooled, so that heat conduction from the table to the ball screw is blocked. Moreover, by cooling hollow shaft in parallel, the screw shaft and ball nut can be cooled at the same time for even more precise temperature control.

> Internal design in consideration of preload torque change

The nut cooling ball screw has double contact-point preload in the tensile direction. This prevents an increase in preload torque when the nut is cooled, enabling effective cooling of the ball screw.

> Cooling structure

The cooling fluid goes in a balanced way through the nut. Double nuts have separate coolant routes for each nut for efficient cooling. Cooling fluid does not go through the inside of spacers, so coolant fluid does not leak even when preload drops and airtightness is maintained.

> Improved handling

Ball screws can be cooled by simply attaching piping to the exterior flange part.* Sliding seals and rotary joints that are required for hollow shaft cooling are not needed. Dimensions for mounting area (without nut cooling) are the same as conventional products, so the nut cooling can be implemented without changing machine designs.

*When cooling double nuts, piping is required on the nut end face on the other side of the flange.

> Long ball screws can be cooled at a low cost

Since these products are suitable for long ball screws for which hollow hole processing is difficult, improved precision of large machine tools can be achieved at a low cost.

2. Cautions regarding design

If heat impact from the bearing is too great, separate cooling for bearing and surrounding areas is recommended. For details, please contact NSK.

> Reference number for nut cooling ball screw

W4012- * * ZMNC-C5Z20

Nut cooling ball screw code



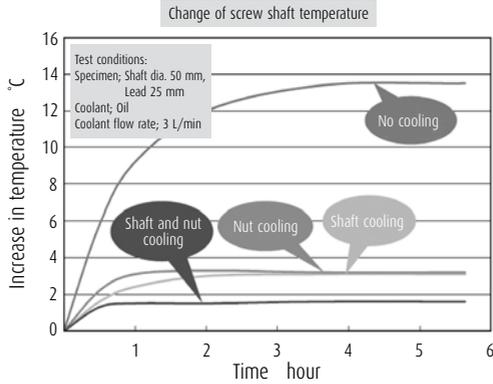


Fig. 1 Effect of forced cooling by nut cooling ball screw



Test table appearance




Temperature distribution with nut cooling




Temperature distribution without cooling

Fig. 2 Effect of forced cooling by nut cooling ball screw

Cooling structure



Single nut

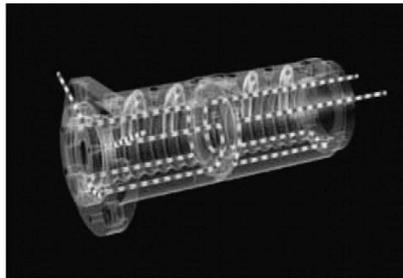


Double nut

Fig. 3 Cooling structure of a nut cooling ball screw

Nut cooling ball screws

Nut cooling ball screws: dimension chart

> Single nut cooling ball screws (for HMD type, nut type: EM)

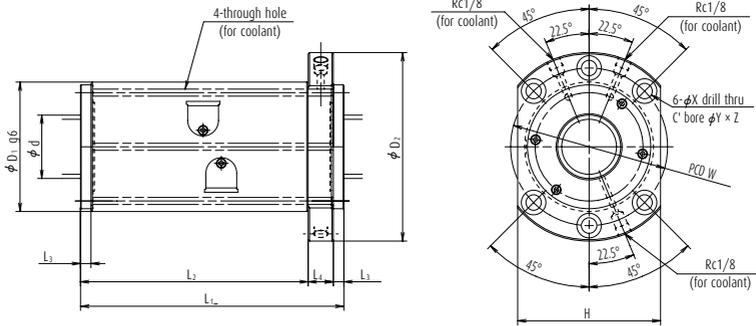

Applicable dimensions for HMD type

Unit: mm

| Model No. | Shaft dia. d | Lead l | Nut dimensions | | | | | | | | | | |
|-----------|-----------------|-----------|----------------|----------------|-----|----------------|----------------|----------------|----------------|-----|----|------|------|
| | | | D ₁ | D ₂ | H | L ₁ | L ₂ | L ₃ | L ₄ | W | X | Y | Z |
| EM4016-4E | 40 | 16 | 86 | 128 | 96 | 166 | 140.5 | 7.5 | 18 | 106 | 11 | 17.5 | 11 |
| EM4020-6E | 40 | 20 | 86 | 128 | 96 | 156 | 130.5 | 7.5 | 18 | 106 | 11 | 17.5 | 11 |
| EM4025-6E | 40 | 25 | 86 | 128 | 96 | 188 | 162.5 | 7.5 | 18 | 106 | 11 | 17.5 | 11 |
| EM4030-6E | 40 | 30 | 86 | 128 | 96 | 219 | 193.5 | 7.5 | 18 | 106 | 11 | 17.5 | 11 |
| EM4516-4E | 45 | 16 | 92 | 134 | 102 | 166 | 140.5 | 7.5 | 18 | 112 | 11 | 17.5 | 11 |
| EM4520-6E | 45 | 20 | 92 | 134 | 102 | 156 | 130.5 | 7.5 | 18 | 112 | 11 | 17.5 | 11 |
| EM4525-6E | 45 | 25 | 92 | 134 | 102 | 188 | 162.5 | 7.5 | 18 | 112 | 11 | 17.5 | 11 |
| EM5016-4E | 50 | 16 | 98 | 140 | 107 | 166 | 140.5 | 7.5 | 18 | 118 | 11 | 17.5 | 11 |
| EM5020-6E | 50 | 20 | 98 | 140 | 107 | 156 | 130.5 | 7.5 | 18 | 118 | 11 | 17.5 | 11 |
| EM5025-6E | 50 | 25 | 98 | 140 | 107 | 188 | 162.5 | 7.5 | 18 | 118 | 11 | 17.5 | 11 |
| EM5030-6E | 50 | 30 | 98 | 140 | 107 | 219 | 193.5 | 7.5 | 18 | 118 | 11 | 17.5 | 11 |
| EM6316-4E | 63 | 16 | 122 | 180 | 138 | 176 | 139 | 9 | 28 | 150 | 18 | 26 | 17.5 |

B-3-3.9 ND Series for Nut-Rotatable Drives

> This product is patented by NSK.

A nut rotatable ball screw is developed as a unit into which angular contact support ball bearings are integrated. It is best suited for an application that requires rotation of the ball nut while the screw shaft is fixed.

NDT model

1. Structure

Balls are installed between the assembly housing and the ball nut. The outer bearing rings are integrated into the assembly housing and thus, compact design are attained. A timing pulley (prepared by the user) is directly secured to the end face of the nut.

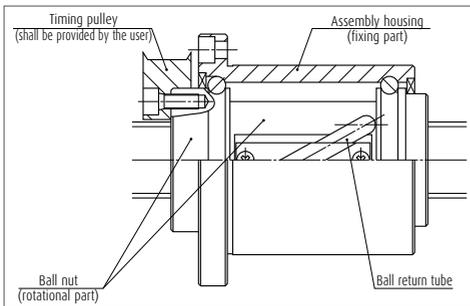


Fig. 1 Ball nut structure

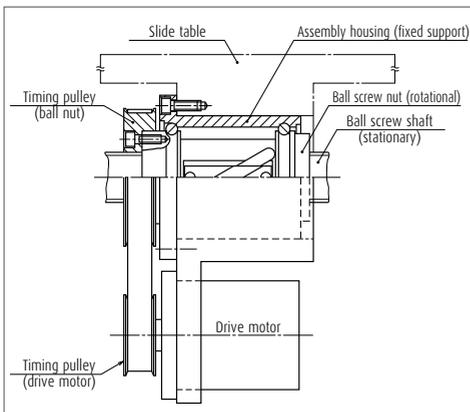


Fig. 2 Example of installation to the table

2. Features

> Multi-nut drive

Two or more nut units can be installed in a single ball screw shaft. They can be operated by respective motors.

> High operation speed

High feeding speed operation, but yet low rotational speed, is feasible by means of medium to high-helix lead ball screws.

> Easy installation

Merely install a mount housing to the table of the machine to take advantage of this multi-nut rotation system.

> Simple shaft end configuration

Shaft end configuration is simple because this unit does not need support bearings.

> Shaft diameter/lead combination

There are 10 types of "shaft diameter/lead" combinations.

Selections are: Shaft diameters -- 32, 40, 50 mm;
Leads -- 20, 25, 32, 40, 50 mm.

> Low inertia

Compared to the NSK current product (end cap ball recirculation system), rotational inertia was reduced by 16% at most.

3. Specifications

(1) Ball recirculation system

The structure of return tube recirculation system is shown below.

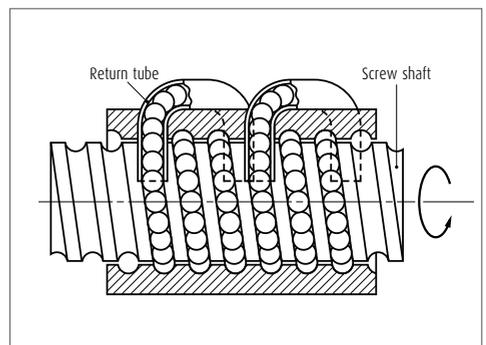


Fig. 3 Structure of ball return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play are as follows. Please consult NSK for other grades.

Table 1 Axial play

| Axial play code | Z | T | S |
|-----------------|---|------------------|------------------|
| Axial play | 0 | 0.005 mm or less | 0.020 mm or less |

Table 2 Combination of accuracy grades and axial play

| Accuracy grade | C3 | C5 | Ct7 |
|-----------------|---------|---------|-----|
| Axial play code | Z, T, S | Z, T, S | S |

4. Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Note: The basic concept is the same as that of general ball screws. Refer to "Technical Description: Permissible Rotational Speed" (page B47).

Table 3 Allowable d·n value and the criterion of maximum rotational speed

| | | |
|---------------------------------------|--------------------------|-------------------------|
| Allowable d·n value | Standard specification | 70 000 or less |
| Allowable d·n value | High-speed specification | 100 000 or less |
| Criterion of maximum rotational speed | 3 000 min ⁻¹ | 3 000 min ⁻¹ |

d·n value: shaft dia. d [mm] × rotational speed n [min⁻¹]

› Critical speed n_c

As shown **Fig. 4**, calculate unsupported length (mm) of L₁, L₂, and L₃ (assumed that the nut section is a fixed support.)

Table 4 shows the coefficients "f" of each shaft end mounting condition.

$$n_c = f \cdot \frac{d_r}{L_i^2} \times 10^7 \text{ (min}^{-1}\text{)} \quad \text{(III-1)}$$

d_r: Screw shaft root diameter (See the dimension table.)

L_i: Unsupported length (mm) (See **Fig. 4**)

f: Factor determined by the ball screw shaft end mounting condition

Table 4

| Shaft end mounting condition | f |
|------------------------------|------|
| Fixed -- Fixed support | 21.9 |
| Fixed -- Simple support | 15.1 |
| Fixed -- Free support | 3.4 |

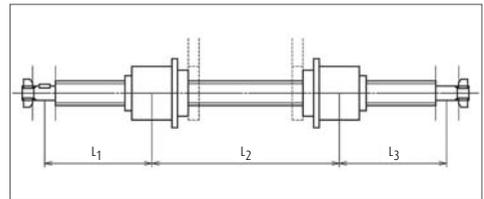


Fig. 4 Installation example

5. Design precautions

One end of the screw thread should be cut-through to the end. Also, if the nut must be removed from the screw shaft, the user should have an arbor to prevent the balls from falling out during this process. (NSK manufactures arbors on request.)

For general precautions regarding ball screws, refer to "Design Precautions" (page B83) and "Handling Precautions" (page B103).

NDD Type: (Incorporating vibration damper)

An increase in stroke length may restrict required rotational speed of a ball screw due to the issue of critical speed even if there is no problem on $d \cdot n$ limitation.

In such a case, we recommend using NDD Type nut rotatable ball screws equipped with vibration damper.

It will make it possible to operate a ball screw exceeding the critical speed, which is conventionally considered being impossible.

- Notes:** 1) However, NDD Type cannot be used exceeding the $d \cdot n$ limitation. Please consult with NSK in such a case.
2) You cannot rotate the screw shaft of NDD Series.

1. Structure

Hollow ball screw shaft has a mechanism to absorb vibration energy (vibration damper). This increases dynamic rigidity of the screw shaft and lowers vibration when exceeding the critical speed.

Construction of the ball nuts are the same as those of NDT Type.

2. Features

- › No need for measures against critical speed.

Conventionally, an increase in screw shaft diameter or use of intermediate support is the measure against the issue of critical speed. NDD Type ball screw will make these measures needless.

- › Dimensional interchangeability with NDT Type ball screws

The vibration damper is set inside a ball screw shaft, and therefore, there is no difference with existing series in regards to external dimensions. The ball nuts of NDD Type are interchangeable with those of NDT Type.

- › Others

Benefits in multiple ball nut on a screw shaft, high feeding speed for long stroke, easy in installation, and low inertia of the ball nuts are the same as NDT Type.

3. Specification

Recirculation system, accuracy grade, axial play and preload system are the same as NDT Type.

4. Design precautions

They are the same as NDT Type.

5. Permissible rotational speed

The $d \cdot n$ value is the same as NDT Type.

You don't need to consider the critical speed.

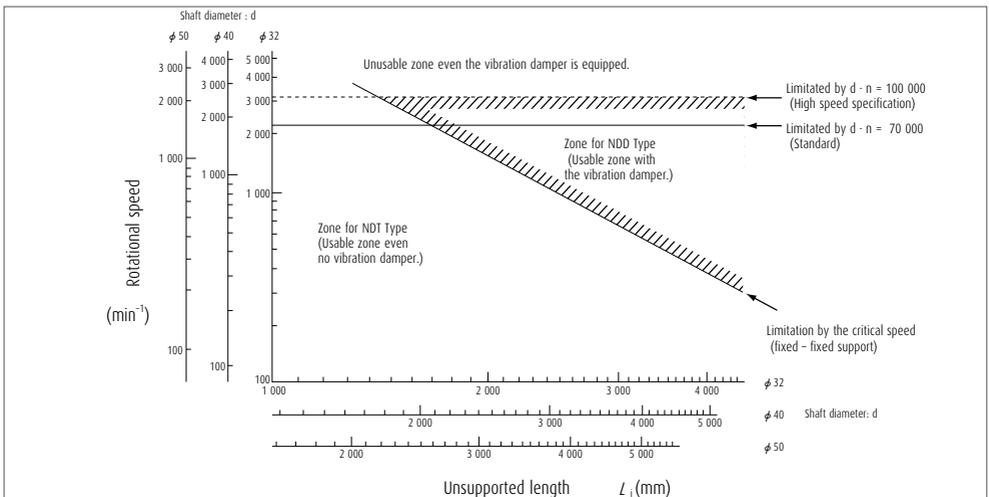


Fig. 5 Compartmentalization between NDT and NDD types to rotational speed and unsupported length




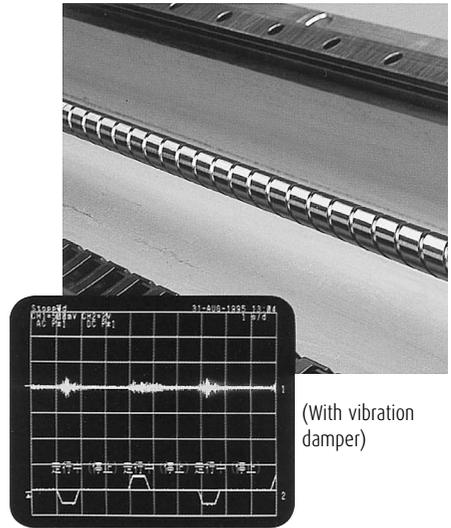


Fig. 6 Vibration of screw shaft when nut is rotating

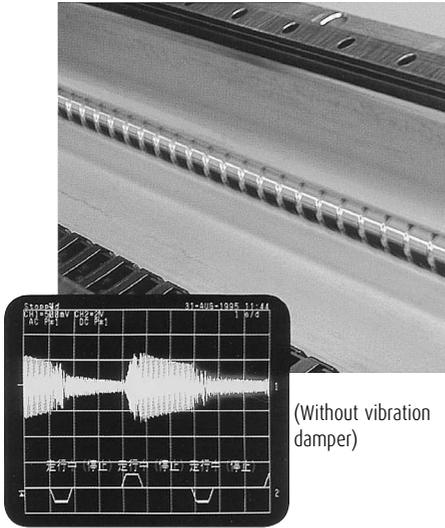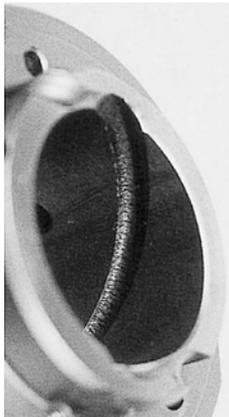

(Without vibration damper)

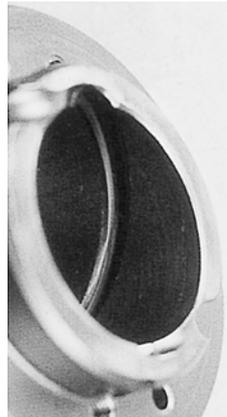

(With vibration damper)

Fig. 7 Effect of vibration damper (results of endurance test)

Calculation example of permissible rotational speed

[Calculation example]

Assume a system which moves two nuts on a shaft as shown below.

Does this system operate appropriately if: both ends of the ball screw (shaft diameter 40 mm/lead 40 mm) are fixed, and the travel speed is at 60 m/min?

[Answer]

The rotational speed n (min^{-1}) when the lead of the ball screw is 40 mm, and the travel speed is at 60 m/min is:

$$n = \frac{60 \times 10^3}{40} = 1\,500 \text{ (min}^{-1}\text{)}$$

> Calculate $d \cdot n$ value

As the $d \cdot n$ value of standard specification is 7 000, therefore, the permissible rotational speed is;

$$n \leq \frac{70\,000}{40} = 1\,750 \text{ (min}^{-1}\text{)}$$

> Calculate critical speed

The maximum unsupported length comes between Nut A and B.

$$L_2 = 3\,300 \text{ (mm)}$$

$$f = 21.9 \text{ (Fixed-Fixed)}$$

$$\text{Root diameter: } d_r = 35.1 \text{ (mm)}$$

Therefore, the permissible rotational speed is;

$$n \leq \frac{21.9 \times 35.1}{3\,300^2} \times 10^7 = 706 \text{ (min}^{-1}\text{)}$$

The calculation indicates that the $d \cdot n$ value is at the safe level. But the critical speed exceeds the limitation. However, with a vibration damper, the system can be operated at 1 500 min^{-1} .


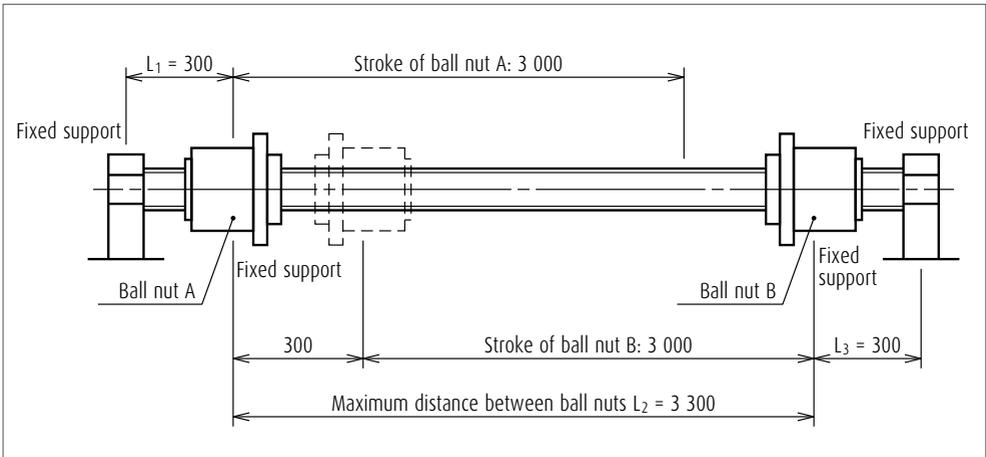


Fig. 8 Calculation example of permissible rotational speed


Structure of reference number

The followings describe the structure of "Reference number for ball screw".

> Reference number for ball screw

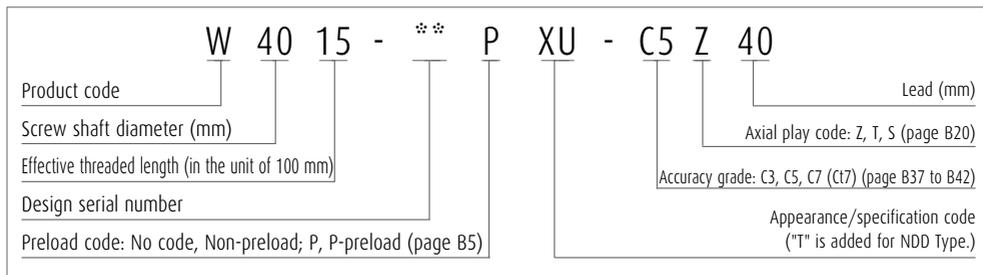


ND Series for nut-rotatable drives

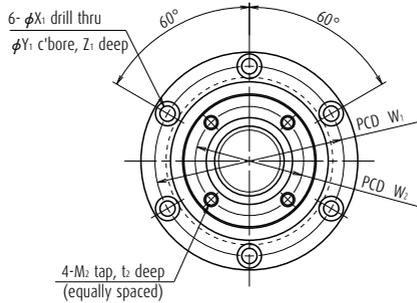

| Model No. | Shaft dia. d | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Effective turns of balls Turns × Circuits | Basic load rating (N) | | Moment of inertia, ball nut J ($\text{kg}\cdot\text{cm}^2$) | Ball nut mass W (kg) |
|--------------|-----------------|-----------|--------------------|---------------------------|--------------------|--|-----------------------|--------------------|---|----------------------------|
| | | | | | | | Dynamic C_a | Static C_{0a} | | |
| NDT 3220-2.5 | 32 | 20 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 700 | 41 900 | 6.2 | 2.9 |
| NDD 3220-2.5 | 32 | 20 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 700 | 41 900 | 6.2 | 2.9 |
| NDT 3225-2.5 | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 6.7 | 3.2 |
| NDD 3225-2.5 | 32 | 25 | 4.762 | 33.25 | 28.3 | 2.5×1 | 20 400 | 42 200 | 6.7 | 3.2 |
| NDT 3232-1.5 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 6.2 | 2.9 |
| NDD 3232-1.5 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×1 | 13 300 | 25 200 | 6.2 | 2.9 |
| NDT 3232-3 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×2 | 21 700 | 45 300 | 6.2 | 2.9 |
| NDD 3232-3 | 32 | 32 | 4.762 | 33.25 | 28.3 | 1.5×2 | 21 700 | 45 300 | 6.2 | 2.9 |
| NDT 4025-2.5 | 40 | 25 | 6.35 | 41.75 | 35.1 | 2.5×1 | 34 100 | 70 100 | 19.3 | 6.0 |
| NDD 4025-2.5 | 40 | 25 | 6.35 | 41.75 | 35.1 | 2.5×1 | 34 100 | 70 100 | 19.3 | 6.0 |
| NDT 4032-1.5 | 40 | 32 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 600 | 41 300 | 18.0 | 5.5 |
| NDD 4032-1.5 | 40 | 32 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 600 | 41 300 | 18.0 | 5.5 |
| NDT 4032-3 | 40 | 32 | 6.35 | 41.75 | 35.1 | 1.5×2 | 35 400 | 74 400 | 18.0 | 5.5 |
| NDD 4032-3 | 40 | 32 | 6.35 | 41.75 | 35.1 | 1.5×2 | 35 400 | 74 400 | 18.0 | 5.5 |
| NDT 4040-1.5 | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 200 | 42 000 | 19.2 | 6.0 |
| NDD 4040-1.5 | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×1 | 21 200 | 42 000 | 19.2 | 6.0 |
| NDT 4040-3 | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×2 | 34 700 | 75 600 | 19.2 | 6.0 |
| NDD 4040-3 | 40 | 40 | 6.35 | 41.75 | 35.1 | 1.5×2 | 34 700 | 75 600 | 19.2 | 6.0 |
| NDT 5025-2.5 | 50 | 25 | 7.938 | 52.25 | 44.0 | 2.5×1 | 51 300 | 110 000 | 45.7 | 8.5 |
| NDD 5025-2.5 | 50 | 25 | 7.938 | 52.25 | 44.0 | 2.5×1 | 51 300 | 110 000 | 45.7 | 8.5 |
| NDT 5032-2.5 | 50 | 32 | 7.938 | 52.25 | 40.0 | 2.5×1 | 50 900 | 109 000 | 48.9 | 9.4 |
| NDD 5032-2.5 | 50 | 32 | 7.938 | 52.25 | 40.0 | 2.5×1 | 50 900 | 109 000 | 48.9 | 9.4 |
| NDT 5040-1.5 | 50 | 40 | 7.938 | 52.25 | 44.0 | 1.5×1 | 32 300 | 64 600 | 45.5 | 8.5 |
| NDD 5040-1.5 | 50 | 40 | 7.938 | 52.25 | 44.0 | 1.5×1 | 32 300 | 64 600 | 45.5 | 8.5 |
| NDT 5040-3 | 50 | 40 | 7.938 | 52.25 | 44.0 | 1.5×2 | 52 800 | 116 000 | 45.5 | 8.5 |
| NDD 5040-3 | 50 | 40 | 7.938 | 52.25 | 44.0 | 1.5×2 | 52 800 | 116 000 | 45.5 | 8.5 |
| NDT 5050-1.5 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.5×1 | 31 700 | 65 700 | 48.7 | 9.4 |
| NDD 5050-1.5 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.5×1 | 31 700 | 65 700 | 48.7 | 9.4 |
| NDT 5050-3 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.5×2 | 51 800 | 118 000 | 48.7 | 9.4 |
| NDD 5050-3 | 50 | 50 | 7.938 | 52.25 | 44.0 | 1.5×2 | 51 800 | 118 000 | 48.7 | 9.4 |

- Notes**
1. The right hand screw is the standard. Consult NSK for the left hand screws.
 2. Seals are standard equipment.

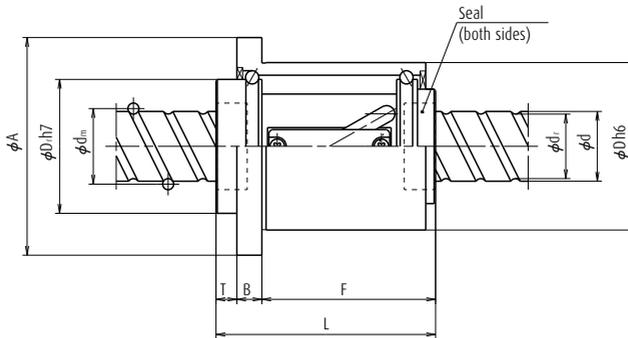

Unit: mm

| Ball nut dimensions | | | | | | | | | | | | | | Tap hole PCD W ₂ |
|---------------------|---------------------------|------------------------------|-------------------|-----------------|----------------------------|----|----------------------|----------------|----------------|----------------|--------------------|----------------|----|--------------------------------|
| Nut length L | Nut outside diameter D | Flange outside diameter A | Flange width B | Nut length F | Projection tube dimensions | | Bolt hole dimensions | | | Bolt hole PCD | Tap hole positions | | | |
| | | | | | D _r | T | X ₁ | Y ₁ | Z ₁ | W ₁ | M ₂ | t ₂ | | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 120 | 78 | 105 | 12 | 96 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 120 | 78 | 105 | 12 | 96 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 107 | 78 | 105 | 12 | 83 | 60 | 12 | 6.6 | 11 | 6.5 | 91 | M6 | 12 | 50 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 122 | 100 | 133 | 15 | 92 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 122 | 100 | 133 | 15 | 92 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 122 | 100 | 133 | 15 | 92 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 122 | 100 | 133 | 15 | 92 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 136 | 100 | 133 | 15 | 106 | 76 | 15 | 9 | 14 | 8.5 | 116 | M8 | 16 | 62 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 140 | 120 | 156 | 18 | 107 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |
| 158 | 120 | 156 | 18 | 125 | 96 | 15 | 11 | 17.5 | 11 | 136 | M10 | 18 | 78 | |

B-3-3.10 Σ Series for Robots

1. Structure

Σ Series (NSK's Robotte) is a ball screw with a high-performance spline. It is ideal for various actuators such as the vertical axis of SCALA type robot.

A ball screw groove and a ball spline groove are made in one shaft, combining the ball screw and the ball spline.

Mount housing, nuts, and support bearings are combined into a single unit.

Timing pulley (prepared by the user) is directly secured at the end face of the nut.

> High functions

A single shaft has both feeding mechanism and guide functions. This allows the shaft ends to move back and forth (linear motion), as well as to rotate.

> Compact and lightweight

A ball screw nut and a spline nut are placed on one shaft, and support bearings are also combined to the unit. This allows compact and high-precision design. Hollow shaft is standard to reduce weight. The hollow can be used for wiring and piping. Other components are also designed to be light in weight.

> Low inertia

Because of return tube type ball nut of which outside diameter is decreased, low inertia design is enabled. It reduces the inertia by 19% of conventional products.

2. Functions

As shown in Fig. 1, the ball screw nut and a spline nut are rotated independently to control rotation value. Thereby the shaft can move in any direction -- linear and rotational.

Table 1 shows the relationship between power input and output.

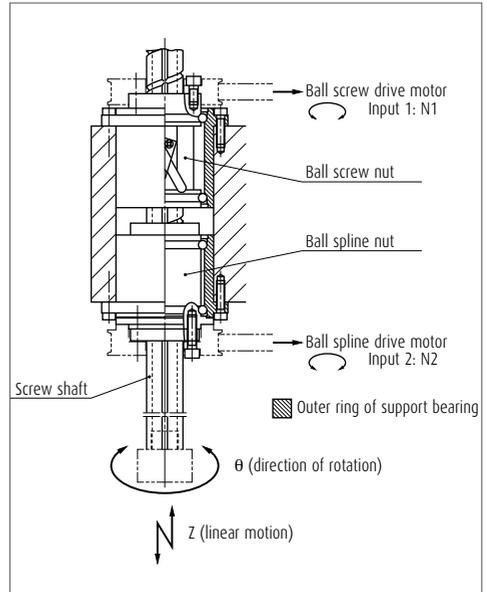


Fig. 1 Example structure of Z axis plus θ axis actuator

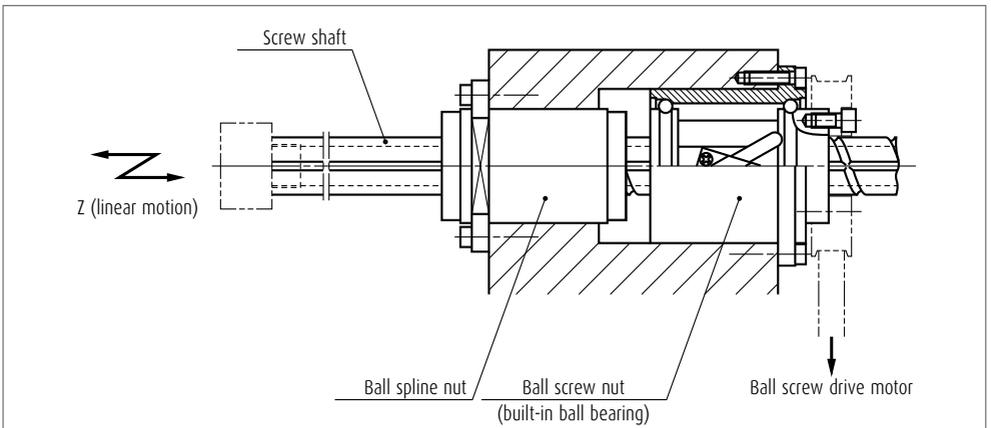


Fig. 2 Example structure of single Z axis unit

Table 1 Power input and output of Σ Series

| Shaft movement (output) | | Input | | |
|-------------------------------|---|-----------------------------------|-------------------------------|---------|
| Z (up-down movement) (mm/min) | θ (rotational movement) (min ⁻¹) | ① Ball screw (min ⁻¹) | ② Spline (min ⁻¹) | Notes |
| Up, down N1-I | Stop 0 | Rotate N1 | Stop 0 | - |
| Stop 0 | Rotate N2 | Rotate N1 | Rotate N2 | N1 = N2 |
| Up, down N2-I | Rotate N2 | Stop 0 | Rotate N2 | - |
| Up, down N1-N2 -I | Rotate N2 | Rotate N1 | Rotate N2 | N1≠N2 |

3. Specifications

(1) Ball recirculation system

A structure of return tube recirculation system is shown below.

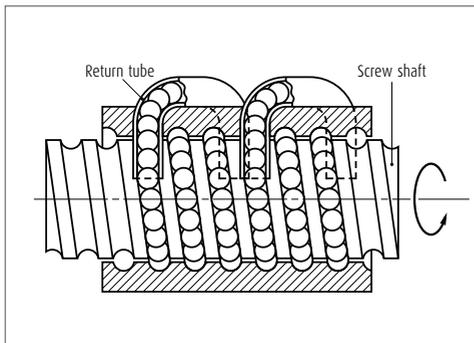


Fig. 3 Structure of return tube recirculation system

(2) Accuracy grade and axial play

The available standard accuracy grade and axial play for ball screw are as follows. The axial play for spline is 0 mm (preloaded product). Please consult NSK for other grades.

Table 2 Accuracy grade and axial play

| | |
|----------------|---|
| Accuracy grade | C3, C5, Ct7 |
| Axial play | Z, 0 mm (preloaded) T, 0.005 mm or less; S, 0.020 mm or less |

(2) Allowable d·n value and the criterion of maximum rotational speed

Allowable d·n value and the criterion of maximum rotational speed are shown below. Please consult NSK if the rotational speed exceeds the permissible range below.

Permissible d·n value: 70 000 or less

Criterion of maximum rotational speed: 3 000 min⁻¹

Note: Please also review the critical speed.

For details, see "Technical Description: Permissible Rotational Speed" (page B47).

(4) Application

SCALA type and Cartesian type industrial robots, semiconductor manufacturing machines, machines for automobile production facilities, material handling systems, other Z (vertical) axis and Z axis plus θ (rotation) axis actuators.

4. Design precautions

The overall length L can be extended to 25 times of the shaft diameter.

To remove the spline nut from the shaft for assembling, use an arbor as shown in Fig. 4. (page B545). Avoid removing ball screw nut as much as possible. Refer to root diameter in the dimension table for arbor diameter. (NSK manufactures the arbors on request.)

For general precautions regarding ball screws, refer to "Precautions in Designing" (page B83) and "Precautions in Handling" (page B103).

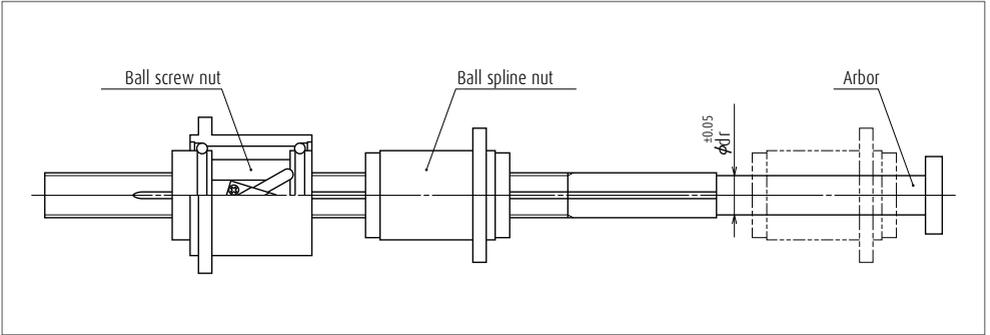


Fig. 4 Removing spline nut

5. Product categories

Σ Series (NSK's Robotte) is four models with different moving functions and performances are available. Select a standard model if rigidity is important. A compact system is recommended for reducing the weight of machine.

Table 3 Σ Series product categories

| Model | Appearance | Size | Structure (Movement) |
|-------------|------------|----------|----------------------|
| Σ | | Standard | Z+ θ Unit |
| ΣZ | | Standard | Z Unit |
| ΣC | | Compact | Z+ θ Unit |
| ΣCZ | | Compact | Z Unit |

6. Load rating and life

The relationship between load rating of the ball spline section and life is the same as in other NSK liner motion products. However, various loads that apply to Robotte must be taken into account. For example, the following factors must be considered in calculating life when the product is used as shown in Fig. 5.

F_a : Load that is generated when the shaft moves in up-down direction. (Load is applied to the ball screw nut.)

T : Torque that is generated to the shaft by F_a .

F_r : Load that is generated by moment of inertia of the shaft and the work attached to Robotte as well as by centrifugal force when the arm rotates.

θ : Direction of F_r load that changes by shaft rotation.

NSK has life calculation programs which take these factors into account. Please ask NSK for more details.

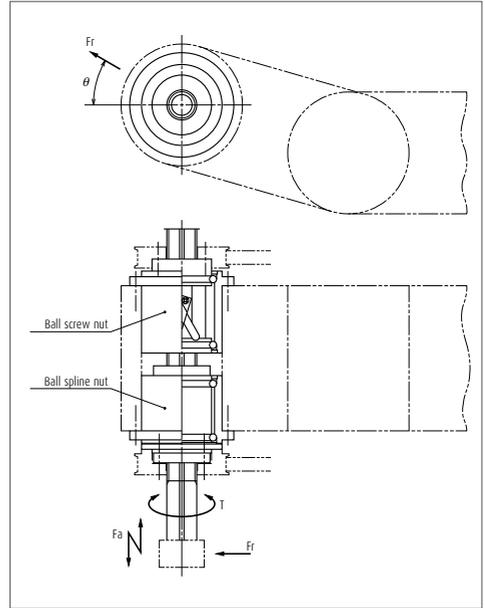


Fig. 5 Example structure of Z axis plus θ axis actuator



7. Structure of reference number

The following describes the structure of "Reference number for ball screw".



> Reference number for ball screw

| | | | | | | | | | | | | | |
|--------------|---------------------------|----|---|----------------------|--|---|---|---|---|----|---|----|--|
| | PW | 25 | 02 | - | ** | P | T | U | - | C5 | Z | 20 | |
| Product code | Screw shaft diameter (mm) | | Effective threaded length (in the unit of 100 mm) | Design serial number | Preload code: No code, Non-preload; P, P-preload (page B5) | | | | | | | | Lead (mm) |
| | | | | | | | | | | | | | Axial play code: Z, T, S (page B20) |
| | | | | | | | | | | | | | Accuracy grade: C3, C5, C7 (Ct7) (page B37 to B42) |
| | | | | | | | | | | | | | Use support unit |
| | | | | | | | | | | | | | Hollow shaft ball screw specification |

Σ Series for Robots

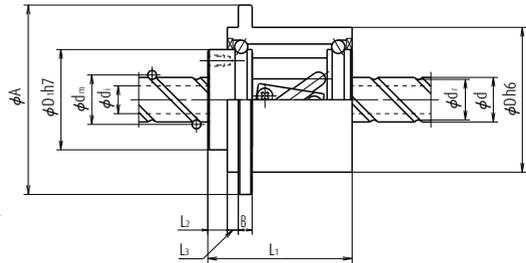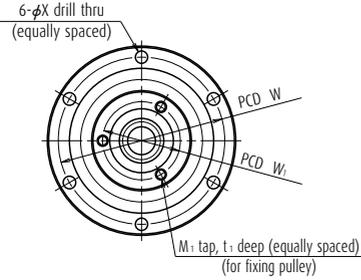



| Model No. | Shaft dia. d | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Screw shaft hollow d_i | Ball screw nut | | | | | | | | | | | | | | |
|-----------|-------------------|-------------|--------------------|---------------------------|--------------------|-----------------------------|-----------------------|-----------------|------------|-----|---|-------|-------|-------|-------|-------|-------|-------|---|-----|------|
| | | | | | | | Basic load rating (N) | | Dimensions | | | | | | | | | | Moment of inertia (kg-cm ²) | | |
| | | | | | | | Dynamic C_a | Static C_{0a} | D | A | B | L_1 | L_2 | L_3 | M_1 | t_1 | W_1 | D_1 | | W | X |
| Σ1610 | 16 | 10 | 3.175 | 16.75 | 13.4 | (8) | 5 670 | 8 300 | 48 | 64 | 5 | 47 | 7 | 4 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 | 0.41 |
| Σ1632 | 16 | 32 | 3.175 | 16.75 | 13.4 | (8) | 3 240 | 4 680 | 48 | 64 | 5 | 52 | 7 | 4 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 | 0.44 |
| Σ2010 | 20 | 10 | 3.175 | 20.75 | 17.4 | (14) | 9 560 | 17 300 | 54 | 70 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.64 |
| Σ2020 | 20 | 20 | 3.175 | 20.75 | 17.4 | (14) | 6 100 | 10 500 | 54 | 70 | 6 | 63 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.65 |
| Σ2040 | 20 | 40 | 3.175 | 20.75 | 17.4 | (14) | 3 640 | 6 310 | 54 | 70 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.64 |
| Σ2510 | 25 | 10 | 3.175 | 25.75 | 22.4 | (18) | 10 700 | 22 000 | 58 | 74 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.10 |
| Σ2520 | 25 | 20 | 3.175 | 25.75 | 22.4 | (18) | 6 860 | 13 100 | 58 | 74 | 6 | 63 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.18 |
| Σ2525 | 25 | 25 | 3.175 | 25.75 | 22.4 | (18) | 6 720 | 13 300 | 58 | 74 | 6 | 72 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.30 |
| Σ2550 | 25 | 50 | 3.175 | 25.75 | 22.4 | (18) | 3 730 | 7 500 | 58 | 74 | 6 | 64 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.20 |
| Σ3220 | 32 | 20 | 3.175 | 32.75 | 29.4 | (25) | 7 710 | 16 900 | 70 | 95 | 8 | 70 | 10 | 6 | 3-M5 | 10 | 44 | 53 | 82 | 6.6 | 2.60 |
| Σ3232 | 32 | 32 | 3.175 | 32.75 | 29.4 | (25) | 7 590 | 16 700 | 70 | 95 | 8 | 91 | 10 | 6 | 3-M5 | 10 | 44 | 53 | 82 | 6.6 | 3.15 |
| Σ4020 | 40 | 20 | 3.969 | 41.0 | 36.9 | (30) | 11 600 | 26 500 | 85 | 110 | 8 | 73 | 10 | 6 | 4-M5 | 10 | 58 | 67 | 96 | 6.6 | 5.96 |
| Σ4040 | 40 | 40 | 3.969 | 41.0 | 36.9 | (30) | 11 300 | 26 200 | 85 | 110 | 8 | 107 | 10 | 6 | 4-M5 | 10 | 58 | 67 | 96 | 6.6 | 7.85 |
| Σ4520 | 45 | 20 | 3.969 | 46.0 | 41.9 | (35) | 12 000 | 30 000 | 90 | 115 | 8 | 73 | 10 | 6 | 4-M5 | 10 | 63 | 72 | 101 | 6.6 | 7.73 |
| Σ4540 | 45 | 40 | 3.969 | 46.0 | 41.9 | (35) | 11 800 | 29 700 | 90 | 115 | 8 | 107 | 10 | 6 | 4-M5 | 10 | 63 | 72 | 101 | 6.6 | 10.3 |

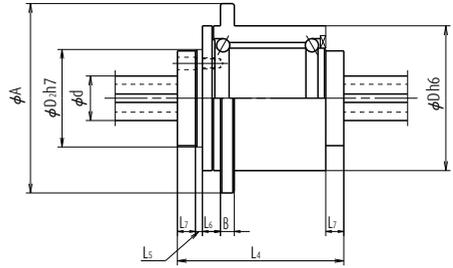

Unit: mm



| Mass (kg) | Ball spline nut | | | | | | | | | | | | | | | | | | | | Moment of inertia (kg-cm ²) | Mass (kg) |
|--------------|--------------------------|--------------------|-----------------------|--------------------|------------|-----|---|-------|-------|-------|-------|-----|-----|-------|-------|-------|-------|-----|-----|------|---|--------------|
| | Basic load rating (N) | | Basic torque (N-m) | | Dimensions | | | | | | | | | | | | | | | | | |
| | Dynamic C_r | Static C_{0r} | Dynamic C_t | Static C_{0t} | D | A | B | L_4 | L_5 | L_6 | L_7 | Y | T | M_2 | t_2 | W_2 | D_2 | W | X | | | |
| 0.50 | 5 530 | 7 270 | 61.5 | 91.3 | 48 | 64 | 5 | 60 | 2.5 | 6.5 | 6.5 | 4.5 | 6.5 | M4 | 7 | 25 | 35 | 56 | 4.5 | 0.71 | 0.63 | |
| 0.55 | 5 890 | 8 000 | 65.5 | 100 | 48 | 64 | 5 | 60 | 2.5 | 6.5 | 6.5 | 4.5 | 6.5 | M4 | 7 | 25 | 35 | 56 | 4.5 | 0.71 | 0.63 | |
| 0.74 | 6 260 | 8 720 | 86.3 | 135 | 54 | 70 | 6 | 65 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 1.15 | 0.87 | |
| 0.81 | 6 610 | 9 450 | 91.1 | 145 | 54 | 70 | 6 | 65 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 1.15 | 0.87 | |
| 0.74 | 6 610 | 9 450 | 91.1 | 145 | 54 | 70 | 6 | 65 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 1.15 | 0.87 | |
| 0.81 | 6 630 | 9 450 | 115 | 185 | 58 | 74 | 6 | 70 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.88 | 1.03 | |
| 0.88 | 7 290 | 10 900 | 125 | 210 | 58 | 74 | 6 | 70 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.88 | 1.03 | |
| 1.00 | 7 290 | 10 900 | 125 | 210 | 58 | 74 | 6 | 70 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.88 | 1.03 | |
| 0.91 | 7 290 | 10 900 | 125 | 210 | 58 | 74 | 6 | 70 | 2.5 | 6.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.88 | 1.03 | |
| 1.46 | 7 630 | 11 600 | 165 | 285 | 70 | 95 | 8 | 75 | 2.5 | 7.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 42 | 50 | 82 | 6.6 | 3.80 | 1.62 | |
| 1.83 | 7 950 | 12 400 | 175 | 305 | 70 | 95 | 8 | 75 | 2.5 | 7.5 | 6.5 | 5.5 | 6.5 | M5 | 8 | 42 | 50 | 82 | 6.6 | 3.80 | 1.62 | |
| 2.02 | 10 600 | 14 800 | 290 | 455 | 85 | 110 | 8 | 80 | 4 | 7.5 | 8 | 5.5 | 8 | M5 | 8 | 55 | 65 | 96 | 6.6 | 9.74 | 2.38 | |
| 2.85 | 11 200 | 15 900 | 305 | 490 | 85 | 110 | 8 | 80 | 4 | 7.5 | 8 | 5.5 | 8 | M5 | 8 | 55 | 65 | 96 | 6.6 | 9.74 | 2.38 | |
| 2.17 | 11 200 | 15 900 | 340 | 550 | 90 | 115 | 8 | 85 | 4 | 7.5 | 8 | 5.5 | 8 | M5 | 8 | 60 | 70 | 101 | 6.6 | 12.5 | 2.56 | |
| 3.06 | 11 700 | 17 000 | 360 | 590 | 90 | 115 | 8 | 85 | 4 | 7.5 | 8 | 5.5 | 8 | M5 | 8 | 60 | 70 | 101 | 6.6 | 12.5 | 2.56 | |

Σ Series for Robots

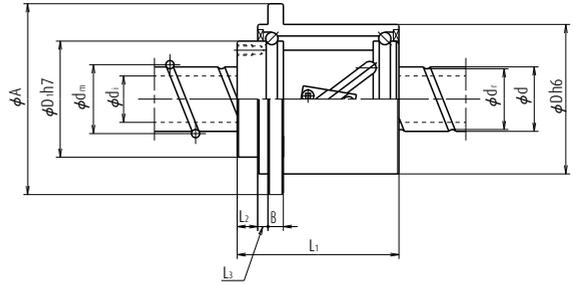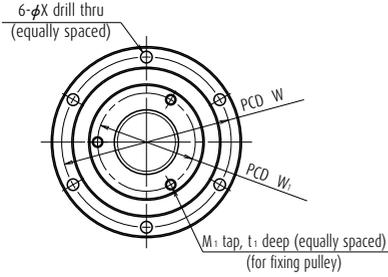

| Model No. | Shaft dia. d | Lead l | Ball dia. D_w | Ball circle dia. d_m | Root dia. d_r | Screw shaft hollow d_i | Ball screw nut | | | | | | | | | | | | | |
|----------------|-------------------|-------------|--------------------|---------------------------|--------------------|-----------------------------|-----------------------|--------------------|------------|-----|---|-------|-------|-------|-------|-------|-------|-------|-----|-----|
| | | | | | | | Basic load rating (N) | | Dimensions | | | | | | | | | | | |
| | | | | | | | Dynamic C_a | Static C_{0a} | D | A | B | L_1 | L_2 | L_3 | M_1 | t_1 | W_1 | D_1 | W | X |
| $\Sigma Z1610$ | 16 | 10 | 3.175 | 16.75 | 13.4 | (8) | 5 670 | 8 300 | 48 | 64 | 5 | 47 | 7 | 4 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 |
| $\Sigma Z1632$ | 16 | 32 | 3.175 | 16.75 | 13.4 | (8) | 3 240 | 4 680 | 48 | 64 | 5 | 52 | 7 | 4 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 |
| $\Sigma Z2010$ | 20 | 10 | 3.175 | 20.75 | 17.4 | (14) | 9 560 | 17 300 | 54 | 70 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| $\Sigma Z2020$ | 20 | 20 | 3.175 | 20.75 | 17.4 | (14) | 6 100 | 10 500 | 54 | 70 | 6 | 63 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| $\Sigma Z2040$ | 20 | 40 | 3.175 | 20.75 | 17.4 | (14) | 3 640 | 6 310 | 54 | 70 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| $\Sigma Z2510$ | 25 | 10 | 3.175 | 25.75 | 22.4 | (18) | 10 700 | 22 000 | 58 | 74 | 6 | 57 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| $\Sigma Z2520$ | 25 | 20 | 3.175 | 25.75 | 22.4 | (18) | 6 720 | 13 100 | 58 | 74 | 6 | 63 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| $\Sigma Z2525$ | 25 | 25 | 3.175 | 25.75 | 22.4 | (18) | 6 720 | 13 300 | 58 | 74 | 6 | 72 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| $\Sigma Z2550$ | 25 | 50 | 3.175 | 25.75 | 22.4 | (18) | 3 730 | 7 500 | 58 | 74 | 6 | 64 | 8 | 4 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| $\Sigma Z3220$ | 32 | 20 | 3.175 | 32.75 | 29.4 | (25) | 7 710 | 16 900 | 70 | 95 | 8 | 70 | 10 | 6 | 3-M5 | 10 | 44 | 53 | 82 | 6.6 |
| $\Sigma Z3232$ | 32 | 32 | 3.175 | 32.75 | 29.4 | (25) | 7 590 | 16 700 | 70 | 95 | 8 | 91 | 10 | 6 | 3-M5 | 10 | 44 | 53 | 82 | 6.6 |
| $\Sigma Z4020$ | 40 | 20 | 3.969 | 41.0 | 36.9 | (30) | 11 600 | 26 500 | 85 | 110 | 8 | 73 | 10 | 6 | 4-M5 | 10 | 58 | 67 | 96 | 6.6 |
| $\Sigma Z4040$ | 40 | 40 | 3.969 | 41.0 | 36.9 | (30) | 11 300 | 26 200 | 85 | 110 | 8 | 107 | 10 | 6 | 4-M5 | 10 | 58 | 67 | 96 | 6.6 |
| $\Sigma Z4520$ | 45 | 20 | 3.969 | 46.0 | 41.9 | (35) | 12 000 | 30 000 | 90 | 115 | 8 | 73 | 10 | 6 | 4-M5 | 10 | 63 | 72 | 101 | 6.6 |
| $\Sigma Z4540$ | 45 | 40 | 3.969 | 46.0 | 41.9 | (35) | 11 800 | 29 700 | 90 | 115 | 8 | 107 | 10 | 6 | 4-M5 | 10 | 63 | 72 | 101 | 6.6 |



Σ Z Type

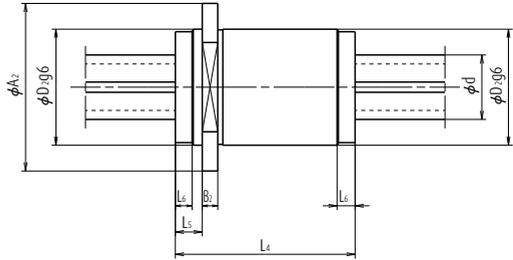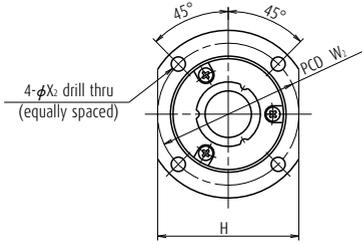



Unit: mm

| | | Ball spline nut | | | | | | | | | | | | | |
|--|--------------|---------------------------|---------------------------|---------------------------|---------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|-----|--------------|
| Moment of inertia (kg-cm ²) | Mass (kg) | Basic load rating (N) | | Basic torque (N-m) | | Dimensions | | | | | | | | | Mass (kg) |
| | | Dynamic C _t | Static C _{0r} | Dynamic C _t | Static C _{0t} | D ₂ | A ₂ | B ₂ | L ₄ | L ₅ | L ₆ | H | W ₂ | X | |
| 0.41 | 0.50 | 5 530 | 7 270 | 61.5 | 91.3 | 35 | 55 | 6 | 60 | 10.5 | 6.5 | 45 | 4.5 | 4.5 | 0.35 |
| 0.44 | 0.55 | 5 890 | 8 000 | 65.5 | 100 | 35 | 55 | 6 | 60 | 10.5 | 6.5 | 45 | 4.5 | 4.5 | 0.35 |
| 0.64 | 0.74 | 6 260 | 8 720 | 86.3 | 135 | 40 | 60 | 6 | 65 | 10.5 | 6.5 | 50 | 5.5 | 5.5 | 0.46 |
| 0.65 | 0.81 | 6 610 | 9 450 | 91.1 | 145 | 40 | 60 | 6 | 65 | 10.5 | 6.5 | 50 | 5.5 | 5.5 | 0.46 |
| 0.64 | 0.74 | 6 610 | 9 450 | 91.1 | 145 | 40 | 60 | 6 | 65 | 10.5 | 6.5 | 50 | 5.5 | 5.5 | 0.46 |
| 1.10 | 0.81 | 6 630 | 9 450 | 115 | 185 | 45 | 65 | 6 | 70 | 10.5 | 6.5 | 55 | 5.5 | 5.5 | 0.57 |
| 1.18 | 0.88 | 7 290 | 10 900 | 125 | 210 | 45 | 65 | 6 | 70 | 10.5 | 6.5 | 55 | 5.5 | 5.5 | 0.57 |
| 1.30 | 1.00 | 7 290 | 10 900 | 125 | 210 | 45 | 65 | 6 | 70 | 10.5 | 6.5 | 55 | 5.5 | 5.5 | 0.57 |
| 1.20 | 0.91 | 7 290 | 10 900 | 125 | 210 | 45 | 65 | 6 | 70 | 10.5 | 6.5 | 55 | 5.5 | 5.5 | 0.57 |
| 2.60 | 1.46 | 7 630 | 11 600 | 165 | 285 | 50 | 70 | 6 | 75 | 10.5 | 6.5 | 60 | 6.0 | 5.5 | 0.64 |
| 3.15 | 1.83 | 7 950 | 12 400 | 175 | 305 | 50 | 70 | 6 | 75 | 10.5 | 6.5 | 60 | 6.0 | 5.5 | 0.64 |
| 5.96 | 2.02 | 10 600 | 14 800 | 290 | 455 | 65 | 88 | 8 | 80 | 12 | 8 | 76 | 7.6 | 6.6 | 1.20 |
| 7.85 | 2.85 | 11 200 | 15 900 | 305 | 490 | 65 | 88 | 8 | 80 | 12 | 8 | 76 | 7.6 | 6.6 | 1.20 |
| 7.73 | 2.17 | 11 200 | 15 900 | 340 | 550 | 70 | 93 | 8 | 85 | 12 | 8 | 81 | 8.1 | 6.6 | 1.39 |
| 10.3 | 3.06 | 11 700 | 17 000 | 360 | 590 | 70 | 93 | 8 | 85 | 12 | 8 | 81 | 8.1 | 6.6 | 1.39 |

Σ Series for Robots

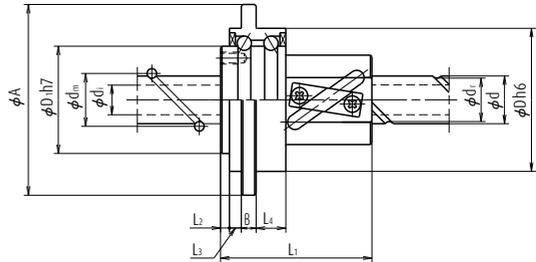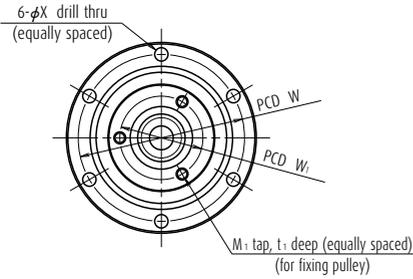



| Model No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Screw shaft hollow d _i | Ball screw nut | | | | | | | | | | | | | | Moment of inertia (kg·cm ²) | |
|-----------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|--------------------------------------|---------------------------|---------------------------|------------|----|---|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|--|------|
| | | | | | | | Basic load rating (N) | | Dimensions | | | | | | | | | | | | | |
| | | | | | | | Dynamic C _a | Static C _{0a} | D | A | B | L ₁ | L ₂ | L ₃ | L ₄ | M ₁ | t ₁ | W ₁ | | D ₁ | | W |
| ΣC1610 | 16 | 10 | 3.175 | 16.75 | 13.4 | (8) | 5 670 | 8 300 | 48 | 64 | 5 | 46 | 3 | 4 | 10 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 | 0.40 |
| ΣC1632 | 16 | 32 | 3.175 | 16.75 | 13.4 | (8) | 3 240 | 4 680 | 48 | 64 | 5 | 51 | 3 | 4 | 10 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 | 0.43 |
| ΣC2010 | 20 | 10 | 3.175 | 20.75 | 17.4 | (14) | 9 560 | 17 300 | 54 | 70 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.63 |
| ΣC2020 | 20 | 20 | 3.175 | 20.75 | 17.4 | (14) | 6 100 | 10 500 | 54 | 70 | 6 | 63 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.65 |
| ΣC2040 | 20 | 40 | 3.175 | 20.75 | 17.4 | (14) | 3 640 | 6 310 | 54 | 70 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 | 0.63 |
| ΣC2510 | 25 | 10 | 3.175 | 25.75 | 22.4 | (18) | 10 700 | 22 000 | 58 | 74 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.04 |
| ΣC2520 | 25 | 20 | 3.175 | 25.75 | 22.4 | (18) | 6 860 | 13 100 | 58 | 74 | 6 | 63 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.13 |
| ΣC2525 | 25 | 25 | 3.175 | 25.75 | 22.4 | (18) | 6 720 | 13 300 | 58 | 74 | 6 | 71 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 | 1.24 |

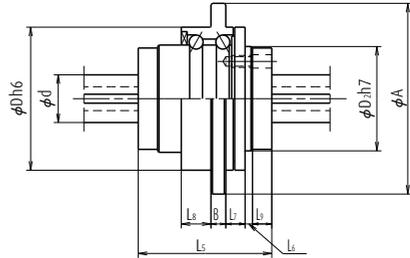

Unit: mm



| Ball spline nut | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|---------------------------|---------------------------|---------------------------|---------------------------|------------|----|---|----------------|----------------|----------------|----------------|----------------|-----|-----|----------------|----------------|----------------|----------------|----|---|--------------|------|
| Mass (kg) | Basic load rating (N) | | Basic torque (N-m) | | Dimensions | | | | | | | | | | | | | | | Moment of inertia (kg-cm ²) | Mass (kg) | |
| | Dynamic C _t | Static C _{0r} | Dynamic C _t | Static C _{0t} | D | A | B | L ₅ | L ₆ | L ₇ | L ₈ | L ₉ | Y | T | M ₂ | t ₃ | W ₂ | D ₂ | W | | | X |
| 0.41 | 4 300 | 5 090 | 47.9 | 63.9 | 48 | 64 | 5 | 45 | 2.5 | 6.5 | 10 | 6.5 | 4.5 | 6.5 | M4 | 7 | 25 | 35 | 56 | 4.5 | 0.52 | 0.42 |
| 0.43 | 4 300 | 5 090 | 47.9 | 63.9 | 48 | 64 | 5 | 45 | 2.5 | 6.5 | 10 | 6.5 | 4.5 | 6.5 | M4 | 7 | 25 | 35 | 56 | 4.5 | 0.52 | 0.42 |
| 0.53 | 4 730 | 5 820 | 65.1 | 90.5 | 54 | 70 | 6 | 50 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 0.86 | 0.56 |
| 0.56 | 5 110 | 6 540 | 70.5 | 100 | 54 | 70 | 6 | 50 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 0.86 | 0.56 |
| 0.53 | 5 110 | 6 540 | 70.5 | 100 | 54 | 70 | 6 | 50 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 30.5 | 40 | 62 | 4.5 | 0.86 | 0.56 |
| 0.60 | 5 130 | 6 540 | 87.8 | 125 | 58 | 74 | 6 | 55 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.44 | 0.67 |
| 0.64 | 5 870 | 8 000 | 100 | 155 | 58 | 74 | 6 | 55 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.44 | 0.67 |
| 0.69 | 5 870 | 8 000 | 100 | 155 | 58 | 74 | 6 | 55 | 2.5 | 6.5 | 10 | 6.5 | 5.5 | 6.5 | M5 | 8 | 35.5 | 45 | 66 | 4.5 | 1.44 | 0.67 |

Σ Series for Robots

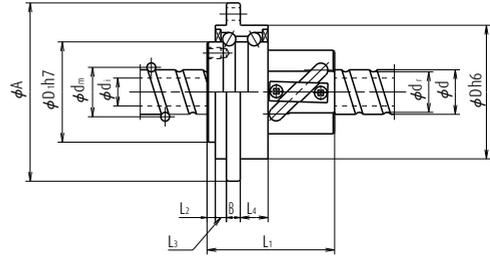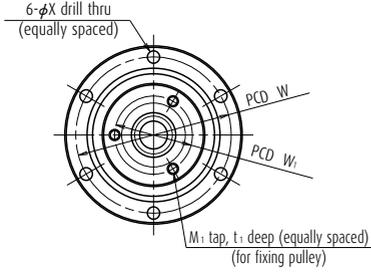

| Model No. | Shaft dia. d | Lead l | Ball dia. D _w | Ball circle dia. d _m | Root dia. d _r | Screw shaft hollow dia. d _i | Ball screw nut | | | | | | | | | | | | | | |
|-----------|-----------------|-----------|-----------------------------|------------------------------------|-----------------------------|---|---------------------------|---------------------------|------------|----|---|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|-----|
| | | | | | | | Basic load rating (N) | | Dimensions | | | | | | | | | | | | |
| | | | | | | | Dynamic C _a | Static C _{0a} | D | A | B | L ₁ | L ₂ | L ₃ | L ₄ | M ₁ | t ₁ | W ₁ | D ₁ | W | X |
| ΣCZ1610 | 16 | 10 | 3.175 | 16.75 | 13.4 | (8) | 5 670 | 8 300 | 48 | 64 | 5 | 46 | 3 | 4 | 10 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 |
| ΣCZ1632 | 16 | 32 | 3.175 | 16.75 | 13.4 | (8) | 3 240 | 4 680 | 48 | 64 | 5 | 51 | 3 | 4 | 10 | 3-M4 | 6 | 28 | 35 | 56 | 4.5 |
| ΣCZ2010 | 20 | 10 | 3.175 | 20.75 | 17.4 | (14) | 9 560 | 17 300 | 54 | 70 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| ΣCZ2020 | 20 | 20 | 3.175 | 20.75 | 17.4 | (14) | 6 100 | 10 500 | 54 | 70 | 6 | 63 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| ΣCZ2040 | 20 | 40 | 3.175 | 20.75 | 17.4 | (14) | 3 640 | 6 310 | 54 | 70 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 32 | 40 | 62 | 4.5 |
| ΣCZ2510 | 25 | 10 | 3.175 | 25.75 | 22.4 | (18) | 10 700 | 22 000 | 58 | 74 | 6 | 56 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| ΣCZ2520 | 25 | 20 | 3.175 | 25.75 | 22.4 | (18) | 6 860 | 13 100 | 58 | 74 | 6 | 63 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| ΣCZ2525 | 25 | 25 | 3.175 | 25.75 | 22.4 | (18) | 6 720 | 13 300 | 58 | 74 | 6 | 71 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |
| ΣCZ2550 | 25 | 50 | 3.175 | 25.75 | 22.4 | (18) | 3 730 | 7 500 | 58 | 74 | 6 | 63 | 4 | 4 | 10 | 3-M4 | 6 | 38 | 45 | 66 | 4.5 |

Σ CZ Type

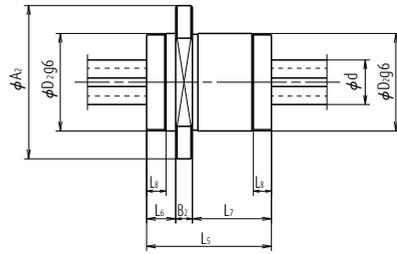

Unit: mm

| | | Ball spline nut | | | | | | | | | | | | | | | |
|---|-----------|------------------------|------------------------|------------------------|------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----|----------------|----------------|-----------|--|
| Moment of inertia (kg-cm ²) | Mass (kg) | Basic load rating (N) | | Basic torque (N-m) | | Dimensions | | | | | | | | | | Mass (kg) | |
| | | Dynamic C _r | Static C _{0r} | Dynamic C _t | Static C _{0t} | D ₂ | A ₂ | B ₂ | L ₅ | L ₆ | L ₇ | L ₈ | H | W ₂ | X ₂ | | |
| 0.40 | 0.41 | 4 300 | 5 090 | 47.9 | 63.9 | 35 | 55 | 6 | 45 | 10.5 | 28.5 | 6.5 | 45 | 45 | 4.5 | 0.26 | |
| 0.43 | 0.43 | 4 300 | 5 090 | 47.9 | 63.9 | 35 | 55 | 6 | 45 | 10.5 | 28.5 | 6.5 | 45 | 45 | 4.5 | 0.26 | |
| 0.63 | 0.53 | 4 730 | 5 820 | 65.1 | 90.5 | 40 | 60 | 6 | 50 | 10.5 | 33.5 | 6.5 | 50 | 50 | 5.5 | 0.35 | |
| 0.65 | 0.56 | 5 110 | 6 540 | 70.5 | 100 | 40 | 60 | 6 | 50 | 10.5 | 33.5 | 6.5 | 50 | 50 | 5.5 | 0.35 | |
| 0.63 | 0.53 | 5 110 | 6 540 | 70.5 | 100 | 40 | 60 | 6 | 50 | 10.5 | 33.5 | 6.5 | 50 | 50 | 5.5 | 0.35 | |
| 1.04 | 0.60 | 5 130 | 6 540 | 87.8 | 125 | 45 | 65 | 6 | 55 | 10.5 | 38.5 | 6.5 | 55 | 55 | 5.5 | 0.44 | |
| 1.13 | 0.64 | 5 870 | 8 000 | 100 | 155 | 45 | 65 | 6 | 55 | 10.5 | 38.5 | 6.5 | 55 | 55 | 5.5 | 0.44 | |
| 1.24 | 0.69 | 5 870 | 8 000 | 100 | 155 | 45 | 65 | 6 | 55 | 10.5 | 38.5 | 6.5 | 55 | 55 | 5.5 | 0.44 | |
| 1.13 | 0.64 | 5 870 | 8 000 | 100 | 155 | 45 | 65 | 6 | 55 | 10.5 | 38.5 | 6.5 | 55 | 55 | 5.5 | 0.44 | |

B-3-3.11 Ball Screw with L1 Seal designed for Minimal Grease Splatter [Patent application submitted]

1. Features

- Substantial reduction in grease splatter

The amount of grease splatter for the L1 seal is reduced to 1/10 compared to NSK standard seal to contribute to maintain equipment and working environment clean.

- Adoption of non-contact type seal

Seal torque is avoided by optimizing the seal shape. The current seals with relatively small splatter are all contact type seals, but the L1 seal is the first non-contact type seal to achieve low grease splatter.

- Seal cover is equipped as standard.

To prevent grease from dripping, a seal cover is equipped as standard.

- Later fitting to NSK standard ball screws is available.

NSK ensures quick delivery because later fitting to “Compact FA Series” and “High Speed SS Series” is possible.

2. Specifications

(1) Applicable ball screw

Shaft diameter : 15 to 23 mm

Lead : 5 mm min.



Lubricant : NSK standard grease, NSK clean grease, grease for general food

Environment : Ambient temperature

Short lead time : Can be fitted to NSK standard stock ball screws.

Compact FA series (dia.15 to 25 mm)

High speed SS series (dia.32 mm)

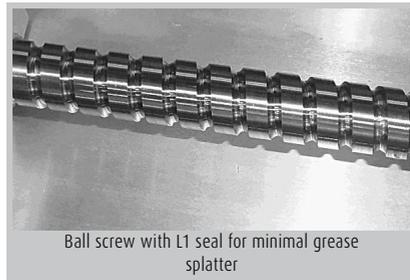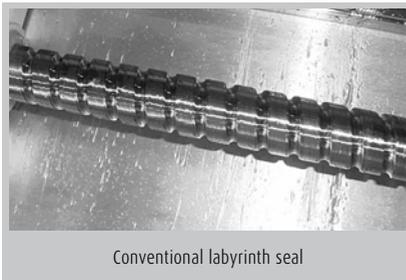

BSS2010-3E
AS2 grease
3 000min⁻¹

Fig. 1 Comparison of grease splatter from the shaft





Fig. 2 Results of grease splattering test

(2) Design-related precautions

When designing the screw shaft end, the one end shall be cut-through. For general precautions regarding ball screws, refer to “Design Precautions” (page B83) and “Handling Precautions” (page B103).



Table 1 Combinations of shaft diameter and lead

| Shaft dia. \ Lead | Lead | | | | Applicable series |
|-------------------|------|----|----|----|-------------------|
| | 5 | 10 | 20 | 25 | |
| 15 | ○ | ○ | ○ | | Compact FA |
| 20 | ○ | ○ | ○ | | Compact FA |
| 25 | ○ | ○ | ○ | ○ | Compact FA |
| 32 | ○ | ○ | | | High speed SS |

Please contact NSK except for the above types.



Fig. 3 of grease splatter from the shaft

3. Example of reference number

A structure of “Reference number for ball screw” is as follows.

*“L1” is added at the end of “nut model code” and “Specifications number”.

- › Reference number for ball screw

W2005 - * * * * L1 - C5 Z10


NSK L1 equipped type ball screw code

4. Precautions for use

- › Maximum temperatures are as follows.
Compact FA series with L1 seal: 80 °C (at outside diameter of ball nut)
High Speed SS series with L1 seal: 60 °C (at outside diameter of ball nut)
- › Do not use the product in environments where foreign matter is present.
- › Please note that L1 seal reduces grease splatter but cannot reduce it to zero.

The data shown in the catalog are the results of our tests, and no warranty is given to sealing performance on actual usage on machinery. The amount of grease splatter is affected by usage conditions (rotational speed, temperature, greases, grease filling amount). Dust covers and other measures to keep machinery free of dust are recommended.


Ball Screw with L1 Seal designed for Minimal Grease Splatter

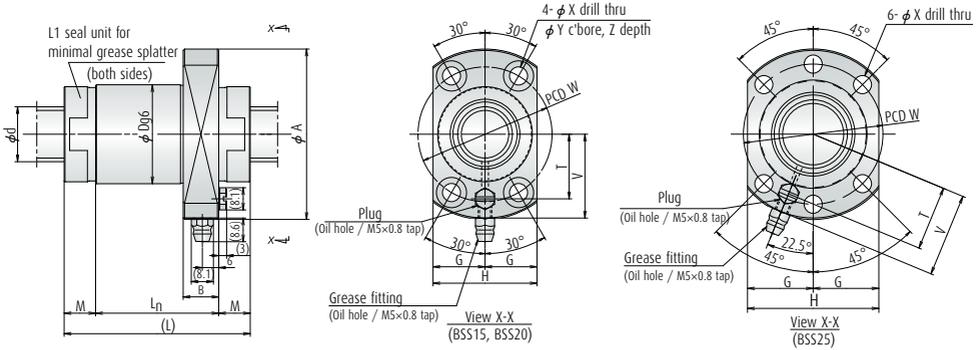

| Model No. | Shaft dia. d | Lead l | Basic load rating (N) | | Ball nut dimensions | | | | | | | | | | | Seal dimensions | Total length with nut & seal L | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | | | | |
|------------|--------------|--------|-----------------------|--------|------------------------|----|------------------------|----------------|-----|----|--------|-----|------------|-----|------------|-----------------|--------------------------------|---|---|-------------------|------|-----|-----|
| | | | | | Dynamic C _a | | Static C _{0a} | | Dia | | Flange | | Nut length | | Bolt holes | | | | | Oil hole position | | | |
| | | | D | A | G | H | B | L _n | W | X | Y | Z | T | V | M | L | (cm ³) | (cm ³) | | | | | |
| BSS1505-3E | 15 | 5 | 5 460 | 10 200 | 28 | 51 | 15.5 | 31 | 11 | 30 | 39 | 5.5 | 9.5 | 5.5 | 18 | 25 | 10 | 50 | 2.0 | 1.0 | | | |
| BSS1510-3E | | 10 | | | | | | | | 63 | | | | | | | | | | | | | |
| BSS1520-2E | | 20 | 5 070 | 8 730 | | | | | | 32 | | | | | | | | 55 | | | 16.5 | 33 | 51 |
| BSS2005-3E | 20 | 5 | 8 790 | 18 500 | 36 | 62 | 19 | 38 | 13 | 31 | 45 | 49 | 6.6 | 11 | 6.5 | 23.5 | 30.5 | 55 | 3.4 | 1.7 | | | |
| BSS2010-3E | | 10 | | | | | | | | 69 | | | | | | | | | | | | | |
| BSS2020-2E | | 20 | 5 900 | 11 700 | | | | | | 54 | | | | | | | | 18 | | | 90 | 3.2 | 1.6 |
| BSS2505-3E | 25 | 5 | 9 760 | 23 600 | 40 | 62 | 24 | 48 | 12 | 32 | 51 | 6.6 | — | — | 23.5 | 30.5 | 12 | 56 | 4.4 | 2.2 | | | |
| BSS2510-4E | | 10 | | | | | | | | 80 | | | | | | | | 4.7 | | | 2.4 | | |
| BSS2520-2E | | 20 | 6 560 | 14 600 | | | | | | 54 | | | | | | | | 20 | | | 94 | 3.9 | 2.0 |
| BSS2525-2E | | 25 | — | — | | | | | | 63 | | | | | | | | — | | | 103 | 4.3 | 2.2 |

Notes

1. Maximum operating temperature: 80°C (at outside diameter of ball nut)
2. Grease nipple attachment is done only on the outer side of the flange (see diagram).

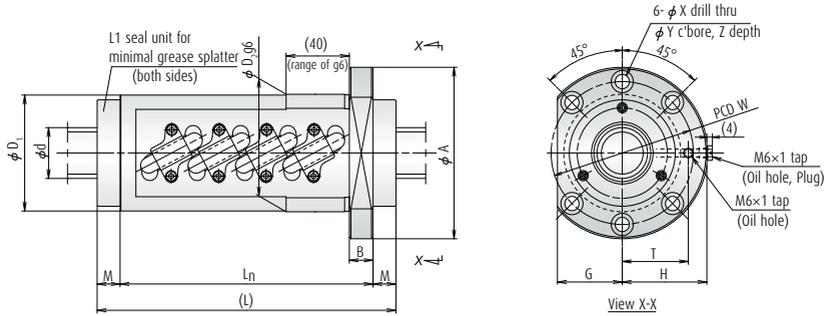

| Model No. | Shaft dia. d | Lead I | Basic load rating (N) | | Ball nut dimensions | | | | | | | | | | | | | Seal dimensions | Total length with nut & seal | Internal spatial volume of nut (cm ³) | Standard volume of grease replenishing (cm ³) | |
|-----------|--------------|--------|------------------------|------------------------|---------------------|----------------|-----|----|--------|----|----------------|----|------------|------------|-----|----|------|-----------------|------------------------------|---|---|-------------------|
| | | | Dynamic C _a | Static C _{0a} | Dia | | | | Flange | | | | Nut length | Bolt holes | | | | | | | | Oil hole position |
| | | | | | D ₁ | D ₂ | A | G | H | B | L _n | W | | X | Y | Z | T | | | | | |
| HSS3205 | 32 | 5 | 18 500 | 56 100 | 57 | 58 | 85 | 32 | 42 | 13 | 89 | 71 | 6.6 | 11 | 6.5 | 33 | 9.5 | 108 | 10 | 5 | | |
| HSS3210 | 32 | 10 | 46 300 | 108 000 | 73 | 74 | 108 | 41 | 53.5 | 15 | 160 | 90 | 9 | 14 | 8.5 | 45 | 14.5 | 189 | 43 | 22 | | |

Notes 1. Maximum operating temperature: 80°C (at outside diameter of ball nut)

B-3-3.12 Equipped with "NSK K1" Lubrication Unit This product is being applied for a patent.

1. Features

NSK K1 is a new, efficient lubrication unit. Equipped with NSK K1, the ball screws demonstrate a superb performance as shown below.

- > Long-term, maintenance-free usage

In mechanical environments where lubrication is difficult to apply, long-term running efficiency is maintained by using the NSK K1 in combination with grease.

[ex.] For automotive component processing lines, etc.

- > Does not pollute the environment

A very small volume of grease combined with NSK K1 can provide sufficient lubrication in the environment where grease is undesirable as well as in the environment where high cleanliness is required.

[ex.] Food processing equipment, medical equipment, liquid crystal display/semiconductor manufacturing equipment, etc.

- > Good for environments where lubricant is washed away

When used with grease, life of the machine is prolonged even when the machine is washed entirely by water, or in an environment where the machine is exposed to rain or wind.

[ex.] Food processing equipment, housing/construction machines, etc.

- > Maintains efficiency in dusty environment

In environment where oil- and grease-absorbing dust is produced, long-term efficiency in lubrication and prevention from foreign inclusions are maintained by using the NSK K1 in combination with grease.

[ex.] Woodworking machines, etc.

- > Comparative duration test of samples with and without NSK K1

Sample, testing conditions and test result are shown in **Table 1** and **Fig. 1**.

Without lubricant, operation became impossible after running 8.6 km. With NSK K1 alone, it was possible to continue running exceeding 10 000 km.

NSK conducts various tests under different conditions.

Please consult NSK.

Table 1 Sample and testing conditions

| | |
|-------------|--|
| Ball screw | Shaft dia. 20 mm, lead 20 mm |
| Lubrication | Comparison with only NSK K1 against no lubrication |
| Speed | 4 000 min ⁻¹ (80 m/min) |
| Stroke | 600 mm |

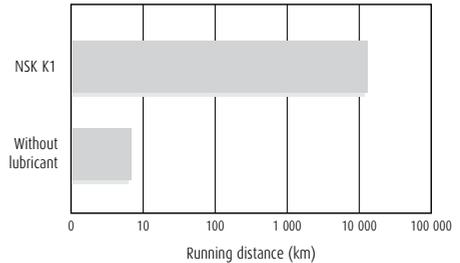


Fig. 1 Duration test results on ball screws without lubricant

2. Specifications

(1) Structure

The structure makes it possible to have a stable contact between the NSK K1 and outside of a ball screw with moderate force by a garter spring which fits onto outside of the NSK K1.

NSK K1 is installed between the ball screw nut and the labyrinth seal. The overall nut length is slightly longer than that of the standard ball screw.

Combination of NSK standard grease (factory-packed in the nut) and NSK K1 are standard specifications.



Fig. 2 NSK K1

(2) Accuracy grade and axial play


Accuracy grades, clearance and preload specifications remain unchanged from the existing products. There is a slight increase in torque due to the equipped NSK K1.

(3) Overall nut length after equipped with NSK K1

The nut length becomes longer than that of standard ball screws after equipped with NSK K1. The nut length after equipped with K1 is shown in pages B577 to B580 for each type of ball recirculation. NSK K1 can be installed on other types not listed in the dimension table. Please consult with NSK if you require the K1 for a special ball nut.

(4) Application examples

Ball screws equipped with NSK K1 are maintenance-free for a long period of time. Its application is expanding in various industries.

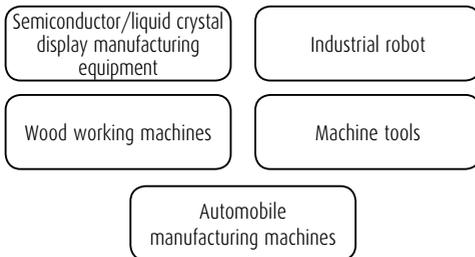

3. Precautions for use

Temperature range for use: Maximum temperature: 50°C
Momentary maximum temperature: 80°C

Chemicals that should not come to contact with K1:

Do not leave NSK K1 in organic solvent, white kerosene such as hexane, thinner which removes oil, and rust preventive oil which contains white kerosene.

Note: Water-type cutting oil, oil-type cutting oil, grease such as mineral-type AS2 and ester-type PS2 do not damage K1 Seal.

Note: NSK K1 is not applicable to the Compact FA series.

4. Example of reference number

A structure of "Reference number for ball screw" is as follows.

Note: "K1" is added at the end of "nut model code" and "Specifications number".


› Reference number for ball screw equipped with NSK K1

W1401 - ** P K1 - C3 Z10

NSK K1 equipped type ball screw code

Equipped with "NSK K1" lubrication unit

(1) Tube type

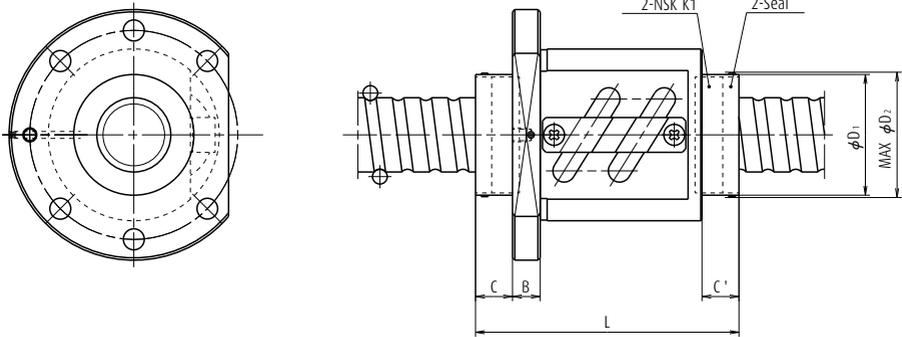

Tube type

| Model No. | Screw Shaft dia. d | Lead l | K1 installing dimension | | Frange width B | Overall length when equipped K1 L | K1 cap dimension | |
|--------------|--------------------|--------|-------------------------|----|----------------|-----------------------------------|---------------------------|---------------------------------------|
| | | | C | C' | | | Cap dia. φ D ₁ | Protruding dimension φ D ₂ |
| PFT1004-2.5 | 10 | 4 | 14 | 15 | 10 | 61.5 | φ 22 | MAX φ 24 |
| PFT1205-2.5 | 12 | 5 | 14 | 15 | 10 | 66 | φ 26.5 | MAX φ 29 |
| LPFT1210-2.5 | 12 | 10 | 14 | 17 | 10 | 79 | φ 26.5 | MAX φ 29 |
| PFT1405-2.5 | 14 | 5 | 14 | 15 | 10 | 65 | φ 30 | MAX φ 32 |
| LPFT1510-2.5 | 15 | 10 | 14 | 15 | 10 | 76 | φ 30 | MAX φ 32 |
| PFT1605-2.5 | 16 | 5 | 14 | 15 | 10 | 67 | φ 32 | MAX φ 34 |
| PFT2005-5 | 20 | 5 | 14 | 14 | 10 | 81 | φ 38 | MAX φ 40 |
| LPFT2010-2.5 | 20 | 10 | 14 | 14 | 10 | 78 | φ 38 | MAX φ 40 |
| LPFT2020-1.5 | 20 | 20 | 14 | 14 | 10 | 84 | φ 38 | MAX φ 40 |
| ZFT2505-10 | 25 | 5 | 16 | 17 | 10 | 115 | φ 44 | MAX φ 46 |
| PFT2506-5 | 25 | 6 | 16 | 17 | 12 | 93 | φ 44 | MAX φ 46 |
| PFT2510-2.5 | 25 | 10 | 16 | 17 | 12 | 89 | φ 44 | MAX φ 46 |
| ZFT2510-3 | 25 | 10 | 16 | 17 | 12 | 103 | φ 44 | MAX φ 46 |
| LPFT2520-2.5 | 25 | 20 | 12 | 12 | 12 | 109 | φ 38 | MAX φ 40 |
| LPFT2525-1.5 | 25 | 25 | 12 | 12 | 12 | 98 | φ 38 | MAX φ 40 |
| DFT2805-5 | 28 | 5 | 16 | 17 | 12 | 137 | φ 48 | MAX φ 50 |
| PFT2810-2.5 | 28 | 5 | 16 | 17 | 12 | 90 | φ 48 | MAX φ 50 |
| DFT2810-3 | 28 | 10 | 16 | 17 | 12 | 174 | φ 48 | MAX φ 50 |
| PFT3206-5 | 32 | 6 | 16 | 17 | 12 | 93 | φ 52 | MAX φ 54 |
| ZFT3206-10 | 32 | 6 | 16 | 17 | 12 | 129 | φ 52 | MAX φ 54 |
| PFT3210-5 | 32 | 10 | 16 | 17 | 12 | 122 | φ 52 | MAX φ 54 |
| ZFT3210-5 | 32 | 10 | 16 | 17 | 12 | 122 | φ 52 | MAX φ 54 |
| DFT3210-5 | 32 | 10 | 16 | 16 | 12 | 212 | φ 52 | MAX φ 54 |
| PFT3212-3 | 32 | 12 | 16 | 17 | 12 | 114 | φ 52 | MAX φ 54 |
| DFT3212-3 | 32 | 12 | 16 | 16 | 12 | 198 | φ 52 | MAX φ 54 |
| LPFT3225-2.5 | 32 | 25 | 12 | 12 | 12 | 122 | φ 46 | MAX φ 48 |
| LPFT3232-1.5 | 32 | 32 | 12 | 12 | 12 | 109 | φ 46 | MAX φ 48 |


Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.

| Model No. | Screw Shaft dia. d | Lead l | K1 installing dimension | | Frang width B | Overall length when equipped K1 L | K1 cap dimension | |
|--------------|--------------------|--------|-------------------------|----|---------------|-----------------------------------|---------------------|---------------------------------|
| | | | C | C' | | | Cap dia. ϕD_1 | Protruding dimension ϕD_2 |
| PFT3610-5 | 36 | 10 | 19 | 20 | 15 | 131 | $\phi 56$ | MAX $\phi 58$ |
| DFT3610-5 | 36 | 10 | 19 | 19 | 15 | 221 | $\phi 56$ | MAX $\phi 58$ |
| HZF3616-5 | 36 | 16 | 19 | 19 | 15 | 163 | $\phi 56$ | MAX $\phi 58$ |
| HZF3620-3.5 | 36 | 20 | 19 | 19 | 15 | 146 | $\phi 56$ | MAX $\phi 58$ |
| PFT4008-5 | 40 | 8 | 19 | 20 | 16 | 117 | $\phi 62$ | MAX $\phi 64$ |
| ZFT4008-10 | 40 | 8 | 19 | 20 | 16 | 165 | $\phi 62$ | MAX $\phi 64$ |
| ZFT4010-7 | 40 | 10 | 19 | 20 | 16 | 152 | $\phi 62$ | MAX $\phi 64$ |
| DFT4010-5 | 40 | 10 | 19 | 19 | 16 | 222 | $\phi 61$ | MAX $\phi 64$ |
| PFT4012-5 | 40 | 12 | 19 | 20 | 16 | 144 | $\phi 62$ | MAX $\phi 64$ |
| DFT4012-5 | 40 | 12 | 19 | 19 | 16 | 252 | $\phi 61$ | MAX $\phi 64$ |
| HZF4016-5 | 40 | 16 | 19 | 19 | 16 | 164 | $\phi 61$ | MAX $\phi 64$ |
| HZF4020-5 | 40 | 20 | 19 | 19 | 16 | 189 | $\phi 61$ | MAX $\phi 64$ |
| LPFT4032-2.5 | 40 | 32 | 14 | 14 | 16 | 151 | $\phi 54$ | MAX $\phi 56$ |
| LPFT4040-1.5 | 40 | 40 | 14 | 14 | 16 | 133 | $\phi 54$ | MAX $\phi 56$ |
| DFT4510-5 | 45 | 10 | 19 | 19 | 16 | 222 | $\phi 72$ | MAX $\phi 75$ |
| DFT4512-5 | 45 | 12 | 19 | 19 | 16 | 254 | $\phi 72$ | MAX $\phi 75$ |
| HZF4520-5 | 45 | 20 | 19 | 19 | 18 | 190 | $\phi 72$ | MAX $\phi 75$ |
| ZFT5010-10 | 50 | 10 | 19 | 20 | 18 | 194 | $\phi 73$ | MAX $\phi 76$ |
| DFT5012-5 | 50 | 12 | 19 | 19 | 18 | 256 | $\phi 73$ | MAX $\phi 76$ |
| ZFT5016-5 | 50 | 16 | 19 | 20 | 18 | 172 | $\phi 73$ | MAX $\phi 76$ |
| DFT5016-5 | 50 | 16 | 19 | 19 | 18 | 300 | $\phi 73$ | MAX $\phi 76$ |
| HZF5020-5 | 50 | 20 | 19 | 19 | 18 | 192 | $\phi 73$ | MAX $\phi 76$ |
| HZF5025-5 | 50 | 25 | 19 | 19 | 18 | 221 | $\phi 73$ | MAX $\phi 76$ |
| DFT5516-5 | 55 | 16 | 22 | 22 | 18 | 178 | $\phi 81$ | MAX $\phi 87$ |
| HZF5520-5 | 55 | 20 | 22 | 22 | 18 | 198 | $\phi 81$ | MAX $\phi 81$ |
| HZF5525-5 | 55 | 25 | 22 | 22 | 18 | 227 | $\phi 81$ | MAX $\phi 81$ |
| DFT6316-5 | 63 | 16 | 22 | 22 | 18 | 322 | $\phi 89$ | MAX $\phi 95$ |
| DFT6320-5 | 63 | 20 | 22 | 22 | 18 | 362 | $\phi 89$ | MAX $\phi 95$ |

Equipped with "NSK K1" lubrication unit

(2) Deflector(bridge) type

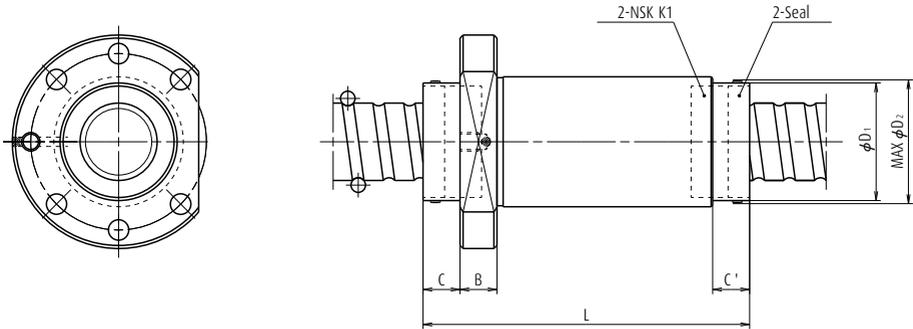


Deflector(bridge) type

| Model No. | Screw Shaft dia. d | Lead l | K1 installing dimension | | Frange width B | Overall length when equipped K1 L | K1 cap dimension | |
|-----------|--------------------|--------|-------------------------|----|----------------|-----------------------------------|---------------------|---------------------------------|
| | | | C | C' | | | Cap dia. ϕD_1 | Protruding dimension ϕD_2 |
| ZFD2005-6 | 20 | 5 | 9 | 9 | 12 | 87 | $\phi 32$ | MAX $\phi 34$ |
| ZFD2506-6 | 25 | 6 | 12 | - | 12 | 102 | $\phi 38$ | MAX $\phi 40$ |
| ZFD2510-4 | 25 | 10 | 12 | 12 | 12 | 106 | $\phi 38$ | MAX $\phi 40$ |
| ZFD3208-8 | 32 | 8 | 12 | 12 | 12 | 136 | $\phi 46$ | MAX $\phi 48$ |
| ZFD3210-6 | 32 | 10 | 12 | 12 | 12 | 138 | $\phi 46$ | MAX $\phi 48$ |
| ZFD3212-6 | 32 | 12 | 12 | 12 | 12 | 153 | $\phi 46$ | MAX $\phi 48$ |
| ZFD4010-8 | 40 | 10 | 14 | 14 | 16 | 167 | $\phi 54$ | MAX $\phi 57$ |
| ZFD4012-8 | 40 | 12 | 14 | 14 | 16 | 189 | $\phi 54$ | MAX $\phi 57$ |
| ZFD5010-8 | 50 | 10 | 14 | 14 | 18 | 169 | $\phi 64$ | MAX $\phi 67$ |
| ZFD5012-6 | 50 | 12 | 14 | 14 | 18 | 167 | $\phi 64$ | MAX $\phi 67$ |

Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.

(3) End cap type

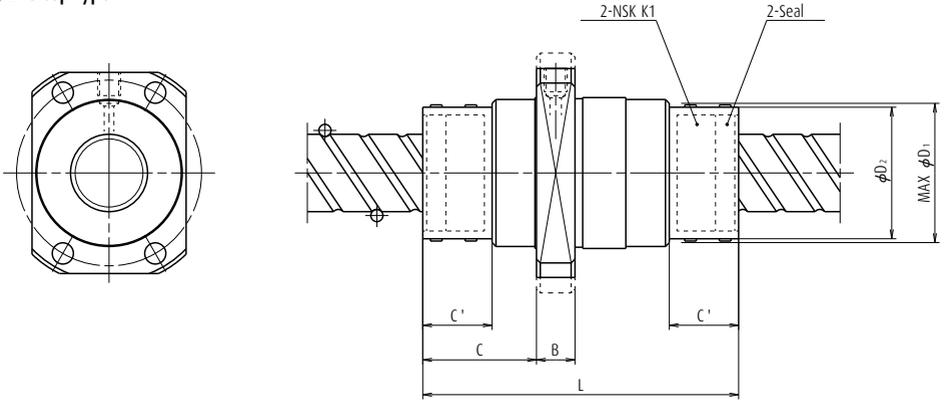

End cap type

| Model No. | Screw Shaft dia. d | Lead l | K1 installing dimension | | Frange width B | Overall length when equipped K1 L | K1 cap dimension | |
|--------------|-----------------------|-----------|-------------------------|----|-------------------|---|------------------------------|--|
| | | | C | C' | | | Cap dia. φ D ₁ | Protruding dimension φ D ₂ |
| UPFC1520-1.5 | 15 | 20 | 29 | 18 | 10 | 81 | φ 30 | MAX φ 32 |
| LPFC1616-3 | 16 | 16 | 28 | 18 | 10 | 74 | φ 28 | MAX φ 30 |
| LPFC2020-3 | 20 | 20 | 29.5 | 18 | 10 | 82 | φ 34 | MAX φ 36 |
| UPFC2040-1 | 20 | 40 | 29 | 18 | 10 | 77 | φ 32 | MAX φ 34 |
| LPFC2525-3 | 25 | 25 | 34 | 21 | 12 | 97 | φ 44 | MAX φ 46 |
| UPFC2550-1 | 25 | 50 | 34 | 21 | 12 | 92 | φ 44 | MAX φ 46 |
| LPFC3232-3 | 32 | 32 | 37 | 21 | 12 | 112 | φ 52 | MAX φ 54 |
| UPFC3264-1 | 32 | 64 | 36.5 | 21 | 12 | 104 | φ 52 | MAX φ 54 |
| LPFC4040-3 | 40 | 40 | 43.5 | 24 | 15 | 133 | φ 62 | MAX φ 65 |
| LPFC5050-3 | 50 | 50 | 43.5 | 24 | 20 | 155 | φ 74 | MAX φ 77 |


Notes

1. NSK K1 can be installed in other types not listed in the table. Please consult NSK.
2. C, C' and L are the dimensions when one NSK K1 is equipped to both ends of the nut.


B-3-3.13 Special Ball Screws

In addition to the standard ball screws, NSK manufactures various types of ball screws in special shapes as shown below.


Thoroughly discuss with NSK the specifications before determining specifications and ordering ball screws in special shapes.

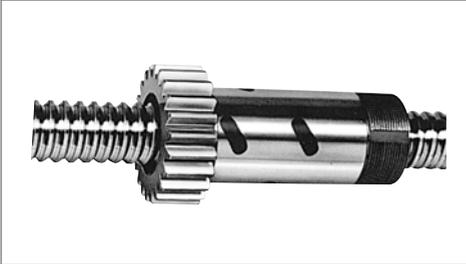


Nut with gear

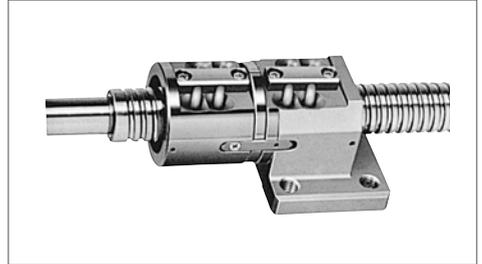


Double nut with flat mounting surface

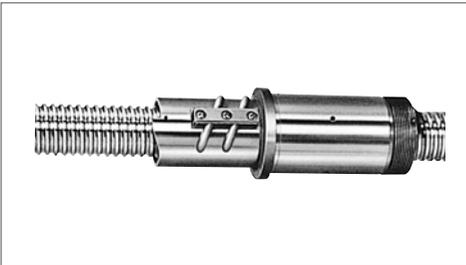

Lightly preloaded single nut with bearing seat

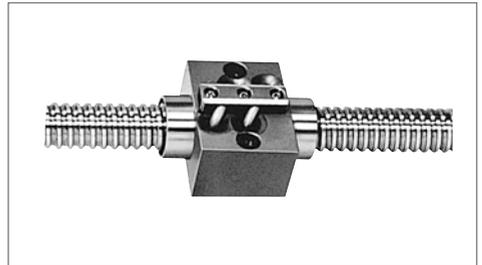


Lightly preloaded single nut with flat mounting surface

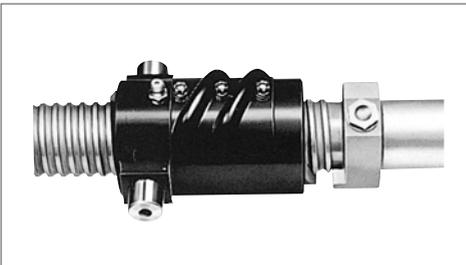


Nut with trunion




Hollow shaft, lightly preloaded single nut, with large shaft diameter and fine lead

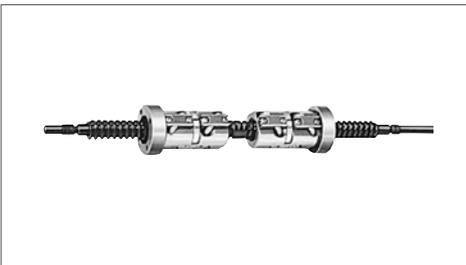

Double nut with right and left turn thread on each side of screw shaft

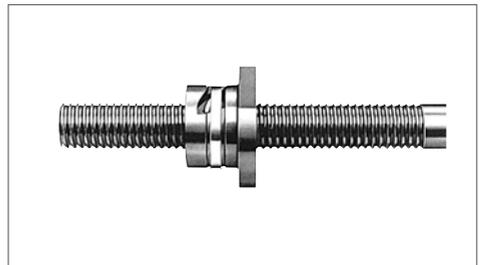

Ceramic ball screw

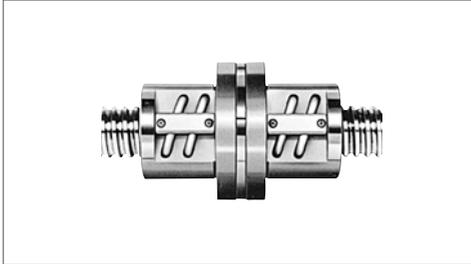


Flanged to flanged ball nut




Ball screw for aircraft




Cylindrical double nut

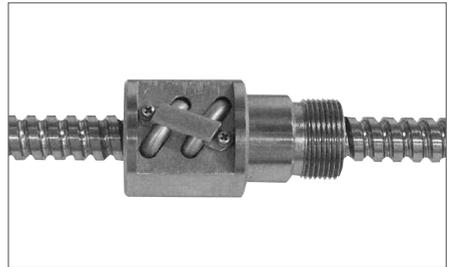

Ball screw for nuclear power plant

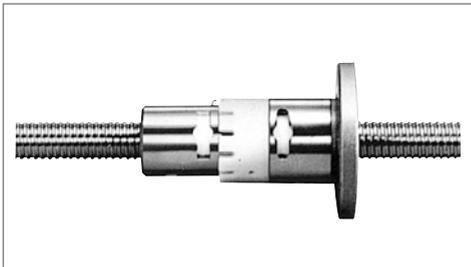

Spring preloaded ball screw

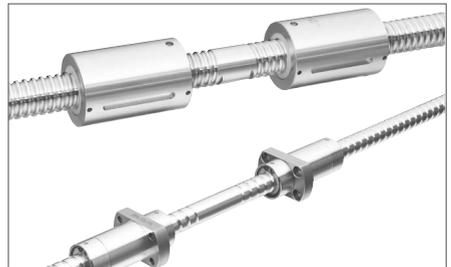


Right and left hand thread on each side of screw

C-1 Monocarrier

| | |
|--|-----|
| 1. Features | C5 |
| 2. Classification and Series | C7 |
| 3. Accessories | C9 |
| 4. Selection of Monocarrier | C10 |
| 4.1. Procedures for Selecting Monocarrier | C10 |
| 4.2. Rigidity | C10 |
| 4.3. Maximum Speed | C11 |
| 4.4. Accuracy Grade | C13 |
| 4.5. Stroke and Ball Screw Lead | C13 |
| 4.6. Basic Load Rating | C15 |
| 4.7. Estimation of Life Expectancy | C17 |
| 4.8. Example of Life Estimation | C19 |
| 5. MCM Series | C23 |
| 5.1. MCM Series Reference Number Coding | C25 |
| 5.2. MCM Series Dimension Table of Standard Products | C26 |
| 5.3. MCM Series Accessories | C47 |
| 6. MCH Series | C71 |
| 6.1. MCH Series Reference Number Coding | C73 |
| 6.2. MCH Series Dimension Table of Standard Products | C74 |
| 6.3. MCH Series Accessories | C81 |

C-2 Toughcarrier

| | |
|---|------|
| 1. Features | C93 |
| 2. Classification and Series | C93 |
| 3. Accessories | C95 |
| 4. Selection of Toughcarrier | C96 |
| 4.1. Selection Procedures | C96 |
| 4.2. Stroke and Lead | C97 |
| 4.3. Reference Number Coding and Accuracy Grade | C98 |
| 4.4. Maximum Speed | C99 |
| 4.5. Rigidity | C101 |
| 4.6. Basic Load Rating | C102 |
| 4.7. Estimation of Life Expectancy | C103 |
| 4.8. Example of Life Estimation | C105 |
| 5. TCH Series Dimension Table for Standard Products | C109 |
| 5.1. TCH06 Series | C109 |
| 5.2. TCH09 Series | C111 |
| 5.3. TCH10 Series | C113 |
| 6. Accessories | C115 |
| 6.1. Sensor Unit | C115 |
| 6.2. Cover Unit | C116 |
| 6.3. Motor Bracket | C119 |
| 7. Motor Bracket Compatibility Table | C128 |
| 8. Sensor Rail and Top Cover Unit Combination Table | C129 |
| 9. Toughcarrier High-Thrust Series | C132 |



Monocarrier

C-3 Technical Materials

| | |
|--|------|
| 1. Sensor Specification | C135 |
| 1.1 Proximity Switch | C135 |
| 1.2 Photo Sensor | C136 |
| 2. Characteristics and Evaluation Method | C137 |
| 2.1 Positioning Accuracy | C137 |
| 2.2 Repeatability | C137 |
| 2.3 Running Parallelism | C137 |
| 3. Special Specifications | C138 |
| 4. Maintenance | C139 |
| 4.1 Maintenance Method | C139 |
| 4.2 NSK K1 Lubricant Unit | C139 |
| 5. NSK Clean Grease LG2 Specification | C140 |

C3-C90

C91
-C132

C133
-C140

Toughcarrier

Monocarrier Toughcarrier

Monocarrier Toughcarrier


All-in-one structure (ball screw, linear guide and base integrated) results in a light and compact actuator without extra work for design or adjustment when installing. Design and assembly loads can be reduced by unit type. Also, the many variations make it possible to deal with many different uses.

Monocarrier and Toughcarrier Classifications

> Monocarrier




Rolling elements: Balls




> Toughcarrier: High load capacity




Rolling elements: Rollers



Procedure for Selecting Monocarrier and Toughcarrier models

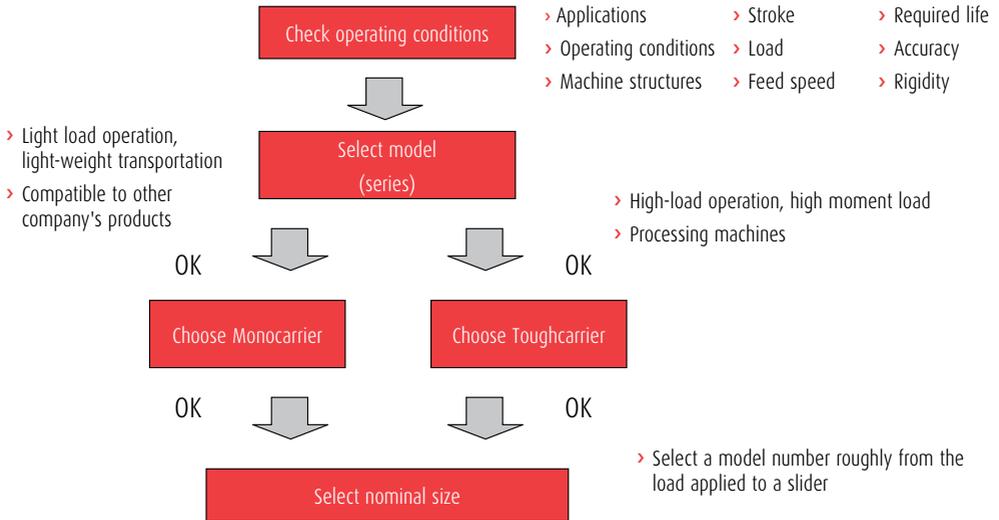

Monocarrier and Toughcarrier Composition

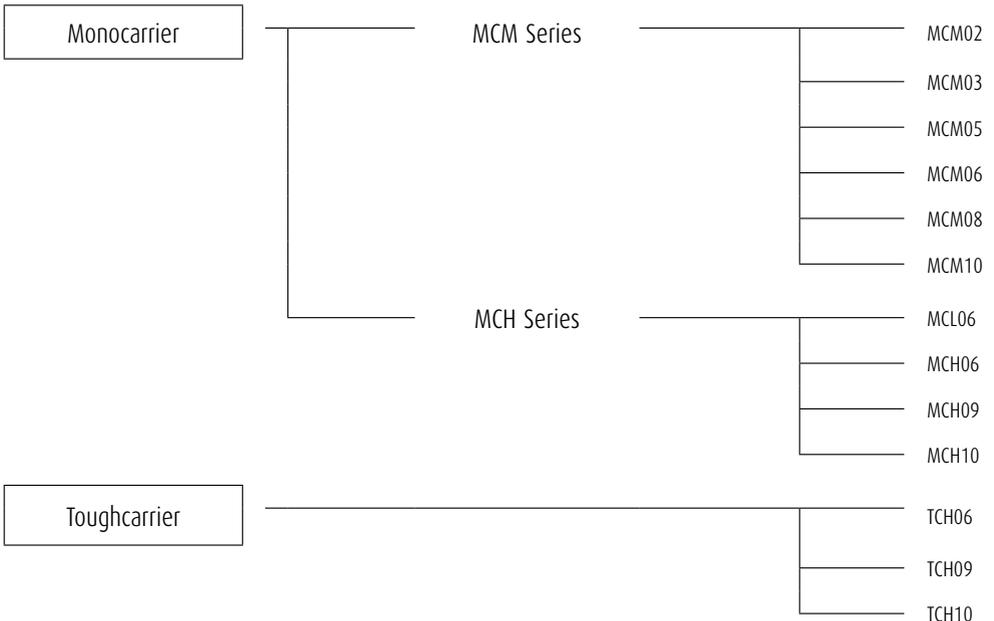

C-1 Monocarrier

C-1 Monocarrier

| | Page |
|---|------|
| 1 Features | C5 |
| 2 Classification and Series | C7 |
| 3 Accessories | C9 |
| 4 Selection of Monocarrier | C10 |
| 4.1 Procedures for Selecting Monocarrier | C10 |
| 4.2 Rigidity..... | C10 |
| 4.3 Maximum Speed..... | C11 |
| 4.4 Accuracy Grade | C13 |
| 4.5 Stroke and Ball Screw Lead | C13 |
| 4.6 Basic Load Rating..... | C15 |
| 4.7 Estimation of Life Expectancy | C17 |
| 4.8 Example of Life Estimation..... | C19 |
| 5 MCM Series | C23 |
| 5.1 MCM Series Reference Number Coding | C25 |
| 5.2 MCM Series Dimension Table of Standard Products | C26 |
| 5.3 MCM Series Accessories | C47 |
| 6 MCH Series | C71 |
| 6.1 MCH Series Reference Number Coding | C73 |
| 6.2 MCH Series Dimension Table of Standard Products | C74 |
| 6.3 MCH Series Accessories | C81 |

C-1 Monocarrier

C-1-1 Features

NSK's Monocarrier is the culmination of technology and innovation in linear motion. This lightweight, compact single axis linear actuator integrates quality NSK ball screw, linear guide and support bearings into one unit.

1

Light weight, compact design

- Available in two different shapes of cross-section, depending on application.
Light weight type: MCM Series
Rigid type: MCH Series

2

All -in-one structure

- The all-in-one structure integrates a ball screw, a linear guide and support bearings into a single unit to significantly reduce design and installation time.
- Multiple datum planes, the bottom and a lateral side of the rail, facilitate highly accurate installation.
- Immediate operation after installation and run-in is possible.
- A wide selection of fine to high helix leads are available.



Built in support bearings

M O N O C

4 Long term maintenance free

- › Use of NSK K1 Lubrication Units and grease maintains a smooth lubricating performance for long periods in mechanical environments where lubrication is difficult to apply, where use of oil is not permitted because of hygienic issues, or where the mechanical equipment is subjected to frequent wash downs.
- › NSK K1 lubrication unit is available for food processing machines and medical equipment.
- › Grease for clean environments and for general machinery is available.

3 Superb antirust capability

- › Low temperature chrome plating is a standard feature for the bodies and sliders to control rusting in normal operating and storing environments. Fluoride low temperature chrome plating is optionally available for much higher rust prevention.



5 Quick Delivery

ARRIER

C-1-2 Classification and Series


Table 2.1

| | Light Weight | Beam Rigidity | Moment Rigidity |
|------------|--------------|---------------|-----------------|
| MCM Series | ◎ | ○ | ○ |
| MCH Series | ○ | ◎ | ○ |


◎: Excellent ○: Suitable in use

[MCM Series Cross-sections]

MCM02



MCM06




MCM03


(Lead 1 and 2 mm)

(Lead 5, 10 and 12 mm)


(Lead 15 mm)

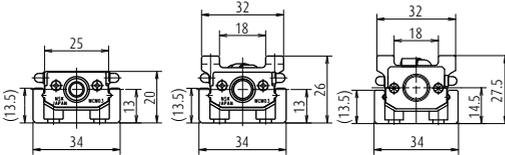

MCM08



MCM05



MCM10




Fig. 2.1

| Accuracy | Long Stroke | Size Variation |
|----------|-------------|----------------|
| ○ | ○ | ○ |
| ◎ | ◎ | ○ |

[MCH Series Cross-sections]

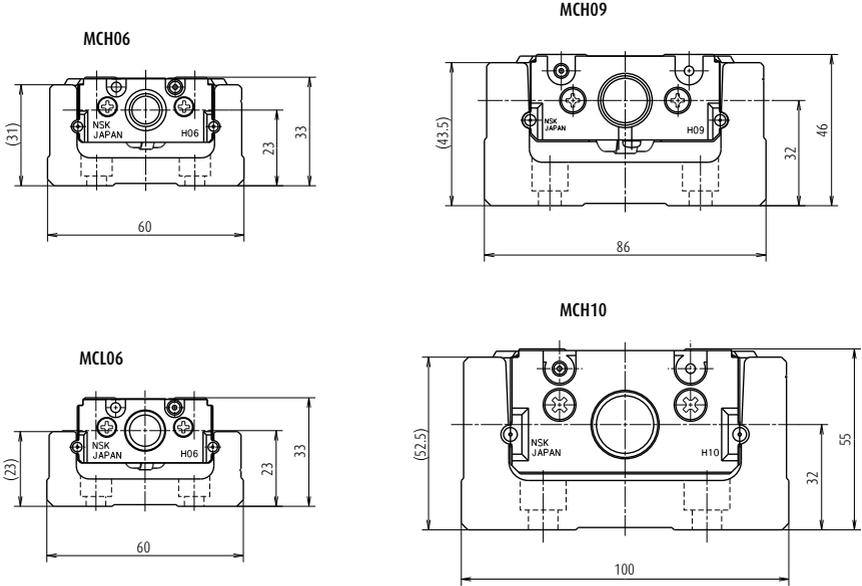


Fig. 2.2

C-1-3 Accessories

MCM Series

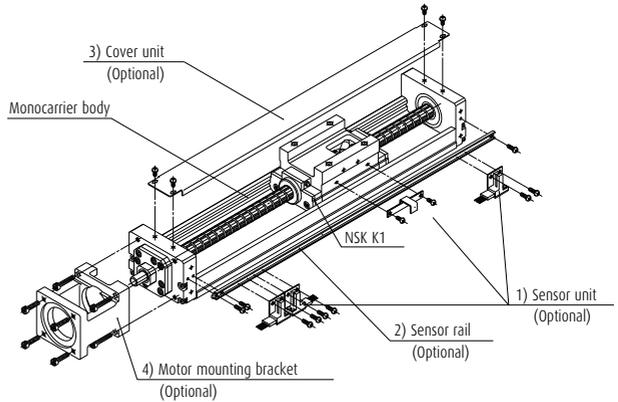


Fig. 3.1 Assembly: Accessories for MCM10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.

* When a sensor unit is used, the full cover unit cannot be used.

2) Sensor rail: Rail for sensor mounting is available.

3) Cover unit: Top cover or full cover (included top cover and side cover) is available.

4) Motor bracket for motor mounting: Available for a variety of models.

Note: We assemble accessories upon request.

MCH Series

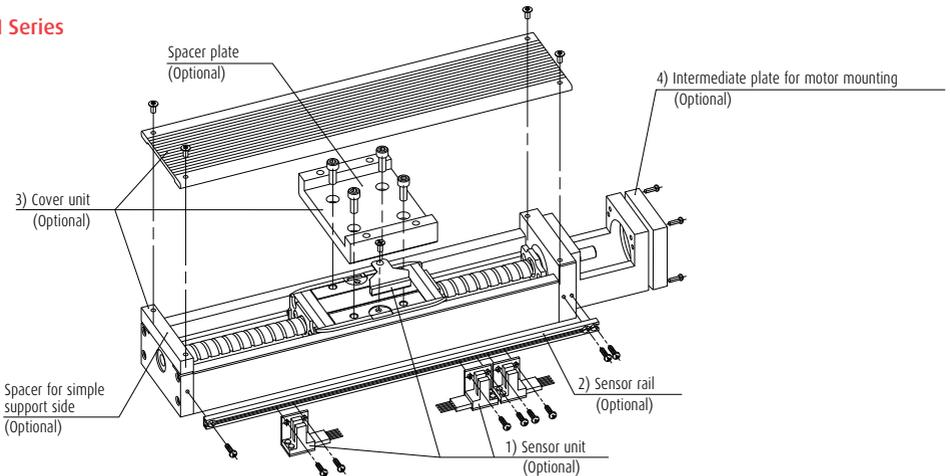


Fig. 3.2 Assembly: Accessories for MCH10 (example)

1) Sensor unit: Sensors, sensor mounting parts and a sensor dog are available in a set.

2) Sensor rail: Rail for sensor mounting is available.

3) Cover unit: Top cover (included spacer plate and spacer for simple support side) is available.

4) Intermediate plate for motor mounting: Available for a variety of models.

Note: We assemble accessories upon request.

Selection

C-1-4 Selection of Monocarrier

C-1-4. 1 Procedures for Selecting Monocarrier

Select a model number of Monocarrier based on stroke and rigidity (refer to **Figs. 4.2, and 4.3**).



Select a ball screw lead referring to "**C-1-4.3 Maximum Speed**" so that the rotational speed does not exceed the limit.



Study the loads to be applied to the linear guide and obtain the equivalent load (F_e) substituting them for equation 1) or 2) on page C17. Obtain the mean effective load (F_m) substituting them for equation 3) on page C18, then calculate the life.



Study the loads to be applied to the ball screw and support unit. Obtain the mean effective load (F_m) substituting them for equation 3) on page C18, then calculate the life.

C-1-4. 2 Rigidity

Rigidity of rail

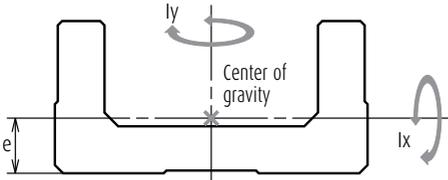


Fig. 4.1

Table 4.1 Rigidity of rail

| Model No. | Geometrical moment of inertia $\times 10^4$ (mm ⁴) | | Center of gravity (mm) | Mass (kg/100 mm) |
|-----------|--|----------------|------------------------|------------------|
| | I _x | I _y | e | w |
| MCM02 | 0.097 | 1.32 | 3.3 | 0.11 |
| MCM03 | 0.30 | 3.3 | 4.5 | 0.18 |
| MCM05 | 0.78 | 11.4 | 6.0 | 0.31 |
| MCM06 | 2.14 | 26.1 | 7.0 | 0.57 |
| MCM08 | 5.90 | 81.0 | 9.2 | 0.88 |
| MCM10 | 15.6 | 219 | 12.2 | 1.52 |
| MCH06 | 6.5 | 38.2 | 10.8 | 0.67 |
| MCL06 | 2.58 | 29.6 | 7.8 | 0.56 |
| MCH09 | 28.7 | 172 | 15.5 | 1.48 |
| MCH10 | 54.0 | 307 | 18 | 1.93 |

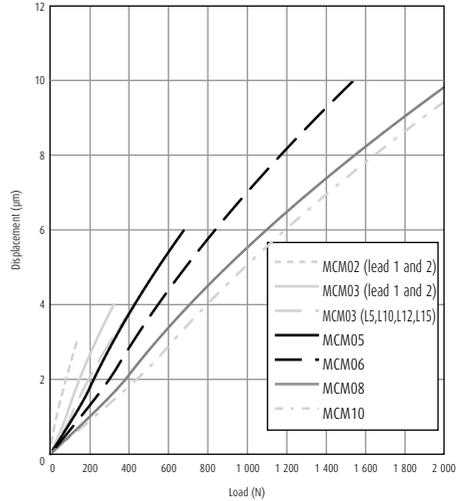


Fig. 4.2 MCM Series rigidity in radial direction

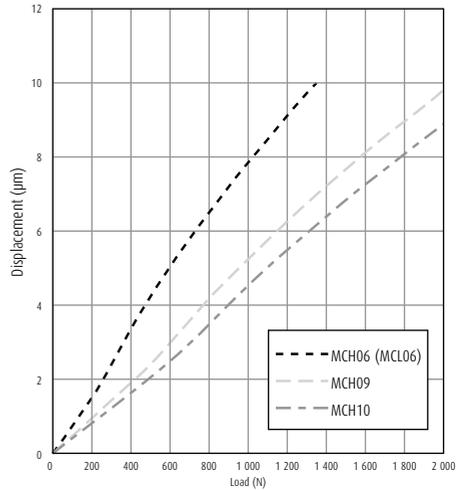


Fig. 4.3 MCH Series rigidity in radial direction

C-1-4. 3 Maximum Speed

(1) Maximum Speed of MCM Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and $d \cdot n$ value.

Do not exceed maximum speeds on the table below.

Table 4.2

| | Ball screw lead | Stroke (mm) | Rail length L ₂ (mm) | Maximum speed (mm/s) | | | |
|------------------------|-----------------|-------------|---------------------------------|----------------------|-------|-----|-----|
| MCM02 Single slider | 1 | 50 | 100 | 50 | | | |
| | 1 | 100 | 150 | 50 | | | |
| | 1 | 150 | 200 | 50 | | | |
| | 2 | 50 | 100 | 100 | | | |
| | 2 | 100 | 150 | 100 | | | |
| | 2 | 150 | 200 | 100 | | | |
| MCM03 Single slider | 1 | 50 | 115 | 50 | | | |
| | 1 | 100 | 190 | 50 | | | |
| | 1 | 150 | 240 | 50 | | | |
| | 2 | 50 | 115 | 100 | | | |
| | 2 | 100 | 190 | 100 | | | |
| | 2 | 150 | 240 | 100 | | | |
| | 5 | 50 | 140 | 340 | 250 | | |
| | | 250 | 340 | | | | |
| | | 10 | 50 | 140 | | 340 | |
| | | | 250 | 340 | | | |
| | | 12 | 50 | 140 | | 340 | 600 |
| | | | 250 | 340 | | | |
| 15 | 50 | 140 | 340 | 750 | | | |
| | 250 | 340 | | | | | |
| MCM05 Single slider | 5 | 50 | 180 | 250 | | | |
| | 600 | 730 | | | | | |
| | 10 | 50 | 180 | 730 | 500 | | |
| | | 600 | 730 | | | | |
| | 20 | 50 | 180 | 730 | 1 000 | | |
| | | 600 | 730 | | | | |
| | 30 | 300 | 430 | 530 | 2 500 | | |
| | | 400 | 530 | | | | |
| | 30 | 500 | 630 | 730 | 2 160 | | |
| | | 600 | 730 | | | | |
| 30 | 600 | 730 | 730 | 1 570 | | | |
| | 600 | 730 | | | | | |
| MCM05 Double slider | 10 | 60 | 280 | 500 | | | |
| | 510 | 730 | | | | | |
| | 20 | 210 | 430 | 730 | 1 000 | | |
| | | 510 | 730 | | | | |
| MCM06 Single slider | 5 | 50 | 190 | 250 | | | |
| | 700 | 840 | | | | | |
| | 5 | 800 | 940 | 190 | | | |
| | 700 | 840 | | | | | |
| | 10 | 50 | 190 | 840 | 500 | | |
| | | 700 | 840 | | | | |
| | 10 | 800 | 940 | 940 | 390 | | |
| | | 300 | 440 | | | | |
| | 20 | 300 | 440 | 740 | 1 000 | | |
| | | 600 | 740 | | | | |
| 20 | 700 | 840 | 940 | 990 | | | |
| | 800 | 940 | | | | | |
| 20 | 800 | 940 | 940 | 780 | | | |
| | 800 | 940 | | | | | |

| | Ball screw lead | Stroke (mm) | Rail length L ₂ (mm) | Maximum speed (mm/s) | |
|------------------------|-----------------|-------------|---------------------------------|----------------------|-------|
| MCM06 Double slider | 5 | 110 | 340 | 250 | |
| | | 410 | 640 | | |
| | 10 | 110 | 340 | 500 | |
| | | 710 | 940 | | |
| | 20 | 210 | 440 | 1 000 | |
| | | 710 | 940 | | |
| MCM08 Single slider | 5 | 50 | 220 | 250 | |
| | 700 | 870 | | | |
| | 5 | 800 | 970 | 190 | |
| | 700 | 970 | | | |
| | 10 | 50 | 220 | 770 | 500 |
| | | 600 | 770 | | |
| | 10 | 700 | 870 | 870 | 490 |
| | 800 | 970 | | | |
| | 10 | 50 | 220 | 770 | 1 000 |
| | | 600 | 770 | | |
| | 20 | 700 | 870 | 870 | 980 |
| | | 800 | 970 | | |
| | 20 | 50 | 220 | 770 | 1 000 |
| | | 600 | 770 | | |
| | 20 | 700 | 870 | 870 | 980 |
| | | 800 | 970 | | |
| | 30 | 400 | 570 | 570 | 2 500 |
| | | 500 | 670 | | |
| 30 | 600 | 770 | 770 | 1 830 | |
| | 700 | 870 | | | |
| 30 | 700 | 870 | 870 | 1 400 | |
| | 700 | 870 | | | |
| MCM08 Double slider | 10 | 80 | 370 | 500 | |
| | | 680 | 970 | | |
| | 20 | 180 | 470 | 970 | 1 000 |
| | | 680 | 970 | | |
| MCM10 Single slider | 10 | 100 | 280 | 500 | |
| | 800 | 980 | | | |
| | 10 | 900 | 1 080 | 420 | |
| | 1 000 | 1 180 | | | |
| | 10 | 1 000 | 1 180 | 340 | |
| | 1 000 | 1 180 | | | |
| | 20 | 100 | 280 | 980 | 1 000 |
| | | 800 | 980 | | |
| | 20 | 900 | 1 080 | 1 080 | 840 |
| | | 1 000 | 1 180 | | |
| 20 | 500 | 680 | 680 | 2 500 | |
| | 600 | 780 | | | |
| 30 | 600 | 780 | 780 | 2 430 | |
| | 700 | 880 | | | |
| 30 | 700 | 880 | 880 | 1 870 | |
| | 800 | 980 | | | |
| 30 | 800 | 980 | 980 | 1 480 | |
| | 800 | 980 | | | |
| MCM10 Double slider | 10 | 70 | 380 | 500 | |
| | | 670 | 980 | | |
| | 10 | 870 | 1 180 | 1 180 | 450 |
| | | 170 | 480 | | |
| | 20 | 670 | 980 | 980 | 1 000 |
| | | 870 | 1 180 | | |
| 20 | 870 | 1 180 | 1 180 | 910 | |
| | 870 | 1 180 | | | |

Note When operating Monocarriers near critical speed or exceeding maximum speed in the table, please consult NSK.

Note When operating Monocarriers near critical speed or exceeding maximum speed in the table, please consult NSK.

(2) Maximum Speed of MCH Series

Maximum speed of Monocarrier is determined by critical speed of ball screw shaft and $d \cdot n$ value.

Do not exceed maximum speeds on the table below.

Table 4.3

| | Ball screw lead | Stroke (mm) | Rail length L_2 (mm) | Maximum speed (mm/s) |
|---------------------------------|-----------------|-------------|------------------------|----------------------|
| MCH06 MCL06 Single slider | 5 | 50 | 150 | 250 |
| | | } | } | |
| | | 500 | 600 | |
| | 10 | 50 | 150 | 500 |
| | | } | } | |
| | | 500 | 600 | |
| 20 | 50 | 150 | 1 000 | |
| | } | } | | |
| | 500 | 600 | | |
| MCH06 Double slider | 5 | 100 | 300 | 250 |
| | | } | } | |
| | | 300 | 400 | |
| | 10 | 100 | 300 | 500 |
| | | } | } | |
| | | 400 | 600 | |
| 20 | 400 | 600 | 1 000 | |
| | | | | |
| | | | | |
| MCH09 Single slider | 5 | 100 | 240 | 250 |
| | | } | } | |
| | | 700 | 840 | |
| | 5 | 800 | 940 | 210 |
| | | | | |
| | | | | |
| | 10 | 100 | 240 | 500 |
| | | } | } | |
| | | 700 | 840 | |
| | | | | |
| 10 | 800 | 940 | 410 | |
| | | | | |
| | | | | |
| | | | | |
| 20 | 100 | 240 | 1 000 | |
| | } | } | | |
| | 700 | 840 | | |
| | | | | |
| 20 | 800 | 940 | 830 | |
| | | | | |
| | | | | |
| | | | | |

Note When operating Monocarriers near critical speed or exceeding maximum speed in the table, please consult NSK.

| | Ball screw lead | Stroke (mm) | Rail length L_2 (mm) | Maximum speed (mm/s) |
|------------------------|-----------------|-------------|------------------------|----------------------|
| MCH09 Double slider | 5 | 150 | 440 | 250 |
| | | } | } | |
| | | 350 | 640 | |
| | 10 | 150 | 440 | 500 |
| | | } | } | |
| | | 650 | 940 | |
| 20 | 450 | 440 | 1 000 | |
| | | 940 | | 1 000 |
| | 10 | 100 | 280 | 500 |
| | | } | } | |
| MCH10 Single slider | 10 | 800 | 980 | 420 |
| | | 900 | 1 080 | |
| | | 1 000 | 1 180 | |
| | 10 | 1 100 | 1 280 | 290 |
| | | 1 200 | 1 380 | |
| | | | | |
| 20 | 100 | 280 | 1 000 | |
| | | } | | } |
| | | 800 | | 980 |
| | 900 | 1 080 | 840 | |
| | | 1 000 | | 1 180 |
| | | 1 100 | | 1 280 |
| 1 200 | 1 380 | 580 | | |
| | | | | |
| | | | | |
| MCH10 Double slider | 10 | 250 | 580 | 500 |
| | | } | } | |
| | | 650 | 980 | |
| | 20 | 250 | 580 | 1 000 |
| | | | 750 | |
| | | 850 | 1 180 | 910 |
| 950 | | | 1 280 | |
| 1 050 | 1 380 | 760 | | |
| | | | | |

Note When operating Monocarriers near critical speed or exceeding maximum speed in the table, please consult NSK.

C-1-4. 4 Accuracy Grade

The accuracy grade of Monocarrier standard series is high grade (H), except for lead 1 and 2 mm of MCM02, and MCM03. When you require strokes longer than 1 200 mm, please consult NSK about the accuracy grade.

Table 4.4

Unit : μm

| Accuracy | High grade (H) | | | Precision (P) | | | |
|----------|----------------|---------------|--------------------------------|---------------|---------------|----------------------|--------------------------------|
| | Stroke (mm) | Repeatability | Running Parallelism (vertical) | Backlash | Repeatability | Positioning accuracy | Running Parallelism (vertical) |
| - 200 | ± 10 | 14 | 20 or less | ± 3 | 20 | 8 | 3 or less |
| - 400 | ± 10 | 16 | 20 or less | ± 3 | 25 | 10 | 3 or less |
| - 600 | ± 10 | 20 | 20 or less | ± 3 | 30 | 12 | 3 or less |
| - 700 | ± 10 | 23 | 20 or less | ± 3 | 30 | 15 | 3 or less |
| - 1 000 | ± 10 | 23 | 20 or less | ± 3 | 35 | 15 | 3 or less |
| - 1 200 | ± 10 | 30 | 20 or less | ± 3 | 40 | 20 | 3 or less |

C-1-4. 5 Stroke and Ball Screw Lead

(1) MCM Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.5 Single slider

Unit : mm

| Model No. | MCM02 | | MCM03 | | | | | MCM05 | | | MCM06 | | | MCM08 | | | MCM10 | | |
|-----------|-------|---|-------|---|---|----|----|-------|---|----|-------|----|---|-------|----|----|-------|----|----|
| | 1 | 2 | 1 | 2 | 5 | 10 | 12 | 15 | 5 | 10 | 20 | 30 | 5 | 10 | 20 | 30 | 10 | 20 | 30 |
| 50 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | |
| 100 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 150 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 200 | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 250 | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 300 | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 400 | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 500 | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 600 | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 700 | | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 800 | | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 900 | | | | | | | | | | | | | | | | | ✓ | ✓ | |
| 1 000 | | | | | | | | | | | | | | | | | ✓ | ✓ | |

Table 4.6 Double slider

Unit : mm

| Model No. | MCM05 | | MCM06 | | | MCM08 | | MCM10 | |
|-----------|-------|----|-------|----|----|-------|----|-------|----|
| | 10 | 20 | 5 | 10 | 20 | 10 | 20 | 10 | 20 |
| 60 | ✓ | | | | | | | | |
| 70 | | | | | | | | | ✓ |
| 80 | | | | | | | | | |
| 110 | ✓ | | ✓ | ✓ | | | | | |
| 160 | ✓ | | | | | | | | |
| 170 | | | | | | | | | ✓ |
| 180 | | | | | | | | ✓ | ✓ |
| 210 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | |
| 270 | | | | | | | | | ✓ |
| 280 | | | | | | | | ✓ | ✓ |
| 310 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | |
| 370 | | | | | | | | | ✓ |
| 380 | | | | | | | | ✓ | ✓ |
| 410 | ✓ | ✓ | ✓ | ✓ | ✓ | | | | |
| 470 | | | | | | | | | ✓ |
| 480 | | | | | | | | ✓ | ✓ |
| 510 | ✓ | ✓ | | ✓ | ✓ | | | | |
| 570 | | | | | | | | | ✓ |
| 580 | | | | | | | | ✓ | ✓ |
| 610 | | | | ✓ | ✓ | | | | |
| 670 | | | | | | | | | ✓ |
| 680 | | | | | | | | ✓ | ✓ |
| 710 | | | | ✓ | ✓ | | | | |
| 870 | | | | | | | | | ✓ |

Note Please consult NSK about double slider of MCM02 and MCM03.

(2) MCH Series Standard Combinations of Stroke and Ball Screw Lead

Table 4.7 Single slider

Unit : mm

| Model No. | MCH06 | | | MCH09 | | | MCH10 | |
|-----------|-------|----|----|-------|----|----|-------|----|
| | 5 | 10 | 20 | 5 | 10 | 20 | 10 | 20 |
| 50 | ✓ | ✓ | ✓ | | | | | |
| 100 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 200 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 300 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 400 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 500 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 600 | | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 700 | | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 800 | | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| 900 | | | | | | | ✓ | ✓ |
| 1 000 | | | | | | | ✓ | ✓ |
| 1 100 | | | | | | | ✓ | ✓ |
| 1 200 | | | | | | | ✓ | ✓ |

Table 4.8 Double slider

Unit : mm

| Model No. | MCH06 | | | MCH09 | | | MCH10 | |
|-----------|-------|----|----|-------|----|----|-------|----|
| | 5 | 10 | 20 | 5 | 10 | 20 | 10 | 20 |
| 100 | ✓ | ✓ | | | | | | |
| 150 | | | | ✓ | ✓ | | | |
| 200 | ✓ | ✓ | | | | | | |
| 250 | | | | ✓ | ✓ | | ✓ | ✓ |
| 300 | ✓ | ✓ | | | | | | |
| 350 | | | | ✓ | ✓ | | ✓ | ✓ |
| 400 | | ✓ | ✓ | | | | | |
| 450 | | | | | ✓ | ✓ | ✓ | ✓ |
| 550 | | | | | | | ✓ | ✓ |
| 650 | | | | | ✓ | ✓ | ✓ | ✓ |
| 750 | | | | | | | | ✓ |
| 850 | | | | | | | | ✓ |
| 950 | | | | | | | | ✓ |
| 1 050 | | | | | | | | ✓ |

Table 4.9 Limitations

| | Model No. | Lead (mm) | Slider | Stroke (mm) |
|------------|-----------|-------------|--------|-------------|
| MCM series | MCM02 | 1,2 | Single | 150 |
| | MCM03 | 1,2 | Single | 150 |
| | MCM03 | 5,10,12,15 | Single | 350 |
| | MCM05 | 5,10,20,30* | Single | 900 |
| | MCM05 | 5,10,20,30* | Double | 810 |
| | MCM06 | 5,10,20 | Single | 1 000 |
| | MCM06 | 5,10,20 | Double | 910 |
| | MCM08 | 5,10,20,30* | Single | 1 000 |
| | MCM08 | 5,10,20,30* | Double | 880 |
| | MCM10 | 10,20,30* | Single | 1 750 |
| MCM10 | 10,20,30* | Double | 1 600 | |
| MCH series | MCH06 | 5,10,20 | Single | 600 |
| | MCH06 | 5,10,20 | Double | 500 |
| | MCH09 | 5,10,20 | Single | 1 000 |
| | MCH09 | 5,10,20 | Double | 850 |
| | MCH10 | 10,20 | Single | 1 750 |
| | MCH10 | 10,20 | Double | 1 600 |
| | MCL06 | 5,10,20 | Single | 500 |

*) Applicable only to single slider

C-1-4. 6 Basic Load Rating

(1) MCM Series Basic Load Rating

Table 4.10 Basic Load Rating

| Model No. | Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating(N) | | | | Basic static load rating(N) | | Support unit Limit load (N) |
|-----------|-------------|------------------|------------------------------|----------------|-----------------------------|--|-----------------------------|-----------------------------|-----------------------------|
| | | | Ball screw C _a | Linear guide C | Support unit C _a | Rated running distance L _r (km) | Ball screw C _{0a} | Linear guide C ₀ | |
| MCM02 | 1 | φ 6 | 340(High grade) | 4 910 | 615 | 1 | 555(High grade) | 2 120 | 490 |
| MCM02 | 1 | φ 6 | 405(Precision) | 4 910 | 615 | 1 | 615(Precision) | 2 120 | 490 |
| MCM02 | 2 | φ 6 | 340(High grade) | 3 900 | 615 | 2 | 555(High grade) | 2 120 | 490 |
| MCM02 | 2 | φ 6 | 405(Precision) | 3 900 | 615 | 2 | 615(Precision) | 2 120 | 490 |
| MCM03 | 1 | φ 6 | 735 | 10 900 | 2 670 | 1 | 1 230 | 4 900 | 1 040 |
| MCM03 | 2 | φ 6 | 735 | 8 650 | 2 670 | 2 | 1 230 | 4 900 | 1 040 |
| MCM03 | 5 | φ 8 | 1 810 | 7 850 | 2 670 | 5 | 2 880 | 6 620 | 1 040 |
| MCM03 | 10 | φ 8 | 1 230 | 6 250 | 2 670 | 10 | 1 690 | 6 620 | 1 040 |
| MCM03 | 12 | φ 8 | 1 230 | 5 880 | 2 670 | 12 | 1 690 | 6 620 | 1 040 |
| MCM03 | 15 | φ 10 | 1 760 | 5 440 | 2 670 | 15 | 2 680 | 6 620 | 1 040 |
| MCM05 | 5 | φ 12 | 3 760 | 15 600 | 4 400 | 5 | 6 310 | 10 900 | 1 450 |
| MCM05 | 10 | φ 12 | 2 420 | 12 400 | 4 400 | 10 | 3 790 | 10 900 | 1 450 |
| MCM05 | 20 | φ 12 | 2 420 | 9 850 | 4 400 | 20 | 3 790 | 10 900 | 1 450 |
| MCM05 | 30 | φ 12 | 3 260 | 8 600 | 6 550 | 30 | 5 400 | 10 900 | 2 730 |
| MCM06 | 5 | φ 15 | 7 070 | 25 200 | 6 550 | 5 | 12 800 | 17 000 | 2 730 |
| MCM06 | 10 | φ 15 | 7 070 | 20 000 | 6 550 | 10 | 12 800 | 17 000 | 2 730 |
| MCM06 | 20 | φ 15 | 4 560 | 15 900 | 6 550 | 20 | 7 730 | 17 000 | 2 730 |
| MCM08 | 5 | φ 15 | 7 070 | 30 800 | 7 100 | 5 | 12 800 | 22 800 | 3 040 |
| MCM08 | 10 | φ 15 | 7 070 | 24 400 | 7 100 | 10 | 12 800 | 22 800 | 3 040 |
| MCM08 | 20 | φ 15 | 4 560 | 19 400 | 7 100 | 20 | 7 730 | 22 800 | 3 040 |
| MCM08 | 30 | φ 15 | 5 070 | 16 930 | 7 100 | 30 | 8 730 | 22 800 | 3 040 |
| MCM10 | 10 | φ 20 | 11 000 | 33 500 | 7 600 | 10 | 21 100 | 29 400 | 3 380 |
| MCM10 | 20 | φ 20 | 7 060 | 26 600 | 7 600 | 20 | 12 700 | 29 400 | 3 380 |
| MCM10 | 30 | φ 20 | 11 700 | 23 200 | 7 600 | 30 | 22 700 | 29 400 | 3 380 |

Notes > Basic dynamic and static load ratings indicate values for one slider. > Basic dynamic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue. > Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. > Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue. > Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at diameter of 0.01%.

Table 4.11 Basic static moment load of linear guide

| Model No. | Lead (mm) | Slider | Basic static moment (N × m) | | |
|-----------|----------------|--------|-----------------------------|--------------------------|------------------------|
| | | | Rolling M _{Ro} | Pitching M _{Po} | Yawing M _{Yo} |
| MCM02 | 1, 2 | Single | 24 | 8 | 8 |
| MCM03 | 1, 2 | Single | 68 | 28 | 28 |
| MCM03 | 5, 10, 12, 15 | Single | 92 | 51 | 51 |
| MCM05 | 5, 10, 20, 30° | Single | 229 | 89 | 89 |
| MCM05 | 5, 10, 20, 30° | Double | 455 | 765 | 765 |
| MCM06 | 5, 10, 20 | Single | 415 | 174 | 174 |
| MCM06 | 5, 10, 20 | Double | 825 | 1 220 | 1 220 |
| MCM08 | 5, 10, 20, 30° | Single | 770 | 300 | 300 |
| MCM08 | 5, 10, 20, 30° | Double | 1 540 | 2 050 | 2 050 |

Table 4.11 Basic static moment load of linear guide

| Model No. | Lead (mm) | Slider | Basic static moment (N × m) | | |
|-----------|-------------|--------|-----------------------------|-------------------|-----------------|
| | | | Rolling M_{Ro} | Pitching M_{Po} | Yawing M_{Yo} |
| MCM10 | 10, 20, 30* | Single | 1 170 | 425 | 425 |
| MCM10 | 10, 20, 30* | Double | 2 340 | 2 940 | 2 940 |

- Notes**
- Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
 - Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
 - If extremely heavy load is required, please consult NSK for estimation of fatigue life.

*) Applicable only to single slider

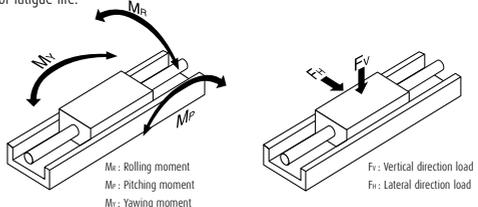


Fig. 4.4

(2) MCH Series Basic Load Rating

Table 4.12 Basic Load Rating

| Model No. | Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating(N) | | | | Basic static load rating(N) | | |
|---------------|-------------|------------------|------------------------------|----------------|--------------------|-----------------------------------|-----------------------------|--------------------|-----------------------------|
| | | | Ball screw C_a | Linear guide C | Support unit C_a | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guide C_0 | Support unit Limit load (N) |
| MCH06 (MCL06) | 5 | φ 12 | 3 760 | 22 800 | 4 400 | 5 | 6 310 | 16 300 | 1 450 |
| | 10 | φ 12 | 2 420 | 18 100 | 4 400 | 10 | 3 790 | 16 300 | 1 450 |
| | 20 | φ 12 | 2 420 | 14 400 | 4 400 | 20 | 3 790 | 16 300 | 1 450 |
| MCH09 | 5 | φ 15 | 7 070 | 40 600 | 7 100 | 5 | 12 800 | 30 500 | 3 040 |
| | 10 | φ 15 | 7 070 | 32 200 | 7 100 | 10 | 12 800 | 30 500 | 3 040 |
| | 20 | φ 15 | 4 560 | 25 500 | 7 100 | 20 | 7 730 | 30 500 | 3 040 |
| MCH10 | 10 | φ 20 | 11 000 | 44 600 | 7 600 | 10 | 21 100 | 42 000 | 3 380 |
| | 20 | φ 20 | 7 060 | 35 400 | 7 600 | 20 | 12 700 | 42 000 | 3 380 |

- Notes**
- Basic dynamic and static load ratings indicate values for one slider.
 - Basic dynamic load rating of linear guide is load of perpendicular direction to the axis that allows 90% of a group of the same Monocarriers to operate "Rated running distance" in table, that is equivalent to 1 million revolutions of ball screw and support unit under the same conditions without causing flaking by rolling contact fatigue.
 - Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue.
 - Basic dynamic load rating of support unit is constant load in the axial direction that allows 90% of support units of the same group of Monocarriers to rotate 1 million revolutions under the same conditions without causing flaking by rolling contact fatigue.
 - Basic static load rating is load that results in combined permanent deformations at contact points of balls and ball grooves of respective parts at a diameter of 0.01%.

Table 4.13 Basic static moment load of linear guide

| Model No. | Slider | Basic static moment (N × m) | | |
|---------------|--------|-----------------------------|-------------------|-----------------|
| | | Rolling M_{Ro} | Pitching M_{Po} | Yawing M_{Yo} |
| MCH06 (MCL06) | Single | 335 | 133 | 133 |
| MCH06 (MCL06) | Double | 770 | 730 | 730 |
| MCH09 | Single | 890 | 385 | 385 |
| MCH09 | Double | 1 780 | 2 070 | 2 070 |
| MCH10 | Single | 1 460 | 610 | 610 |
| MCH10 | Double | 2 920 | 3 430 | 3 430 |

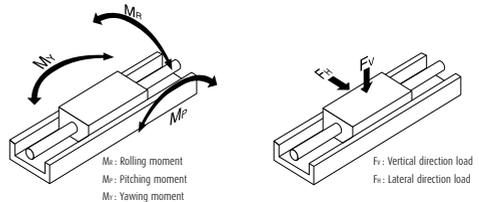


Fig. 4.5

- Notes**
- Basic static moment of double slider is value when two sliders equipped with NSK K1 are butted against each other.
 - Basic static moment is value when rolling contact pressure of balls exceeds 4 000 N/mm².
 - If extremely heavy load is required, please consult NSK for estimation of fatigue life.

*) Applicable only to single slider

C-1-4. 7 Estimation of Life Expectancy

(1) Life of Linear Guide

Study the load to be applied to the linear guide of Monocarrier (Fig. 4.6). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2): in case of the tightly coupled double slider type).

> In case of the single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \epsilon_R M_R + Y_P \epsilon_P M_P + Y_Y \epsilon_Y M_Y \dots\dots\dots 1)$$

> In case of the double slider

$$F_e = \frac{Y_H F_H}{2} + \frac{Y_V F_V}{2} + Y_R \epsilon_{Rd} M_R + Y_P \epsilon_{Pd} M_P + Y_Y \epsilon_{Yd} M_Y \dots\dots\dots 2)$$

- F_H : Lateral direction load acting on the slider (N)
 - F_V : Vertical direction load acting on the slider (N)
 - M_R : Rolling moment acting on the slider (N × m)
 - M_P : Pitching moment acting on the slider (N × m)
 - M_Y : Yawing moment acting on the slider (N × m)
 - $\epsilon_R, \epsilon_{Rd}$: Dynamic equivalent coefficient to rolling moment
 - $\epsilon_P, \epsilon_{Pd}$: Dynamic equivalent coefficient to pitching moment
 - $\epsilon_Y, \epsilon_{Yd}$: Dynamic equivalent coefficient to yawing moment
- Refer to **Table 4.14** about Dynamic equivalent coefficient.

Y_H, Y_V, Y_R, Y_P, Y_Y
: 1.0 or 0.5

At equations 1) and 2) for obtaining equivalent load F_e , among $F_H, F_V, \epsilon_P M_P, \epsilon_R M_R, \epsilon_Y M_Y$, the maximum load is assumed to be 1.0, and others are to be 0.5.

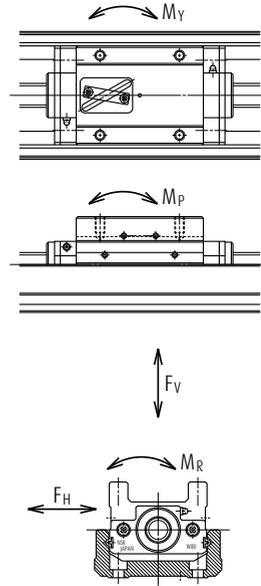


Fig. 4.6 Direction of load

Table 4.14 Dynamic equivalent coefficient

| Model No. | MCM02 | MCM03 | | MCM05 | MCM06 | MCM08 | MCM10 | MCH06 MCL06 | MCH09 | MCH10 |
|-----------------|-------|-----------|-----------------------|-------------|------------|-----------|-----------|----------------|-------------|-------------|
| | | Lead 1, 2 | Lead 5, 10, 12, 15 | | | | | | | |
| ϵ_R | 95.2 | 79.4 | 79.4 | 52.6 | 45.5 | 32.5 | 27.8 | 48.3 | 34.5 | 28.6 |
| ϵ_P | 174 | 113.9 | 84.2 | 81.3 | 65.1 | 48.8 | 45.2 | 75.1 | 47.9 | 41.0 |
| ϵ_Y | 174 | 113.9 | 84.2 | 81.3 | 65.1 | 48.8 | 45.2 | 75.1 | 47.9 | 41.0 |
| ϵ_{Rd} | - | - | - | 26.3 | 22.7 | 16.3 | 13.9 | 24.2 | 17.2 | 14.3 |
| ϵ_{Pd} | - | - | - | 10.4 (12.2) | 9.7 (11.5) | 7.6 (8.6) | 7.1 (8.0) | 11.4 (13.2) | 8.11 (9.10) | 6.98 (7.82) |
| ϵ_{Yd} | - | - | - | 10.4 (12.2) | 9.7 (11.5) | 7.6 (8.6) | 7.1 (8.0) | 11.4 (13.2) | 8.11 (9.10) | 6.98 (7.82) |

Note Parenthesized figures are dynamic equivalent coefficient in case of the Monocarrier without NSK K1.

In case when the load acting on the slider may fluctuate (In general, M_p , M_V may fluctuate with the acceleration/ deceleration of slider), the mean effective load is determined by Eq. 3).




Fig. 4.7 Stepwise Fluctuating Load

Travelling distance under the equivalent load Fe_1 : L_1

Travelling distance under the equivalent load Fe_2 : L_2

Travelling distance under the equivalent load Fe_n : L_n

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 L_1 + Fe_2^3 L_2 + \dots + Fe_n^3 L_n)} \quad 3)$$

F_m : Mean effective load of fluctuating loads

L : Total travelling distance

The life of linear guide is calculated by Eq. 4).

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m} \right)^3 \dots\dots\dots 4)$$

L : Life of linear guide (km)

F_m : Mean effective load acting on the linear guide (N)

C : Basic dynamic load rating of the linear guide (N)

L_a : Travelling distance (km)

f_w : Load factor (refer to **Table 4.15**)

When the estimated life does not clear the required life, the life of the linear guide is to be calculated again after the following measures are taken:

1. Change from the single slider type to double slider type.
2. Use a larger size Monocarrier.

(2) Life of Ball Screw (Support unit)

The mean effective load is determined from the axial loads.

For calculation of the mean effective load, use Eq. 3.

The life of ball screw is calculated by Eq. 5).

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \dots\dots\dots 5)$$

ℓ : Lead of ball screw (mm)

L : Life of ball screw (km)

C_a : Basic dynamic load rating of the ball screw (N)

F_m : Mean effective load acting on the ball screw (N)

f_w : Load factor (refer to **Table 4.15**)

The life of a support unit is calculated by Eq. 5).

If the life of ball screw/support unit does not clear the required life, use a larger size Monocarrier.

After applying the calculations mentioned above, selection of the Monocarrier is completed.

Table 4.15 Values of load factor f_w

| Operating conditions | Load factor f_w |
|---|-------------------|
| At smooth operation with no mechanical shock | 1.0 - 1.2 |
| At normal operation | 1.2 - 1.5 |
| At operation with mechanical shock and vibrations | 1.5 - 3.0 |

C-1-4. 8 Example of Life Estimation

This section offers an example how to estimate the life of Monocarrier based on the life of each component.

<<Example of calculation-1>>

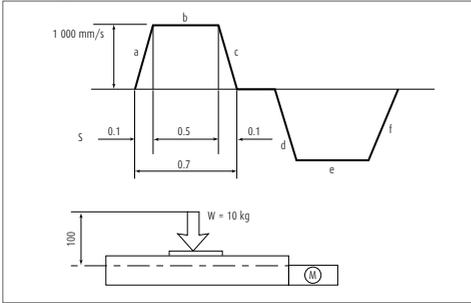


Fig. 4.8

1. Use condition

- Stroke : 600 mm
- Maximum speed : 1000 mm/s
- Load mass : W = 10 kg
- Acceleration : g = 9.8 m/s²
- Setting position : Horizontal
- Operating profile : See above figure

2. Selection of Model number (Interim Selection)

Firstly, select a greater ball screw lead as the maximum speed is 1000 mm/s. The interim selection is MCM06060H20K00, a single slider specification MCM06 that has 600 mm stroke, as the stroke is 600 mm.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life:

Multiply the result of the Eq. 1) by the dynamic equivalent coefficient (Table 4.14 single slider) to convert the load volume. From above operation profile,

- i) Constant speed $Fe_1 = Y_V \cdot F_V = Y_V \cdot W_g = W \cdot g$
 $= 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$
- ii) Accelerating $Fe_2 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_p$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
 $= 700 \text{ N}$
- iii) Decelerating $Fe_3 = Y_V \cdot F_V + Y_P \cdot \epsilon_P \cdot M_p$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 65.1 \cdot 0.1 \cdot 100$
 $= 700 \text{ N}$

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (98^3 \cdot 500 + 700^3 \cdot 50 + 700^3 \cdot 50)}$$

$$= 387 \text{ N}$$

$$L = \left(\frac{C}{f_w \cdot F_m} \right)^3 \times L_a$$

$$= \left(\frac{15\,900}{1.2 \cdot 387} \right)^3 \times 20$$

$$= 8.02 \times 10^5 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_S = \frac{C_0}{Fe} = \frac{C_0}{Fe_2} = \frac{17\,000}{700} = 24.2$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

By the process above,

- i) Constant speed $Fe_1 = \mu \cdot W \times g = 0.01 \times 10 \times 9.8 = 0.98$
- ii) Accelerating $Fe_2 = Fe_1 + W\alpha = 101 \text{ N}$
- iii) Decelerating $Fe_3 = Fe_1 - W\alpha = 99 \text{ N}$

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (0.98^3 \cdot 500 + 101^3 \cdot 50 + 99^3 \cdot 50)}$$

$$= 55 \text{ N}$$

$$L = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times \ell \times 10^6$$

$$= \left(\frac{4\,560}{1.2 \cdot 55} \right)^3 \times 20 \times 10^6 \text{ (mm)}$$

$$= 6.5 \times 10^6 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{Fe} = \frac{C_{0a}}{Fe_2} = \frac{7\,730}{101} = 76.5$$

3-2-3. Maximum rotational speed: According to the table of maximum speed on page C9, MCM06 with 20 mm lead and 600 mm stroke, is possible to operate under the maximum speed of 1 000 mm/s.

3-3. Support unit

3-3-1. Fatigue life: Use the axial load $F_m = 55 \text{ N}$, that is the

result of above calculation 3-2-1.

$$L = \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times \ell \times 10^6 = \left(\frac{6\,550}{1.2 \times 55} \right)^3 \times 20 \times 10^6 \text{ (mm)}$$

$$= 1.95 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 27.0$$

3-4. Result

| MCM06060H20K00 | Linear guide | Ball screw | Support unit |
|----------------------|--------------------|--------------------|--------------------|
| | 8.02 · | 6.5 · | 1.95 · |
| Fatigue life | 10 ⁵ km | 10 ⁶ km | 10 ⁷ km |
| Static safety factor | 24.2 | 76.5 | 27.0 |

In this case, the linear guide has the shortest fatigue life of the components. Therefore, the linear guide fatigue life is used as the life of the Monocarrier. The interim selection of MCM06060H20K00, that is chosen based on the use conditions, satisfies the required life.

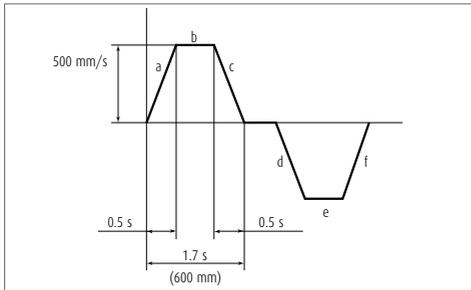


Fig. 4.9

<<Example of calculation-2>>

1. Use condition

- Stroke : 600 mm
- Maximum speed : 500 mm/s
- Load mass : W = 20 kg
- Acceleration : 9.8 m/s²
- Setting position : Horizontal
- Operating profile : See above figure




Fig. 4.10

2. Selection of Model number (Interim Selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.

The interim selection is MCM08068H10D00 as a double slider

specification of MCM08 has 680 mm stroke, and the setting position is vertical.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of the Eq. 2) by the dynamic equivalent coefficient (Table 4.14, double slider) to convert the load volume. From operation profile (Fig. 4.9), the acceleration is 1 m/s².

i) Constant speed $F_{e1} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.15$
 $+ 0.5 \cdot 7.6 \cdot 20 \cdot 9.8 \cdot 0.1$
 $= 298 \text{ N}$

ii) Accelerating $F_{e2} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.15$
 $+ 0.5 \cdot 7.6 \cdot 20 \cdot (9.8 + 1.0) \cdot 0.1$
 $= 329 \text{ N}$

iii) Decelerating $F_{e3} = Y_p \cdot \epsilon_{pd} \cdot M_p + Y_Y \cdot \epsilon_{Yd} \cdot M_Y$
 $= 1 \cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.15 + 0.5$
 $\cdot 7.6 \cdot 20 \cdot (9.8 - 1.0) \cdot 0.1$
 $= 268 \text{ N}$

Mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (298^3 \cdot 350 + 329^3 \cdot 125 + 268^3 \cdot 125)}$$

$$= 300 \text{ N}$$

$$L = L_a \times \left(\frac{C}{f_w \cdot F_m} \right)^3$$

$$= 10 \times \left(\frac{24\,400}{1.2 \cdot 300} \right)^3$$

$$= 3.11 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{22\,800}{329} = 69.3$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, then calculate the mean load.

i) Constant speed
 $F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$

ii) Accelerating
 $F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1 = 216 \text{ N}$

iii) Decelerating
 $F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1 = 176 \text{ N}$

Axial mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_e \cdot L_1 + F_e \cdot L_2 + F_e \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125)}$$

$$= 197 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 10 \times \left(\frac{7\,070}{1.2 \cdot 197} \right)^3 \times 10^6 \text{ (mm)}$$

$$= 2.67 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,800}{216} = 59.2$$

3-3. Support unit

3-3-1. Fatigue life: Use the axial load $F_m = 197 \text{ N}$, that is the result of above calculation 3-2-1.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 = 10 \times \left(\frac{7\,100}{1.2 \times 197} \right)^3 \times 10^6 \text{ (mm)}$$

$$= 2.70 \times 10^5 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_S = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,040}{216} = 14.0$$

3-4. Result

| MCM08068H10D00 | Linear guide | Ball screw | Support unit |
|----------------------|--------------------|--------------------|--------------------|
| | 3.11 · | 2.67 · | 2.70 · |
| Fatigue life | 10 ⁶ km | 10 ⁵ km | 10 ⁵ km |
| Static safety factor | 69.3 | 59.2 | 14.0 |





C-1-5 MCM Series

| | Page |
|---|------|
| 1 MCM Series Reference Number Coding..... | C25 |
| 2 MCM Series Dimension Table of Standard Products | |
| MCM02..... | C26 |
| MCM03..... | C27 |
| MCM05..... | C31 |
| MCM06..... | C35 |
| MCM08..... | C39 |
| MCM10..... | C43 |
| 3 MCM Series Accessories | |
| 3.1 Sensor Unit..... | C47 |
| 3.2 Cover Unit | C51 |
| 3.3 Motor Bracket | C53 |

C-1-5 MCM Series

C-1-5.1 MCM Series Reference Number Coding

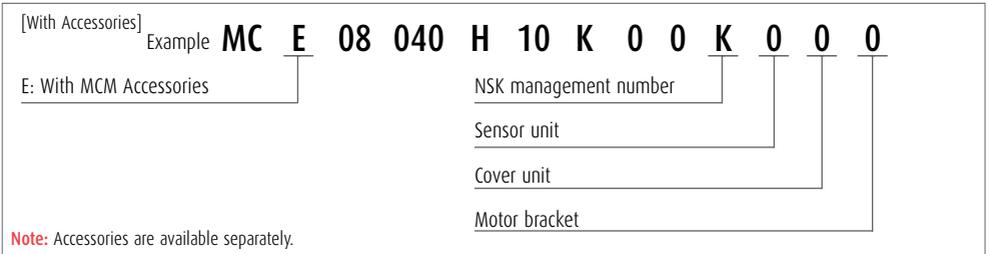
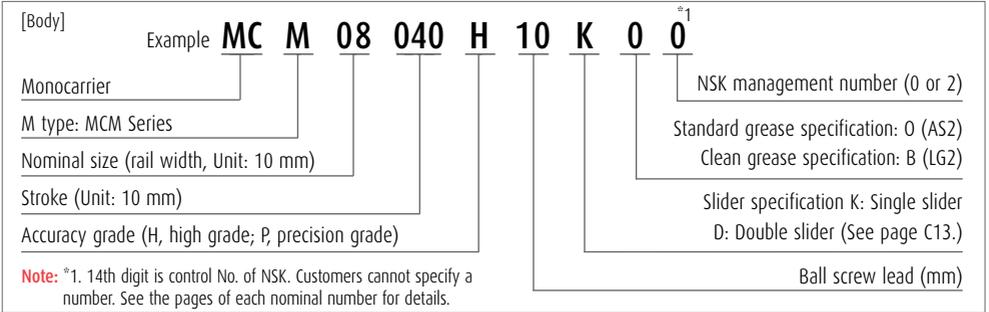


Table 1 Sensor unit (See page C47.)

| Reference No. code | Specification | Reference No. |
|--------------------|---|----------------|
| 0 | N/A | — |
| 1 | Proximity switch (normally close contact 3 pieces) | MC - SRxx - 10 |
| 2 | Proximity switch (normally open contact 3 pieces) | MC - SRxx - 11 |
| 3 | Proximity switch (normally open contact 1 piece, normally close contact 2 pieces) | MC - SRxx - 12 |
| 4 | Photo sensor 3 pieces | MC - SRxx - 13 |

Note 1) xx: Reference number 2) Sensor rail is not included in sensor unit. If you require the rail, please request separately. (See page C48 to C50.)

Table 2 Cover unit (See pages C51 to C52.)

| Reference No. code | Specification | Reference No. |
|--------------------|----------------|-------------------------|
| 0 | N/A | — |
| 1 | With top cover | MC - CVxxxx - 01 (02) * |
| — | Full cover | MC - CVxxxx - 00 |

Note 1) xxxx: Reference number and stroke number 2)*: "-02" is only used for Monocarrier MCM03. 3) When a sensor unit is used, full cover unit cannot be used.

Table 3 Motor bracket (See pages C53 to C69.)


| Reference No. code | Reference No. | | | | |
|--------------------|----------------|----------------|----------------|----------------|----------------|
| | MCM03 | MCM05 | MCM06 | MCM08 | MCM10 |
| 0 | N/A | N/A | N/A | N/A | N/A |
| 1 | MC-BK03-146-00 | MC-BK05-145-00 | MC-BK06-145-00 | MC-BK08-145-00 | MC-BK10-170-00 |
| 2 | MC-BK03-148-01 | MC-BK05-146-00 | MC-BK06-146-00 | MC-BK08-146-00 | MC-BK10-170-01 |
| 3 | MC-BK03-231-00 | MC-BK05-148-00 | MC-BK06-148-00 | MC-BK08-160-00 | MC-BK10-190-00 |
| 4 | — | MC-BK05-160-00 | MC-BK06-160-00 | MC-BK08-170-00 | MC-BK10-270-00 |
| 5 | — | MC-BK05-250-00 | MC-BK06-170-00 | MC-BK08-170-01 | — |
| 6 | — | — | MC-BK06-170-01 | MC-BK08-190-00 | — |
| 7 | — | — | MC-BK06-250-00 | MC-BK08-250-00 | — |
| 8 | — | — | — | MC-BK08-270-00 | — |

N/A: Not applicable

MCM03

Ball screw lead 5, 10 and 12

Accuracy grade: High grade (H)

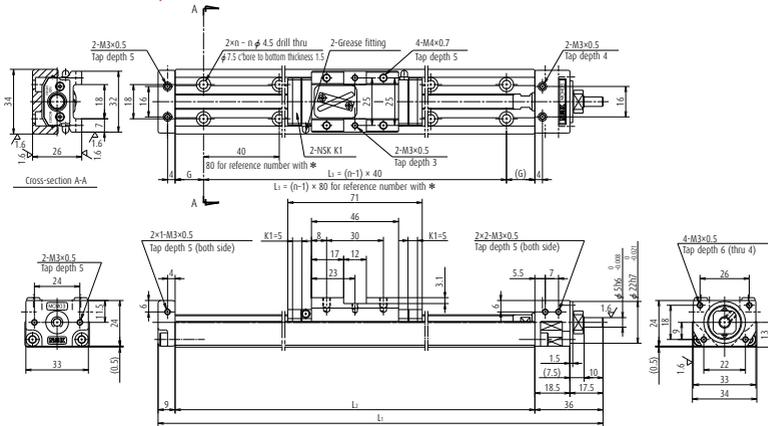

Dimension of MCM03 (Single slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting hole n | Inertia $\times 10^{-5}$ (kg · m ²) | Mass (kg) |
|-----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----|----------------|------------------------|---|-----------|
| | | | | L ₁ | L ₂ | G | L ₃ | | | |
| *MCM03005H05K00 | 50 | 69 (79) | 5 | 185 | 140 | 30 | 80 | 2 | 0.057 | 0.6 |
| *MCM03005H10K00 | 50 | 69 (79) | 10 | 185 | 140 | 30 | 80 | 2 | 0.080 | 0.6 |
| *MCM03005H12K00 | 50 | 69 (79) | 12 | 185 | 140 | 30 | 80 | 2 | 0.097 | 0.6 |
| MCM03010H05K00 | 100 | 119 (129) | 5 | 235 | 190 | 15 | 160 | 5 | 0.073 | 0.7 |
| MCM03010H10K00 | 100 | 119 (129) | 10 | 235 | 190 | 15 | 160 | 5 | 0.092 | 0.7 |
| MCM03010H12K00 | 100 | 119 (129) | 12 | 235 | 190 | 15 | 160 | 5 | 0.109 | 0.7 |
| MCM03015H05K00 | 150 | 169 (179) | 5 | 285 | 240 | 20 | 200 | 6 | 0.089 | 0.8 |
| MCM03015H10K00 | 150 | 169 (179) | 10 | 285 | 240 | 20 | 200 | 6 | 0.105 | 0.8 |
| MCM03015H12K00 | 150 | 169 (179) | 12 | 285 | 240 | 20 | 200 | 6 | 0.122 | 0.8 |
| MCM03020H05K00 | 200 | 219 (229) | 5 | 335 | 290 | 25 | 240 | 7 | 0.104 | 0.9 |
| MCM03020H10K00 | 200 | 219 (229) | 10 | 335 | 290 | 25 | 240 | 7 | 0.118 | 0.9 |
| MCM03020H12K00 | 200 | 219 (229) | 12 | 335 | 290 | 25 | 240 | 7 | 0.135 | 0.9 |
| MCM03025H05K00 | 250 | 269 (279) | 5 | 385 | 340 | 30 | 280 | 8 | 0.120 | 1.0 |
| MCM03025H10K00 | 250 | 269 (279) | 10 | 385 | 340 | 30 | 280 | 8 | 0.131 | 1.0 |
| MCM03025H12K00 | 250 | 269 (279) | 12 | 385 | 340 | 30 | 280 | 8 | 0.147 | 1.0 |

Note Bolt hole pitch L₃ on items marked with * is 80 mm.

Monocarrier dynamic torque specification (N · cm)

| Ball screw lead (mm) | 5 | 10 | 12 |
|----------------------|-----------|-----------|-----------|
| Stroke limit (mm) | 0.2 - 2.5 | 0.3 - 3.0 | 0.3 - 3.0 |


Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | Support unit load limit (N) |
|-------------|------------------|-------------------------------|-----------------|-----------------------------|--|------------------------------|------------------------------|-----------------------------|
| | | Ball screw C _a | Linear guides C | Support unit C _o | Rated running distance L _a (km) | Ball screw C _{0a} | Linear guides C ₀ | |
| 5 | φ 8 | 1 810 | 7 850 | 2 670 | 5 | 2 880 | 6 620 | 1 040 |
| 10 | φ 8 | 1 230 | 6 250 | 2 670 | 10 | 1 690 | 6 620 | 1 040 |
| 12 | φ 8 | 1 230 | 5 880 | 2 670 | 12 | 1 690 | 6 620 | 1 040 |

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|--------------------------|------------------------|
| | Rolling M _{RO} | Pitching M _{PO} | Yawing M _{YO} |
| | Single | 92 | 51 |



MCM05 (Double slider)

Accuracy grade: High grade (H)

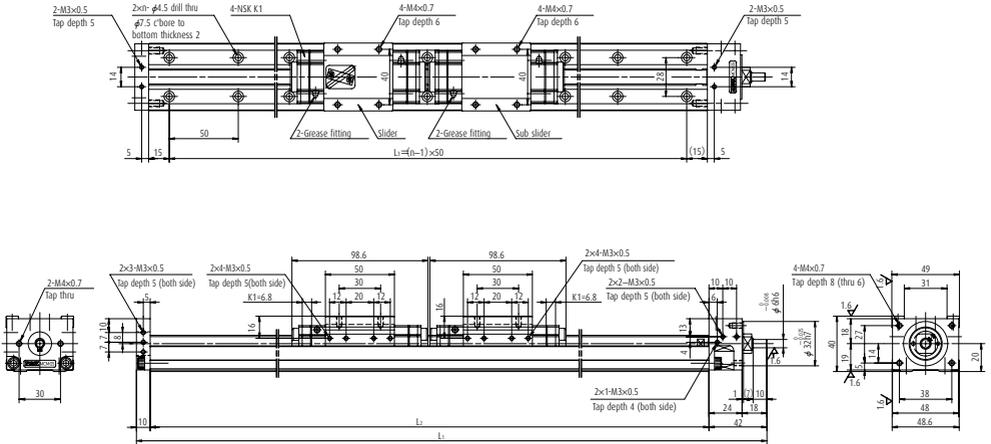

Dimension of MCM05 (Double slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | No. of mounting hole n | Inertia $\times 10^{-4}$ (kg · m ²) | Mass (kg) |
|----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | | | |
| MCM05006H10D00 | 60 | 82 (110) | 10 | 332 | 280 | 250 | 6 | 0.058 | 2.3 |
| MCM05011H10D00 | 110 | 132 (160) | 10 | 382 | 330 | 300 | 7 | 0.064 | 2.5 |
| MCM05016H10D00 | 160 | 182 (210) | 10 | 432 | 380 | 350 | 8 | 0.070 | 2.7 |
| MCM05021H10D00 | 210 | 232 (260) | 10 | 482 | 430 | 400 | 9 | 0.075 | 2.8 |
| MCM05021H20D00 | 210 | 232 (260) | 20 | 482 | 430 | 400 | 9 | 0.151 | 2.8 |

Monocarrier dynamic torque specification (N · cm)

| | | |
|----------------------|----|------------|
| Ball screw lead (mm) | 10 | 1.5 - 7.6 |
| | 20 | 2.3 - 11.8 |

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|---------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_a | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 5 | ϕ 12 | 3 760 | 15 600 | 4 400 | 5 | 6 310 | 10 900 | 1 450 |
| 10 | ϕ 12 | 2 420 | 12 400 | 4 400 | 10 | 3 790 | 10 900 | 1 450 |
| 20 | ϕ 12 | 2 420 | 9 850 | 4 400 | 20 | 3 790 | 10 900 | 1 450 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Double | 455 | 765 | 765 |

MCM06

Accuracy grade: High grade (H)

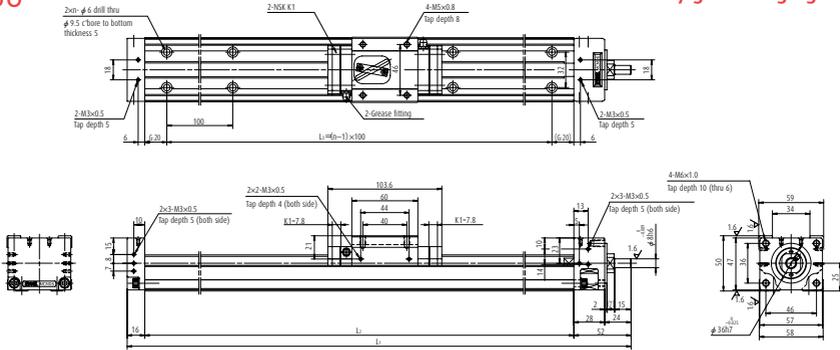

Dimension of MCM06 (Single slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | No. of mounting hole n | Inertia $\times 10^{-4}$ (kg · m ²) | Mass (kg) |
|-----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | | | |
| ◇MCM06005H05K02 | 50 | 86 (102) | 5 | 258 | 190 | 100 | 2 | 0.066 | 2.7 |
| ◇MCM06005H10K00 | 50 | 86 (102) | 10 | 258 | 190 | 100 | 2 | 0.077 | 2.7 |
| ◇MCM06005H20K00 | 50 | 86 (102) | 20 | 258 | 190 | 100 | 2 | 0.122 | 2.7 |
| MCM06010H05K02 | 100 | 136 (152) | 5 | 308 | 240 | 200 | 3 | 0.080 | 3.0 |
| MCM06010H10K00 | 100 | 136 (152) | 10 | 308 | 240 | 200 | 3 | 0.092 | 3.0 |
| MCM06010H20K00 | 100 | 136 (152) | 20 | 308 | 240 | 200 | 3 | 0.137 | 3.0 |
| ◇MCM06015H05K02 | 150 | 186 (202) | 5 | 358 | 290 | 200 | 3 | 0.095 | 3.5 |
| ◇MCM06015H10K00 | 150 | 186 (202) | 10 | 358 | 290 | 200 | 3 | 0.106 | 3.5 |
| ◇MCM06015H20K00 | 150 | 186 (202) | 20 | 358 | 290 | 200 | 3 | 0.152 | 3.5 |
| MCM06020H05K02 | 200 | 236 (252) | 5 | 408 | 340 | 300 | 4 | 0.110 | 3.8 |
| MCM06020H10K00 | 200 | 236 (252) | 10 | 408 | 340 | 300 | 4 | 0.121 | 3.8 |
| MCM06020H20K00 | 200 | 236 (252) | 20 | 408 | 340 | 300 | 4 | 0.167 | 3.8 |
| ◇MCM06025H05K02 | 250 | 286 (302) | 5 | 458 | 390 | 300 | 4 | 0.125 | 4.2 |
| ◇MCM06025H10K00 | 250 | 286 (302) | 10 | 458 | 390 | 300 | 4 | 0.136 | 4.2 |
| ◇MCM06025H20K00 | 250 | 286 (302) | 20 | 458 | 390 | 300 | 4 | 0.181 | 4.2 |
| MCM06030H05K02 | 300 | 336 (352) | 5 | 508 | 440 | 400 | 5 | 0.139 | 4.5 |
| MCM06030H10K00 | 300 | 336 (352) | 10 | 508 | 440 | 400 | 5 | 0.150 | 4.5 |
| MCM06030H20K00 | 300 | 336 (352) | 20 | 508 | 440 | 400 | 5 | 0.196 | 4.5 |

Note 1. Dimension G is 45 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | Lead | High-grade, precision-grade |
|----------|--------|-----------------------------|
| Standard | 5 | 02 |
| | 10, 20 | 00 |
| LG2 | 5 | B2 |
| | 10, 20 | B0 |

| Monocarrier dynamic torque specification (N · cm) | | |
|---|----|------------|
| Ball screw lead (mm) | 5 | 1.9 – 7.4 |
| | 10 | 2.2 – 8.6 |
| | 20 | 2.8 – 11.0 |

Note

1. Frictional resistance of NSK K1 is included in dynamic torque in table.
2. Grease is packed into ball screw, linear guide parts and support unit.
3. Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|---------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_s | Rated running distance L_R (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 5 | $\phi 15$ | 7 070 | 25 200 | 6 550 | 5 | 12 800 | 17 000 | 2 730 |
| 10 | $\phi 15$ | 7 070 | 20 000 | 6 550 | 10 | 12 800 | 17 000 | 2 730 |
| 20 | $\phi 15$ | 4 560 | 15 900 | 6 550 | 20 | 7 730 | 17 000 | 2 730 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Single | 415 | 174 | 174 |

MCM06 (Double slider)

Accuracy grade: High grade (H)

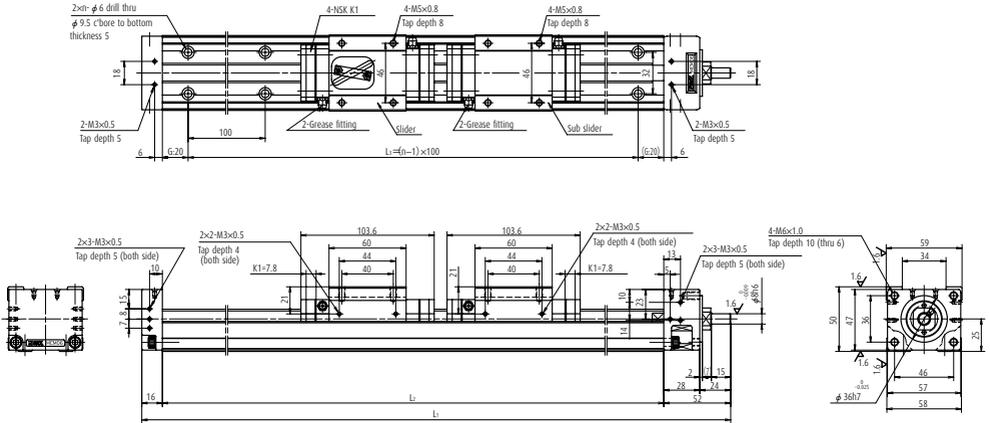

Dimension of MCM06 (Double slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | No. of mounting hole n | Inertia $\times 10^{-4}$ (kg · m ²) | Mass (kg) |
|----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | | | |
| MCM06011H05D02 | 110 | 132 (164) | 5 | 408 | 340 | 300 | 4 | 0.114 | 4.4 |
| MCM06011H10D00 | 110 | 132 (164) | 10 | 408 | 340 | 300 | 4 | 0.136 | 4.4 |
| MCM06021H05D02 | 210 | 232 (264) | 5 | 508 | 440 | 400 | 5 | 0.143 | 5.1 |
| MCM06021H10D00 | 210 | 232 (264) | 10 | 508 | 440 | 400 | 5 | 0.166 | 5.1 |
| MCM06021H20D00 | 210 | 232 (264) | 20 | 508 | 440 | 400 | 5 | 0.257 | 5.1 |
| MCM06031H05D02 | 310 | 332 (364) | 5 | 608 | 540 | 500 | 6 | 0.173 | 5.8 |
| MCM06031H10D00 | 310 | 332 (364) | 10 | 608 | 540 | 500 | 6 | 0.195 | 5.8 |
| MCM06031H20D00 | 310 | 332 (364) | 20 | 608 | 540 | 500 | 6 | 0.286 | 5.8 |

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | Lead | High-grade, precision-grade |
|----------|--------|-----------------------------|
| Standard | 5 | 02 |
| Standard | 10, 20 | 00 |
| LG2 | 5 | B2 |
| LG2 | 10, 20 | B0 |

| Monocarrier dynamic torque specification (N · cm) | | |
|---|----|------------|
| Ball screw lead (mm) | 5 | 2.3 – 8.5 |
| | 10 | 2.7 – 10.9 |
| | 20 | 4.0 – 15.9 |

Note

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|---------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_a | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 5 | $\phi 15$ | 7 070 | 25 200 | 6 550 | 5 | 12 800 | 17 000 | 2 730 |
| 10 | $\phi 15$ | 7 070 | 20 000 | 6 550 | 10 | 12 800 | 17 000 | 2 730 |
| 20 | $\phi 15$ | 4 560 | 15 900 | 6 550 | 20 | 7 730 | 17 000 | 2 730 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Double | 825 | 1 220 | 1 220 |

MCM10 Ball screw lead 30

Accuracy grade: High grade (H)

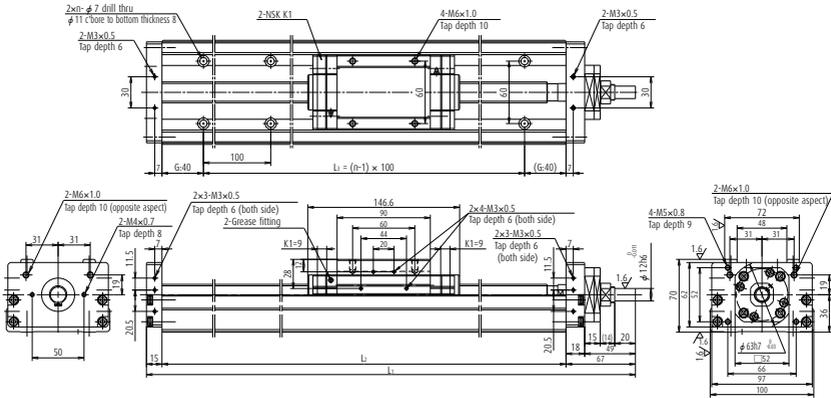

Dimension of MCM10 (Single slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | No. of mounting hole n | Inertia $\times 10^{-4}$ (kg · m ²) | Mass (kg) |
|-----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | | | |
| MCM10060H10K00 | 600 | 633 (651) | 10 | 862 | 780 | 700 | 8 | 0.800 | 16.3 |
| MCM10060H20K00 | 600 | 633 (651) | 20 | 862 | 780 | 700 | 8 | 0.914 | 16.3 |
| MCM10060H30K00 | 600 | 633 (651) | 30 | 862 | 780 | 700 | 8 | 1.104 | 16.3 |
| MCM10070H10K00 | 700 | 733 (751) | 10 | 962 | 880 | 800 | 9 | 0.893 | 18.0 |
| MCM10070H20K00 | 700 | 733 (751) | 20 | 962 | 880 | 800 | 9 | 1.007 | 18.0 |
| MCM10070H30K00 | 700 | 733 (751) | 30 | 962 | 880 | 800 | 9 | 1.197 | 18.0 |
| MCM10080H10K00 | 800 | 833 (851) | 10 | 1 062 | 980 | 900 | 10 | 0.987 | 19.7 |
| MCM10080H20K00 | 800 | 833 (851) | 20 | 1 062 | 980 | 900 | 10 | 1.101 | 19.7 |
| MCM10080H30K00 | 800 | 833 (851) | 30 | 1 062 | 980 | 900 | 10 | 1.291 | 19.7 |
| MCM10090H10K00 | 900 | 933 (951) | 10 | 1 162 | 1 080 | 1 000 | 11 | 1.081 | 21.4 |
| MCM10090H20K00 | 900 | 933 (951) | 20 | 1 162 | 1 080 | 1 000 | 11 | 1.195 | 21.4 |
| ◇MCM10100H10K00 | 1 000 | 1 033 (1 051) | 10 | 1 262 | 1 180 | 1 000 | 11 | 1.174 | 23.1 |
| ◇MCM10100H20K00 | 1 000 | 1 033 (1 051) | 20 | 1 262 | 1 180 | 1 000 | 11 | 1.288 | 23.1 |

Note Dimension G is 90 for items marked with ◇.

| Monocarrier dynamic torque specification (N · cm) | | |
|---|----|------------|
| Ball screw lead (mm) | 10 | 2.7 – 10.8 |
| Ball screw lead (mm) | 20 | 3.1 – 12.7 |
| Ball screw lead (mm) | 30 | 5.1 – 18.0 |

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|---------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_a | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 10 | ϕ 20 | 11 000 | 33 500 | 7 600 | 10 | 21 100 | 29 400 | 3 380 |
| 20 | ϕ 20 | 7 060 | 26 600 | 7 600 | 20 | 12 700 | 29 400 | 3 380 |
| 30 | ϕ 20 | 11 700 | 23 200 | 7 600 | 30 | 22 700 | 29 400 | 3 380 |



Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Single | 1 170 | 425 | 425 |

C-1-5.3 MCM Series Accessories

C-1-5.3 1 Sensor Unit

> Proximity switch



(Example of assembly)

| Model No. | | Reference No. | | | A (mm) | B (mm) | Body width W (mm) |
|-----------|---|---------------|------------|------------|-----------------------|--------|-------------------|
| MCM02 | | MC-SR02-00 | MC-SR02-01 | MC-SR02-02 | 17 | 2 | 28 |
| MCM03 | | MC-SR03-10 | MC-SR03-11 | MC-SR03-12 | 17 | 3 | 34 |
| MCM05 | | MC-SR05-10 | MC-SR05-11 | MC-SR05-12 | 17 | 15 | 48.6 |
| MCM06 | | MC-SR06-10 | MC-SR06-11 | MC-SR06-12 | 17 | 19 | 58 |
| MCM08 | | MC-SR08-10 | MC-SR08-11 | MC-SR08-12 | 16 | 27 | 80 |
| MCM10 | | MC-SR10-10 | MC-SR10-11 | MC-SR10-12 | 16 | 35 | 100 |
| Quantity | Proximity switch (normally open contact) | — | 3 | 1 | E2S-W13 (OMRON Corp.) | | |
| Quantity | Proximity switch (normally close contact) | 3 | — | 2 | E2S-W14 (OMRON Corp.) | | |



Notes 1. See page C133 for proximity switch specification.

2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

3. Sensor unit for MCM02 contains two sensor dogs.

4. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C51.)

> Photo sensor



(Example of assembly)

| Model No. | Reference No. | C (mm) | D (mm) | Body width W (mm) | Remarks |
|-----------|---------------|--------|--------|-------------------|--|
| MCM03 | MC-SR03-13 | 24 | 0.5 | 34 | EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment) |
| MCM05 | MC-SR05-13 | 24 | 5 | 48.6 | |
| MCM06 | MC-SR06-13 | 24 | 9 | 58 | |
| MCM08 | MC-SR08-13 | 23 | 17 | 80 | |
| MCM10 | MC-SR10-13 | 22 | 24 | 100 | |


Notes 1. See page C134 for photo sensor specification.

2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.


3. A spacer plate is required when using a cover unit or sensor unit for MCM03 with the lead of 1 or 2 mm. (Refer to page C51.)

(1) Sensor Rail

Sensor rail for MCM03: MC-SRL3-****

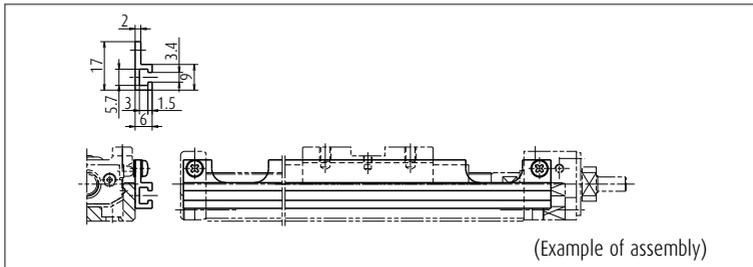

Sensor rail for MCM03: MC-SRL3-****

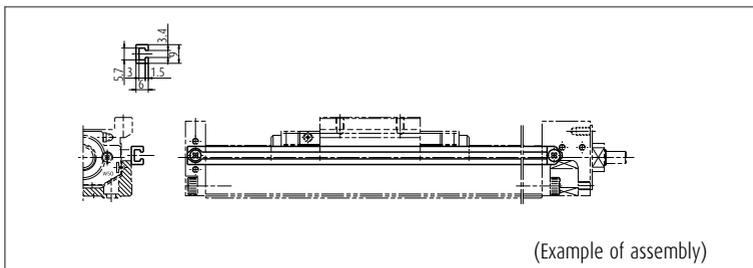


Sensor rail for MCM02: MC-SRL2-****

Sensor rail for MCM06: MC-SRL6-****

Sensor rail for MCM08: MC-SRL8-****

Sensor rail for MCM10: MC-SRL1-****

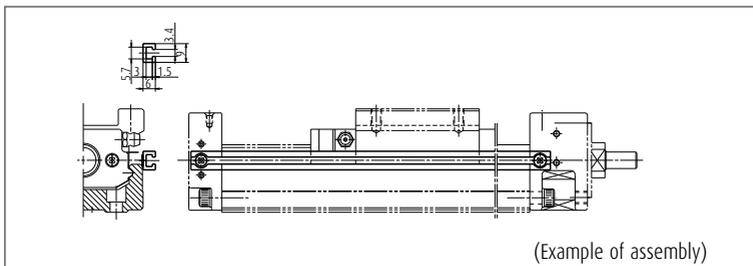

- Notes:**
1. **** is the same as rail dimension L_2 .
 2. Please assemble the attached seat between the sensor rail and the support unit for MCM03, MCM05, MCM06 and MCM08.
 3. For combinations of sensors and rails, see pages C49 to C50.

MCM Series and Sensor Rail Combination Table

Table 4

| Model No. | Body length L ₂ mm | Reference No. | Sensor rail reference No. |
|-----------|-------------------------------|----------------|---------------------------|
| MCM02 | 100 | MCM02005H01K | MC-SRL2-0100* |
| MCM02 | 100 | MCM02005P01K | MC-SRL2-0100* |
| MCM02 | 100 | MCM02005H02K | MC-SRL2-0100* |
| MCM02 | 100 | MCM02005P02K | MC-SRL2-0100* |
| MCM02 | 150 | MCM02010H01K | MC-SRL2-0150 |
| MCM02 | 150 | MCM02010P01K | MC-SRL2-0150 |
| MCM02 | 150 | MCM02010H02K | MC-SRL2-0150 |
| MCM02 | 150 | MCM02010P02K | MC-SRL2-0150 |
| MCM02 | 200 | MCM02015H01K | MC-SRL2-0200 |
| MCM02 | 200 | MCM02015P01K | MC-SRL2-0200 |
| MCM02 | 200 | MCM02015H02K | MC-SRL2-0200 |
| MCM02 | 200 | MCM02015P02K | MC-SRL2-0200 |
| MCM03 | 115 | MCM03005P01K00 | MC-SRL3-0115 |
| MCM03 | 115 | MCM03005P02K00 | MC-SRL3-0115 |
| MCM03 | 140 | MCM03005H05K00 | MC-SRL3-0140 |
| MCM03 | 140 | MCM03005H10K00 | MC-SRL3-0140 |
| MCM03 | 140 | MCM03005H12K00 | MC-SRL3-0140 |
| MCM03 | 140 | MCM03005H15K00 | MC-SRL3-0140 |
| MCM03 | 190 | MCM03010P01K00 | MC-SRL3-0190 |
| MCM03 | 190 | MCM03010P02K00 | MC-SRL3-0190 |
| MCM03 | 190 | MCM03010H05K00 | MC-SRL3-0190 |
| MCM03 | 190 | MCM03010H10K00 | MC-SRL3-0190 |
| MCM03 | 190 | MCM03010H12K00 | MC-SRL3-0190 |
| MCM03 | 190 | MCM03010H15K00 | MC-SRL3-0190 |
| MCM03 | 240 | MCM03015P01K00 | MC-SRL3-0240 |
| MCM03 | 240 | MCM03015P02K00 | MC-SRL3-0240 |
| MCM03 | 240 | MCM03015H05K00 | MC-SRL3-0240 |
| MCM03 | 240 | MCM03015H10K00 | MC-SRL3-0240 |
| MCM03 | 240 | MCM03015H12K00 | MC-SRL3-0240 |
| MCM03 | 240 | MCM03015H15K00 | MC-SRL3-0240 |
| MCM03 | 290 | MCM03020H05K00 | MC-SRL3-0290 |
| MCM03 | 290 | MCM03020H10K00 | MC-SRL3-0290 |
| MCM03 | 290 | MCM03020H12K00 | MC-SRL3-0290 |
| MCM03 | 290 | MCM03020H15K00 | MC-SRL3-0290 |
| MCM03 | 340 | MCM03025H05K00 | MC-SRL3-0340 |
| MCM03 | 340 | MCM03025H10K00 | MC-SRL3-0340 |
| MCM03 | 340 | MCM03025H12K00 | MC-SRL3-0340 |
| MCM03 | 340 | MCM03025H15K00 | MC-SRL3-0340 |
| MCM05 | 180 | MCM05005H05K00 | MC-SRL5-0180 |
| MCM05 | 180 | MCM05005H10K00 | MC-SRL5-0180 |
| MCM05 | 180 | MCM05005H20K00 | MC-SRL5-0180 |
| MCM05 | 230 | MCM05010H05K00 | MC-SRL5-0230 |
| MCM05 | 230 | MCM05010H10K00 | MC-SRL5-0230 |
| MCM05 | 230 | MCM05010H20K00 | MC-SRL5-0230 |
| MCM05 | 280 | MCM05015H05K00 | MC-SRL5-0280 |
| MCM05 | 280 | MCM05015H10K00 | MC-SRL5-0280 |
| MCM05 | 280 | MCM05015H20K00 | MC-SRL5-0280 |
| MCM05 | 280 | MCM05016H10D00 | MC-SRL5-0280 |
| MCM05 | 330 | MCM05020H05K00 | MC-SRL5-0330 |
| MCM05 | 330 | MCM05020H10K00 | MC-SRL5-0330 |
| MCM05 | 330 | MCM05020H20K00 | MC-SRL5-0330 |
| MCM05 | 330 | MCM05011H10D00 | MC-SRL5-0330 |
| MCM05 | 380 | MCM05025H05K00 | MC-SRL5-0380 |
| MCM05 | 380 | MCM05025H10K00 | MC-SRL5-0380 |
| MCM05 | 380 | MCM05025H20K00 | MC-SRL5-0380 |
| MCM05 | 380 | MCM05016H10D00 | MC-SRL5-0380 |
| MCM05 | 430 | MCM05030H05K00 | MC-SRL5-0430 |
| MCM05 | 430 | MCM05030H10K00 | MC-SRL5-0430 |
| MCM05 | 430 | MCM05030H20K00 | MC-SRL5-0430 |
| MCM05 | 430 | MCM05030H30K00 | MC-SRL5-0430 |
| MCM05 | 430 | MCM05021H10D00 | MC-SRL5-0430 |
| MCM05 | 430 | MCM05021H20D00 | MC-SRL5-0430 |
| MCM05 | 530 | MCM05040H05K00 | MC-SRL5-0530 |
| MCM05 | 530 | MCM05040H10K00 | MC-SRL5-0530 |
| MCM05 | 530 | MCM05040H20K00 | MC-SRL5-0530 |
| MCM05 | 530 | MCM05040H30K00 | MC-SRL5-0530 |
| MCM05 | 530 | MCM05031H10D00 | MC-SRL5-0530 |


| Model No. | Body length L ₂ mm | Reference No. | Sensor rail reference No. |
|-----------|-------------------------------|-----------------|---------------------------|
| MCM05 | 530 | MCM05031H20D00 | MC-SRL5-0530 |
| MCM05 | 630 | MCM05050H05K00 | MC-SRL5-0630 |
| MCM05 | 630 | MCM05050H10K00 | MC-SRL5-0630 |
| MCM05 | 630 | MCM05050H20K00 | MC-SRL5-0630 |
| MCM05 | 630 | MCM05050H30K00 | MC-SRL5-0630 |
| MCM05 | 630 | MCM05041H10D00 | MC-SRL5-0630 |
| MCM05 | 630 | MCM05041H20D00 | MC-SRL5-0630 |
| MCM05 | 730 | MCM05060H05K00 | MC-SRL5-0730 |
| MCM05 | 730 | MCM05060H10K00 | MC-SRL5-0730 |
| MCM05 | 730 | MCM05060H20K00 | MC-SRL5-0730 |
| MCM05 | 730 | MCM05060H30K00 | MC-SRL5-0730 |
| MCM05 | 730 | MCM05051H10D00 | MC-SRL5-0730 |
| MCM05 | 730 | MCM05051H20D00 | MC-SRL5-0730 |
| MCM06 | 190 | MCM06005H05K02 | MC-SRL6-0190 |
| MCM06 | 190 | MCM06005H10K00 | MC-SRL6-0190 |
| MCM06 | 190 | MCM06005H20K00 | MC-SRL6-0190 |
| MCM06 | 240 | MCM06010H05K02 | MC-SRL6-0240 |
| MCM06 | 240 | MCM06010H10K00 | MC-SRL6-0240 |
| MCM06 | 240 | MCM06010H20K00 | MC-SRL6-0240 |
| MCM06 | 290 | MCM06015H05K02 | MC-SRL6-0290 |
| MCM06 | 290 | MCM06015H10K00 | MC-SRL6-0290 |
| MCM06 | 290 | MCM06015H20K00 | MC-SRL6-0290 |
| MCM06 | 340 | MCM06020H05K02 | MC-SRL6-0340 |
| MCM06 | 340 | MCM06020H10K00 | MC-SRL6-0340 |
| MCM06 | 340 | MCM06020H20K00 | MC-SRL6-0340 |
| MCM06 | 340 | MCM06011H05D02 | MC-SRL6-0340 |
| MCM06 | 340 | MCM06011H10D00 | MC-SRL6-0340 |
| MCM06 | 390 | MCM06025H05K02 | MC-SRL6-0390 |
| MCM06 | 390 | MCM06025H10K00 | MC-SRL6-0390 |
| MCM06 | 390 | MCM06025H20K00 | MC-SRL6-0390 |
| MCM06 | 440 | MCM06030H05K02 | MC-SRL6-0440 |
| MCM06 | 440 | MCM06030H10K00 | MC-SRL6-0440 |
| MCM06 | 440 | MCM06030H20K00 | MC-SRL6-0440 |
| MCM06 | 440 | MCM06021H05D02 | MC-SRL6-0440 |
| MCM06 | 440 | MCM06021H10D00 | MC-SRL6-0440 |
| MCM06 | 440 | MCM06021H20D00 | MC-SRL6-0440 |
| MCM06 | 540 | MCM06040H05K02 | MC-SRL6-0540 |
| MCM06 | 540 | MCM06040H10K00 | MC-SRL6-0540 |
| MCM06 | 540 | MCM06040H20K00 | MC-SRL6-0540 |
| MCM06 | 540 | MCM06031H05D02 | MC-SRL6-0540 |
| MCM06 | 540 | MCM06031H10D00 | MC-SRL6-0540 |
| MCM06 | 540 | MCM06031H20D00 | MC-SRL6-0540 |
| MCM06 | 640 | MCM06050H05K02 | MC-SRL6-0640 |
| MCM06 | 640 | MCM06050H10K00 | MC-SRL6-0640 |
| MCM06 | 640 | MCM06050H20K00 | MC-SRL6-0640 |
| MCM06 | 640 | MCM06041H05D02 | MC-SRL6-0640 |
| MCM06 | 640 | MCM06041H10D00 | MC-SRL6-0640 |
| MCM06 | 640 | MCM06041H20D00 | MC-SRL6-0640 |
| MCM06 | 740 | MCM06060H05K02 | MC-SRL6-0740 |
| MCM06 | 740 | MCM06060H10K00 | MC-SRL6-0740 |
| MCM06 | 740 | MCM06060H20K00 | MC-SRL6-0740 |
| MCM06 | 740 | MCM06051H10D00 | MC-SRL6-0740 |
| MCM06 | 740 | MCM06051H20D00 | MC-SRL6-0740 |
| MCM06 | 840 | MCM06070H05K02 | MC-SRL6-0840 |
| MCM06 | 840 | MCM06070H10K00 | MC-SRL6-0840 |
| MCM06 | 840 | MCM06070H20K00 | MC-SRL6-0840 |
| MCM06 | 840 | MCM06061H10D00 | MC-SRL6-0840 |
| MCM06 | 840 | MCM06061H20D00 | MC-SRL6-0840 |
| MCM06 | 840 | MCM060608H05K02 | MC-SRL6-0940 |
| MCM06 | 940 | MCM06080H10K00 | MC-SRL6-0940 |
| MCM06 | 940 | MCM06080H20K00 | MC-SRL6-0940 |
| MCM06 | 940 | MCM06071H10D00 | MC-SRL6-0940 |
| MCM06 | 940 | MCM06071H20D00 | MC-SRL6-0940 |

*) When using NSK standard sensors, prepare two sensor rails. Two sensor rails will also be required for another Monocarriers depending on signal points of sensors. Contact NSK for details.

| Model No. | Body length L ₂ mm | Reference No. | Sensor rail reference No. |
|-----------|-------------------------------|----------------|---------------------------|
| MCM08 | 220 | MCM08005H05K02 | MC-SRL8-0220 |
| MCM08 | 220 | MCM08005H10K00 | MC-SRL8-0220 |
| MCM08 | 270 | MCM08010H05K02 | MC-SRL8-0270 |
| MCM08 | 270 | MCM08010H10K00 | MC-SRL8-0270 |
| MCM08 | 270 | MCM08010H20K00 | MC-SRL8-0270 |
| MCM08 | 320 | MCM08015H05K02 | MC-SRL8-0320 |
| MCM08 | 320 | MCM08015H10K00 | MC-SRL8-0320 |
| MCM08 | 320 | MCM08015H20K00 | MC-SRL8-0320 |
| MCM08 | 370 | MCM08020H05K02 | MC-SRL8-0370 |
| MCM08 | 370 | MCM08020H10K00 | MC-SRL8-0370 |
| MCM08 | 370 | MCM08020H20K00 | MC-SRL8-0370 |
| MCM08 | 370 | MCM08008H10D00 | MC-SRL8-0370 |
| MCM08 | 420 | MCM08025H05K02 | MC-SRL8-0420 |
| MCM08 | 420 | MCM08025H10K00 | MC-SRL8-0420 |
| MCM08 | 420 | MCM08025H20K00 | MC-SRL8-0420 |
| MCM08 | 470 | MCM08030H05K02 | MC-SRL8-0470 |
| MCM08 | 470 | MCM08030H10K00 | MC-SRL8-0470 |
| MCM08 | 470 | MCM08030H20K00 | MC-SRL8-0470 |
| MCM08 | 470 | MCM08018H10D00 | MC-SRL8-0470 |
| MCM08 | 470 | MCM08018H20D00 | MC-SRL8-0470 |
| MCM08 | 570 | MCM08040H05K02 | MC-SRL8-0570 |
| MCM08 | 570 | MCM08040H10K00 | MC-SRL8-0570 |
| MCM08 | 570 | MCM08040H20K00 | MC-SRL8-0570 |
| MCM08 | 570 | MCM08040H30K00 | MC-SRL8-0570 |
| MCM08 | 570 | MCM08028H10D00 | MC-SRL8-0570 |
| MCM08 | 570 | MCM08028H20D00 | MC-SRL8-0570 |
| MCM08 | 670 | MCM08050H05K02 | MC-SRL8-0670 |
| MCM08 | 670 | MCM08050H10K00 | MC-SRL8-0670 |
| MCM08 | 670 | MCM08050H20K00 | MC-SRL8-0670 |
| MCM08 | 670 | MCM08050H30K00 | MC-SRL8-0670 |
| MCM08 | 670 | MCM08038H10D00 | MC-SRL8-0670 |
| MCM08 | 670 | MCM08038H20D00 | MC-SRL8-0670 |
| MCM08 | 770 | MCM08060H05K02 | MC-SRL8-0770 |
| MCM08 | 770 | MCM08060H10K00 | MC-SRL8-0770 |
| MCM08 | 770 | MCM08060H20K00 | MC-SRL8-0770 |
| MCM08 | 770 | MCM08060H30K00 | MC-SRL8-0770 |
| MCM08 | 770 | MCM08048H10D00 | MC-SRL8-0770 |
| MCM08 | 770 | MCM08048H20D00 | MC-SRL8-0770 |
| MCM08 | 870 | MCM08070H05K02 | MC-SRL8-0870 |
| MCM08 | 870 | MCM08070H10K00 | MC-SRL8-0870 |
| MCM08 | 870 | MCM08070H20K00 | MC-SRL8-0870 |
| MCM08 | 870 | MCM08070H30K00 | MC-SRL8-0870 |
| MCM08 | 870 | MCM08058H10D00 | MC-SRL8-0870 |
| MCM08 | 870 | MCM08058H20D00 | MC-SRL8-0870 |
| MCM08 | 970 | MCM08080H05K02 | MC-SRL8-0970 |
| MCM08 | 970 | MCM08080H10K00 | MC-SRL8-0970 |
| MCM08 | 970 | MCM08080H20K00 | MC-SRL8-0970 |
| MCM08 | 970 | MCM08080H30K00 | MC-SRL8-0970 |
| MCM08 | 970 | MCM08068H10D00 | MC-SRL8-0970 |
| MCM08 | 970 | MCM08068H20D00 | MC-SRL8-0970 |

| Model No. | Body length L ₂ mm | Reference No. | Sensor rail reference No. |
|-----------|-------------------------------|----------------|---------------------------|
| MCM10 | 280 | MCM10010H10K00 | MC-SRL1-0280 |
| MCM10 | 280 | MCM10010H20K00 | MC-SRL1-0280 |
| MCM10 | 330 | MCM10015H10K00 | MC-SRL1-0330 |
| MCM10 | 330 | MCM10015H20K00 | MC-SRL1-0330 |
| MCM10 | 380 | MCM10020H10K00 | MC-SRL1-0380 |
| MCM10 | 380 | MCM10020H20K00 | MC-SRL1-0380 |
| MCM10 | 380 | MCM10007H10K00 | MC-SRL1-0380 |
| MCM10 | 430 | MCM10025H10K00 | MC-SRL1-0430 |
| MCM10 | 430 | MCM10025H20K00 | MC-SRL1-0430 |
| MCM10 | 480 | MCM10030H10K00 | MC-SRL1-0480 |
| MCM10 | 480 | MCM10030H20K00 | MC-SRL1-0480 |
| MCM10 | 480 | MCM10017H10K00 | MC-SRL1-0480 |
| MCM10 | 480 | MCM10017H20K00 | MC-SRL1-0480 |
| MCM10 | 580 | MCM10040H10K00 | MC-SRL1-0580 |
| MCM10 | 580 | MCM10040H20K00 | MC-SRL1-0580 |
| MCM10 | 580 | MCM10027H10K00 | MC-SRL1-0580 |
| MCM10 | 580 | MCM10027H20K00 | MC-SRL1-0580 |
| MCM10 | 680 | MCM10050H10K00 | MC-SRL1-0680 |
| MCM10 | 680 | MCM10050H20K00 | MC-SRL1-0680 |
| MCM10 | 680 | MCM10050H30K00 | MC-SRL1-0680 |
| MCM10 | 680 | MCM10037H10K00 | MC-SRL1-0680 |
| MCM10 | 680 | MCM10037H20K00 | MC-SRL1-0680 |
| MCM10 | 780 | MCM10060H10K00 | MC-SRL1-0780 |
| MCM10 | 780 | MCM10060H20K00 | MC-SRL1-0780 |
| MCM10 | 780 | MCM10060H30K00 | MC-SRL1-0780 |
| MCM10 | 780 | MCM10047H10K00 | MC-SRL1-0780 |
| MCM10 | 780 | MCM10047H20K00 | MC-SRL1-0780 |
| MCM10 | 880 | MCM10070H10K00 | MC-SRL1-0880 |
| MCM10 | 880 | MCM10070H20K00 | MC-SRL1-0880 |
| MCM10 | 880 | MCM10070H30K00 | MC-SRL1-0880 |
| MCM10 | 880 | MCM10057H10K00 | MC-SRL1-0880 |
| MCM10 | 880 | MCM10057H20K00 | MC-SRL1-0880 |
| MCM10 | 980 | MCM10080H10K00 | MC-SRL1-0980 |
| MCM10 | 980 | MCM10080H20K00 | MC-SRL1-0980 |
| MCM10 | 980 | MCM10080H30K00 | MC-SRL1-0980 |
| MCM10 | 980 | MCM10067H10K00 | MC-SRL1-0980 |
| MCM10 | 980 | MCM10067H20K00 | MC-SRL1-0980 |
| MCM10 | 1 080 | MCM10090H10K00 | MC-SRL1-1080 |
| MCM10 | 1 080 | MCM10090H20K00 | MC-SRL1-1080 |
| MCM10 | 1 180 | MCM10100H10K00 | MC-SRL1-1180 |
| MCM10 | 1 180 | MCM10100H20K00 | MC-SRL1-1180 |
| MCM10 | 1 180 | MCM10087H10K00 | MC-SRL1-1180 |
| MCM10 | 1 180 | MCM10087H20K00 | MC-SRL1-1180 |

Cover unit for MCM05, 06, 08, and 10

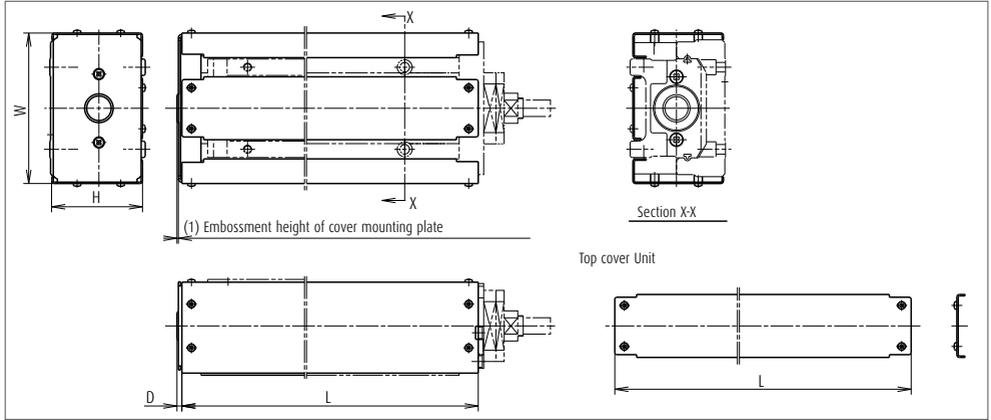

Unit : μm

| Model No. | Stroke | | Cover unit reference No. | | Cover length | | | |
|-----------|---------------|---------------|--------------------------|-------------------|--------------|------------|-----------|--------------|
| | Single Slider | Double Slider | Top cover Unit | Full cover Unit*1 | Length (L) | Height (H) | Width (W) | End part (D) |
| MCM05 | 50 | — | MC-CV05005-01 | MC-CV05005-00 | 200 | 38.5 | 65 | 2.6 |
| MCM05 | 100 | — | MC-CV05010-01 | MC-CV05010-00 | 250 | 38.5 | 65 | 2.6 |
| MCM05 | 150 | 60 | MC-CV05015-01 | MC-CV05015-00 | 300 | 38.5 | 65 | 2.6 |
| MCM05 | 200 | 110 | MC-CV05020-01 | MC-CV05020-00 | 350 | 38.5 | 65 | 2.6 |
| MCM05 | 250 | 160 | MC-CV05025-01 | MC-CV05025-00 | 400 | 38.5 | 65 | 2.6 |
| MCM05 | 300 | 210 | MC-CV05030-01 | MC-CV05030-00 | 450 | 38.5 | 65 | 2.6 |
| MCM05 | 400 | 310 | MC-CV05040-01 | MC-CV05040-00 | 550 | 38.5 | 65 | 2.6 |
| MCM05 | 500 | 410 | MC-CV05050-01 | MC-CV05050-00 | 650 | 38.5 | 65 | 2.6 |
| MCM05 | 600 | 510 | MC-CV05060-01 | MC-CV05060-00 | 750 | 38.5 | 65 | 2.6 |
| MCM06 | 50 | — | MC-CV06005-01 | MC-CV06005-00 | 225 | 48.5 | 75 | —*2 |
| MCM06 | 100 | — | MC-CV06010-01 | MC-CV06010-00 | 275 | 48.5 | 75 | —*2 |
| MCM06 | 150 | — | MC-CV06015-01 | MC-CV06015-00 | 325 | 48.5 | 75 | —*2 |
| MCM06 | 200 | 110 | MC-CV06020-01 | MC-CV06020-00 | 375 | 48.5 | 75 | —*2 |
| MCM06 | 250 | — | MC-CV06025-01 | MC-CV06025-00 | 425 | 48.5 | 75 | —*2 |
| MCM06 | 300 | 210 | MC-CV06030-01 | MC-CV06030-00 | 475 | 48.5 | 75 | —*2 |
| MCM06 | 400 | 310 | MC-CV06040-01 | MC-CV06040-00 | 575 | 48.5 | 75 | —*2 |
| MCM06 | 500 | 410 | MC-CV06050-01 | MC-CV06050-00 | 675 | 48.5 | 75 | —*2 |
| MCM06 | 600 | 510 | MC-CV06060-01 | MC-CV06060-00 | 775 | 48.5 | 75 | —*2 |
| MCM06 | 700 | 610 | MC-CV06070-01 | MC-CV06070-00 | 875 | 48.5 | 75 | —*2 |
| MCM06 | 800 | 710 | MC-CV06080-01 | MC-CV06080-00 | 975 | 48.5 | 75 | —*2 |
| MCM08 | 50 | — | MC-CV08005-01 | MC-CV08005-00 | 248 | 56.5 | 90 | 2.6 |
| MCM08 | 100 | — | MC-CV08010-01 | MC-CV08010-00 | 298 | 56.5 | 90 | 2.6 |
| MCM08 | 150 | — | MC-CV08015-01 | MC-CV08015-00 | 348 | 56.5 | 90 | 2.6 |
| MCM08 | 200 | 80 | MC-CV08020-01 | MC-CV08020-00 | 398 | 56.5 | 90 | 2.6 |
| MCM08 | 250 | — | MC-CV08025-01 | MC-CV08025-00 | 448 | 56.5 | 90 | 2.6 |
| MCM08 | 300 | 180 | MC-CV08030-01 | MC-CV08030-00 | 498 | 56.5 | 90 | 2.6 |
| MCM08 | 400 | 280 | MC-CV08040-01 | MC-CV08040-00 | 598 | 56.5 | 90 | 2.6 |
| MCM08 | 500 | 380 | MC-CV08050-01 | MC-CV08050-00 | 698 | 56.5 | 90 | 2.6 |
| MCM08 | 600 | 480 | MC-CV08060-01 | MC-CV08060-00 | 798 | 56.5 | 90 | 2.6 |
| MCM08 | 700 | 580 | MC-CV08070-01 | MC-CV08070-00 | 898 | 56.5 | 90 | 2.6 |
| MCM08 | 800 | 680 | MC-CV08080-01 | MC-CV08080-00 | 998 | 56.5 | 90 | 2.6 |
| MCM10 | 100 | — | MC-CV10010-01 | MC-CV10010-00 | 308 | 66.5 | 110 | 3.6 |
| MCM10 | 150 | — | MC-CV10015-01 | MC-CV10015-00 | 358 | 66.5 | 110 | 3.6 |
| MCM10 | 200 | 70 | MC-CV10020-01 | MC-CV10020-00 | 408 | 66.5 | 110 | 3.6 |
| MCM10 | 250 | — | MC-CV10025-01 | MC-CV10025-00 | 458 | 66.5 | 110 | 3.6 |
| MCM10 | 300 | 170 | MC-CV10030-01 | MC-CV10030-00 | 508 | 66.5 | 110 | 3.6 |
| MCM10 | 400 | 270 | MC-CV10040-01 | MC-CV10040-00 | 608 | 66.5 | 110 | 3.6 |
| MCM10 | 500 | 370 | MC-CV10050-01 | MC-CV10050-00 | 708 | 66.5 | 110 | 3.6 |
| MCM10 | 600 | 470 | MC-CV10060-01 | MC-CV10060-00 | 808 | 66.5 | 110 | 3.6 |
| MCM10 | 700 | 570 | MC-CV10070-01 | MC-CV10070-00 | 908 | 66.5 | 110 | 3.6 |
| MCM10 | 800 | 670 | MC-CV10080-01 | MC-CV10080-00 | 1008 | 66.5 | 110 | 3.6 |
| MCM10 | 900 | — | MC-CV10090-01 | MC-CV10090-00 | 1108 | 66.5 | 110 | 3.6 |
| MCM10 | 1000 | 870 | MC-CV10100-01 | MC-CV10100-00 | 1208 | 66.5 | 110 | 3.6 |

Note: The dimensions of cover shown above do not include the head height of fixing machine screws. Add the head of machine screws of approximately 2.5 mm to the outer measurement of a cover unit. Set a margin for mechanical interference with surrounding components.

*1) When using sensor unit, full-cover unit cannot be used.

*2) A cover mounting plate is not used to MCM06.


C-1-5. 3 Motor Bracket

Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.

Motor bracket for MCM02


▶ Reference number

MC-BK02-128-00

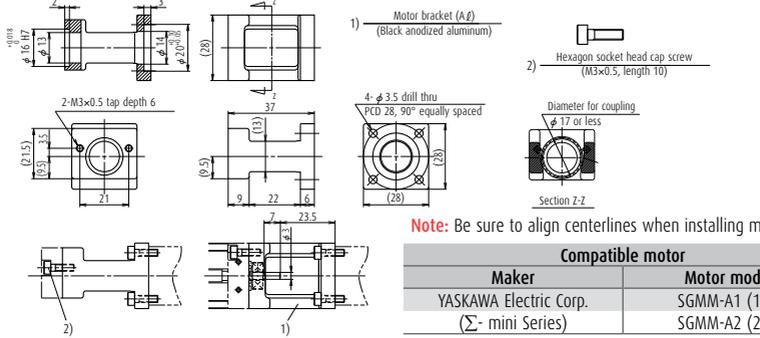


▶ Reference number

MC-BK02-133-00

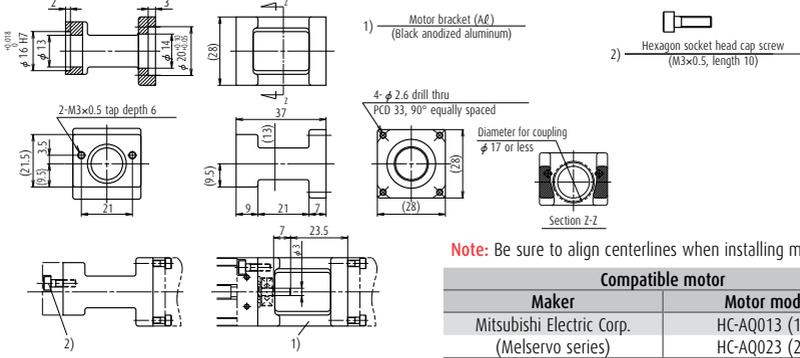

▶ Reference number


MC-BK02-223-00

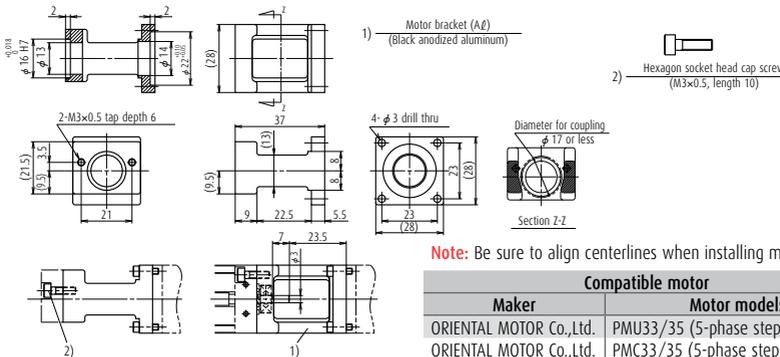

Motor bracket for MCM03

Reference number

MC-BK03-146-00

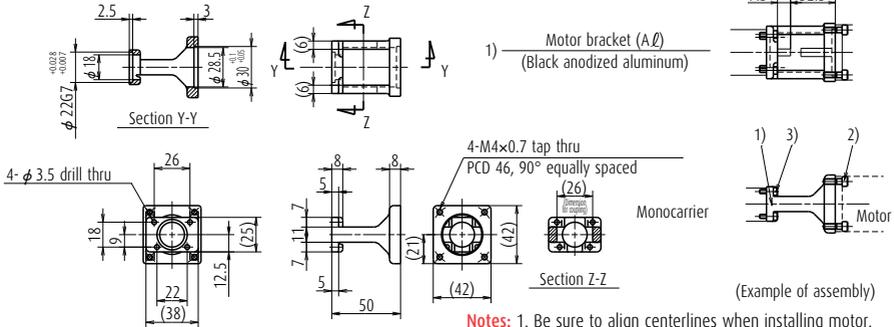

- 2) Hexagon socket head cap screw (M4, length 12)
- 3) Hexagon socket head cap screw (M3, length 10)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|---------------------------|--|
| Maker | Motor models |
| YASKAWA Electric Corp. | SGMAH-A3(30W), SGMJV-A5A(50W), SGMVA-A5A(50W) SGMJV-01A(100W), SGMVA-01A(100W), SGMAV-C2A(150W) |
| Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W) HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) |
| OMRON Corp. | R88M-W03(30W), R88M-W05(50W), R88M-W10(100W) |
| SANYO DENKI Co., Ltd. | P30B04003(30W), P30B04005(50W), P30B04010(100W) |

Motor bracket for MCM03

Reference number

MC-BK03-148-01

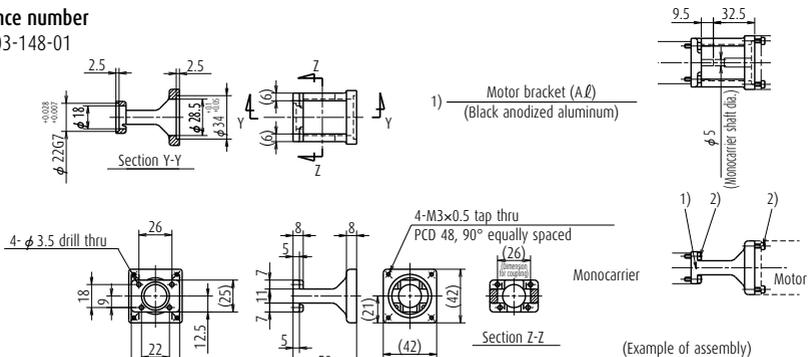

- 2) Hexagon socket head cap screw (M3, length 10)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|-----------------------|-----------------------------------|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | P50B04006 (60W), P50B04010 (100W) |

Motor bracket for MCM05

Reference number

MC-BK05-146-00

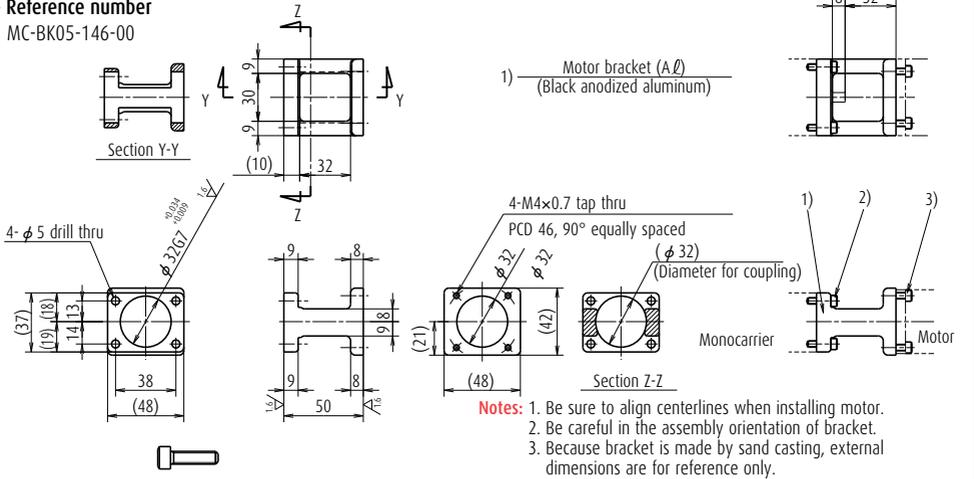

2) Hexagon socket head cap screw (M4, length 15)

3) Hexagon socket head cap screw (M4, length 12)


Compatible motor

| Maker | Motor models |
|---------------------------|---|
| YASKAWA Electric Corp. | SGMAH-A3(30W), SGMJV-A5A(50W), SGMAV-A5A(50W) SGMJV-01A(100W), SGMAV-01A(100W), SGMAV-C2A(150W) |
| Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W) HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) |
| OMRON Corp. | R88M-W03(30W), R88M-W05(50W), R88M-W10(100W) |
| SANYO DENKI Co., Ltd. | P30B04003(30W), P30B04005(50W), P30B04010(100W) |

Motor bracket for MCM05

Reference number

MC-BK05-148-00

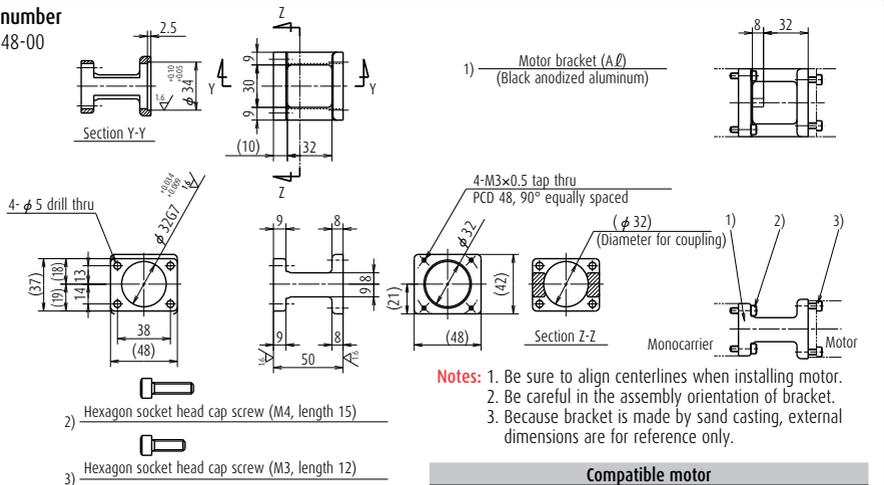

2) Hexagon socket head cap screw (M4, length 15)

3) Hexagon socket head cap screw (M3, length 12)


Compatible motor

| Maker | Motor models |
|---------------------|--------------|
| Panasonic Co., Ltd. | MAMA01(100W) |

Motor bracket for MCM05

Reference number

MC-BK05-160-00

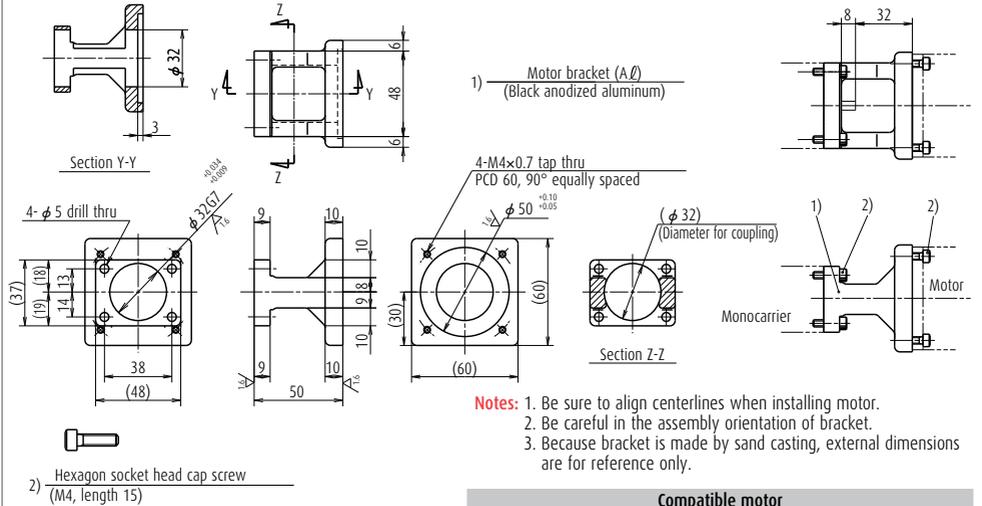


Compatible motor

| Maker | Motor models |
|-----------------------|--|
| SANYO DENKI Co., Ltd. | P50B05005(50W), P50B05010(100W), P50B05020(200W) |

Motor bracket for MCM05

Reference number

MC-BK05-250-00

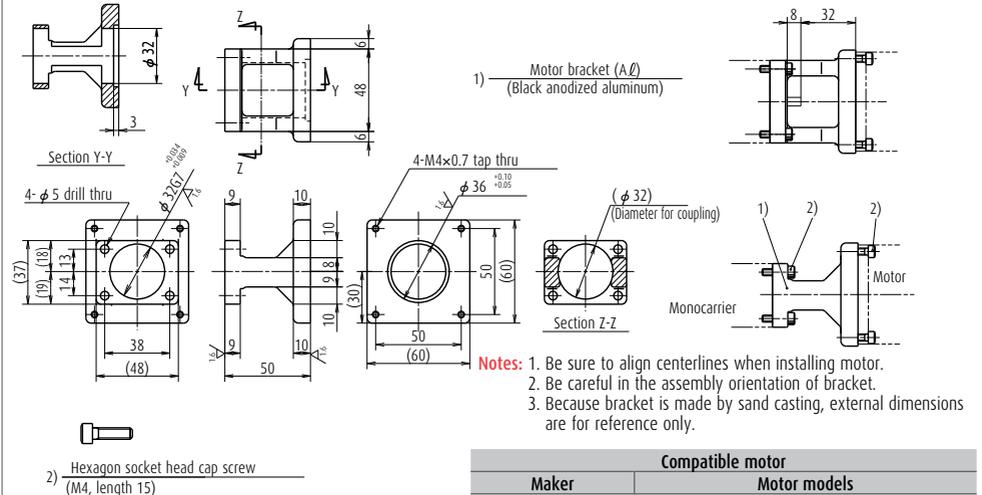


Compatible motor

| Maker | Motor models |
|--------------------------|--|
| SANYO DENKI Co., Ltd. | PBM603xxx, PBM604xxx, 103F78xx |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x |

Motor bracket for MCM06

Reference number

MC-BK06-145-00

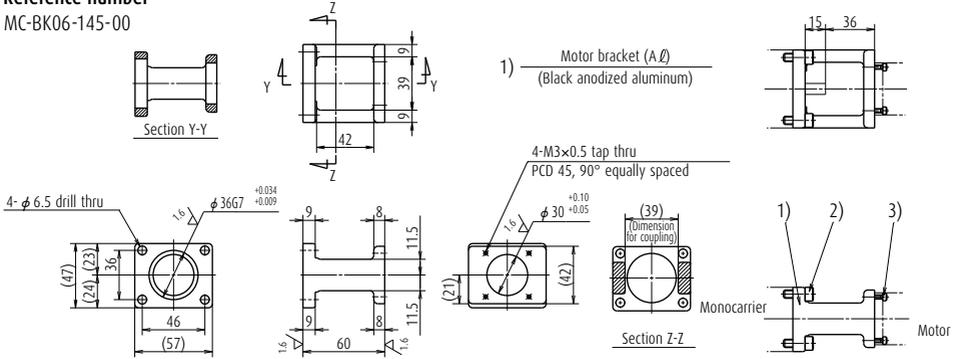

1) Motor bracket (A/L)
(Black anodized aluminum)

4-M3×0.5 tap thru
PCD 45, 90° equally spaced

φ30<sup>+0.10
-0.05</sup>

39
(Dimension for coupling)

Section Z-Z

Monocarrier Motor

- 2) Hexagon socket head cap screw (M6, length 16)
- 3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.


Compatible motor

| Maker | Motor models |
|---------------------|---------------------------|
| Panasonic Co., Ltd. | MSMD5A(50W), MSMD01(100W) |

Motor bracket for MCM05

Reference number

MC-BK05-148-00

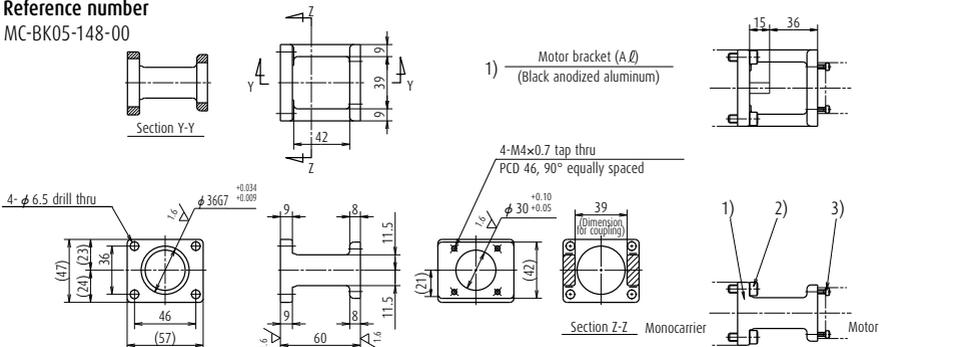

1) Motor bracket (A/L)
(Black anodized aluminum)

4-M4×0.7 tap thru
PCD 46, 90° equally spaced

φ30<sup>+0.10
-0.05</sup>

39
(Dimension for coupling)

Section Z-Z

Monocarrier Motor

- 2) Hexagon socket head cap screw (M6, length 16)
- 3) Hexagon socket head cap screw (M4, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

Compatible motor

| Maker | Motor models |
|---------------------------|---|
| YASKAWA Electric Corp. | SGMJV-ASA(50W), SGMVA-ASA(50W) SGMJV-01A(100W), SGMVA-01A(100W), SGMAV-C2A(150W) |
| Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) |
| OMRON Corp. | R88M-W03(30W), R88M-W05(50W), R88M-W10(100W) |
| SANYO DENKI Co., Ltd. | P30B04003(30W), P30B04005(50W), P30B04010(100W) |

Motor bracket for MCM06

Reference number
MC-BK06-148-00

1) Motor bracket (A) (Black anodized aluminum)

4-M3x0.5 tap thru
PCD 48, 90° equally spaced

4- ϕ 6.5 drill thru

ϕ 36G7 $^{+0.034}$ / $^{+0.009}$

ϕ 34 $^{+0.10}$ / $^{+0.05}$

(39) (Dimension for coupling)

Section Z-Z Monocarrier

1) 2) 3)

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M3, length 12)

Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|-----------------------|---------------------------------|
| Maker | Motor models |
| Panasonic Co., Ltd. | MAMA01(100W) |
| SANYO DENKI Co., Ltd. | P50B04006(60W), P50B04010(100W) |

Motor bracket for MCM06

Reference number
MC-BK06-160-00

1) Motor bracket (A) (Black anodized aluminum)

4-M4x0.7 tap thru
PCD 60, 90° equally spaced

4- ϕ 6.5 drill thru

ϕ 36G7 $^{+0.034}$ / $^{+0.009}$

ϕ 50 $^{+0.10}$ / $^{+0.05}$

(39) (Dimension for coupling)

Section Z-Z Monocarrier

1) 2) 3)

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M4, length 14)



Notes: 1. Be sure to align centerlines when installing motor.
2. Be careful in the assembly orientation of bracket.
3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|-----------------------|--|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | P50B05005(50W), P50B05010(100W), P50B05020(200W) |

Motor bracket for MCM06

Reference number



MC-BK06-170-00

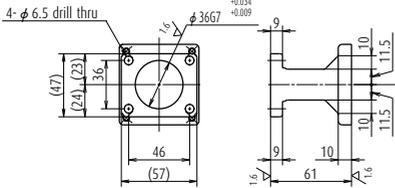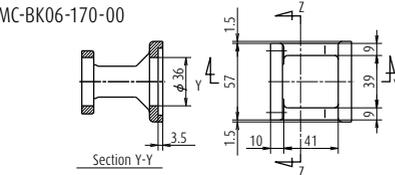

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M5, length 14)

1) Motor bracket (A \emptyset)
(Black anodized aluminum)



Section Z-Z Monocarrier Motor

- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.



Compatible motor

| Maker | Motor models |
|---------------------------|--|
| YASKAWA Electric Corp. | SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W), HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W) |
| Mitsubishi Electric Corp. | HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| SANYO DENKI Co., Ltd. | P30B06020(200W), P30B06040(400W) |

Motor bracket for MCM06

Reference number



MC-BK06-170-01

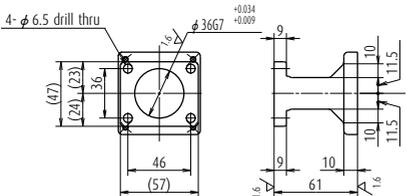

2) Hexagon socket head cap screw (M6, length 16)

3) Hexagon socket head cap screw (M4, length 14)

1) Motor bracket (A \emptyset)
(Black anodized aluminum)



Section Z-Z Monocarrier Motor

- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.


Compatible motor

| Maker | Motor models |
|---------------------|--|
| Panasonic Co., Ltd. | MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W) |

Motor bracket for MCM06

Reference number

MC-BK06-250-00

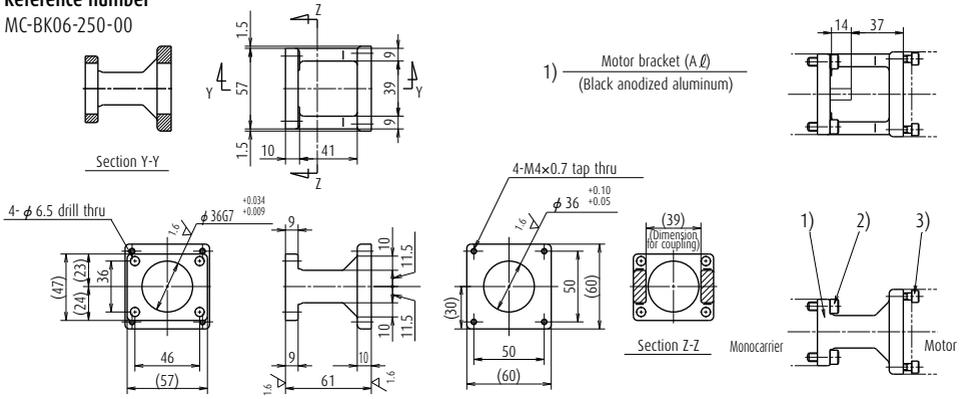

- 2) Hexagon socket head cap screw (M6, length 16)
- 3) Hexagon socket head cap screw (M4, length 14)


Notes: 1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|--------------------------|---|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | PBM603xxx, PBM604xxx, 103F78xx |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, PK56x, CSK56x CFK56x, UFK56x |

Motor bracket for MCM08

Reference number

MC-BK08-145-00

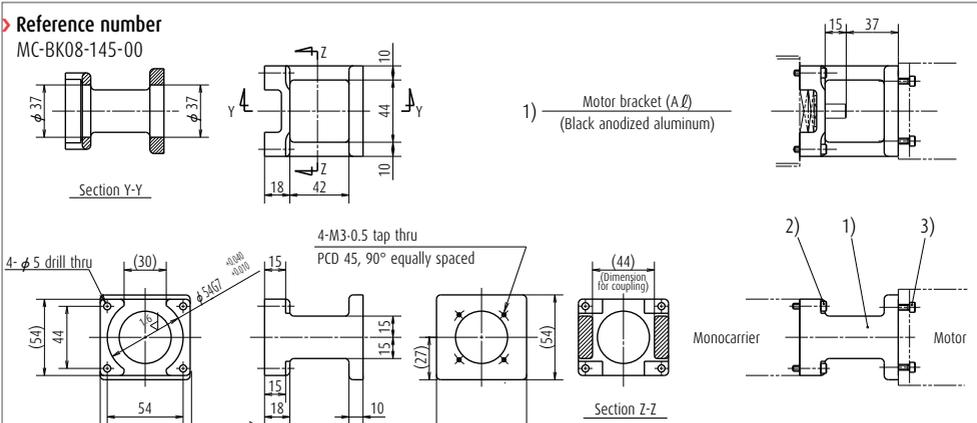

- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M3, length 12)


Notes: 1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|---------------------|--------------|
| Maker | Motor models |
| Panasonic Co., Ltd. | MSMD01(100W) |

Motor bracket for MCM08

Reference number

MC-BK08-146-00

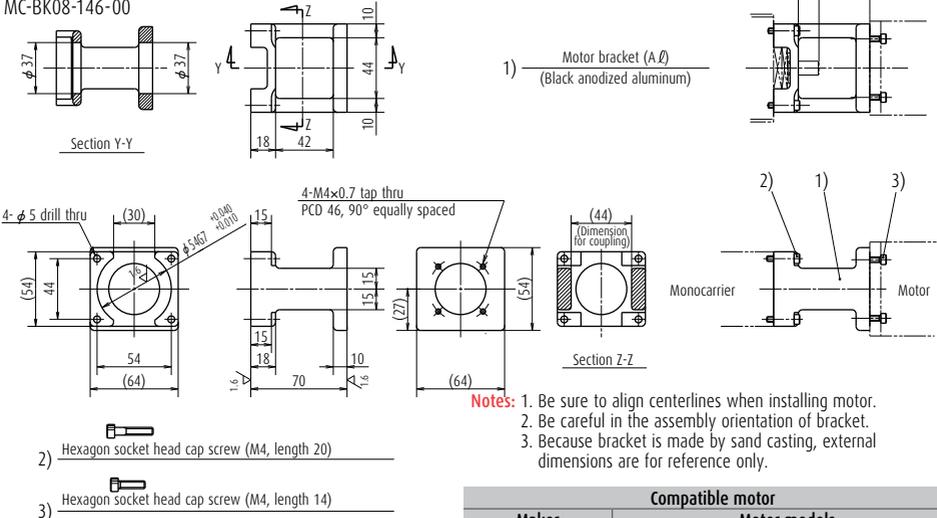


| Compatible motor | |
|---------------------------|--|
| Maker | Motor models |
| YASKAWA Electric Corp. | SGMJV-01A(100W), SGMJV-01A(100W), SGMJV-C2A(150W) |
| Mitsubishi Electric Corp. | HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) |
| SANYO DENKI Co., Ltd. | P30B04003(30W), P30B04005(50W), P30B04010(100W) |

Motor bracket for MCM08

Reference number

MC-BK08-160-00

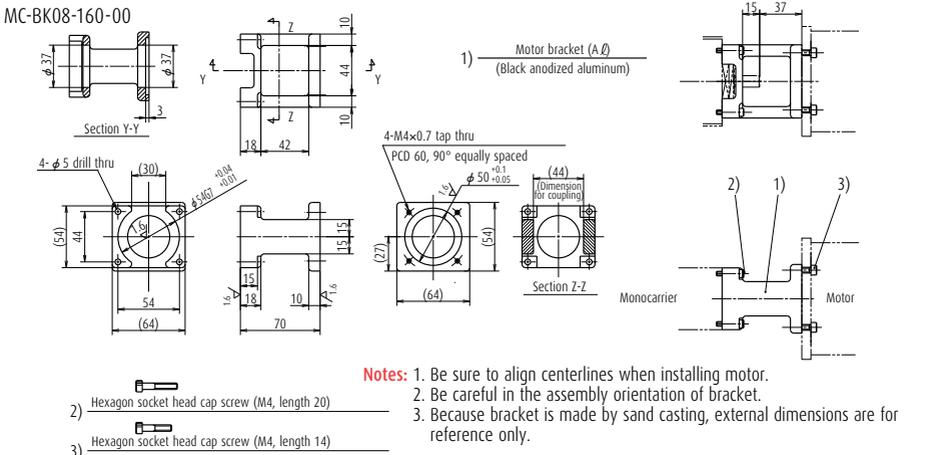


| Compatible motor | |
|-----------------------|--|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | P50B05005(50W), P50B05010(100W), P50B05020(200W) |

Motor bracket for MCM08

Reference number

MC-BK08-170-00

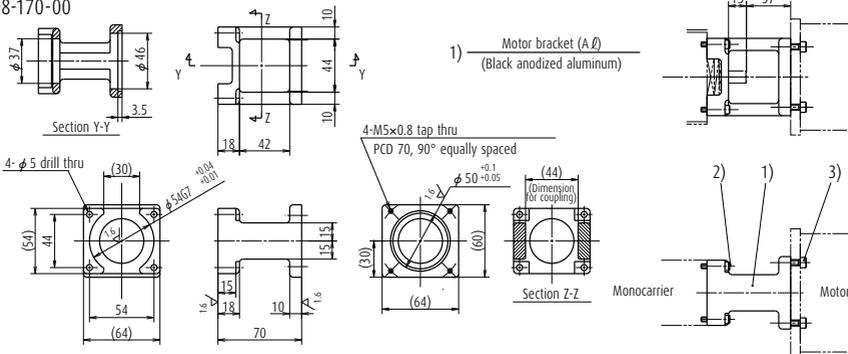

- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M5, length 14)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|---------------------------|--|
| Maker | Motor models |
| YASKAWA Electric Corp. | SGMJV-02A(200W), SGM2V-02A(200W), SGMJV-04A(400W), SGM2V-04A(400W), HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W) |
| Mitsubishi Electric Corp. | HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| SANYO DENKI Co., Ltd. | P30B06020(200W), P30B06040(400W) |

Motor bracket for MCM08

Reference number

MC-BK08-170-01

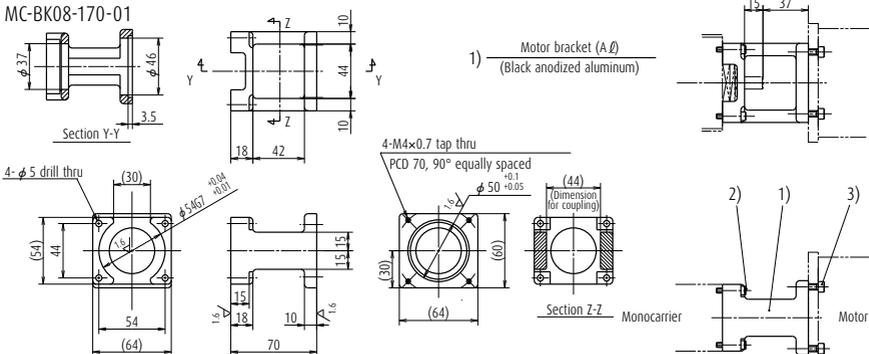

- 2) Hexagon socket head cap screw (M4, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)


- Notes:**
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

| Compatible motor | |
|---------------------|--|
| Maker | Motor models |
| Panasonic Co., Ltd. | MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W) |

Motor bracket for MCM10

Reference number

MC-BK10-270-00

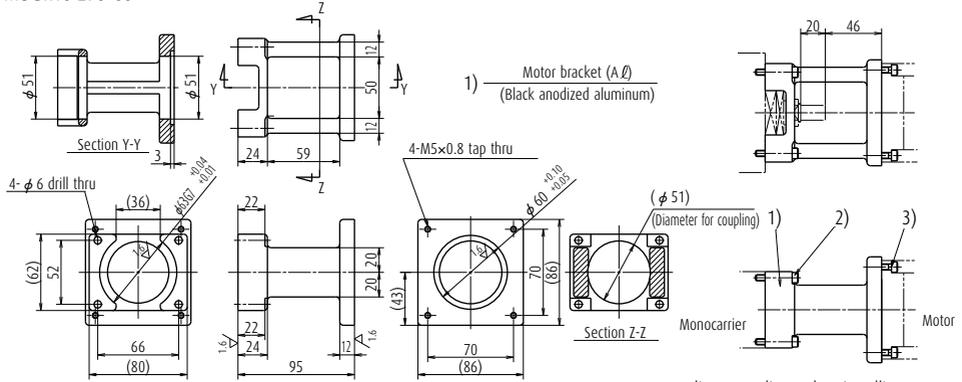

- Notes:
1. Be sure to align centerlines when installing motor.
 2. Be careful in the assembly orientation of bracket.
 3. Because bracket is made by sand casting, external dimensions are for reference only.

- 2)  Hexagon socket head cap screw (M5, length 30)
- 3)  Hexagon socket head cap screw (M5, length 18)

| Compatible motor | |
|--------------------------|---|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | 103F85xx |
| ORIENTAL MOTOR Co., Ltd. | AS98, UPK59x, PK59x, CSK59x CFK59x, UFK59x |

Motor Availability Table of Motor Bracket for MCM Series

Table 5

| Model No. | ref No. code | Motor bracket reference No. | Motor manufacturer | Stepping motor model No. | Wattage of AC servo motor | | | | | | | | | | | |
|-----------|--------------|-----------------------------|---------------------------|--------------------------|---------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----------|-----|-----|--|
| | | | | | 10 | 20 | 30 | 50 | 60 | 100 | 150 | 200 | 300 | 400 | 750 | |
| MCM02 | 1 | MC-BK02-128-00 | YASKAWA Electric Corp. | | SGMM-A1 | SGMM-A2 | | | | | | | | | | |
| MCM02 | 2 | MC-BK02-133-00 | Mitsubishi Electric Corp. | | HC-AQ013 | HC-AQ023 | | | | | | | | | | |
| MCM02 | 3 | MC-BK02-223-00 | ORIENTAL MOTOR Co., Ltd. | PMU33/35 (5-phase) | | | | | | | | | | | | |
| MCM02 | 3 | MC-BK02-223-00 | ORIENTAL MOTOR Co., Ltd. | PMC33/35 (5-phase) | | | | | | | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | YASKAWA Electric Corp. | | | SGMAH-A3 | SGMJV-A5A | | | SGMJV-01A | SGMAV-C2A | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | YASKAWA Electric Corp. | | | SGMAH-A3 | SGMAV-A5A | | | SGMAV-01A | SGMAV-C2A | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | Mitsubishi Electric Corp. | | | | HF-KP053 | | | HF-KP13 | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | Mitsubishi Electric Corp. | | | | HF-MP053 | | | HF-MP13 | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | Mitsubishi Electric Corp. | | | | HC-KFS053 | | | HC-KFS13 | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | Mitsubishi Electric Corp. | | | | HC-MFS053 | | | HC-MFS13 | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | OMRON Corp. | | | R88M-W03 | R88M-W05 | | | R88M-W10 | | | | | | |
| MCM03 | 1 | MC-BK03-146-00 | SANYO DENKI Co., Ltd. | | | P30B04003 | P30B04005 | | | P30B04010 | | | | | | |
| MCM03 | 2 | MC-BK03-148-01 | SANYO DENKI Co., Ltd. | | | | | | P50B04006 | P50B04010 | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | SANYO DENKI Co., Ltd. | PBM423xxx | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | SANYO DENKI Co., Ltd. | 103F55xx | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | ORIENTAL MOTOR Co., Ltd. | AS46, ASC46 | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | ORIENTAL MOTOR Co., Ltd. | UPK54x, PK54x | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | ORIENTAL MOTOR Co., Ltd. | CSK54x, CFK54x | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | ORIENTAL MOTOR Co., Ltd. | UMK24x, CSK24x | | | | | | | | | | | | |
| MCM03 | 3 | MC-BK03-231-00 | ORIENTAL MOTOR Co., Ltd. | PK24x | | | | | | | | | | | | |
| MCM05 | 1 | MC-BK05-145-00 | Panasonic Co., Ltd. | | | | | | MSMD5A | | MSMD01 | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | YASKAWA Electric Corp. | | | | SGMAH-A3 | SGMJV-A5A | | SGMJV-01A | SGMAV-C2A | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | YASKAWA Electric Corp. | | | | SGMAH-A3 | SGMAV-A5A | | SGMAV-01A | SGMAV-C2A | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | Mitsubishi Electric Corp. | | | | | HF-KP053 | | HF-KP13 | | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | Mitsubishi Electric Corp. | | | | | HF-MP053 | | HF-MP13 | | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | Mitsubishi Electric Corp. | | | | | HC-KFS053 | | HC-KFS13 | | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | Mitsubishi Electric Corp. | | | | | HC-MFS053 | | HC-MFS13 | | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | OMRON Corp. | | | | R88M-W03 | R88M-W05 | | R88M-W10 | | | | | | |
| MCM05 | 2 | MC-BK05-146-00 | SANYO DENKI Co., Ltd. | | | | P30B04003 | P30B04005 | | P30B04010 | | | | | | |
| MCM05 | 3 | MC-BK05-148-00 | Panasonic Co., Ltd. | | | | | | | MAMA01 | | | | | | |
| MCM05 | 4 | MC-BK05-160-00 | SANYO DENKI Co., Ltd. | | | | | P50B05005 | | P50B05010 | | | P50B05020 | | | |

| Model No. | ref No. code | Motor bracket reference No. | Motor manufacturer | Stepping motor model No. | Wattage of AC servo motor | | | | | | | | | | | |
|-----------|--------------|-----------------------------|---------------------------|--------------------------|---------------------------|----|-----------|-----------|-----------|-----------|-----------|-----|-----|-----|-----------|--|
| | | | | | 10 | 20 | 30 | 50 | 60 | 100 | 150 | 200 | 300 | 400 | 750 | |
| MCM05 | 5 | MC-BK05-250-00 | SANYO DENKI Co., Ltd. | PBM603xx, PBM604xx | | | | | | | | | | | | |
| MCM05 | 5 | MC-BK05-250-00 | SANYO DENKI Co., Ltd. | 103F78xx | | | | | | | | | | | | |
| MCM05 | 5 | MC-BK05-250-00 | ORIENTAL MOTOR Co., Ltd. | AS66, ASC66 | | | | | | | | | | | | |
| MCM05 | 5 | MC-BK05-250-00 | ORIENTAL MOTOR Co., Ltd. | UPK56x, UFK56x | | | | | | | | | | | | |
| MCM05 | 5 | MC-BK05-250-00 | ORIENTAL MOTOR Co., Ltd. | PK56x, CSK56x | | | | | | | | | | | | |
| MCM05 | 5 | MC-BK05-250-00 | ORIENTAL MOTOR Co., Ltd. | CFK56x | | | | | | | | | | | | |
| MCM06 | 1 | MC-BK06-145-00 | Panasonic Co., Ltd. | | | | | MSMD5A | | MSMD01 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | YASKAWA Electric Corp. | | | | | SGMJV-A5A | | SGMJV-01A | SGMAV-C2A | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | YASKAWA Electric Corp. | | | | | SGMAV-A5A | | SGMAV-01A | SGMAV-C2A | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | Mitsubishi Electric Corp. | | | | | HF-KP053 | | HF-KP13 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | Mitsubishi Electric Corp. | | | | | HF-MP053 | | HF-MP13 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | Mitsubishi Electric Corp. | | | | | HC-KFS053 | | HC-KFS13 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | Mitsubishi Electric Corp. | | | | | HC-MFS053 | | HC-MFS13 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | OMRON Corp. | | | | R88M-W03 | R88M-W05 | | R88M-W10 | | | | | | |
| MCM06 | 2 | MC-BK06-146-00 | SANYO DENKI Co., Ltd. | | | | P30B04003 | P30B04005 | | P30B04010 | | | | | | |
| MCM06 | 3 | MC-BK06-148-00 | SANYO DENKI Co., Ltd. | | | | | | P50B04006 | P50B04010 | | | | | | |
| MCM06 | 3 | MC-BK06-148-00 | Panasonic Co., Ltd. | | | | | | | MAMA01 | | | | | | |
| MCM06 | 4 | MC-BK06-160-00 | SANYO DENKI Co., Ltd. | | | | | P50B05005 | | P50B05010 | P50B05020 | | | | | |
| MCM06 | 4 | MC-BK06-160-00 | | | | | | | | | | | | | | |
| MCM06 | 5 | MC-BK06-170-00 | YASKAWA Electric Corp. | | | | | | | | SGMJV-02A | | | | SGMJV-04A | |
| MCM06 | 5 | MC-BK06-170-00 | YASKAWA Electric Corp. | | | | | | | | SGMAV-02A | | | | SGMAV-04A | |
| MCM06 | 5 | MC-BK06-170-00 | Mitsubishi Electric Corp. | | | | | | | | HF-KP23 | | | | HF-KP43 | |
| MCM06 | 5 | MC-BK06-170-00 | Mitsubishi Electric Corp. | | | | | | | | HF-MP23 | | | | HF-MP43 | |
| MCM06 | 5 | MC-BK06-170-00 | Mitsubishi Electric Corp. | | | | | | | | HC-KFS23 | | | | HC-KFS43 | |
| MCM06 | 5 | MC-BK06-170-00 | Mitsubishi Electric Corp. | | | | | | | | HC-MFS23 | | | | HC-MFS43 | |
| MCM06 | 5 | MC-BK06-170-00 | OMRON Corp. | | | | | | | | R88M-W20 | | | | R88M-W40 | |
| MCM06 | 5 | MC-BK06-170-00 | SANYO DENKI Co., Ltd. | | | | | | | | P30B06020 | | | | P30B06040 | |
| MCM06 | 6 | MC-BK06-170-01 | Panasonic Co., Ltd. | | | | | | | | MSMD02 | | | | MSMD04 | |
| MCM06 | 6 | MC-BK06-170-01 | Panasonic Co., Ltd. | | | | | | | | MAMA02 | | | | MAMA04 | |
| MCM06 | 7 | MC-BK06-250-00 | SANYO DENKI Co., Ltd. | PBM603xxx | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | SANYO DENKI Co., Ltd. | PBM604xxx | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | SANYO DENKI Co., Ltd. | 103F78xx | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | ORIENTAL MOTOR Co., Ltd. | AS66, ASC66 | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | ORIENTAL MOTOR Co., Ltd. | UPK56x, PK56x | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | ORIENTAL MOTOR Co., Ltd. | CSK56x, CFK56x | | | | | | | | | | | | |
| MCM06 | 7 | MC-BK06-250-00 | ORIENTAL MOTOR Co., Ltd. | UFK56x | | | | | | | | | | | | |

Accessories

| Model No. | ref No. code | Motor bracket reference No. | Motor manufacturer | Stepping motor model No. | Wattage of AC servo motor | | | | | | | | | | | | |
|-----------|--------------|-----------------------------|---------------------------|--------------------------|---------------------------|----|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-----|-----------|--|
| | | | | | 10 | 20 | 30 | 50 | 60 | 100 | 150 | 200 | 300 | 400 | 750 | | |
| MCM08 | 1 | MC-BK08-145-00 | Panasonic Co., Ltd. | | | | | | | MSMD01 | | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | YASKAWA Electric Corp | | | | | | | SGMJV-01A | SGMAV-C2A | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | YASKAWA Electric Corp | | | | | | | SGMAV-01A | SGMAV-C2A | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | Mitsubishi Electric Corp | | | | | | | HF-KP13 | | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | Mitsubishi Electric Corp | | | | | | | HF-MP13 | | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | Mitsubishi Electric Corp | | | | | | | HC-KFS13 | | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | Mitsubishi Electric Corp | | | | | | | HC-MFS13 | | | | | | | |
| MCM08 | 2 | MC-BK08-146-00 | SANYO DENKI Co., Ltd. | | | | P30B04003 | P30B04005 | | P30B04010 | | | | | | | |
| MCM08 | 3 | MC-BK08-160-00 | SANYO DENKI Co., Ltd. | | | | | P50B05005 | | P50B05010 | | P50B05020 | | | | | |
| MCM08 | 4 | MC-BK08-170-00 | YASKAWA Electric Corp. | | | | | | | | | SGMJV-02A | | | | SGMJV-04A | |
| MCM08 | 4 | MC-BK08-170-00 | YASKAWA Electric Corp. | | | | | | | | | SGMAV-02A | | | | SGMAV-04A | |
| MCM08 | 4 | MC-BK08-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HF-KP23 | | | | HF-KP43 | |
| MCM08 | 4 | MC-BK08-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HF-MP23 | | | | HF-MP43 | |
| MCM08 | 4 | MC-BK08-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HC-KFS23 | | | | HC-KFS43 | |
| MCM08 | 4 | MC-BK08-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HC-MFS23 | | | | HC-MFS43 | |
| MCM08 | 4 | MC-BK08-170-00 | OMRON Corp. | | | | | | | | | R88M-W20 | | | | R88M-W40 | |
| MCM08 | 4 | MC-BK08-170-00 | SANYO DENKI Co., Ltd. | | | | | | | | | P30B06020 | | | | P30B06040 | |
| MCM08 | 5 | MC-BK08-170-01 | Panasonic Co., Ltd. | | | | | | | | | MSMD02 | | | | MSMD04 | |
| MCM08 | 5 | MC-BK08-170-01 | Panasonic Co., Ltd. | | | | | | | | | MAMA02 | | | | MAMA04 | |
| MCM08 | 6 | MC-BK08-190-00 | SANYO DENKI Co., Ltd. | | | | | | | | | P50B07020 | P50B07030 | | | P50B07040 | |
| MCM08 | 7 | MC-BK08-250-00 | SANYO DENKI Co., Ltd. | PBM603xxx, | | | SGMAH-A3 | SGMJV-A5A | | SGMJV-01A | SGMAV-C2A | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | SANYO DENKI Co., Ltd. | PBM604xxx | | | SGMAH-A3 | SGMAV-A5A | | SGMAV-01A | SGMAV-C2A | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | SANYO DENKI Co., Ltd. | 103F78xx | | | | HF-KP053 | | HF-KP13 | | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | Mitsubishi Electric Corp. | | | | | HF-MP053 | | HF-MP13 | | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | Mitsubishi Electric Corp. | | | | | HC-KFS053 | | HC-KFS13 | | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | Mitsubishi Electric Corp. | | | | | HC-MFS053 | | HC-MFS13 | | | | | | | |
| MCM08 | 7 | MC-BK08-250-00 | OMRON Corp. | | | | R88M-W03 | R88M-W05 | | R88M-W10 | | | | | | | |
| MCM08 | 8 | MC-BK08-270-00 | SANYO DENKI Co., Ltd. | 103F85xx | | | | P30B04003 | P30B04005 | P30B04010 | | | | | | | |
| MCM08 | 8 | MC-BK08-270-00 | ORIENTAL MOTOR Co., Ltd. | AS98 | | | | | | MAMA01 | | | | | | | |
| MCM08 | 8 | MC-BK08-270-00 | ORIENTAL MOTOR Co., Ltd. | UPK59x, PK59x | | | | | P50B05005 | P50B05010 | | P50B05020 | | | | | |
| MCM08 | 8 | MC-BK08-270-00 | ORIENTAL MOTOR Co., Ltd. | CSK59x, CFK59x | | | | | | | | | | | | | |
| MCM08 | 8 | MC-BK08-270-00 | ORIENTAL MOTOR Co., Ltd. | UFK59x | | | | | | | | | | | | | |
| MCM10 | 1 | MC-BK10-170-00 | YASKAWA Electric Corp. | | | | | | | | | SGMJV-02A | | | | SGMJV-04A | |
| MCM10 | 1 | MC-BK10-170-00 | YASKAWA Electric Corp. | | | | | | | | | SGMAV-02A | | | | SGMAV-04A | |
| MCM10 | 1 | MC-BK10-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HF-KP23 | | | | HF-KP43 | |
| MCM10 | 1 | MC-BK10-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HF-MP23 | | | | HF-MP43 | |
| MCM10 | 1 | MC-BK10-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HC-KFS23 | | | | HC-KFS43 | |
| MCM10 | 1 | MC-BK10-170-00 | Mitsubishi Electric Corp. | | | | | | | | | HC-MFS23 | | | | HC-MFS43 | |
| MCM10 | 1 | MC-BK10-170-00 | OMRON Corp. | | | | | | | | | R88M-W20 | | | | R88M-W40 | |
| MCM10 | 1 | MC-BK10-170-00 | SANYO DENKI Co., Ltd. | | | | | | | | | P30B06020 | | | | P30B06040 | |
| MCM10 | 2 | MC-BK10-170-01 | Panasonic Co., Ltd. | | | | | | | | | MSMD02 | | | | MSMD04 | |
| MCM10 | 2 | MC-BK10-170-01 | Panasonic Co., Ltd. | | | | | | | | | MAMA02 | | | | MAMA04 | |
| MCM10 | 3 | MC-BK10-190-00 | Panasonic Co., Ltd. | | | | | HC-MFS053 | | HC-MFS13 | | | | | | | |
| MCM10 | 3 | MC-BK10-190-00 | Panasonic Co., Ltd. | | | | | | | | | R88M-W20 | | | | R88M-W40 | |
| MCM10 | 3 | MC-BK10-190-00 | SANYO DENKI Co., Ltd. | | | | | | | | | P50B07020 | P50B07030 | | | P50B07040 | |
| MCM10 | 4 | MC-BK10-270-00 | SANYO DENKI Co., Ltd. | 103F85xx | | | | | | | | | | | | | |
| MCM10 | 4 | MC-BK10-270-00 | ORIENTAL MOTOR Co., Ltd. | AS98 | | | | | | | | | | | | | |
| MCM10 | 4 | MC-BK10-270-00 | ORIENTAL MOTOR Co., Ltd. | UPK59x, PK59x | | | | | | | | | | | | | |
| MCM10 | 4 | MC-BK10-270-00 | ORIENTAL MOTOR Co., Ltd. | CSK59x, CFK59x | | | | | | | | | | | | | |
| MCM10 | 4 | MC-BK10-270-00 | ORIENTAL MOTOR Co., Ltd. | UFK59x | | | | | | | | | | | | | |



C-1-6 MCH Series

| | Page |
|--|------|
| 1. MCH Series Reference Number Coding | C73 |
| 2. MCH Series Dimension Table of Standard Products | |
| MCL06..... | C74 |
| MCH06..... | C75 |
| MCH09..... | C77 |
| MCH10..... | C79 |
| 3. MCH Series Accessories | |
| 3.1 Sensor Unit..... | C81 |
| 3.2 Cover Unit..... | C83 |
| 3.3 Intermediate Plate for Motor..... | C87 |

C-1-6 MCH Series

C-1-6. 1 MCH Series Reference Number Coding

[Body] Example: **MC H 06 040 H 10 K (B 2)**^{*1}

Monocarrier

H Type: MCH Series
L Type: MCH Series low profile rail (only for 06 size)

Nominal size (rail width, Unit: 10mm)

Stroke (Unit: 10mm)

Accuracy grade (H, high grade; P, precision grade)

14th digit is control No. of NSK. Customers cannot specify a number. See the pages of each nominal number for details.

NSK management number (0 or 2)

Grease specification: B (LG2)
(See page C140.)

Slider specification K: Single slider
D: Double slider (See page C14.)

Ball screw lead (mm)

^{*1}: These two code fields are added when non-standard grease is used.

[With Accessories] Example **MC S 06 040 H 10 K 0 2 K 0 0 0**

S: With MCH Accessories
R: With MCL Accessories

NSK management number

Sensor unit

Cover unit

Intermediate plate for motor

Note: Option parts are available separately.

Table 1 Sensor unit (See page C81.)

| Reference No. code | Specification | Reference No. |
|--------------------|---|---------------|
| 0 | N/A | — |
| 1 | Proximity switch (Normally close contact 3 pieces) | MC-SRHxx-10 |
| 2 | Proximity switch (Normally open contact 3 pieces) | MC-SRHxx-11 |
| 3 | Proximity switch (Normally open contact 1 piece, Normally close contact 2 pieces) | MC-SRHxx-12 |
| 4 | Photo sensor 3 pieces | MC-SRHxx-13 |

Note 1) xx: Nominal size 2) Sensor rail is not included in a sensor unit. If you require the rail, please specify upon ordering. (See page C81 to C82.)

Table 2 Cover unit (See page C83 to C85.)

| Reference No. code | Specification | Reference No. |
|--------------------|-------------------|---------------|
| 0 | N/A | — |
| 1 | For single slider | MC-HVxxxxx-00 |
| 1 | For double slider | MC-HVxxxxxD00 |

Note xxxxx: Nominal size and stroke number

Table 3 Intermediate plate for motor (See page C87 to C90.)


| Reference No. code | Reference No. | | |
|--------------------|-----------------|-----------------|-----------------|
| | MCH06 (MCL06) | MCH09 | MCH10 |
| 0 | N/A | N/A | N/A |
| 1 | MC-BKH06-145-00 | MC-BKH09-145-00 | MC-BKH10-170-00 |
| 2 | MC-BKH06-146-00 | MC-BKH09-146-00 | MC-BKH10-170-01 |
| 3 | MC-BKH06-231-00 | MC-BKH09-170-00 | MC-BKH10-190-00 |
| 4 | MC-BKH06-250-00 | MC-BKH09-170-01 | MC-BKH10-190-01 |
| 5 | — | MC-BKH09-231-00 | MC-BKH10-250-00 |
| 6 | — | MC-BKH09-250-00 | MC-BKH10-270-00 |

N/A: Not applicable

C-1-6. 2 MCH Series Dimension Table of Standard Products

MCL06

Accuracy grade: High grade (H)

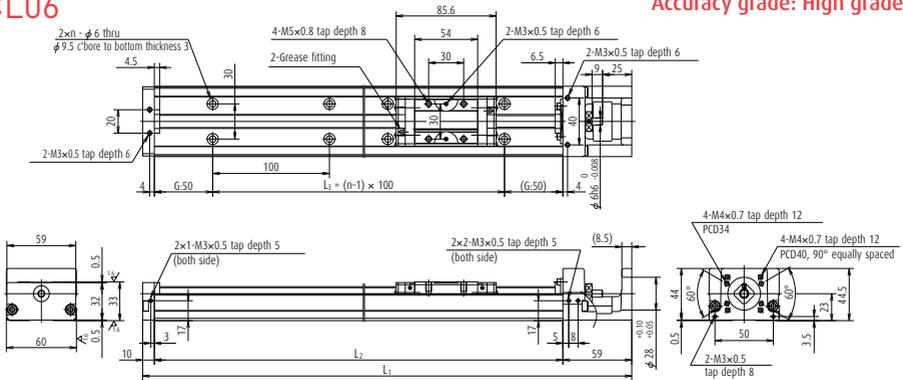

- > Rail of MCL 06 is made lighter than that of MCH 06 by lowering rail height. Weight ratio between MCH 06 and MCL 06 is 5 to 4.
- > Double slider specification is also available for MCL 06.
- > Combinations of stroke and ball screw lead of the MCL 06 are the same as those of MCH 06.

Dimension of MCL06 (Single slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|------------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|---|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | n | | |
| ◇ MCL06005H05K02 | 50 | 53 (65) | 5 | 219 | 150 | 100 | 2 | 2.38 | 1.0 |
| ◇ MCL06005H10K02 | 50 | 53 (65) | 10 | 219 | 150 | 100 | 2 | 3.45 | 1.0 |
| MCL06010H05K02 | 100 | 103 (115) | 5 | 269 | 200 | 100 | 2 | 3.17 | 1.3 |
| MCL06010H10K02 | 100 | 103 (115) | 10 | 269 | 200 | 100 | 2 | 4.12 | 1.3 |
| MCL06020H05K02 | 200 | 203 (215) | 5 | 369 | 300 | 200 | 3 | 4.51 | 1.9 |
| MCL06020H10K02 | 200 | 203 (215) | 10 | 369 | 300 | 200 | 3 | 5.46 | 1.9 |
| MCL06030H10K02 | 300 | 303 (315) | 10 | 469 | 400 | 300 | 4 | 6.80 | 2.6 |
| MCL06030H20K02 | 300 | 303 (315) | 20 | 469 | 400 | 300 | 4 | 10.6 | 2.6 |
| MCL06040H10K02 | 400 | 403 (415) | 10 | 569 | 500 | 400 | 5 | 8.13 | 3.2 |
| MCL06040H20K02 | 400 | 403 (415) | 20 | 569 | 500 | 400 | 5 | 11.9 | 3.2 |
| MCL06050H10K02 | 500 | 503 (515) | 10 | 669 | 600 | 500 | 6 | 9.47 | 3.9 |
| MCL06050H20K02 | 500 | 503 (515) | 20 | 669 | 600 | 500 | 6 | 13.3 | 3.9 |

Notes: 1. Dimension G is 25 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | High-grade | Precision-grade |
|----------|------------|-----------------|
| Standard | 02 | (None) |
| LG2 | B2 | B0 |

Monocarrier dynamic torque specification (N · cm)

| Ball screw lead (mm) | 5 | 1.0 - 4.8 |
|----------------------|-----------|-----------|
| 10 | 1.1 - 5.8 | |
| 20 | 1.6 - 7.9 | |

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead ℓ (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|------------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_a | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 5 | ϕ 12 | 3 760 | 22 800 | 4 400 | 5 | 6 310 | 16 300 | 1 450 |
| 10 | ϕ 12 | 2 420 | 18 100 | 4 400 | 10 | 3 790 | 16 300 | 1 450 |
| 20 | ϕ 12 | 2 420 | 14 400 | 4 400 | 20 | 3 790 | 16 300 | 1 450 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Single | 335 | 133 | 133 |

MCH06

Accuracy grade: High grade (H)

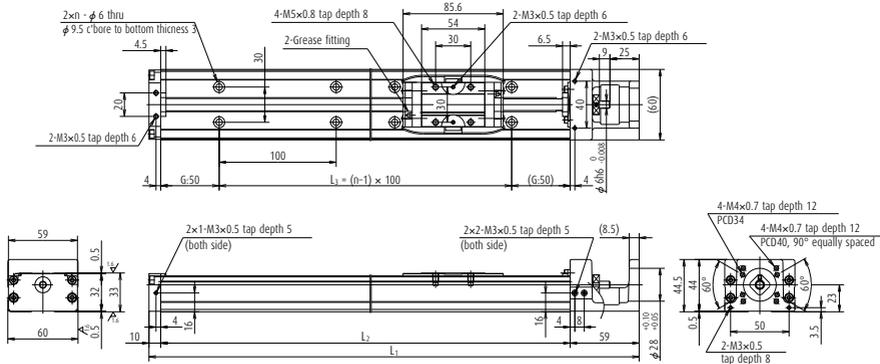

Dimension of MCH06 (Single slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|------------------|---------------------|--------------------------------|----------------------|------------------|----------------|----------------|---|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | n | | |
| ◇ MCH06005H05K02 | 50 | 53 (65) | 5 | 219 | 150 | 100 | 2 | 2.38 | 1.8 |
| ◇ MCH06005H10K02 | 50 | 53 (65) | 10 | 219 | 150 | 100 | 2 | 3.45 | 1.8 |
| ◇ MCH06005H20K02 | 50 | 53 (65) | 20 | 219 | 150 | 100 | 2 | 7.25 | 1.8 |
| MCH06010H05K02 | 100 | 103 (115) | 5 | 269 | 200 | 100 | 2 | 3.17 | 2.2 |
| MCH06010H10K02 | 100 | 103 (115) | 10 | 269 | 200 | 100 | 2 | 4.12 | 2.2 |
| MCH06010H20K02 | 100 | 103 (115) | 20 | 269 | 200 | 100 | 2 | 7.92 | 2.2 |
| MCH06020H05K02 | 200 | 203 (215) | 5 | 369 | 300 | 200 | 3 | 4.51 | 3.0 |
| MCH06020H10K02 | 200 | 203 (215) | 10 | 369 | 300 | 200 | 3 | 5.46 | 3.0 |
| MCH06020H20K02 | 200 | 203 (215) | 20 | 369 | 300 | 200 | 3 | 9.26 | 3.0 |
| MCH06030H05K02 | 300 | 303 (315) | 5 | 469 | 400 | 300 | 4 | 5.85 | 3.7 |
| MCH06030H10K02 | 300 | 303 (315) | 10 | 469 | 400 | 300 | 4 | 6.80 | 3.7 |
| MCH06030H20K02 | 300 | 303 (315) | 20 | 469 | 400 | 300 | 4 | 10.6 | 3.7 |
| MCH06040H05K02 | 400 | 403 (415) | 5 | 569 | 500 | 400 | 5 | 7.18 | 4.5 |
| MCH06040H10K02 | 400 | 403 (415) | 10 | 569 | 500 | 400 | 5 | 8.13 | 4.5 |
| MCH06040H20K02 | 400 | 403 (415) | 20 | 569 | 500 | 400 | 5 | 11.9 | 4.5 |
| MCH06050H05K02 | 500 | 503 (515) | 5 | 669 | 600 | 500 | 6 | 8.52 | 5.2 |
| MCH06050H10K02 | 500 | 503 (515) | 10 | 669 | 600 | 500 | 6 | 9.47 | 5.2 |
| MCH06050H20K02 | 500 | 503 (515) | 20 | 669 | 600 | 500 | 6 | 13.3 | 5.2 |

Notes 1. Dimension G is 25 for items marked with ◇. 2. The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | High-grade | Precision-grade |
|----------|------------|-----------------|
| Standard | O2 | (None) |
| LG2 | B2 | B0 |

| Monocarrier dynamic torque specification (N · cm) | | |
|---|----|-----------|
| Ball screw lead (mm) | 5 | 1.0 - 4.8 |
| | 10 | 1.1 - 5.8 |
| | 20 | 1.6 - 7.9 |

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating


| Lead l (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|---------------|--------------------|-------------------------------|-------------------|--------------------|-----------------------------------|------------------------------|---------------------|-----------------------------|
| | | Ball screw C_a | Linear guides C | Support unit C_s | Rated running distance L_a (km) | Ball screw C_{0a} | Linear guides C_0 | Support unit load limit (N) |
| 5 | ϕ 12 | 3 760 | 22 800 | 4 400 | 5 | 6 310 | 16 300 | 1 450 |
| 10 | ϕ 12 | 2 420 | 18 100 | 4 400 | 10 | 3 790 | 16 300 | 1 450 |
| 20 | ϕ 12 | 2 420 | 14 400 | 4 400 | 20 | 3 790 | 16 300 | 1 450 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|-------------------|-----------------|
| | Rolling M_{R0} | Pitching M_{P0} | Yawing M_{Y0} |
| Single | 335 | 133 | 133 |

MCH09 (Double slider)

Accuracy grade: High grade (H)

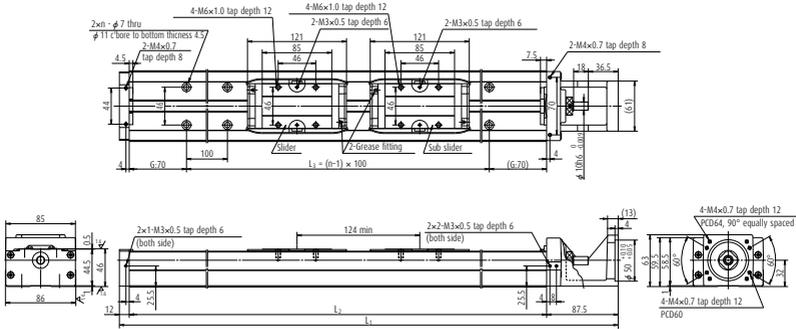

Dimension of MCH09 (Double slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | | Inertia × 10 ⁻⁶ (kg · m ²) | Mass (kg) |
|----------------|---------------------|--------------------------------|----------------------|------------------|-----|-----|---|---|-----------|
| | | | | L1 | L2 | L3 | n | | |
| MCH09015H05D02 | 150 | 183 (211) | 5 | 539.5 | 440 | 300 | 4 | 16.1 | 8.9 |
| MCH09015H10D02 | 150 | 183 (211) | 10 | 539.5 | 440 | 300 | 4 | 19.2 | 8.9 |
| MCH09025H05D02 | 250 | 283 (311) | 5 | 639.5 | 540 | 400 | 5 | 19.3 | 11 |
| MCH09025H10D02 | 250 | 283 (311) | 10 | 639.5 | 540 | 400 | 5 | 22.4 | 11 |
| MCH09035H05D02 | 350 | 383 (411) | 5 | 739.5 | 640 | 500 | 6 | 22.5 | 12 |
| MCH09035H10D02 | 350 | 383 (411) | 10 | 739.5 | 640 | 500 | 6 | 25.6 | 12 |
| MCH09045H10D02 | 450 | 483 (511) | 10 | 839.5 | 740 | 600 | 7 | 28.8 | 14 |
| MCH09045H20D02 | 450 | 483 (511) | 20 | 839.5 | 740 | 600 | 7 | 40.9 | 14 |
| MCH09065H10D02 | 650 | 683 (711) | 10 | 1 039.5 | 940 | 800 | 9 | 35.2 | 17 |
| MCH09065H20D02 | 650 | 683 (711) | 20 | 1 039.5 | 940 | 800 | 9 | 47.3 | 17 |

Note The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | High-grade | Precision-grade |
|----------|------------|-----------------|
| Standard | 02 | (None) |
| LG2 | B2 | B0 |

| Monocarrier dynamic torque specification (N · cm) | | |
|---|----|------------|
| Ball screw lead (mm) | 5 | 1.5 - 7.0 |
| | 10 | 2.5 - 10.8 |
| | 20 | 4.0 - 17.2 |

Notes


- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

| Lead ℓ (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|-------------|------------------|-------------------------------|-----------------|-----------------------------|--|------------------------------|------------------------------|-----------------------------|
| | | Ball screw C _a | Linear guides C | Support unit C _a | Rated running distance L _a (km) | Ball screw C _{0a} | Linear guides C ₀ | Support unit load limit (N) |
| 5 | φ 15 | 7 070 | 40 600 | 7 100 | 5 | 12 800 | 30 500 | 3 040 |
| 10 | φ 15 | 7 070 | 32 200 | 7 100 | 10 | 12 800 | 30 500 | 3 040 |
| 20 | φ 15 | 4 560 | 25 500 | 7 100 | 20 | 7 730 | 30 500 | 3 040 |

Basic static moment load of linear guide

| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|--------------------------|------------------------|
| | Rolling M _{RO} | Pitching M _{PO} | Yawing M _{YO} |
| Double | 1 780 | 2 070 | 2 070 |

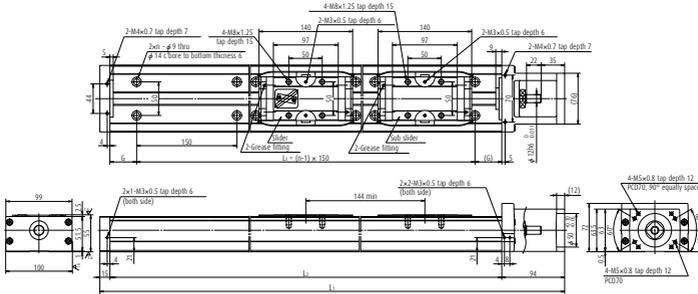

Dimension of MCH10 (Double slider)

| Reference No. | Nominal stroke (mm) | Stroke limit (mm) (without K1) | Ball screw lead (mm) | Body length (mm) | | | | | Inertia × 10 ⁻⁶ (kg · m ²) | Mass (kg) |
|----------------|---------------------|--------------------------------|----------------------|------------------|----------------|----|----------------|----|---|-----------|
| | | | | L ₁ | L ₂ | G | L ₃ | n | | |
| MCH10025H10D02 | 250 | 282 (314) | 10 | 689 | 580 | 65 | 450 | 4 | 67.1 | 15 |
| MCH10025H20D02 | 250 | 282 (314) | 20 | 689 | 580 | 65 | 450 | 4 | 82.4 | 15 |
| MCH10035H10D02 | 350 | 382 (414) | 10 | 789 | 680 | 40 | 600 | 5 | 77.3 | 17 |
| MCH10035H20D02 | 350 | 382 (414) | 20 | 789 | 680 | 40 | 600 | 5 | 92.5 | 17 |
| MCH10045H10D02 | 450 | 482 (514) | 10 | 889 | 780 | 15 | 750 | 6 | 87.5 | 20 |
| MCH10045H20D02 | 450 | 482 (514) | 20 | 889 | 780 | 15 | 750 | 6 | 103 | 20 |
| MCH10055H10D02 | 550 | 582 (614) | 10 | 989 | 880 | 65 | 750 | 6 | 97.7 | 22 |
| MCH10055H20D02 | 550 | 582 (614) | 20 | 989 | 880 | 65 | 750 | 6 | 113 | 22 |
| MCH10065H10D02 | 650 | 682 (714) | 10 | 1 089 | 980 | 40 | 900 | 7 | 108 | 24 |
| MCH10065H20D02 | 650 | 682 (714) | 20 | 1 089 | 980 | 40 | 900 | 7 | 123 | 24 |
| MCH10075H20D02 | 750 | 782 (814) | 20 | 1 189 | 1 080 | 15 | 1 050 | 8 | 133 | 26 |
| MCH10085H20D02 | 850 | 882 (914) | 20 | 1 289 | 1 180 | 65 | 1 050 | 8 | 143 | 28 |
| MCH10095H20D02 | 950 | 982 (1 014) | 20 | 1 389 | 1 280 | 40 | 1 200 | 9 | 154 | 30 |
| MCH10105H20D02 | 1 050 | 1 082 (1 114) | 20 | 1 489 | 1 380 | 15 | 1 350 | 10 | 164 | 33 |

Note: The nominal number in the above table is for high-grade grease specifications. In the case of other specifications, see the following table for the 13th and 14th digits.

Coding for columns 13 and 14

| Grease | High-grade | Precision-grade |
|----------|------------|-----------------|
| Standard | 02 | (None) |
| LG2 | B2 | B0 |

Monocarrier dynamic torque specification

| | (N · cm) | |
|----------------------|----------|------------|
| Ball screw lead (mm) | 10 | 4.2 – 15.6 |
| | 20 | 5.0 – 19.6 |

Notes

- Frictional resistance of NSK K1 is included in dynamic torque in table.
- Grease is packed into ball screw, linear guide parts and support unit.
- Consult NSK for life estimates under large moment loads.

Basic load rating

| Lead ℓ (mm) | Shaft dia d (mm) | Basic dynamic load rating (N) | | | | Basic static load rating (N) | | |
|-------------|------------------|-------------------------------|-----------------|-----------------------------|--|------------------------------|------------------------------|-----------------------------|
| | | Ball screw C _a | Linear guides C | Support unit C _a | Rated running distance L _a (km) | Ball screw C _{0a} | Linear guides C ₀ | Support unit load limit (N) |
| 10 | φ 20 | 11 000 | 44 600 | 7 600 | 10 | 21 100 | 42 000 | 3 380 |
| 20 | φ 20 | 7 060 | 35 400 | 7 600 | 20 | 12 700 | 42 000 | 3 380 |

Basic static moment load of linear guide



| Slider | Basic static moment load (N · m) | | |
|--------|----------------------------------|--------------------------|------------------------|
| | Rolling M _{RO} | Pitching M _{PO} | Yawing M _{YO} |
| Double | 2 920 | 3 430 | 3 430 |

C-1-6. 3 MCH Series Accessories

C-1-6. 3. 1 Sensor Unit

> Proximity switch

Sensor rail is not included in a sensor unit.





(Example of assembly)

| Model No. | | Reference No. | | | A (mm) | B (mm) | Body width W (mm) |
|-----------|---|---------------|-------------|-------------|-----------------------|--------|-------------------|
| MCH06 | | MC-SRH06-10 | MC-SRH06-11 | MC-SRH06-12 | 17 | 10 | 60 |
| MCH09 | | MC-SRH09-10 | MC-SRH09-11 | MC-SRH09-12 | 16 | 21 | 86 |
| MCH10 | | MC-SRH10-10 | MC-SRH10-11 | MC-SRH10-12 | 16 | 16 | 100 |
| Quantity | Proximity switch (normally open contact) | — | 3 | 1 | E2S-W13 (OMRON Corp.) | | |
| | Proximity switch (normally close contact) | 3 | — | 2 | E2S-W14 (OMRON Corp.) | | |

Notes 1. See page C135 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

> Photo sensor

Sensor rail is not included in a sensor unit.



(Example of assembly)


| Model No. | Reference No. | C (mm) | D (mm) | E (mm) | Body width W (mm) | Remarks |
|-----------|---------------|--------|--------|--------|-------------------|--|
| MCH06 | MC-SRH06-13 | 24 | 2 | 11 | 60 | EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment) |
| MCH09 | MC-SRH09-13 | 23 | 12 | 21 | 86 | EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment) |
| MCH10 | MC-SRH10-13 | 23 | 29 | 16 | 100 | EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector attachment) |

Notes 1. See page C136 for proximity switch specifications. 2. A sensor unit consists of sensors, a sensor dog and sensor mounting parts.

(1) Sensor rail

Reference number: MC-SRL-****

> **** is the same as rail dimension L₂.



Note: For combinations of sensors and rails, see page C82.


Body of MCH Series and Sensor Rail Combination Table

Table 4

| Model No. | Body length L ₂ (mm) | Reference No. | Sensor rail reference No. | Model No. | Body length L ₂ (mm) | Reference No. | Sensor rail reference No. |
|-----------|---------------------------------|----------------|---------------------------|-----------|---------------------------------|----------------|---------------------------|
| MCH06 | 150 | MCH06005H05K02 | MC-SRL-0150 | MCH09 | 640 | MCH09050H10K02 | MC-SRL-0640 |
| MCH06 | 150 | MCH06005H10K02 | MC-SRL-0150 | MCH09 | 640 | MCH09050H20K02 | MC-SRL-0640 |
| MCH06 | 150 | MCH06005H20K02 | MC-SRL-0150 | MCH09 | 640 | MCH09035H05D02 | MC-SRL-0640 |
| MCH06 | 200 | MCH06010H05K02 | MC-SRL-0200 | MCH09 | 640 | MCH09035H10D02 | MC-SRL-0640 |
| MCH06 | 200 | MCH06010H10K02 | MC-SRL-0200 | MCH09 | 740 | MCH09060H05K02 | MC-SRL-0740 |
| MCH06 | 200 | MCH06010H20K02 | MC-SRL-0200 | MCH09 | 740 | MCH09060H10K02 | MC-SRL-0740 |
| MCH06 | 300 | MCH06020H05K02 | MC-SRL-0300 | MCH09 | 740 | MCH09060H20K02 | MC-SRL-0740 |
| MCH06 | 300 | MCH06020H10K02 | MC-SRL-0300 | MCH09 | 740 | MCH09045H10D02 | MC-SRL-0740 |
| MCH06 | 300 | MCH06020H20K02 | MC-SRL-0300 | MCH09 | 740 | MCH09045H20D02 | MC-SRL-0740 |
| MCH06 | 300 | MCH06010H05D02 | MC-SRL-0300 | MCH09 | 840 | MCH09070H05K02 | MC-SRL-0840 |
| MCH06 | 300 | MCH06010H10D02 | MC-SRL-0300 | MCH09 | 840 | MCH09070H10K02 | MC-SRL-0840 |
| MCH06 | 400 | MCH06030H05K02 | MC-SRL-0400 | MCH09 | 840 | MCH09070H20K02 | MC-SRL-0840 |
| MCH06 | 400 | MCH06030H10K02 | MC-SRL-0400 | MCH09 | 940 | MCH09080H05K02 | MC-SRL-0940 |
| MCH06 | 400 | MCH06030H20K02 | MC-SRL-0400 | MCH09 | 940 | MCH09080H10K02 | MC-SRL-0940 |
| MCH06 | 400 | MCH06020H05D02 | MC-SRL-0400 | MCH09 | 940 | MCH09080H20K02 | MC-SRL-0940 |
| MCH06 | 400 | MCH06020H10D02 | MC-SRL-0400 | MCH09 | 940 | MCH09065H10D02 | MC-SRL-0940 |
| MCH06 | 500 | MCH06040H05K02 | MC-SRL-0500 | MCH09 | 940 | MCH09065H20D02 | MC-SRL-0940 |
| MCH06 | 500 | MCH06040H10K02 | MC-SRL-0500 | MCH10 | 280 | MCH10010H10K02 | MC-SRL-0280 |
| MCH06 | 500 | MCH06040H20K02 | MC-SRL-0500 | MCH10 | 280 | MCH10010H20K02 | MC-SRL-0280 |
| MCH06 | 500 | MCH06030H05D02 | MC-SRL-0500 | MCH10 | 380 | MCH10020H10K02 | MC-SRL-0380 |
| MCH06 | 500 | MCH06030H10D02 | MC-SRL-0500 | MCH10 | 380 | MCH10020H20K02 | MC-SRL-0380 |
| MCH06 | 600 | MCH06050H05K02 | MC-SRL-0600 | MCH10 | 480 | MCH10030H10K02 | MC-SRL-0480 |
| MCH06 | 600 | MCH06050H10K02 | MC-SRL-0600 | MCH10 | 480 | MCH10030H20K02 | MC-SRL-0480 |
| MCH06 | 600 | MCH06050H20K02 | MC-SRL-0600 | MCH10 | 580 | MCH10040H10K02 | MC-SRL-0580 |
| MCH06 | 600 | MCH06040H10D02 | MC-SRL-0600 | MCH10 | 580 | MCH10025H10D02 | MC-SRL-0580 |
| MCH06 | 600 | MCH06040H20D02 | MC-SRL-0600 | MCH10 | 680 | MCH10050H10K02 | MC-SRL-0680 |
| MCL06 | 150 | MCL06005H05K02 | MC-SRL-0150 | MCH10 | 680 | MCH10050H20K02 | MC-SRL-0680 |
| MCL06 | 150 | MCL06005H10K02 | MC-SRL-0150 | MCH10 | 680 | MCH10035H10D02 | MC-SRL-0680 |
| MCL06 | 200 | MCL06010H05K02 | MC-SRL-0200 | MCH10 | 680 | MCH10035H20D02 | MC-SRL-0680 |
| MCL06 | 200 | MCL06010H10K02 | MC-SRL-0200 | MCH10 | 780 | MCH10060H10K02 | MC-SRL-0780 |
| MCL06 | 300 | MCL06020H05K02 | MC-SRL-0300 | MCH10 | 780 | MCH10060H20K02 | MC-SRL-0780 |
| MCL06 | 300 | MCL06020H10K02 | MC-SRL-0300 | MCH10 | 780 | MCH10045H10D02 | MC-SRL-0780 |
| MCL06 | 400 | MCL06030H10K02 | MC-SRL-0400 | MCH10 | 780 | MCH10045H20D02 | MC-SRL-0780 |
| MCL06 | 400 | MCL06030H20K02 | MC-SRL-0400 | MCH10 | 880 | MCH10070H10K02 | MC-SRL-0880 |
| MCL06 | 500 | MCL06040H10K02 | MC-SRL-0500 | MCH10 | 880 | MCH10070H20K02 | MC-SRL-0880 |
| MCL06 | 500 | MCL06040H20K02 | MC-SRL-0500 | MCH10 | 880 | MCH10055H10D02 | MC-SRL-0880 |
| MCL06 | 600 | MCL06050H10K02 | MC-SRL-0600 | MCH10 | 880 | MCH10055H20D02 | MC-SRL-0880 |
| MCL06 | 600 | MCL06050H20K02 | MC-SRL-0600 | MCH10 | 980 | MCH10080H10K02 | MC-SRL-0980 |
| MCH09 | 240 | MCH09010H05K02 | MC-SRL-0240 | MCH10 | 980 | MCH10080H20K02 | MC-SRL-0980 |
| MCH09 | 240 | MCH09010H10K02 | MC-SRL-0240 | MCH10 | 980 | MCH10065H10D02 | MC-SRL-0980 |
| MCH09 | 240 | MCH09010H20K02 | MC-SRL-0240 | MCH10 | 980 | MCH10065H20D02 | MC-SRL-0980 |
| MCH09 | 340 | MCH09020H05K02 | MC-SRL-0340 | MCH10 | 1 080 | MCH10090H10K02 | MC-SRL-1080 |
| MCH09 | 340 | MCH09020H10K02 | MC-SRL-0340 | MCH10 | 1 080 | MCH10090H20K02 | MC-SRL-1080 |
| MCH09 | 340 | MCH09020H20K02 | MC-SRL-0340 | MCH10 | 1 080 | MCH10075H20D02 | MC-SRL-1080 |
| MCH09 | 440 | MCH09030H05K02 | MC-SRL-0440 | MCH10 | 1 180 | MCH10100H10K02 | MC-SRL-1080 |
| MCH09 | 440 | MCH09030H10K02 | MC-SRL-0440 | MCH10 | 1 180 | MCH10100H20K02 | MC-SRL-1180 |
| MCH09 | 440 | MCH09030H20K02 | MC-SRL-0440 | MCH10 | 1 180 | MCH10085H20D02 | MC-SRL-1080 |
| MCH09 | 440 | MCH09015H05D02 | MC-SRL-0440 | MCH10 | 1 280 | MCH10110H10K02 | MC-SRL-1280 |
| MCH09 | 440 | MCH09015H10D02 | MC-SRL-0440 | MCH10 | 1 280 | MCH10110H20K02 | MC-SRL-1280 |
| MCH09 | 540 | MCH09040H05K02 | MC-SRL-0540 | MCH10 | 1 280 | MCH10095H20D02 | MC-SRL-1280 |
| MCH09 | 540 | MCH09040H10K02 | MC-SRL-0540 | MCH10 | 1 380 | MCH10120H10K02 | MC-SRL-1380 |
| MCH09 | 540 | MCH09040H20K02 | MC-SRL-0540 | MCH10 | 1 380 | MCH10120H20K02 | MC-SRL-1380 |
| MCH09 | 540 | MCH09025H05D02 | MC-SRL-0540 | MCH10 | 1 380 | MCH10105H20D02 | MC-SRL-1380 |
| MCH09 | 540 | MCH09025H10D02 | MC-SRL-0540 | | | | |
| MCH09 | 640 | MCH09050H05K02 | MC-SRL-0640 | | | | |

C-1-6. 3. 2 Cover Unit

Cover unit for MCH06 and MCL06

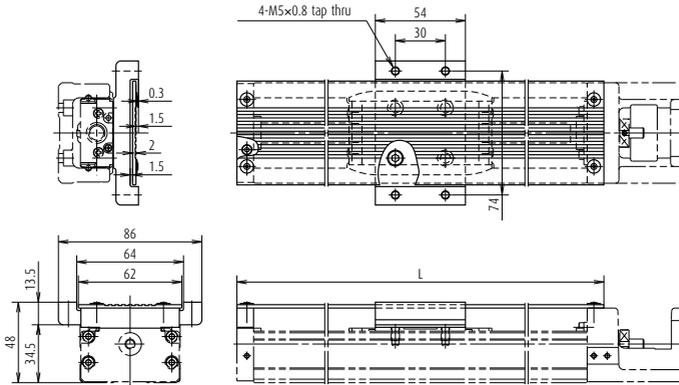


Unit: mm


| Single slider | | Double slider | | Top cover length |
|---------------|---------------|---------------|---------------|------------------|
| Stroke | Reference No. | Stroke | Reference No. | L |
| 50 | MC-HV06005-00 | - | - | 170 |
| 100 | MC-HV06010-00 | - | - | 220 |
| 200 | MC-HV06020-00 | 100 | MC-HV06010D00 | 320 |
| 300 | MC-HV06030-00 | 200 | MC-HV06020D00 | 420 |
| 400 | MC-HV06040-00 | 300 | MC-HV06030D00 | 520 |
| 500 | MC-HV06050-00 | 400 | MC-HV06040D00 | 620 |

› Cover unit for double sliders

Two spacers are provided for double slider.

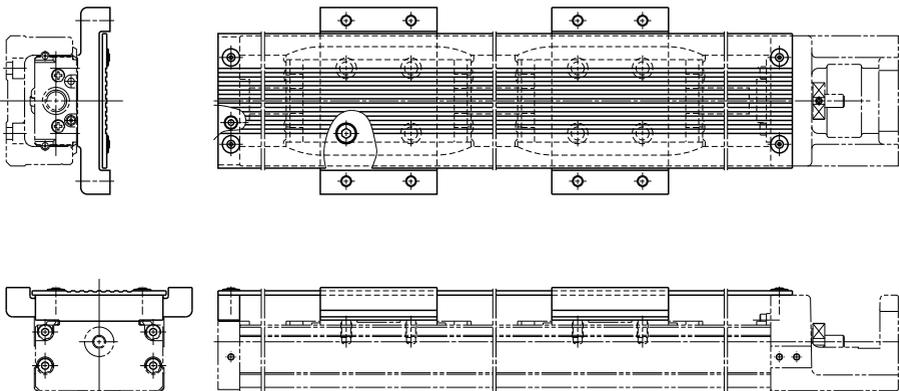


Cover unit for MCH09

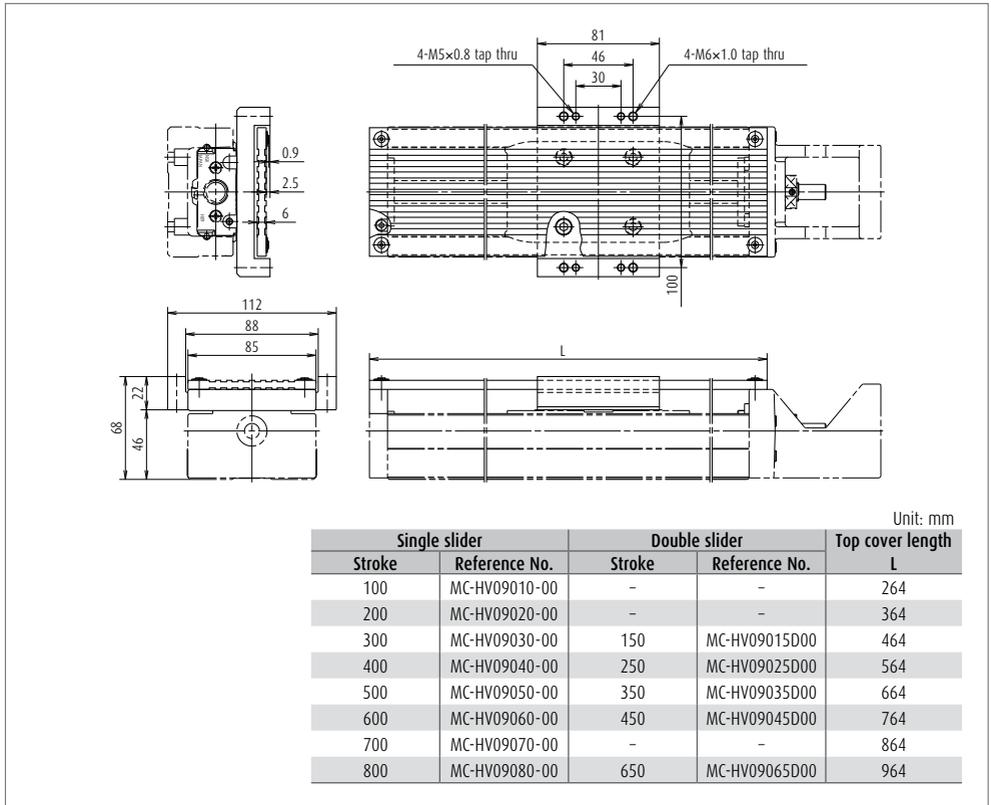


> Cover unit for double sliders

Two spacers are provided for double slider.

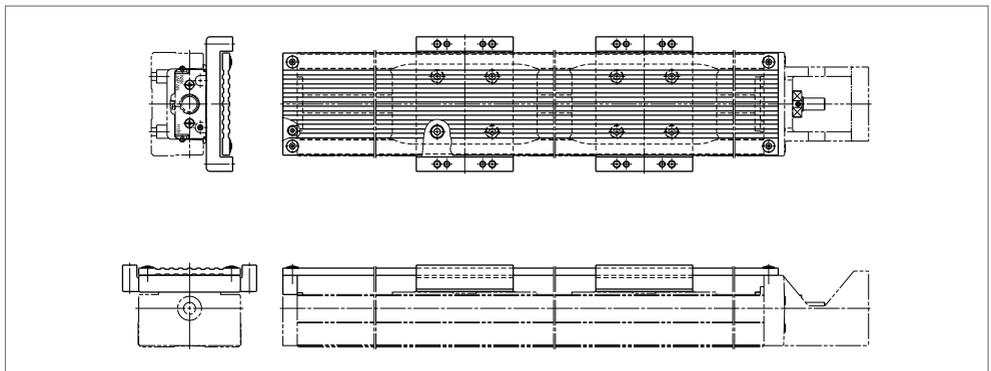


Cover unit for MCH10

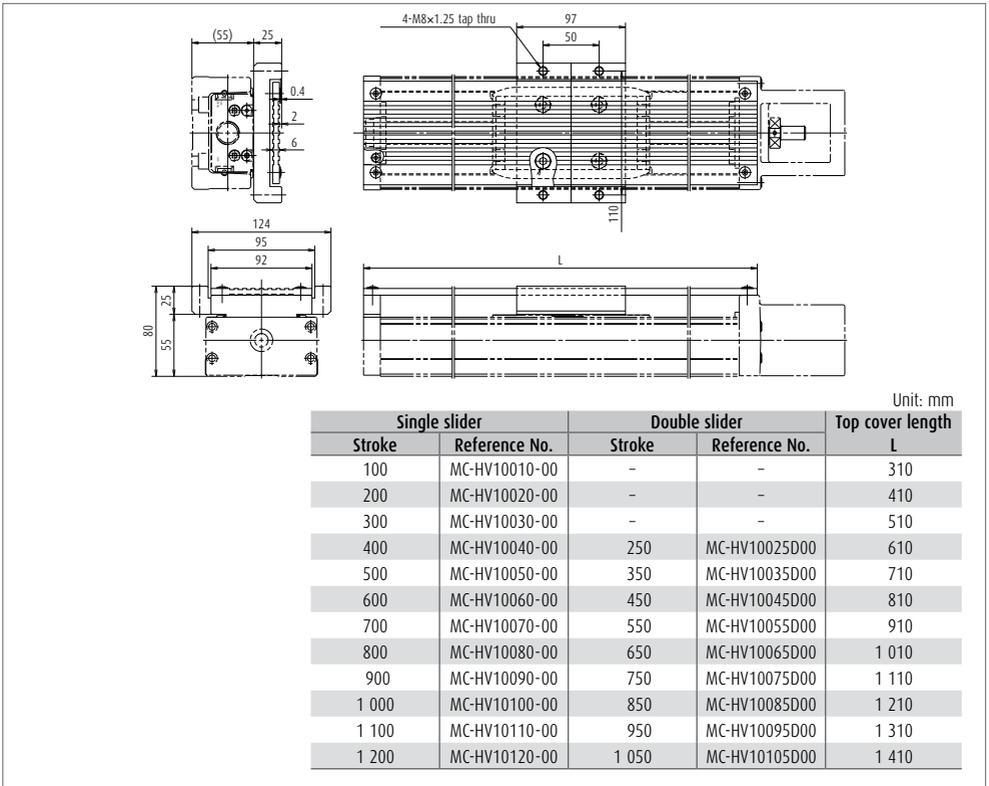

> Cover unit for double sliders





Two spacers are provided for double slider.

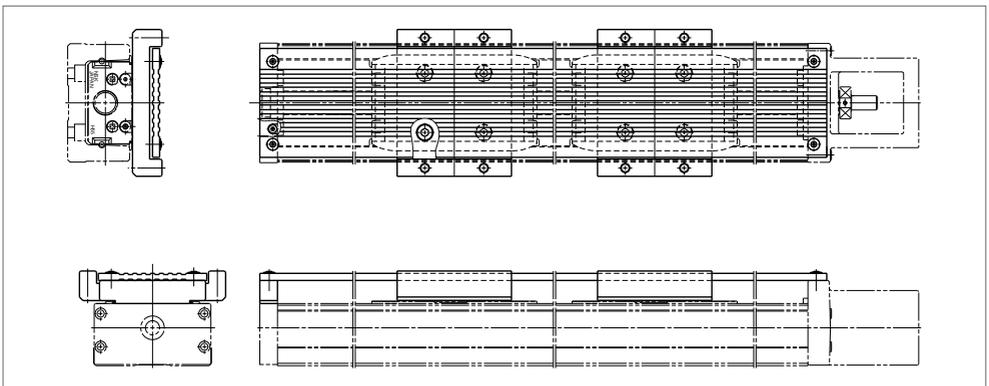


C-1-6. 3.3 Intermediate Plate for Motor

- > Please ask NSK about motors not listed in compatible motor list.
- > In case of parallel motor mount, please consult with NSK.
- > Be sure to align centerlines when installing motor.
- > Motor models are subject to change at the motor manufacturers. For details, please contact the manufacturer.

Motor Bracket for MCH06 and MCL06

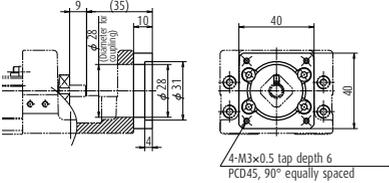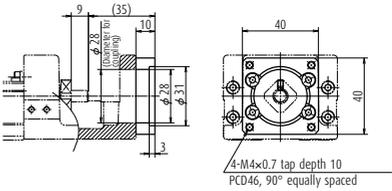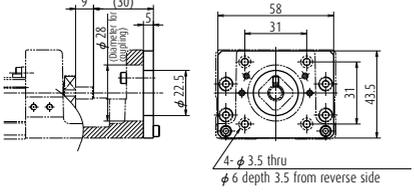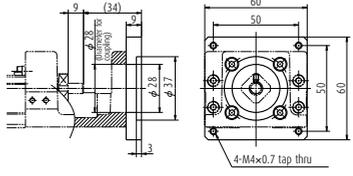
| <p>Reference number: MC-BKH06-145-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>Panasonic Co., Ltd.</td> <td>MSMD5A(50W), MSMD01(100W)</td> </tr> </tbody> </table> | Compatible motor | | Maker | Motor models | Panasonic Co., Ltd. | MSMD5A(50W), MSMD01(100W) | <p>Reference number: MC-BKH06-146-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>YASKAWA Electric Corp.</td> <td>SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W)</td> </tr> <tr> <td>Mitsubishi Electric Corp.</td> <td>HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W)</td> </tr> <tr> <td>OMRON Corp.</td> <td>R88M-W03(30W), R88M-W05(50W), R88M-W10(100W)</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>P30B04xxx P Series</td> </tr> </tbody> </table> | Compatible motor | | Maker | Motor models | YASKAWA Electric Corp. | SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W) | Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) | OMRON Corp. | R88M-W03(30W), R88M-W05(50W), R88M-W10(100W) | SANYO DENKI Co., Ltd. | P30B04xxx P Series |
|---|--|--|-------|--------------|--------------------------|---|---|---------------------|--|------------------|--------------|------------------------|---|---------------------------|--|-------------|--|-----------------------|------------------------------|
| Compatible motor | | | | | | | | | | | | | | | | | | | |
| Maker | Motor models | | | | | | | | | | | | | | | | | | |
| Panasonic Co., Ltd. | MSMD5A(50W), MSMD01(100W) | | | | | | | | | | | | | | | | | | |
| Compatible motor | | | | | | | | | | | | | | | | | | | |
| Maker | Motor models | | | | | | | | | | | | | | | | | | |
| YASKAWA Electric Corp. | SGMAH-A3(30W), SGMJV-ASA(50W), SGMAV-ASA(50W), SGMJV-01A(100W), SGMAV-01A(100W) | | | | | | | | | | | | | | | | | | |
| Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP053(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) | | | | | | | | | | | | | | | | | | |
| OMRON Corp. | R88M-W03(30W), R88M-W05(50W), R88M-W10(100W) | | | | | | | | | | | | | | | | | | |
| SANYO DENKI Co., Ltd. | P30B04xxx P Series | | | | | | | | | | | | | | | | | | |
| <p>Reference number: MC-BKH06-231-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>ORIENTAL MOTOR Co., Ltd.</td> <td>AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>PBM423xxx, 103F55xx</td> </tr> </tbody> </table> | Compatible motor | | Maker | Motor models | ORIENTAL MOTOR Co., Ltd. | AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x | SANYO DENKI Co., Ltd. | PBM423xxx, 103F55xx | <p>Reference number: MC-BKH06-250-00</p>  <table border="1"> <thead> <tr> <th colspan="2">Compatible motor</th> </tr> <tr> <th>Maker</th> <th>Motor models</th> </tr> </thead> <tbody> <tr> <td>ORIENTAL MOTOR Co., Ltd.</td> <td>AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x</td> </tr> <tr> <td>OMRON Corp.</td> <td>MUMS02(200W), MUMS04(400W)</td> </tr> <tr> <td>SANYO DENKI Co., Ltd.</td> <td>PBM603xx, PBM604xx, 103F78xx</td> </tr> </tbody> </table> | Compatible motor | | Maker | Motor models | ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x | OMRON Corp. | MUMS02(200W), MUMS04(400W) | SANYO DENKI Co., Ltd. | PBM603xx, PBM604xx, 103F78xx |
| Compatible motor | | | | | | | | | | | | | | | | | | | |
| Maker | Motor models | | | | | | | | | | | | | | | | | | |
| ORIENTAL MOTOR Co., Ltd. | AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x | | | | | | | | | | | | | | | | | | |
| SANYO DENKI Co., Ltd. | PBM423xxx, 103F55xx | | | | | | | | | | | | | | | | | | |
| Compatible motor | | | | | | | | | | | | | | | | | | | |
| Maker | Motor models | | | | | | | | | | | | | | | | | | |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x | | | | | | | | | | | | | | | | | | |
| OMRON Corp. | MUMS02(200W), MUMS04(400W) | | | | | | | | | | | | | | | | | | |
| SANYO DENKI Co., Ltd. | PBM603xx, PBM604xx, 103F78xx | | | | | | | | | | | | | | | | | | |

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH06

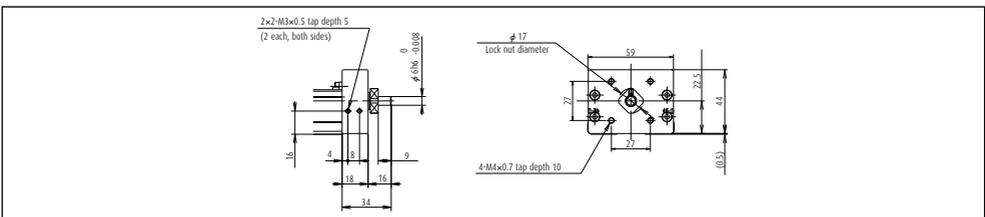


Motor Bracket for MCH09

Reference number: MC-BKH09-145-00, MC-BKH09-146-00

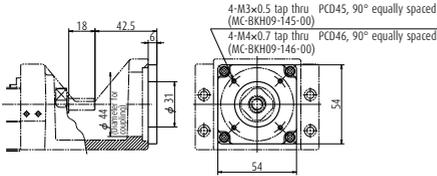


| Reference No. | Compatible motor | |
|-----------------|---------------------------|---|
| | Maker | Motor models |
| MC-BKH09-145-00 | Panasonic Co., Ltd. | MSMD5A(50W), MSMD01(100W) |
| MC-BKH09-146-00 | YASKAWA Electric Corp. | SGMJV-A5A(50W), SGMJV-01A(100W), SGMV-01A(100W) |
| MC-BKH09-146-00 | Mitsubishi Electric Corp. | HF-KP053(50W), HF-MP05(50W), HC-KFS053(50W), HC-MFS053(50W), HF-KP13(100W), HF-MP13(100W), HC-KFS13(100W), HC-MFS13(100W) |
| MC-BKH09-146-00 | OMRON Corp. | R88M-W05(50W), R88M-W10(100W) |
| MC-BKH09-146-00 | SANYO DENKI Co., Ltd. | P30B04xxx P Series |

Reference number: MC-BKH09-170-00, MC-BKH09-170-01

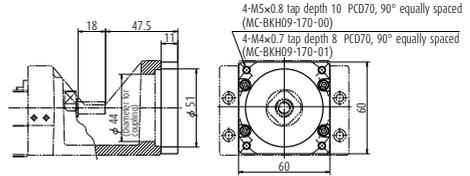


| Reference No. | Compatible motor | |
|-----------------|---------------------------|--|
| | Maker | Motor models |
| MC-BKH09-170-00 | YASKAWA Electric Corp. | SGMJV-02A(200W), SGMV-02A(200W), SGMJV-04A(400W), SGMV-04A(400W) |
| MC-BKH09-170-00 | Mitsubishi Electric Corp. | HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| MC-BKH09-170-00 | OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| MC-BKH09-170-00 | SANYO DENKI Co., Ltd. | P30B06xxx P Series |
| MC-BKH09-170-01 | Panasonic Co., Ltd. | MSMD02(200W), MSMA02(200W), MSMA04(400W), MSMD04(400W) |

Reference number: MC-BKH09-231-00

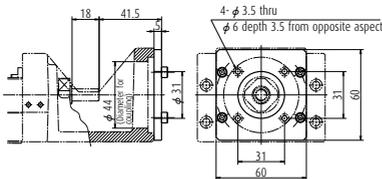


| Compatible motor | |
|--------------------------|---|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | PBM423xxx, 103F55xx |
| ORIENTAL MOTOR Co., Ltd. | AS46, ASC46, UPK54x, PK54x, CSK54x, CFK54x, UMK24x, CSK24x, PK24x |

Reference number: MC-BKH09-250-00

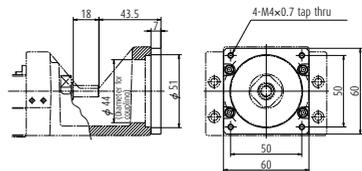


| Compatible motor | |
|--------------------------|--|
| Maker | Motor models |
| SANYO DENKI Co., Ltd. | PBM603xx, PBM604xx, 103F78xx |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, UFK56x, PK56x, CSK56x, CFK56x |

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH09

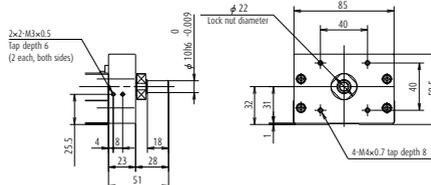


Motor Bracket for MCH10

Reference number: MC-BKH10-170-00, MC-BKH10-170-01

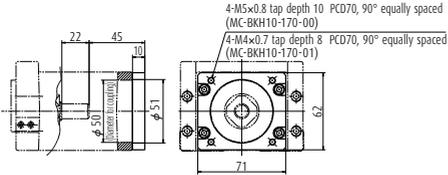


| Reference No. | Compatible motor | |
|-----------------|---------------------------|--|
| | Maker | Motor models |
| MC-BKH10-170-00 | YASKAWA Electric Corp. | SGMJV-02A(200W), SGM4V-02A(200W), SGMJV-04A(400W), SGM4V-04A(400W) |
| MC-BKH10-170-00 | Mitsubishi Electric Corp. | HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| MC-BKH10-170-00 | OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| MC-BKH10-170-00 | SANYO DENKI Co., Ltd. | P30B06xxx P Series |
| MC-BKH10-170-01 | Panasonic Co., Ltd. | MSMD02(200W), MSMA02(200W), MSMD04(400W), MSMA04(400W) |

Reference number: MC-BKH10-190-00, MC-BKH10-190-01

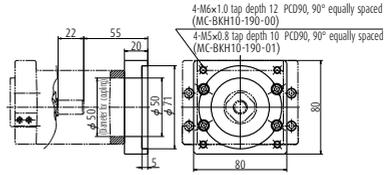


| Reference No. | Compatible motor | |
|-----------------|---------------------------|--|
| | Maker | Motor models |
| MC-BKH10-190-00 | Mitsubishi Electric Corp. | HC-KFS73(750W), HC-MFS73(750W), HF-KP73(750W), HF-MP73(750W) |
| MC-BKH10-190-01 | SANYO DENKI Co., Ltd. | P50B07xxx P Series |

Reference number: MC-BKH10-250-00

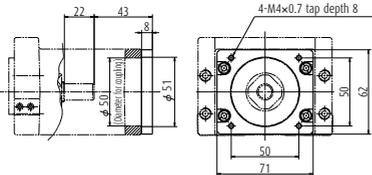


| Maker | Compatible motor | |
|--------------------------|--|--|
| | Motor models | |
| SANYO DENKI Co., Ltd. | PBM603xx, PBM604xx, T03F78xx | |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56x, PK56x, CSK56x, CFK56x, UMK56x, UFK56x | |

Reference number: MC-BKH10-270-00

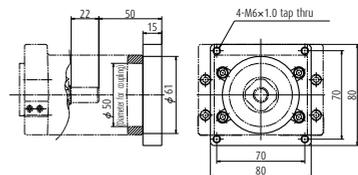

| Maker | Compatible motor | |
|--------------------------|--|--|
| | Motor models | |
| ORIENTAL MOTOR Co., Ltd. | AS98, ASC98, UPK59x, PK59x, CSK59x, CFK59x, UMK59x, UFK59x | |

Diameter of ball screw shaft end to install a pulley for parallel motor mount of MCH10

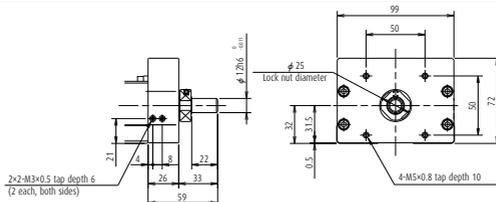

Motor Availability Table of Intermediate Plate for MCH Series

Table 5

| Model No. | Reference No. code | Motor bracket reference No. | Motor manufacturers | Stepping motor model No. | Wattage of AC servo motor | | | | | |
|----------------|--------------------|-----------------------------|---------------------------|--------------------------|---------------------------|-----------|-----------|-----------|-----|----------|
| | | | | | 30 | 50 | 100 | 200 | 400 | 750 |
| MCH06 MCL06 | 1 | MC-BKH06-145-00 | Panasonic Co., Ltd. | | | MSMDSA | MSMD01 | | | |
| | 2 | MC-BKH06-146-00 | YASKAWA Electric Corp. | | SGMAH-A3 | SGMJV-ASA | SGMJV-01A | | | |
| | | MC-BKH06-146-00 | YASKAWA Electric Corp. | | | SGMAV-ASA | SGMAV-01A | | | |
| | | MC-BKH06-146-00 | Mitsubishi Electric Corp. | | | HF-KP053 | HF-KP13 | | | |
| | | MC-BKH06-146-00 | Mitsubishi Electric Corp. | | | HF-MP053 | HF-MP13 | | | |
| | | MC-BKH06-146-00 | Mitsubishi Electric Corp. | | | HC-KF5053 | HC-KF513 | | | |
| | | MC-BKH06-146-00 | Mitsubishi Electric Corp. | | | HC-MF5053 | HC-MF513 | | | |
| | | MC-BKH06-146-00 | OMRON Corp. | | R88M-W03 | R88M-W05 | R88M-W10 | | | |
| | | MC-BKH06-146-00 | SANYO DENKI Co., Ltd. | | P30B04xxx (P Series) | | | | | |
| | | MC-BKH06-231-00 | SANYO DENKI Co., Ltd. | | PBM423xxx | | | | | |
| | | MC-BKH06-231-00 | SANYO DENKI Co., Ltd. | | 103F55xx | | | | | |
| | | MC-BKH06-231-00 | ORIENTAL MOTOR Co., Ltd. | | AS46, ASC46 | | | | | |
| | | MC-BKH06-231-00 | ORIENTAL MOTOR Co., Ltd. | | UPK54x, PK54x | | | | | |
| | | MC-BKH06-231-00 | ORIENTAL MOTOR Co., Ltd. | | CSK54x, CFS54x | | | | | |
| | | MC-BKH06-231-00 | ORIENTAL MOTOR Co., Ltd. | | UMK24x, CSK24x | | | | | |
| | | MC-BKH06-231-00 | ORIENTAL MOTOR Co., Ltd. | | PK24x | | | | | |
| | | MC-BKH06-250-00 | SANYO DENKI Co., Ltd. | | PBM603xx | | | | | |
| | | MC-BKH06-250-00 | SANYO DENKI Co., Ltd. | | PBM604xx | | | | | |
| | | MC-BKH06-250-00 | SANYO DENKI Co., Ltd. | | 103F78xx | | | | | |
| | | MC-BKH06-250-00 | ORIENTAL MOTOR Co., Ltd. | | AS66, ASC66 | | | | | |
| | MC-BKH06-250-00 | ORIENTAL MOTOR Co., Ltd. | | UPK56x, UFK56x | | | | | | |
| | MC-BKH06-250-00 | ORIENTAL MOTOR Co., Ltd. | | PK56x, CSK56x | | | | | | |
| | MC-BKH06-250-00 | ORIENTAL MOTOR Co., Ltd. | | CFK56x | | | | | | |
| | MC-BKH06-250-00 | OMRON Corp. | | | | | MUMS02 | MUMS04 | | |
| | 1 | MC-BKH09-145-00 | Panasonic Co., Ltd. | | | MSMDSA | MSMD01 | | | |
| | 2 | MC-BKH09-146-00 | YASKAWA Electric Corp. | | | SGMJV-ASA | SGMJV-01A | | | |
| | | MC-BKH09-146-00 | YASKAWA Electric Corp. | | | SGMAV-ASA | SGMAV-01A | | | |
| | | MC-BKH09-146-00 | Mitsubishi Electric Corp. | | | HF-KP053 | HF-KP13 | | | |
| | | MC-BKH09-146-00 | Mitsubishi Electric Corp. | | | HF-MP053 | HF-MP13 | | | |
| | | MC-BKH09-146-00 | Mitsubishi Electric Corp. | | | HC-KF5053 | HC-KF513 | | | |
| | | MC-BKH09-146-00 | Mitsubishi Electric Corp. | | | HC-MF5053 | HC-MF513 | | | |
| | | MC-BKH09-146-00 | OMRON Corp. | | | R88M-W05 | R88M-W10 | | | |
| | | MC-BKH09-146-00 | SANYO DENKI Co., Ltd. | | P30B04xxx (P Series) | | | | | |
| | 3 | MC-BKH09-170-00 | YASKAWA Electric Corp. | | | | SGMJV-02A | SGMJV-04A | | |
| | | MC-BKH09-170-00 | YASKAWA Electric Corp. | | | | SGMAV-02A | SGMAV-04A | | |
| | | MC-BKH09-170-00 | Mitsubishi Electric Corp. | | | | HF-KP23 | HF-KP43 | | |
| | | MC-BKH09-170-00 | Mitsubishi Electric Corp. | | | | HF-MP23 | HF-MP43 | | |
| | | MC-BKH09-170-00 | Mitsubishi Electric Corp. | | | | HC-KF523 | HC-KF543 | | |
| | | MC-BKH09-170-00 | Mitsubishi Electric Corp. | | | | HC-MF523 | HC-MF543 | | |
| | | MC-BKH09-170-00 | OMRON Corp. | | | | R88M-W20 | R88M-W40 | | |
| | | MC-BKH09-170-00 | SANYO DENKI Co., Ltd. | | P30B06xxx (P Series) | | | | | |
| | 4 | MC-BKH09-170-01 | Panasonic Co., Ltd. | | | | MSMD02 | MSMD04 | | |
| | | MC-BKH09-170-01 | Panasonic Co., Ltd. | | | | MSMA02 | MSMA04 | | |
| | 5 | MC-BKH09-231-00 | SANYO DENKI Co., Ltd. | | PBM423xxx | | | | | |
| | | MC-BKH09-231-00 | SANYO DENKI Co., Ltd. | | 103F55xx | | | | | |
| | | MC-BKH09-231-00 | ORIENTAL MOTOR Co., Ltd. | | AS46, ASC46 | | | | | |
| | | MC-BKH09-231-00 | ORIENTAL MOTOR Co., Ltd. | | UPK54x, PK54x | | | | | |
| | | MC-BKH09-231-00 | ORIENTAL MOTOR Co., Ltd. | | CSK54x, CFS54x | | | | | |
| | | MC-BKH09-231-00 | ORIENTAL MOTOR Co., Ltd. | | UMK24x, CSK24x | | | | | |
| | | MC-BKH09-231-00 | ORIENTAL MOTOR Co., Ltd. | | PK24x | | | | | |
| | 6 | MC-BKH09-250-00 | SANYO DENKI Co., Ltd. | | PBM603xx | | | | | |
| | | MC-BKH09-250-00 | SANYO DENKI Co., Ltd. | | PBM604xx | | | | | |
| | | MC-BKH09-250-00 | SANYO DENKI Co., Ltd. | | 103F78xx | | | | | |
| | | MC-BKH09-250-00 | ORIENTAL MOTOR Co., Ltd. | | AS66, ASC66 | | | | | |
| | | MC-BKH09-250-00 | ORIENTAL MOTOR Co., Ltd. | | UPK56x, UFK56x | | | | | |
| | | MC-BKH09-250-00 | ORIENTAL MOTOR Co., Ltd. | | PK56x, CSK56x | | | | | |
| | | MC-BKH09-250-00 | ORIENTAL MOTOR Co., Ltd. | | CFK56x | | | | | |
| | 1 | MC-BKH10-170-00 | YASKAWA Electric Corp. | | | | SGMJV-02A | SGMJV-04A | | |
| | | MC-BKH10-170-00 | YASKAWA Electric Corp. | | | | SGMAV-02A | SGMAV-04A | | |
| | | MC-BKH10-170-00 | Mitsubishi Electric Corp. | | | | HF-KP23 | HF-KP43 | | |
| | | MC-BKH10-170-00 | Mitsubishi Electric Corp. | | | | HF-MP23 | HF-MP43 | | |
| | | MC-BKH10-170-00 | Mitsubishi Electric Corp. | | | | HC-KF523 | HC-KF543 | | |
| | | MC-BKH10-170-00 | Mitsubishi Electric Corp. | | | | HC-MF523 | HC-MF543 | | |
| | | MC-BKH10-170-00 | OMRON Corp. | | | | R88M-W20 | R88M-W40 | | |
| | | MC-BKH10-170-00 | SANYO DENKI Co., Ltd. | | P30B06xxx (P Series) | | | | | |
| | 2 | MC-BKH10-170-01 | Panasonic Co., Ltd. | | | | MSMD02 | MSMD04 | | |
| | | MC-BKH10-170-01 | Panasonic Co., Ltd. | | | | MSMA02 | MSMA04 | | |
| | 3 | MC-BKH10-190-00 | Mitsubishi Electric Corp. | | | | | | | HC-KF573 |
| | | MC-BKH10-190-00 | Mitsubishi Electric Corp. | | | | | | | HC-MF573 |
| | | MC-BKH10-190-00 | Mitsubishi Electric Corp. | | | | | | | HF-KP73 |
| | | MC-BKH10-190-00 | Mitsubishi Electric Corp. | | | | | | | HF-MP73 |
| | 4 | MC-BKH10-190-01 | SANYO DENKI Co., Ltd. | | P50B07xxx (P Series) | | | | | |
| | 5 | MC-BKH10-250-00 | SANYO DENKI Co., Ltd. | | PBM603xx | | | | | |
| | | MC-BKH10-250-00 | SANYO DENKI Co., Ltd. | | PBM604xx | | | | | |
| | | MC-BKH10-250-00 | SANYO DENKI Co., Ltd. | | 103F78xx | | | | | |
| | | MC-BKH10-250-00 | ORIENTAL MOTOR Co., Ltd. | | AS66, ASC66 | | | | | |
| | | MC-BKH10-250-00 | ORIENTAL MOTOR Co., Ltd. | | UPK56x, PK56x | | | | | |
| | | MC-BKH10-250-00 | ORIENTAL MOTOR Co., Ltd. | | CSK56x, CFS56x | | | | | |
| | | MC-BKH10-250-00 | ORIENTAL MOTOR Co., Ltd. | | UMK56x, UFK56x | | | | | |
| | | MC-BKH10-250-00 | ORIENTAL MOTOR Co., Ltd. | | AS98, ASC98 | | | | | |
| | 6 | MC-BKH10-270-00 | ORIENTAL MOTOR Co., Ltd. | | UPK59x, PK59x | | | | | |
| | | MC-BKH10-270-00 | ORIENTAL MOTOR Co., Ltd. | | UPK59x, PK59x | | | | | |
| | | MC-BKH10-270-00 | ORIENTAL MOTOR Co., Ltd. | | CSK59x, CFS59x | | | | | |
| | | MC-BKH10-270-00 | ORIENTAL MOTOR Co., Ltd. | | UMK59x, UFK59x | | | | | |

C-2 Toughcarrier

C-2 Toughcarrier

| | Page |
|---|------|
| 1. Features | C93 |
| 2. Classification and Series | C93 |
| 3. Accessories | C95 |
| 4. Selection of Toughcarrier | C96 |
| 4.1 Selection Procedures | C96 |
| 4.2 Stroke and Lead | C97 |
| 4.3 Reference Number Coding and Accuracy Grade | C98 |
| 4.4 Maximum Speed | C99 |
| 4.5 Rigidity | C101 |
| 4.6 Basic Load Rating | C102 |
| 4.7 Estimation of Life Expectancy | C103 |
| 4.8 Example of Life Estimation | C105 |
| 5. TCH Series Dimension Table for Standard Products | C109 |
| 5.1 TCH06 Series | C109 |
| 5.2 TCH09 Series | C111 |
| 5.3 TCH10 Series | C113 |
| 6. Accessories | C115 |
| 6.1 Sensor Unit | C115 |
| 6.2 Cover Unit | C116 |
| 6.3 Motor Bracket | C119 |
| 7. Motor Bracket Compatibility Table | C128 |
| 8. Sensor Rail and Top Cover Unit Combination Table | C129 |
| 9. Toughcarrier High-Thrust Series | C132 |

C-2 Toughcarrier

C-2-1 Features

Greatly improved load capacity due to switching of rolling elements to rollers.
Mounting dimensions are compatible with those of the MCH Series, allowing substitution.

> Light weight and compact design

Taking into account part composition and rigidity, the cross sections of the rail and slider are the same as MCH series.

> Superb rust-preventive ability

Low-temperature chrome plating comes standard.

> All-in-one structure


- 1) The all-in-one structure integrates a ball screw, a linear guide and a support unit into a single structure to significantly reduce design time.
- 2) The bottom and one side of the rail are datum surfaces to facilitate highly accurate installation. Models with pin holes are also available as standard.
- 3) Immediate operation after installation and run-in is possible due to pre-packed grease.
- 4) A wide selection of ball screw leads are available.

> Long-term maintenance-free operation

Use of NSK K1 lubrication unit and grease maintains smooth lubricating performance for long periods.

> Updated rolling elements

Rollers are installed as rolling elements for the first time anywhere.

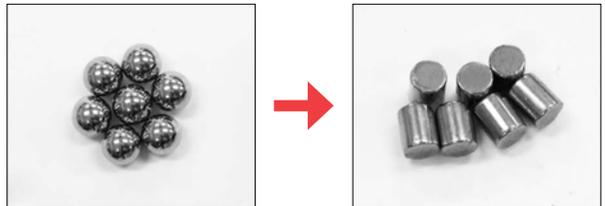


C-2-2 Classification and Series

Structure


Rolling elements: Balls


MCH Series




Rolling elements: Rollers

TCH Series




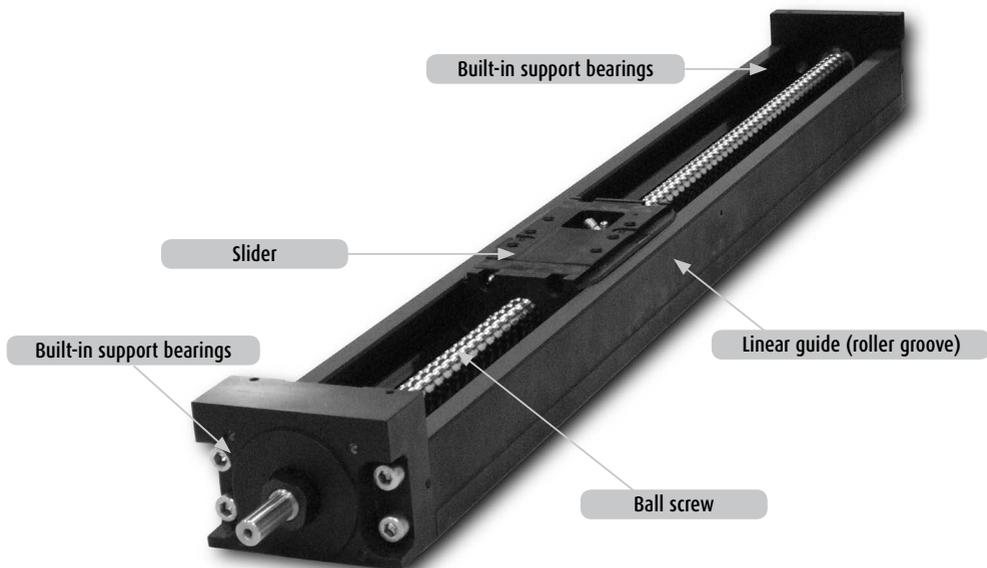

> High rigidity, long life (N)


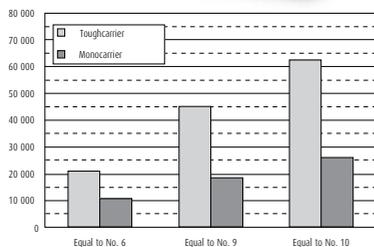


Twice the dynamic load rating and nine-times longer life compared to Monocarrier




Four-times higher rigidity than Monocarrier

Cross-sections of TCH Series

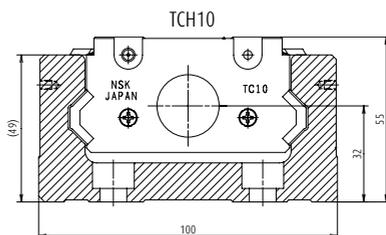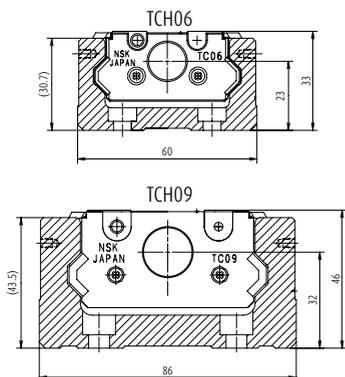

C-2-3 Accessories

Accessories for Toughcarrier

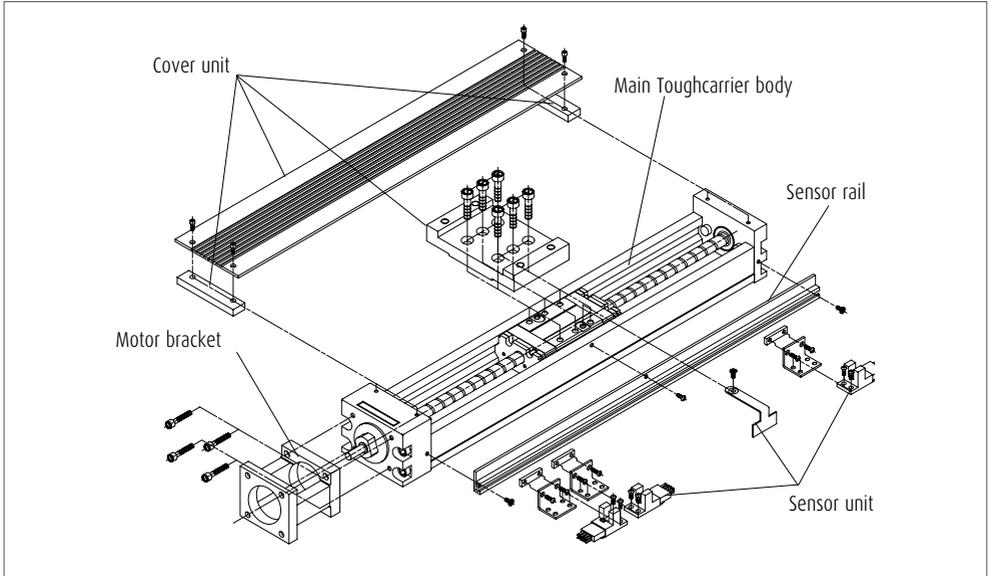**Assembly Example of accessories**

Sensor unit, cover unit, motor bracket and sensor rail are available as options for Toughcarrier.
Contact NSK for other specifications other than those of NSK standard accessories.

1. Sensor unit:

- > Photo sensor...Use of both OMRON EE-SX674 and EE-1001
- > Proximity switch...Use of OMRON E2S-W13, E2S-W14

Available in a unit including sensor fitting clamps.


2. Sensor rail : This rail holds the sensor. Please order the appropriate rail according to the stroke.

3. Cover unit : This unit consists of a top cover and spacer plate.

4. Motor bracket: Brackets are available for a variety of models from different motor manufacturers.
Please consult NSK when the mounting dimensions differ from your order.

C-2-4 Selection of Toughcarrier

C-2-4. 1 Selection Procedure for Toughcarrier

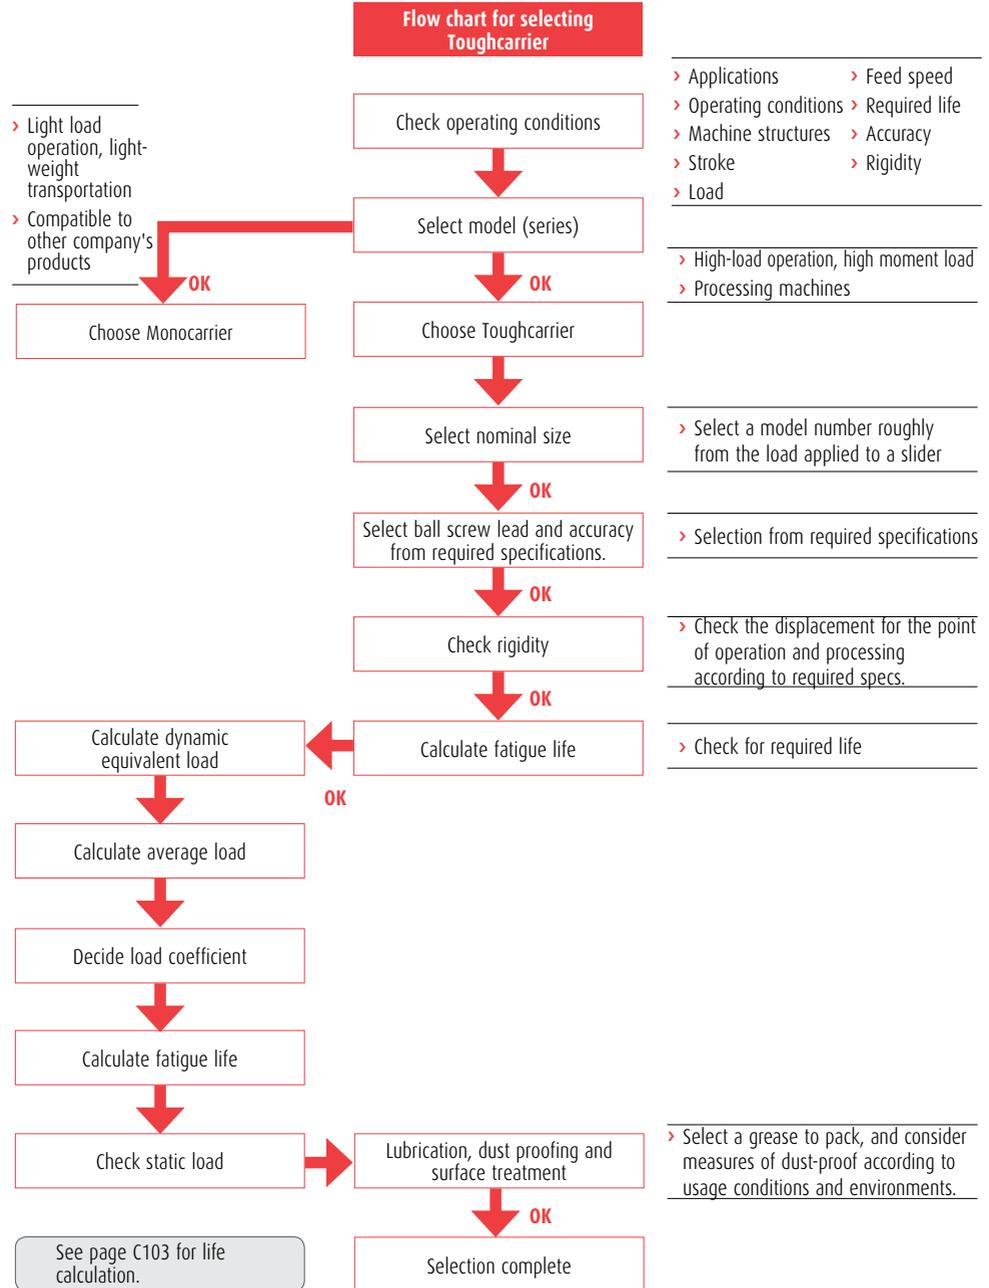

C-2-4. 2 Stroke and Lead

◆ Combinations of rail length and lead

> TCH06

| Slider type | Standard slider | | | | | | Short slider | | | | | |
|------------------|-----------------|----|----|---------------|----|----|---------------|----|----|---------------|----|----|
| | Single slider | | | Double slider | | | Single slider | | | Double slider | | |
| Lead (mm) | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 |
| Rail length (mm) | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 |
| 150 | ✓ | ✓ | ✓ | | | | ✓ | ✓ | | | | |
| 200 | ✓ | ✓ | ✓ | | | | ✓ | ✓ | | | | |
| 300 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ | ✓ | |
| 400 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ | ✓ | |
| 500 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | | ✓ | ✓ | |
| 600 | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | | | ✓ | |

*20 mm lead for short sliders not available.

> TCH09

| Slider type | Standard slider | | | | | | Short slider | | | | | |
|------------------|-----------------|----|----|---------------|----|----|---------------|----|----|---------------|----|----|
| | Single slider | | | Double slider | | | Single slider | | | Double slider | | |
| Lead (mm) | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 |
| Rail length (mm) | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 | 5 | 10 | 20 |
| 240 | ✓ | ✓ | ✓ | | | | ✓ | ✓ | ✓ | | | |
| 340 | ✓ | ✓ | ✓ | | | | ✓ | ✓ | ✓ | | | |
| 440 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 540 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 640 | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 740 | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ |
| 840 | ✓ | ✓ | ✓ | | | | ✓ | ✓ | ✓ | | | |
| 940 | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ |

> TCH10

| Slider type | Standard slider | | | | Short slider | | | |
|------------------|-----------------|----|---------------|----|---------------|----|---------------|----|
| | Single slider | | Double slider | | Single slider | | Double slider | |
| Lead (mm) | 10 | 20 | 10 | 20 | 10 | 20 | 10 | 20 |
| Rail length (mm) | 10 | 20 | 10 | 20 | 10 | 20 | 10 | 20 |
| 280 | ✓ | ✓ | | | ✓ | ✓ | | |
| 380 | ✓ | ✓ | | | ✓ | ✓ | | |
| 480 | ✓ | ✓ | | | ✓ | ✓ | | |
| 580 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 680 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 780 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 880 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 980 | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 1 080 | ✓ | ✓ | | ✓ | ✓ | ✓ | | ✓ |
| 1 180 | ✓ | ✓ | | ✓ | ✓ | ✓ | | ✓ |
| 1 280 | ✓ | ✓ | | ✓ | ✓ | ✓ | | ✓ |
| 1 380 | ✓ | ✓ | | ✓ | ✓ | ✓ | | ✓ |

◆ Availability

| Model No. | Lead (mm) | Slider | Rail length (mm) |
|-----------|-----------|--------|------------------|
| TCH06 | 5, 10, 20 | Single | 600 |
| TCH06 | 5, 10, 20 | Double | 600 |
| TCH09 | 5, 10, 20 | Single | 940 |
| TCH09 | 5, 10, 20 | Double | 940 |
| TCH10 | 10, 20 | Single | 1 380 |
| TCH10 | 10, 20 | Double | 1 380 |

Reference Number Coding and Accuracy Grade

C-2-4. 3 Reference Number Coding and Accuracy Grade

› Reference number coding for TCH Series

Body
Reference number: **TC H 06 030 H 10 K 0 0**

Toughcarrier
Model: TCH Series
(with accessories: TCS)
Nominal size (rail width, 10 mm units)
Stroke (10 mm units)
Accuracy grade: H, High grade; P, Precision grade

NSK control number (0: without pin holes)
(1: with pin holes)
Grease (0: YS2, standard)
Slider specification*
Ball screw lead (mm)

* K: Single slider
D: Double slider
A: Single short slider
B: Double short slider

Special specifications
Reference number: **TC H 06 030 H 10 K - XXB**

3: Toughcarrier for special specs
5: Toughcarrier high-thrust series*
* For the specifications of the High-Thrust Series, see page C132.

Design serial number

› Reference number for accessories

1. Sensor unit
Reference number: **TC - SRH XX - 00**
Toughcarrier
Sensor unit
Nominal size: 06, 09 and 10
Control no.: see page C115

2. Sensor rail
Reference number: **TC - SRL X - XXXX**
Toughcarrier
Sensor rail
Nominal size: 06 is 6, 09 is 9, and 10 is 1.
Body rail length

3. Cover unit
Reference number: **TC - HV XX XXX - K 00**
Toughcarrier
Cover unit
Nominal size: 06, 09 and 10
Stroke (nominal)
Slider specs: refer to the body reference no.
Control no.: See pages C116 to C118

4. Motor bracket
Reference number: **TC - BKH XX - XXX - 00**
Toughcarrier
Motor bracket
Nominal size: 06, 09 and 10
Dimension for motor mounting
Control no.

◆ Accuracy grade

Unit: μm

| Stroke (mm) | Grade | High grade (H grade) | | | Precision grade (P grade) | | | |
|-------------|-------|----------------------|--------------------------------|------------|---------------------------|----------------------|--------------------------------|-----------|
| | | Repeatability | Running parallelism (vertical) | Backlash | Repeatability | Positioning accuracy | Running parallelism (vertical) | Backlash |
| ~ 200 | | ±10 | 14 | 20 or less | ±3 | 20 | 8 | 3 or less |
| ~ 400 | | ±10 | 16 | 20 or less | ±3 | 25 | 10 | 3 or less |
| ~ 600 | | ±10 | 20 | 20 or less | ±3 | 30 | 12 | 3 or less |
| ~ 700 | | ±10 | 23 | 20 or less | ±3 | 30 | 15 | 3 or less |
| ~ 1 000 | | ±10 | 23 | 20 or less | ±3 | 35 | 15 | 3 or less |
| ~ 1 200 | | ±10 | 30 | 20 or less | ±3 | 40 | 20 | 3 or less |

High and precision grades are available for accuracy grade. Consult NSK for your requirements.

C-2-4. 4 Maximum Speed

› Maximum speed (standard slider)

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speed in the table below.

| | Stroke (nominal) | Ball screw lead (mm) | Body rail length L2 (mm) | Maximum speed (mm/s) |
|---------------------|------------------|----------------------|--------------------------|----------------------|
| TCH06 Single slider | 50 | 5 | 150 | 250 |
| | 100 | 5 | 200 | 250 |
| | 200 | 5 | 300 | 250 |
| | 300 | 5 | 400 | 250 |
| | 400 | 5 | 500 | 250 |
| | 500 | 5 | 600 | 250 |
| | 50 | 10 | 150 | 500 |
| | 100 | 10 | 200 | 500 |
| | 200 | 10 | 300 | 500 |
| | 300 | 10 | 400 | 500 |
| | 400 | 10 | 500 | 500 |
| | 500 | 10 | 600 | 500 |
| | 50 | 20 | 150 | 1 000 |
| | 100 | 20 | 200 | 1 000 |
| | 200 | 20 | 300 | 1 000 |
| | 300 | 20 | 400 | 1 000 |
| | 400 | 20 | 500 | 1 000 |
| | 500 | 20 | 600 | 1 000 |
| TCH06 Double slider | 130 | 5 | 300 | 250 |
| | 230 | 5 | 400 | 250 |
| | 330 | 5 | 500 | 250 |
| | 130 | 10 | 300 | 500 |
| | 230 | 10 | 400 | 500 |
| | 330 | 10 | 500 | 500 |
| | 430 | 10 | 600 | 500 |
| 430 | 20 | 600 | 1 000 | |
| TCH09 Single slider | 100 | 5 | 240 | 250 |
| | 200 | 5 | 340 | 250 |
| | 300 | 5 | 440 | 250 |
| | 400 | 5 | 540 | 250 |
| | 500 | 5 | 640 | 250 |
| | 600 | 5 | 740 | 250 |
| | 700 | 5 | 840 | 250 |
| | 800 | 5 | 940 | 210 |
| | 100 | 10 | 240 | 500 |
| | 200 | 10 | 340 | 500 |
| | 300 | 10 | 440 | 500 |
| | 400 | 10 | 540 | 500 |
| | 500 | 10 | 640 | 500 |
| | 600 | 10 | 740 | 500 |
| | 700 | 10 | 840 | 500 |
| | 800 | 10 | 940 | 410 |
| | 100 | 20 | 240 | 1 000 |
| | 200 | 20 | 340 | 1 000 |
| 300 | 20 | 440 | 1 000 | |
| 400 | 20 | 540 | 1 000 | |
| 500 | 20 | 640 | 1 000 | |
| 600 | 20 | 740 | 1 000 | |
| 700 | 20 | 840 | 1 000 | |
| 800 | 20 | 940 | 820 | |

| | Stroke (nominal) | Ball screw lead (mm) | Body rail length L2 (mm) | Maximum speed (mm/s) |
|---------------------|------------------|----------------------|--------------------------|----------------------|
| TCH09 Double slider | 170 | 5 | 440 | 250 |
| | 270 | 5 | 540 | 250 |
| | 370 | 5 | 640 | 250 |
| | 170 | 10 | 440 | 500 |
| | 270 | 10 | 540 | 500 |
| | 370 | 10 | 640 | 500 |
| | 470 | 10 | 740 | 500 |
| | 670 | 10 | 940 | 500 |
| | 470 | 20 | 740 | 1 000 |
| | 670 | 20 | 940 | 1 000 |
| TCH10 Single slider | 100 | 10 | 280 | 500 |
| | 200 | 10 | 380 | 500 |
| | 300 | 10 | 480 | 500 |
| | 400 | 10 | 580 | 500 |
| | 500 | 10 | 680 | 500 |
| | 600 | 10 | 780 | 500 |
| | 700 | 10 | 880 | 500 |
| | 800 | 10 | 980 | 500 |
| | 900 | 10 | 1 080 | 440 |
| | 1 000 | 10 | 1 180 | 360 |
| | 1 100 | 10 | 1 280 | 300 |
| | 1 200 | 10 | 1 380 | 250 |
| | 100 | 20 | 280 | 1 000 |
| | 200 | 20 | 380 | 1 000 |
| | 300 | 20 | 480 | 1 000 |
| | 400 | 20 | 580 | 1 000 |
| | 500 | 20 | 680 | 1 000 |
| | 600 | 20 | 780 | 1 000 |
| 700 | 20 | 880 | 1 000 | |
| 800 | 20 | 980 | 1 000 | |
| 900 | 20 | 1 080 | 870 | |
| 1 000 | 20 | 1 180 | 720 | |
| 1 100 | 20 | 1 280 | 600 | |
| 1 200 | 20 | 1 380 | 510 | |
| TCH10 Double slider | 270 | 10 | 580 | 500 |
| | 370 | 10 | 680 | 500 |
| | 470 | 10 | 780 | 500 |
| | 570 | 10 | 880 | 500 |
| | 670 | 10 | 980 | 500 |
| | 270 | 20 | 580 | 1 000 |
| | 370 | 20 | 680 | 1 000 |
| | 470 | 20 | 780 | 1 000 |
| | 570 | 20 | 880 | 1 000 |
| | 670 | 20 | 980 | 1 000 |
| 770 | 20 | 1 080 | 1 000 | |
| 870 | 20 | 1 180 | 930 | |
| 970 | 20 | 1 280 | 780 | |
| 1 070 | 20 | 1 380 | 650 | |

Note If you need to operate the Toughcarrier near the critical speed or in excess of the maximum speed in the table, please consult NSK.

› **Maximum speed (short slider)**

Maximum speed of the Toughcarrier is determined by the critical speed of the ball screw shaft and the $d \cdot n$ value. Do not exceed the maximum speed in the table below.


| | Stroke (nominal) | Ball screw lead (mm) | Body rail length L2 (mm) | Maximum speed (mm/s) | |
|---------------------|---------------------|----------------------|--------------------------|----------------------|-------|
| TCH06 Single slider | 70 | 5 | 150 | 250 | |
| | 120 | 5 | 200 | 250 | |
| | 220 | 5 | 300 | 250 | |
| | 320 | 5 | 400 | 250 | |
| | 420 | 5 | 500 | 250 | |
| | 520 | 5 | 600 | 250 | |
| | 70 | 10 | 150 | 500 | |
| | 120 | 10 | 200 | 500 | |
| | 220 | 10 | 300 | 500 | |
| | 320 | 10 | 400 | 500 | |
| TCH06 Double slider | 420 | 10 | 500 | 500 | |
| | 520 | 10 | 600 | 500 | |
| | 170 | 5 | 300 | 250 | |
| | 270 | 5 | 400 | 250 | |
| | 370 | 5 | 500 | 250 | |
| | 470 | 5 | 600 | 500 | |
| TCH09 Single slider | 140 | 5 | 240 | 250 | |
| | 240 | 5 | 340 | 250 | |
| | 340 | 5 | 440 | 250 | |
| | 440 | 5 | 540 | 250 | |
| | 540 | 5 | 640 | 250 | |
| | 640 | 5 | 740 | 250 | |
| | 740 | 5 | 840 | 240 | |
| | 840 | 5 | 940 | 190 | |
| | 140 | 10 | 240 | 500 | |
| | 240 | 10 | 340 | 500 | |
| | 340 | 10 | 440 | 500 | |
| | 440 | 10 | 540 | 500 | |
| | 540 | 10 | 640 | 500 | |
| | 640 | 10 | 740 | 500 | |
| | 740 | 10 | 840 | 480 | |
| | 840 | 10 | 940 | 380 | |
| | TCH09 Double slider | 140 | 20 | 240 | 1 000 |
| | | 240 | 20 | 340 | 1 000 |
| 340 | | 20 | 440 | 1 000 | |
| 440 | | 20 | 540 | 1 000 | |
| 540 | | 20 | 640 | 1 000 | |
| 640 | | 20 | 740 | 1 000 | |
| 740 | | 20 | 840 | 960 | |
| 840 | | 20 | 940 | 760 | |

| | Stroke (nominal) | Ball screw lead (mm) | Body rail length L2 (mm) | Maximum speed (mm/s) |
|---------------------|------------------|----------------------|--------------------------|----------------------|
| TCH09 Double slider | 250 | 5 | 440 | 250 |
| | 350 | 5 | 540 | 250 |
| | 450 | 5 | 640 | 250 |
| | 250 | 10 | 440 | 500 |
| | 350 | 10 | 540 | 500 |
| | 450 | 10 | 640 | 500 |
| | 550 | 10 | 740 | 500 |
| | 750 | 10 | 940 | 460 |
| | 550 | 20 | 740 | 1 000 |
| | 750 | 20 | 940 | 930 |
| TCH10 Single slider | 160 | 10 | 280 | 500 |
| | 260 | 10 | 380 | 500 |
| | 360 | 10 | 480 | 500 |
| | 460 | 10 | 580 | 500 |
| | 560 | 10 | 680 | 500 |
| | 660 | 10 | 780 | 500 |
| | 760 | 10 | 880 | 500 |
| | 860 | 10 | 980 | 490 |
| | 960 | 10 | 1 080 | 400 |
| | 1 060 | 10 | 1 180 | 330 |
| | 1 160 | 10 | 1 280 | 280 |
| | 1 260 | 10 | 1 380 | 240 |
| | 160 | 20 | 280 | 1 000 |
| | 260 | 20 | 380 | 1 000 |
| | 360 | 20 | 480 | 1 000 |
| | 460 | 20 | 580 | 1 000 |
| | 560 | 20 | 680 | 1 000 |
| | 660 | 20 | 780 | 1 000 |
| 760 | 20 | 880 | 1 000 | |
| 860 | 20 | 980 | 980 | |
| 960 | 20 | 1 080 | 800 | |
| 1 060 | 20 | 1 180 | 660 | |
| 1 160 | 20 | 1 280 | 560 | |
| 1 260 | 20 | 1 380 | 480 | |
| TCH10 Double slider | 360 | 10 | 580 | 500 |
| | 460 | 10 | 680 | 500 |
| | 560 | 10 | 780 | 500 |
| | 660 | 10 | 880 | 500 |
| | 760 | 10 | 980 | 500 |
| | 360 | 20 | 580 | 1 000 |
| | 460 | 20 | 680 | 1 000 |
| | 560 | 20 | 780 | 1 000 |
| | 660 | 20 | 880 | 1 000 |
| | 760 | 20 | 980 | 1 000 |
| 860 | 20 | 1 080 | 980 | |
| 960 | 20 | 1 180 | 800 | |
| 1 060 | 20 | 1 280 | 660 | |
| 1 160 | 20 | 1 380 | 560 | |

Note If you need to operate the Toughcarrier near the critical speed or in excess of the maximum speed in the table, please consult NSK.


C-2-4. 5 Rigidity

Rigidity of rail

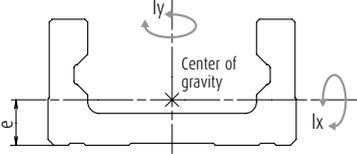


| Model no. | Geometrical moment of inertia $\times 10^4$ (mm ⁴) | | Center of gravity (mm) | Mass (kg/100mm) |
|-----------|--|-------|------------------------|-----------------|
| | I_x | I_y | e | w |
| TCH06 | 6.47 | 36.2 | 10.6 | 0.6 |
| TCH09 | 28.4 | 162 | 15.7 | 1.32 |
| TCH10 | 46 | 283 | 17.2 | 1.73 |

◆ Rigidity in radial direction

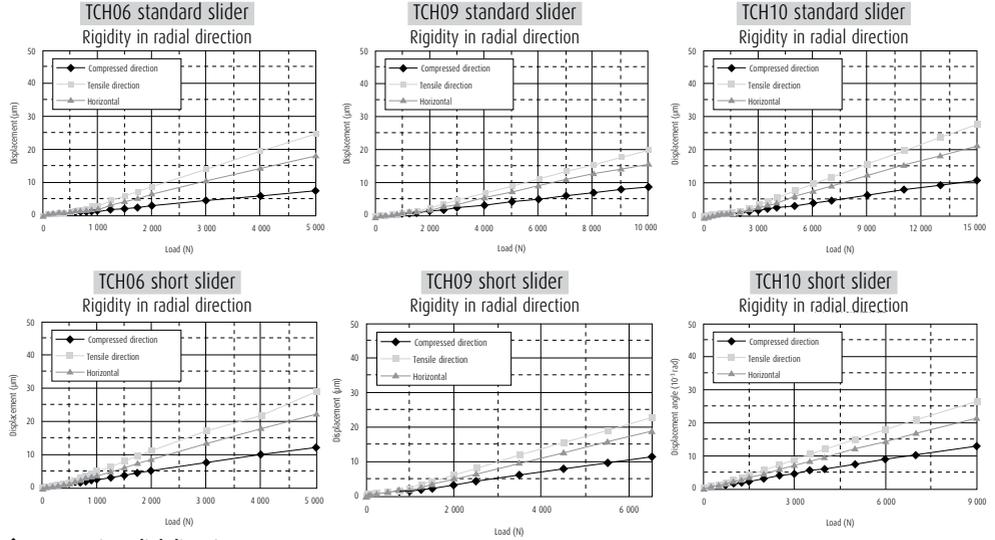

◆ Moment in radial direction

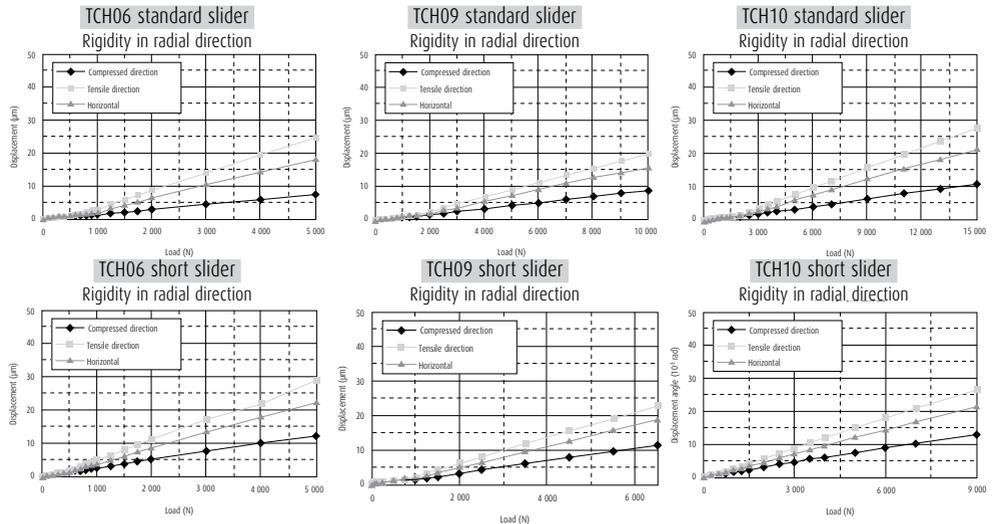

C-2-4. 6 Basic Load Rating

◆ Road rating for TCH series

Standard slider

| Model no. | Lead l (mm) | Shaft dia. d (mm) | Basic dynamic load rating (N) | | | Basic static load rating (N) | | Support bearing limit load (N) |
|-----------|---------------|---------------------|-------------------------------|------------------|------------------------|------------------------------|--------------------|--------------------------------|
| | | | Ball screw C_a | Linear guide C | Support bearings C_a | Ball screw C_{0a} | Linear guide C_0 | |
| TCH06 | 5 | $\phi 12$ | 3 760 | 20 900 | 6 600 | 6 310 | 45 000 | 2 700 |
| TCH06 | 10 | $\phi 12$ | 2 260 | 20 900 | 6 600 | 3 780 | 45 000 | 2 700 |
| TCH06 | 20 | $\phi 12$ | 2 260 | 20 900 | 6 600 | 3 780 | 45 000 | 2 700 |
| TCH09 | 5 | $\phi 15$ | 7 100 | 44 900 | 8 800 | 13 000 | 96 900 | 5 090 |
| TCH09 | 10 | $\phi 15$ | 7 060 | 44 900 | 8 800 | 12 700 | 96 900 | 5 090 |
| TCH09 | 20 | $\phi 15$ | 4 560 | 44 900 | 8 800 | 7 750 | 96 900 | 5 090 |
| TCH10 | 10 | $\phi 20$ | 10 900 | 62 400 | 9 600 | 21 700 | 132 000 | 5 670 |
| TCH10 | 20 | $\phi 20$ | 7 060 | 62 400 | 9 600 | 12 700 | 132 000 | 5 670 |

Short slider

| Model no. | Lead l (mm) | Shaft dia. d (mm) | Basic dynamic load rating (N) | | | Basic static load rating (N) | | Support bearing limit load (N) |
|-----------|---------------|---------------------|-------------------------------|------------------|------------------------|------------------------------|--------------------|--------------------------------|
| | | | Ball screw C_a | Linear guide C | Support bearings C_a | Ball screw C_{0a} | Linear guide C_0 | |
| TCH06 | 5 | $\phi 12$ | 3 760 | 12 200 | 6 600 | 6 310 | 22 500 | 2 700 |
| TCH06 | 10 | $\phi 12$ | 2 260 | 12 200 | 6 600 | 3 780 | 22 500 | 2 700 |
| TCH09 | 5 | $\phi 15$ | 7 100 | 27 900 | 8 800 | 13 000 | 52 500 | 5 090 |
| TCH09 | 10 | $\phi 15$ | 7 060 | 27 900 | 8 800 | 12 700 | 52 500 | 5 090 |
| TCH09 | 20 | $\phi 15$ | 4 560 | 27 900 | 8 800 | 7 750 | 52 500 | 5 090 |
| TCH10 | 10 | $\phi 20$ | 10 900 | 38 700 | 9 600 | 21 700 | 71 500 | 5 670 |
| TCH10 | 20 | $\phi 20$ | 7 060 | 38 700 | 9 600 | 12 700 | 71 500 | 5 670 |

- Basic dynamic and static load ratings indicate values for one slider.
- Basic dynamic load rating of linear guide is a load that allows for a 50-km rating fatigue life and is a vertical and constant load on the ball mounting surface.
- Basic dynamic load rating of ball screw is load in the axial direction that allows 90% of ball screws of a group of the same Toughcarriers to rotate 1 million revolutions under the same condition without causing flaking by rolling contact fatigue.
- Basic dynamic load rating of support bearings is load that allows 1 million revolutions under the same condition.
- Basic static load rating is load that results in combined permanent deformations at contact points of rolling elements and rolling surfaces of respective parts at a diameter of 0.01%.


◆ Basic static moment load of linear guide

Standard slider

| Model no. | Slider | Basic static moment load (N-m) | | |
|-----------|--------|--------------------------------|-------------------|-----------------|
| | | Rolling M_{RO} | Pitching M_{PO} | Yawing M_{YO} |
| TCH06 | Single | 800 | 340 | 340 |
| TCH09 | Single | 2 510 | 1 340 | 1 340 |
| TCH10 | Single | 3 980 | 2 150 | 2 150 |

Short slider

| Model no. | Slider | Basic static moment load (N-m) | | |
|-----------|--------|--------------------------------|-------------------|-----------------|
| | | Rolling M_{RO} | Pitching M_{PO} | Yawing M_{YO} |
| TCH06 | Single | 400 | 85 | 85 |
| TCH09 | Single | 1 350 | 390 | 390 |
| TCH10 | Single | 2 150 | 630 | 630 |



M_{RO} : Rolling moment
 M_{PO} : Pitching moment
 M_{YO} : Yawing moment

C-2-4. 7 Estimation of Life Expectancy

(1) Life of linear guide for Toughcarrier

Study the load to be applied to the linear guide of Toughcarrier (**Fig. 1**). The equivalent load (F_e) is determined by substituting the load for equation 1) (Eq. 2) or 2') for tightly coupled double slider type).

> For single slider

$$F_e = Y_H F_H + Y_V F_V + Y_R \epsilon_R M_R + Y_P \epsilon_P M_P + Y_Y \epsilon_Y M_Y \dots\dots\dots 1)$$

> For double slider

For double sliders, calculation of the load applied to each slider is required.

Dynamic equivalent load is only for rolling moment. This is the same procedure as for linear guide selection where two sliders are installed in a rail. Check the mean load for each slider, and calculate shortest life becomes the life of linear guide.

When lateral direction (F_H) and vertical direction (F_V) loads are applied to the center of the coordinate in **Fig. 1**,

$$F_{HA} = \frac{F_H}{2} + \frac{M_Y}{\ell}, F_{VA} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

$$F_{HB} = \frac{F_H}{2} + \frac{M_Y}{\ell}, F_{VB} = \frac{F_V}{2} + \frac{M_P}{\ell}$$

[Slider A]

$$F_{eA} = Y_H \cdot F_{HA} + Y_V \cdot F_{VA} + Y_R \epsilon_R \frac{M_R}{2} \dots\dots\dots 2)$$

$$= Y_H \left[\frac{F_H}{2} + \frac{M_Y}{\ell} \right] + Y_V \left[\frac{F_V}{2} + \frac{M_P}{\ell} \right] + Y_R \epsilon_R \frac{M_R}{2}$$

[Slider B]

$$F_{eA} = Y_H \cdot F_{HB} + Y_V \cdot F_{VB} + Y_R \epsilon_R \frac{M_R}{2} \dots\dots\dots 2')$$

$$= Y_H \left[\frac{F_H}{2} - \frac{M_Y}{\ell} \right] + Y_V \left[\frac{F_V}{2} - \frac{M_P}{\ell} \right] + Y_R \epsilon_R \frac{M_R}{2}$$

F_H : Lateral direction load acting on the slider (N)

F_V : Vertical direction load acting on the slider (N)

M_R : Rolling moment acting on the slider (N · m)

M_P : Pitching moment acting on the slider (N · m)

M_Y : Yawing moment acting on the slider (N · m)

ϵ_R : Dynamic equivalent coefficient to rolling moment

ϵ_P : Dynamic equivalent coefficient to pitching moment

ϵ_Y : Dynamic equivalent coefficient to yawing moment

ℓ : Sliders span (m)

*For dynamic equivalent coefficient, see **table 1**.

Y_H, Y_V, Y_R, Y_P, Y_Y : 1.0 or 0.5

At equations 1), 2) and 2') for obtaining equivalent load F_e , the maximum value of Y in the values for each equation is assumed to be 1.0. For others it is assumed to be 0.5.

Fig.1 Direction of load


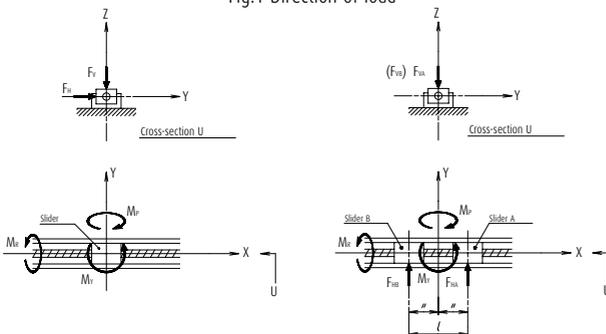


Fig. 2 Stepwise Fluctuating Load



If the loads acting on the slider fluctuate (in general, M_p and M_y may fluctuate with the acceleration/deceleration of slider), the mean effective load is determined by Eq. 3).

Travelling distance under the equivalent load F_{e1} : L_1

Travelling distance under the equivalent load F_{e2} : L_2

.....

Travelling distance under the equivalent load F_{en} : L_n

Mean effective load F_m is calculated by the following equation.

$$F_m = \sqrt[10]{\frac{1}{L} (F_{e1}^{10} \cdot L_1 + F_{e2}^{10} \cdot L_2 + \dots + F_{en}^{10} \cdot L_n)} \dots\dots\dots 3)$$

F_m : Mean effective load of fluctuating loads (N)

L : Total travelling distance (mm)

The life of linear guide for Toughcarrier is determined by Eq. 4).

$$L = 50 \times \left[\frac{C}{f_w \cdot F_m} \right]^{10} \dots\dots\dots 4)$$

L : Life of linear guide (km)

C : Basic dynamic load rating of linear guide (N)

F_m : Mean effective load acting on linear guide (N)

f_w : Load coefficient (see **table 2**)

When the estimated life does meet clear the required life, the life of the linear guide is calculated again after following measures are taken,

- 1: Change from single slider type to double slider type.
- 2: Use a larger Toughcarrier.

Table 1 Dynamic equivalent coefficient

| | TCH06 | | | TCH09 | | | TCH10 | | |
|-----------------|---------|----------|--------|---------|----------|--------|---------|----------|--------|
| | Rolling | Pitching | Yawing | Rolling | Pitching | Yawing | Rolling | Pitching | Yawing |
| Standard slider | 56 | 93 | 93 | 39 | 51 | 51 | 33 | 44 | 44 |
| Short slider | 56 | 186 | 186 | 39 | 95 | 95 | 33 | 80 | 80 |

(2) Life of Ball Screw (Support Bearing)

The mean effective load is determined from the axial load.

Axial direction mean effective load F_m

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + \dots + F_{en}^3 \cdot L_n)} \dots\dots\dots 5)$$

The life of ball screw is determined by Eq. 6).

$$L = \ell \times \left[\frac{C_a}{f_w \cdot F_m} \right]^3 \times 10^6 \dots\dots\dots 6)$$

ℓ : Ball screw lead (mm)

L : Life of ball screw (mm)

C_a : Basic dynamic load rating of ball screw (N)

F_m : Mean effective load acting on ball screw (N)

f_w : Load factor (see **table 2**)

The life of a support bearing is calculated by Eq. 6).

If the life of ball screw/support bearing does not meet the required life, use a larger size Toughcarrier. After applying the calculations mentioned above, selection of the Toughcarrier is completed.

Table 2 Value of load factor


| Operating conditions | Load factor f_w |
|--|-------------------|
| At smooth operation with no mechanical shock | 1.0 ~ 1.2 |
| At normal operation | 1.2 ~ 1.5 |
| At operation with mechanical shock and vibration | 1.5 ~ 3.0 |

*When the bottom of rail is not fastened, the load factor is 1.5 or greater.

C-2-4. 8 Example of Life Estimation

Example of life estimation for Toughcarrier

Example-1

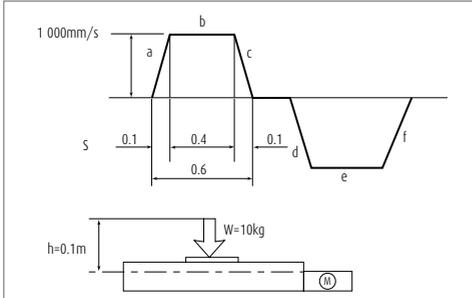

1. Use condition

| | |
|-------------------|-------------------------|
| Stroke | : 500 mm |
| Maximum speed | : 1 000 mm/s |
| Load mass | : W = 10 kg |
| Acceleration | : 9.80 m/s ² |
| Setting position | : Horizontal |
| Operating profile | : See figure to above |

2. Selection of model number (Interim selection)

First, select a greater ball screw lead as the maximum speed is 1 000 mm/s.

The interim selection is TCH06050H20K00, a single slider specification TCH06 that has 500 mm stroke, as the stroke is 500 mm.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of Eq. 1) by the dynamic equivalent coefficient (**Table 1** single slider) to convert the load volume. From operation profile in the above figure, the acceleration is 10 m/s².

- i) Constant speed $F_{e1} = Y_V \cdot F_V = Y_V \cdot W \cdot g$
 $= 1 \cdot 10 \cdot 9.8 = 98 \text{ N}$
- ii) Accelerating $F_{e2} = Y_V \cdot F_V + Y_P \cdot \epsilon_p \cdot M_p$
 $= Y_V \cdot W \cdot g + Y_P \cdot \epsilon_p h W \alpha$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
 $= 979 \text{ N}$
- iii) Decelerating $F_{e3} = Y_V \cdot F_V + Y_P \cdot \epsilon_p \cdot M_p$
 $= Y_V \cdot W \cdot g + Y_P \cdot \epsilon_p h W \alpha$
 $= 0.5 \cdot 10 \cdot 9.8 + 1 \cdot 93 \cdot 0.1 \cdot 10 \cdot 10$
 $= 979 \text{ N}$

Mean effective load Fm

$$F_m = \sqrt[3]{\frac{1}{L} \left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3 \right)}$$

$$= \sqrt[3]{\frac{1}{500} \left(98^3 \cdot 400 + 979^3 \cdot 50 + 979^3 \cdot 50 \right)}$$

$$= 605 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

$$= 50 \times \left(\frac{20\,900}{1.2 \cdot 605} \right)^{\frac{10}{3}}$$

$$= 3.65 \times 10^6 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{45\,000}{979} = 45.9$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

By the process above,

- i) Constant speed $F_{e1} = \mu \cdot W \cdot g = 0.01 \cdot 10 \cdot 9.8 = 0.98 \text{ N}$
- ii) Accelerating $F_{e2} = F_{e1} + W \cdot \alpha = 0.98 + 10 \cdot 10 = 101 \text{ N}$
- iii) Decelerating $F_{e3} = F_{e1} + W \cdot \alpha = 0.98 - 10 \cdot 10 = 99 \text{ N}$

Axial mean effective load

$$F_m = \sqrt[3]{\frac{1}{L} \left(F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3 \right)}$$

$$= \sqrt[3]{\frac{1}{500} \left(0.98^3 \cdot 400 + 101^3 \cdot 50 + 99^3 \cdot 50 \right)}$$

$$= 59 \text{ N}$$

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{2\,260}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 6.50 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{3\,780}{101} = 37.4$$

3-3. Support bearings

3-3-1. Fatigue life: Use the axial load Fm = 59 N that is the result of the calculation in 3-2-1, above.

$$L = \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 20 \times \left(\frac{6\,600}{1.2 \cdot 59} \right)^3 \times 10^6$$

$$= 1.62 \times 10^7 \text{ km}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.


$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{2\,730}{101} = 26.7$$

3-4. Result

| TCH06050H20K00 | Linear guide | Ball screw | Support bearings |
|-----------------------|-----------------------|-----------------------|-------------------------|
| Fatigue life | 3.65×10^6 km | 6.50×10^5 km | 1.62×10^7 km |
| Static safety factor | 45.9 | 37.4 | 26.7 |


Example of life estimation

Example-2

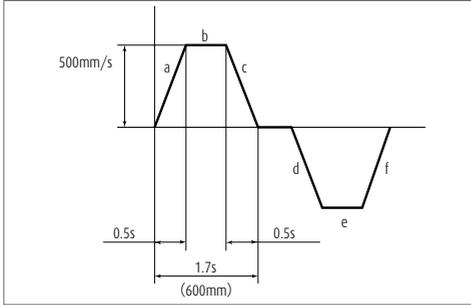

1. Use condition

| | |
|-------------------|------------------------|
| Stroke | : 600 mm |
| Maximum speed | : 500 mm/s |
| Load mass | : W = 20 kg |
| Acceleration | : 9.8 m/s ² |
| Setting position | : Vertical |
| Operating profile | : See figure to above |



2. Selection of model number (interim selection)

Select a 10 mm lead ball screw as the maximum speed is 500 mm/s.

The interim selection is TCH09067H10D00 (double slider specification) from the stroke and the vertical setting position.

3. Calculation

3-1. Linear guide

3-1-1. Fatigue life: Multiply the result of Eq. 2) and 2') by the dynamic equivalent coefficient (Table 1 double slider) to convert the load volume. From operation profile in the above figure, the acceleration is 1 m/s². The interim slider span is 0.13.

Under this condition,

$$F_H = 0, F_V = 0, M_R = 0$$

in Eq., and both sliders have the same load with different direction.

i) Constant speed

$$F_{e1} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot 9.8}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot 9.8}{0.13}$$

$$= 302 \text{ N}$$

ii) Accelerating

$$F_{e2} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 + 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 + 1.0)}{0.13}$$

$$= 333 \text{ N}$$

iii) Decelerating

$$F_{e3} = \gamma_H \cdot \frac{M_Y}{\ell} + \gamma_V \cdot \frac{M_P}{\ell}$$

$$= 0.5 \cdot \frac{0.1 \cdot 20 \cdot (9.8 - 1.0)}{0.13} + 1.0 \cdot \frac{0.15 \cdot 20 \cdot (9.8 - 1.0)}{0.13}$$

$$= 271 \text{ N}$$

Mean effective load Fm

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (302^3 \cdot 350 + 333^3 \cdot 125 + 271^3 \cdot 125)}$$

$$= 304 \text{ N}$$

$$L = 50 \times \left(\frac{C}{f_w \cdot F_m} \right)^{\frac{10}{3}}$$

$$= 50 \times \left(\frac{44900}{1.2 \cdot 304} \right)^{\frac{10}{3}}$$

$$= 4.63 \times 10^8 \text{ km}$$

3-1-2. Static safety factor: Divide the basic static load rating by the maximum load.

$$F_s = \frac{C_0}{F_e} = \frac{C_0}{F_{e2}} = \frac{96900}{333} = 290$$

3-2. Ball screw

3-2-1. Fatigue life: Obtain the axial load of each stage of operation referring to the operation profile, and then calculate the mean load.

i) Constant speed

$$F_{e1} = W \cdot g = 20 \cdot 9.8 = 196 \text{ N}$$

ii) Accelerating

$$F_{e2} = F_{e1} + W \cdot \alpha = 196 + 20 \cdot 1.0 = 216 \text{ N}$$

iii) Decelerating

$$F_{e3} = F_{e1} - W \cdot \alpha = 196 - 20 \cdot 1.0 = 176 \text{ N}$$

Axial mean effective load Fm

$$F_m = \sqrt[3]{\frac{1}{L} (F_{e1}^3 \cdot L_1 + F_{e2}^3 \cdot L_2 + F_{e3}^3 \cdot L_3)}$$

$$= \sqrt[3]{\frac{1}{600} (196^3 \cdot 350 + 216^3 \cdot 125 + 176^3 \cdot 125)}$$

$$= 197 \text{ N}$$

$$L = \ell \times \left(\frac{C_s}{f_w \cdot F_m} \right)^3 \times 10^6$$

$$= 10 \times \left(\frac{7060}{1.2 \cdot 197} \right)^3 \times 10^6$$

$$= 2.66 \times 10^5 \text{ km}$$

3-2-2. Static safety factor: Divide the basic static load rating by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{12\,700}{216} = 58.7$$

3-3. Support bearings

3-3-1. Fatigue life: Use the axial load $F_m = 197\text{ N}$ that is the result of the calculation in 3-2-1, above.

$$\begin{aligned} L &= \ell \times \left(\frac{C_a}{f_w \cdot F_m} \right)^3 \times 10^6 \\ &= 10 \times \left(\frac{8\,800}{1.2 \cdot 197} \right)^3 \times 10^6 \\ &= 5.15 \times 10^5 \text{ km} \end{aligned}$$

3-3-2. Static safety factor: Divide the limit load by the maximum axial load.

$$F_s = \frac{C_{0a}}{F_e} = \frac{C_{0a}}{F_{e2}} = \frac{5\,090}{216} = 23.5$$


3-4. Result

| TCH09067H10D00 | Linear guide | Ball screw | Support bearings |
|----------------------|-------------------------------|-------------------------------|-------------------------------|
| Fatigue life | $4.63 \times 10^8 \text{ km}$ | $2.66 \times 10^5 \text{ km}$ | $5.15 \times 10^5 \text{ km}$ |
| Static safety factor | 290 | 58.7 | 23.5 |

C-2-5 TCH Series Dimension Table for Standard Products

C-2-5. 1 TCH06 series

◆ TCH06 Standard Slider Specifications (with pin holes)

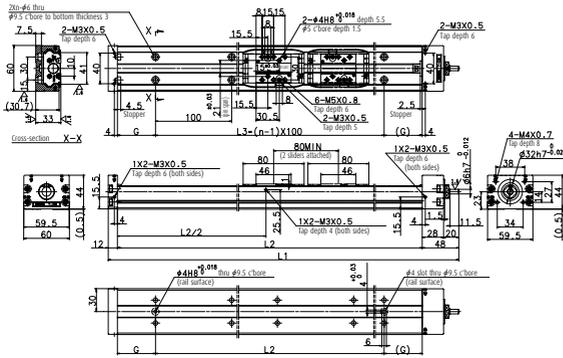

TCH06 Standard Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes n | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|------------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH06005H05K00 (01) | 50 | 63 | 5 | 210 | 150 | 100 | 25 | 2 | 2.94 | 2.2 |
| * TCH06005SH10K00 (01) | 50 | 63 | 10 | 210 | 150 | 100 | 25 | 2 | 3.38 | 2.2 |
| * TCH06005SH20K00 (01) | 50 | 63 | 20 | 210 | 150 | 100 | 25 | 2 | 5.10 | 2.2 |
| * TCH06010H05K00 (01) | 100 | 113 | 5 | 260 | 200 | 100 | 50 | 2 | 3.74 | 2.5 |
| * TCH06010H10K00 (01) | 100 | 113 | 10 | 260 | 200 | 100 | 50 | 2 | 4.18 | 2.5 |
| * TCH06010H20K00 (01) | 100 | 113 | 20 | 260 | 200 | 100 | 50 | 2 | 5.90 | 2.5 |
| TCH06020H05K00 (01) | 200 | 213 | 5 | 360 | 300 | 200 | 50 | 3 | 5.34 | 3.3 |
| TCH06020H10K00 (01) | 200 | 213 | 10 | 360 | 300 | 200 | 50 | 3 | 5.78 | 3.3 |
| TCH06020H20K00 (01) | 200 | 213 | 20 | 360 | 300 | 200 | 50 | 3 | 7.50 | 3.3 |
| TCH06030H05K00 (01) | 300 | 313 | 5 | 460 | 400 | 300 | 50 | 4 | 6.84 | 3.9 |
| TCH06030H10K00 (01) | 300 | 313 | 10 | 460 | 400 | 300 | 50 | 4 | 7.28 | 3.9 |
| TCH06030H20K00 (01) | 300 | 313 | 20 | 460 | 400 | 300 | 50 | 4 | 9.00 | 3.9 |
| TCH06040H05K00 (01) | 400 | 413 | 5 | 560 | 500 | 400 | 50 | 5 | 8.44 | 4.6 |
| TCH06040H10K00 (01) | 400 | 413 | 10 | 560 | 500 | 400 | 50 | 5 | 8.88 | 4.6 |
| TCH06040H20K00 (01) | 400 | 413 | 20 | 560 | 500 | 400 | 50 | 5 | 10.6 | 4.6 |
| TCH06050H05K00 (01) | 500 | 513 | 5 | 660 | 600 | 500 | 50 | 6 | 10.1 | 5.3 |
| TCH06050H10K00 (01) | 500 | 513 | 10 | 660 | 600 | 500 | 50 | 6 | 10.5 | 5.3 |
| TCH06050H20K00 (01) | 500 | 513 | 20 | 660 | 600 | 500 | 50 | 6 | 12.2 | 5.3 |

Items marked with * are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Double)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes n | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH06013H05D00 (01) | 130 | 133 | 5 | 360 | 300 | 200 | 50 | 3 | 5.47 | 3.6 |
| * TCH06013H10D00 (01) | 130 | 133 | 10 | 360 | 300 | 200 | 50 | 3 | 6.32 | 4.2 |
| * TCH06023H05D00 (01) | 230 | 233 | 5 | 460 | 400 | 300 | 50 | 4 | 7.06 | 4.2 |
| * TCH06023H10D00 (01) | 230 | 233 | 10 | 460 | 400 | 300 | 50 | 4 | 7.91 | 4.2 |
| * TCH06033H05D00 (01) | 330 | 333 | 5 | 560 | 500 | 400 | 50 | 5 | 8.64 | 4.9 |
| * TCH06033H10D00 (01) | 330 | 333 | 10 | 560 | 500 | 400 | 50 | 5 | 9.49 | 4.9 |
| TCH06043H10D00 (01) | 430 | 433 | 10 | 660 | 600 | 500 | 50 | 6 | 11.08 | 5.6 |
| TCH06043H20D00 (01) | 430 | 433 | 20 | 660 | 600 | 500 | 50 | 6 | 14.4 | 5.6 |

Items marked with * are unavailable for upside-down operation.

TCH06 Standard Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes n | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH06007H05A00 (01) | 70 | 84 | 5 | 210 | 150 | 100 | 25 | 2 | 2.87 | 2.1 |
| * TCH06007H10A00 (01) | 70 | 84 | 10 | 210 | 150 | 100 | 25 | 2 | 3.06 | 2.1 |
| * TCH06012H05A00 (01) | 120 | 134 | 5 | 210 | 150 | 100 | 50 | 2 | 3.67 | 2.4 |
| * TCH06012H10A00 (01) | 120 | 134 | 10 | 260 | 200 | 100 | 50 | 2 | 3.86 | 2.4 |
| TCH06022H05A00 (01) | 220 | 234 | 5 | 260 | 200 | 100 | 50 | 3 | 5.27 | 3.2 |
| TCH06022H10A00 (01) | 220 | 234 | 10 | 260 | 200 | 100 | 50 | 3 | 5.46 | 3.2 |
| TCH06032H05A00 (01) | 320 | 334 | 5 | 360 | 300 | 200 | 50 | 4 | 6.77 | 3.8 |
| TCH06032H10A00 (01) | 320 | 334 | 10 | 360 | 300 | 200 | 50 | 4 | 6.96 | 3.8 |
| TCH06042H05A00 (01) | 420 | 434 | 5 | 360 | 300 | 200 | 50 | 5 | 8.37 | 4.5 |
| TCH06042H10A00 (01) | 420 | 434 | 10 | 460 | 400 | 300 | 50 | 5 | 8.56 | 4.5 |
| TCH06052H05A00 (01) | 520 | 534 | 5 | 460 | 400 | 300 | 50 | 6 | 9.97 | 5.2 |
| TCH06052H10A00 (01) | 520 | 534 | 10 | 460 | 400 | 300 | 50 | 6 | 10.2 | 5.2 |

Items marked with * are unavailable for upside-down operation.


TCH06 Standard Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes n | Inertia $\times 10^{-6}$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-------------------------|---|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH06017H05B00 (01) | 170 | 175 | 5 | 360 | 300 | 200 | 50 | 3 | 5.34 | 3.4 |
| * TCH06017H10B00 (01) | 170 | 175 | 10 | 360 | 300 | 200 | 50 | 3 | 5.81 | 3.4 |
| TCH06027H05B00 (01) | 270 | 275 | 5 | 460 | 400 | 300 | 50 | 4 | 6.93 | 4.0 |
| TCH06027H10B00 (01) | 270 | 275 | 10 | 460 | 400 | 300 | 50 | 4 | 7.40 | 4.0 |
| TCH06037H05B00 (01) | 370 | 375 | 5 | 560 | 500 | 400 | 50 | 5 | 8.51 | 4.7 |
| TCH06037H10B00 (01) | 370 | 375 | 10 | 560 | 500 | 400 | 50 | 5 | 8.98 | 4.7 |
| TCH06047H10B00 (01) | 470 | 475 | 10 | 660 | 600 | 500 | 50 | 6 | 10.57 | 5.4 |

Items marked with * are unavailable for upside-down operation.

C-2-5. 2 TCH09 Series

◆ TCH09 Standard Slider Specifications (with pin holes)

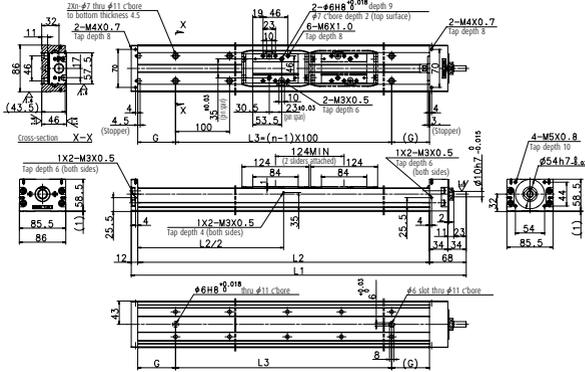


Toughcarrier dynamic torque specifications

Unit: N · cm

| Model no. | Slider specifications | Ball screw lead (mm) | Accuracy grade | |
|-----------|-------------------------|----------------------|----------------|-----------------|
| | | | High grade | Precision grade |
| TCH09 | Single standard slider | 5 | 2.8 ~ 7.7 | 4.2 ~ 12.8 |
| TCH09 | Single standard slider | 10 | 3.7 ~ 9.5 | 4.5 ~ 15.1 |
| TCH09 | Single standard slider | 20 | 3.7 ~ 12.6 | 5.1 ~ 17.9 |
| TCH09 | Double standard sliders | 5 | 3.2 ~ 8.7 | 4.5 ~ 14.1 |
| TCH09 | Double standard sliders | 10 | 4.2 ~ 12.6 | 5.1 ~ 17.9 |
| TCH09 | Double standard sliders | 20 | 5.7 ~ 18.9 | 6.3 ~ 23.3 |

◆ TCH09 Short Slider Specifications (with pin holes)

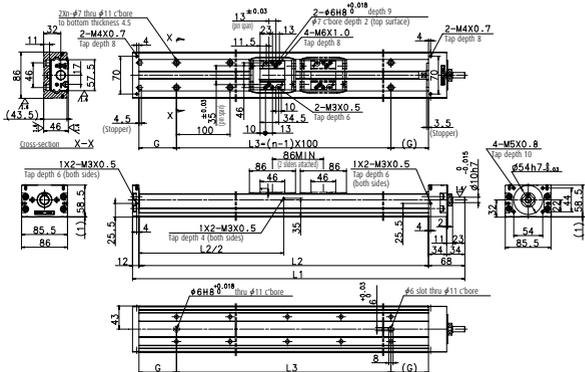

Toughcarrier dynamic torque specifications

Unit: N · cm

| Model no. | Slider specifications | Ball screw lead (mm) | Accuracy grade | |
|-----------|-----------------------|----------------------|----------------|-----------------|
| | | | High grade | Precision grade |
| TCH09 | Single short slider | 5 | 2.0 ~ 6.9 | 3.5 ~ 12.0 |
| TCH09 | Single short slider | 10 | 2.9 ~ 8.7 | 3.8 ~ 14.3 |
| TCH09 | Single short slider | 20 | 2.9 ~ 11.8 | 4.3 ~ 17.1 |
| TCH09 | Double short sliders | 5 | 2.5 ~ 7.9 | 3.8 ~ 13.3 |
| TCH09 | Double short sliders | 10 | 3.4 ~ 11.8 | 4.3 ~ 17.1 |
| TCH09 | Double short sliders | 20 | 4.9 ~ 18.1 | 5.5 ~ 22.6 |

TCH09 Standard Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-----------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH09010H05K00 (01) | 100 | 108 | 5 | 320 | 240 | 100 | 70 | 2 | 9.13 | 6.5 |
| * TCH09010H10K00 (01) | 100 | 108 | 10 | 320 | 240 | 100 | 70 | 2 | 11.0 | 6.5 |
| * TCH09010H20K00 (01) | 100 | 108 | 20 | 320 | 240 | 100 | 70 | 2 | 18.6 | 6.5 |
| TCH09020H05K00 (01) | 200 | 208 | 5 | 420 | 340 | 200 | 70 | 3 | 14.2 | 7.9 |
| TCH09020H10K00 (01) | 200 | 208 | 10 | 420 | 340 | 200 | 70 | 3 | 16.0 | 7.9 |
| TCH09020H20K00 (01) | 200 | 208 | 20 | 420 | 340 | 200 | 70 | 3 | 23.6 | 7.9 |
| TCH09030H05K00 (01) | 300 | 308 | 5 | 520 | 440 | 300 | 70 | 4 | 18.1 | 9.4 |
| TCH09030H10K00 (01) | 300 | 308 | 10 | 520 | 440 | 300 | 70 | 4 | 19.9 | 9.4 |
| TCH09030H20K00 (01) | 300 | 308 | 20 | 520 | 440 | 300 | 70 | 4 | 27.5 | 9.4 |
| TCH09040H05K00 (01) | 400 | 408 | 5 | 620 | 540 | 400 | 70 | 5 | 21.9 | 10.8 |
| TCH09040H10K00 (01) | 400 | 408 | 10 | 620 | 540 | 400 | 70 | 5 | 23.8 | 10.8 |
| TCH09040H20K00 (01) | 400 | 408 | 20 | 620 | 540 | 400 | 70 | 5 | 31.4 | 10.8 |
| TCH09050H05K00 (01) | 500 | 508 | 5 | 720 | 640 | 500 | 70 | 6 | 25.9 | 12.3 |
| TCH09050H10K00 (01) | 500 | 508 | 10 | 720 | 640 | 500 | 70 | 6 | 27.7 | 12.3 |
| TCH09050H20K00 (01) | 500 | 508 | 20 | 720 | 640 | 500 | 70 | 6 | 35.3 | 12.3 |
| TCH09060H05K00 (01) | 600 | 608 | 5 | 820 | 740 | 600 | 70 | 7 | 29.4 | 13.6 |
| TCH09060H10K00 (01) | 600 | 608 | 10 | 820 | 740 | 600 | 70 | 7 | 31.3 | 13.6 |
| TCH09060H20K00 (01) | 600 | 608 | 20 | 820 | 740 | 600 | 70 | 7 | 38.9 | 13.6 |
| TCH09070H05K00 (01) | 700 | 708 | 5 | 920 | 840 | 700 | 70 | 8 | 33.5 | 15.0 |
| TCH09070H10K00 (01) | 700 | 708 | 10 | 920 | 840 | 700 | 70 | 8 | 35.4 | 15.0 |
| TCH09070H20K00 (01) | 700 | 708 | 20 | 920 | 840 | 700 | 70 | 8 | 43.0 | 15.0 |
| TCH09080H05K00 (01) | 800 | 808 | 5 | 1 020 | 940 | 800 | 70 | 9 | 37.4 | 16.4 |
| TCH09080H10K00 (01) | 800 | 808 | 10 | 1 020 | 940 | 800 | 70 | 9 | 39.3 | 16.4 |
| TCH09080H20K00 (01) | 800 | 808 | 20 | 1 020 | 940 | 800 | 70 | 9 | 46.9 | 16.4 |

Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Double)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-----------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH09017H10D00 (01) | 170 | 184 | 5 | 520 | 440 | 300 | 70 | 4 | 19.47 | 10.3 |
| * TCH09017H20D00 (01) | 170 | 184 | 10 | 520 | 440 | 300 | 70 | 4 | 22.89 | 10.3 |
| * TCH09027H05D00 (01) | 270 | 284 | 5 | 620 | 540 | 400 | 70 | 5 | 23.35 | 11.7 |
| * TCH09027H10D00 (01) | 270 | 284 | 10 | 620 | 540 | 400 | 70 | 5 | 26.77 | 11.7 |
| TCH09037H05D00 (01) | 370 | 384 | 5 | 720 | 640 | 500 | 70 | 6 | 27.22 | 13.2 |
| TCH09037H10D00 (01) | 370 | 384 | 10 | 720 | 640 | 500 | 70 | 6 | 30.64 | 13.2 |
| TCH09047H10D00 (01) | 470 | 484 | 10 | 820 | 740 | 600 | 70 | 7 | 34.55 | 14.5 |
| TCH09047H20D00 (01) | 470 | 484 | 20 | 820 | 740 | 600 | 70 | 7 | 48.24 | 14.5 |
| TCH09067H10D00 (01) | 670 | 684 | 10 | 1 020 | 940 | 800 | 70 | 9 | 42.27 | 17.3 |
| TCH09067H20D00 (01) | 670 | 684 | 20 | 1 020 | 940 | 800 | 70 | 9 | 55.96 | 17.3 |

Items marked with * are unavailable for upside-down operation.

TCH09 Short Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-----------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| * TCH09014H05A00 (01) | 140 | 146 | 5 | 320 | 240 | 100 | 70 | 2 | 8.9 | 6.1 |
| * TCH09014H10A00 (01) | 140 | 146 | 10 | 320 | 240 | 100 | 70 | 2 | 10.1 | 6.1 |
| * TCH09014H20A00 (01) | 140 | 146 | 20 | 320 | 240 | 100 | 70 | 2 | 14.6 | 6.1 |
| TCH09024H05A00 (01) | 240 | 246 | 5 | 420 | 340 | 200 | 70 | 3 | 13.9 | 7.5 |
| TCH09024H10A00 (01) | 240 | 246 | 10 | 420 | 340 | 200 | 70 | 3 | 15.1 | 7.5 |
| TCH09024H20A00 (01) | 240 | 246 | 20 | 420 | 340 | 200 | 70 | 3 | 19.6 | 7.5 |
| TCH09034H05A00 (01) | 340 | 346 | 5 | 520 | 440 | 300 | 70 | 4 | 17.8 | 9.4 |
| TCH09034H10A00 (01) | 340 | 346 | 10 | 520 | 440 | 300 | 70 | 4 | 18.9 | 9.4 |
| TCH09034H20A00 (01) | 340 | 346 | 20 | 520 | 440 | 300 | 70 | 4 | 23.5 | 9.4 |
| TCH09044H05A00 (01) | 440 | 446 | 5 | 620 | 540 | 400 | 70 | 5 | 21.7 | 10.8 |
| TCH09044H10A00 (01) | 440 | 446 | 10 | 620 | 540 | 400 | 70 | 5 | 22.8 | 10.8 |
| TCH09044H20A00 (01) | 440 | 446 | 20 | 620 | 540 | 400 | 70 | 5 | 27.4 | 10.8 |
| TCH09054H05A00 (01) | 540 | 546 | 5 | 720 | 640 | 500 | 70 | 6 | 25.6 | 11.9 |
| TCH09054H10A00 (01) | 540 | 546 | 10 | 720 | 640 | 500 | 70 | 6 | 26.7 | 11.9 |
| TCH09054H20A00 (01) | 540 | 546 | 20 | 720 | 640 | 500 | 70 | 6 | 31.3 | 11.9 |
| TCH09064H05A00 (01) | 640 | 646 | 5 | 820 | 740 | 600 | 70 | 7 | 29.2 | 13.2 |
| TCH09064H10A00 (01) | 640 | 646 | 10 | 820 | 740 | 600 | 70 | 7 | 30.3 | 13.2 |
| TCH09064H20A00 (01) | 640 | 646 | 20 | 820 | 740 | 600 | 70 | 7 | 34.9 | 13.2 |
| TCH09074H05A00 (01) | 740 | 746 | 5 | 920 | 840 | 700 | 70 | 8 | 33.3 | 14.6 |
| TCH09074H10A00 (01) | 740 | 746 | 10 | 920 | 840 | 700 | 70 | 8 | 34.4 | 14.6 |
| TCH09074H20A00 (01) | 740 | 746 | 20 | 920 | 840 | 700 | 70 | 8 | 39.9 | 14.6 |
| TCH09084H05A00 (01) | 840 | 846 | 5 | 1 020 | 940 | 800 | 70 | 9 | 37.2 | 16.0 |
| TCH09084H10A00 (01) | 840 | 846 | 10 | 1 020 | 940 | 800 | 70 | 9 | 38.3 | 16.0 |
| TCH09084H20A00 (01) | 840 | 846 | 20 | 1 020 | 940 | 800 | 70 | 9 | 42.8 | 16.0 |

Items marked with * are unavailable for upside-down operation.

TCH09 Standard Slider Specifications (Double)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | No. of mounting holes | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|---------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----|-----------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | G | | | |
| TCH09025H05B00 (01) | 250 | 260 | 5 | 520 | 440 | 300 | 70 | 4 | 18.96 | 9.5 |
| TCH09025H10B00 (01) | 250 | 260 | 10 | 520 | 440 | 300 | 70 | 4 | 20.86 | 9.5 |
| TCH09035H05B00 (01) | 350 | 360 | 5 | 620 | 540 | 400 | 70 | 5 | 22.84 | 10.9 |
| TCH09035H10B00 (01) | 350 | 360 | 10 | 620 | 540 | 400 | 70 | 5 | 24.74 | 10.9 |
| TCH09045H05B00 (01) | 450 | 460 | 5 | 720 | 640 | 500 | 70 | 6 | 26.71 | 12.4 |
| TCH09045H10B00 (01) | 450 | 460 | 10 | 720 | 640 | 500 | 70 | 6 | 28.61 | 12.4 |
| TCH09055H10B00 (01) | 550 | 560 | 10 | 820 | 740 | 600 | 70 | 7 | 32.52 | 13.7 |
| TCH09055H20B00 (01) | 550 | 560 | 20 | 820 | 740 | 600 | 70 | 7 | 40.13 | 13.7 |
| TCH09075H10B00 (01) | 750 | 760 | 10 | 1 020 | 940 | 800 | 70 | 9 | 40.24 | 16.5 |
| TCH09075H20B00 (01) | 750 | 760 | 20 | 1 020 | 940 | 800 | 70 | 9 | 47.85 | 16.5 |

TCH10 Standard Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | | No. of mounting holes n | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----------------|----|-------------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | L ₄ | G | | | |
| * TCH10010H10K00 (01) | 100 | 126 | 10 | 373 | 280 | 150 | 100 | 65 | 2 | 42.72 | 9.6 |
| * TCH10010H20K00 (01) | 100 | 126 | 20 | 373 | 280 | 150 | 100 | 65 | 2 | 58.52 | 9.6 |
| TCH10020H10K00 (01) | 200 | 226 | 10 | 473 | 380 | 300 | 200 | 40 | 3 | 54.97 | 11.5 |
| TCH10020H20K00 (01) | 200 | 226 | 20 | 473 | 380 | 300 | 200 | 40 | 3 | 65.62 | 11.5 |
| TCH10030H10K00 (01) | 300 | 326 | 10 | 573 | 480 | 450 | 300 | 15 | 4 | 67.22 | 13.5 |
| TCH10030H20K00 (01) | 300 | 326 | 20 | 573 | 480 | 450 | 300 | 15 | 4 | 77.87 | 13.5 |
| TCH10040H10K00 (01) | 400 | 426 | 10 | 673 | 580 | 450 | 400 | 65 | 4 | 79.47 | 15.4 |
| TCH10040H20K00 (01) | 400 | 426 | 20 | 673 | 580 | 450 | 400 | 65 | 4 | 90.12 | 15.4 |
| TCH10050H10K00 (01) | 500 | 526 | 10 | 773 | 680 | 600 | 500 | 40 | 5 | 91.72 | 17.4 |
| TCH10050H20K00 (01) | 500 | 526 | 20 | 773 | 680 | 600 | 500 | 40 | 5 | 102.37 | 17.4 |
| TCH10060H10K00 (01) | 600 | 626 | 10 | 873 | 780 | 750 | 600 | 15 | 6 | 104.02 | 19.3 |
| TCH10060H20K00 (01) | 600 | 626 | 20 | 873 | 780 | 750 | 600 | 15 | 6 | 114.67 | 19.3 |
| TCH10070H10K00 (01) | 700 | 726 | 10 | 973 | 880 | 750 | 700 | 65 | 6 | 116.22 | 21.2 |
| TCH10070H20K00 (01) | 700 | 726 | 20 | 973 | 880 | 750 | 700 | 65 | 6 | 126.87 | 21.2 |
| TCH10080H10K00 (01) | 800 | 826 | 10 | 1 073 | 980 | 900 | 800 | 40 | 7 | 128.52 | 23.2 |
| TCH10080H20K00 (01) | 800 | 826 | 20 | 1 073 | 980 | 900 | 800 | 40 | 7 | 139.17 | 23.2 |
| TCH10090H10K00 (01) | 900 | 926 | 10 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 140.70 | 25.2 |
| TCH10090H20K00 (01) | 900 | 926 | 20 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 151.35 | 25.2 |
| TCH10100H10K00 (01) | 1 000 | 1 026 | 10 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 152.94 | 27.1 |
| TCH10100H20K00 (01) | 1 000 | 1 026 | 20 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 163.59 | 27.1 |
| TCH10110H10K00 (01) | 1 100 | 1 126 | 10 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 165.19 | 29.1 |
| TCH10110H20K00 (01) | 1 100 | 1 126 | 20 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 175.84 | 29.1 |
| TCH10120H10K00 (01) | 1 200 | 1 226 | 10 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 177.43 | 31.1 |
| TCH10120H20K00 (01) | 1 200 | 1 226 | 20 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 188.08 | 31.1 |

TCH10 Standard Slider Specifications (Double)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | | No. of mounting holes n | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----------------|----|-------------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | L ₄ | G | | | |
| * TCH10027H10D00 (01) | 270 | 281 | 10 | 673 | 580 | 450 | 400 | 65 | 4 | 83.02 | 16.8 |
| * TCH10027H20D00 (01) | 270 | 281 | 20 | 673 | 580 | 450 | 400 | 65 | 4 | 104.31 | 16.8 |
| TCH10037H10D00 (01) | 370 | 381 | 10 | 773 | 680 | 600 | 500 | 40 | 5 | 95.27 | 18.8 |
| TCH10037H20D00 (01) | 370 | 381 | 20 | 773 | 680 | 600 | 500 | 40 | 5 | 116.56 | 18.8 |
| TCH10047H10D00 (01) | 470 | 481 | 10 | 873 | 780 | 750 | 600 | 15 | 6 | 107.57 | 20.7 |
| TCH10047H20D00 (01) | 470 | 481 | 20 | 873 | 780 | 750 | 600 | 15 | 6 | 128.86 | 20.7 |
| TCH10057H10D00 (01) | 570 | 581 | 10 | 973 | 880 | 750 | 700 | 65 | 6 | 119.77 | 22.6 |
| TCH10057H20D00 (01) | 570 | 581 | 20 | 973 | 880 | 750 | 700 | 65 | 6 | 141.06 | 22.6 |
| TCH10067H10D00 (01) | 670 | 681 | 10 | 1 073 | 980 | 900 | 800 | 40 | 7 | 132.07 | 24.6 |
| TCH10067H20D00 (01) | 670 | 681 | 20 | 1 073 | 980 | 900 | 800 | 40 | 7 | 153.36 | 24.6 |
| TCH10077H20D00 (01) | 770 | 781 | 20 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 165.54 | 26.6 |
| TCH10087H20D00 (01) | 870 | 881 | 20 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 177.78 | 28.5 |
| TCH10097H20D00 (01) | 970 | 981 | 20 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 190.03 | 30.5 |
| TCH10107H20D00 (01) | 1 070 | 1 081 | 20 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 202.27 | 32.5 |

TCH10 Short Slider Specifications (Single)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | | No. of mounting holes n | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|-----------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----------------|----|-------------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | L ₄ | G | | | |
| * TCH10016H10A00 (01) | 160 | 170 | 10 | 373 | 280 | 150 | 100 | 65 | 2 | 41.20 | 8.9 |
| * TCH10016H20A00 (01) | 160 | 170 | 20 | 373 | 280 | 150 | 100 | 65 | 2 | 79.81 | 8.9 |
| TCH10026H10A00 (01) | 260 | 270 | 10 | 473 | 380 | 300 | 200 | 40 | 3 | 53.45 | 10.9 |
| TCH10026H20A00 (01) | 260 | 270 | 20 | 473 | 380 | 300 | 200 | 40 | 3 | 59.54 | 10.9 |
| TCH10036H10A00 (01) | 360 | 370 | 10 | 573 | 480 | 450 | 300 | 15 | 4 | 65.70 | 12.8 |
| TCH10036H20A00 (01) | 360 | 370 | 20 | 573 | 480 | 450 | 300 | 15 | 4 | 71.79 | 12.8 |
| TCH10046H10A00 (01) | 460 | 470 | 10 | 673 | 580 | 450 | 400 | 65 | 4 | 77.95 | 14.8 |
| TCH10046H20A00 (01) | 460 | 470 | 20 | 673 | 580 | 450 | 400 | 65 | 4 | 84.04 | 14.8 |
| TCH10056H10A00 (01) | 560 | 570 | 10 | 773 | 680 | 600 | 500 | 40 | 5 | 90.20 | 16.7 |
| TCH10056H20A00 (01) | 560 | 570 | 20 | 773 | 680 | 600 | 500 | 40 | 5 | 99.29 | 16.7 |
| TCH10066H10A00 (01) | 660 | 670 | 10 | 873 | 780 | 750 | 600 | 15 | 6 | 102.50 | 18.6 |
| TCH10066H20A00 (01) | 660 | 670 | 20 | 873 | 780 | 750 | 600 | 15 | 6 | 108.59 | 18.6 |
| TCH10076H10A00 (01) | 760 | 770 | 10 | 973 | 880 | 750 | 700 | 65 | 6 | 114.70 | 20.6 |
| TCH10076H20A00 (01) | 760 | 770 | 20 | 973 | 880 | 750 | 700 | 65 | 6 | 120.79 | 20.6 |
| TCH10086H10A00 (01) | 860 | 870 | 10 | 1 073 | 980 | 900 | 800 | 40 | 7 | 127.00 | 22.6 |
| TCH10086H20A00 (01) | 860 | 870 | 20 | 1 073 | 980 | 900 | 800 | 40 | 7 | 133.09 | 22.6 |
| TCH10096H10A00 (01) | 960 | 970 | 10 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 139.18 | 24.5 |
| TCH10096H20A00 (01) | 960 | 970 | 20 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 145.27 | 24.5 |
| TCH10106H10A00 (01) | 1 060 | 1 070 | 10 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 151.42 | 26.5 |
| TCH10106H20A00 (01) | 1 060 | 1 070 | 20 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 157.51 | 26.5 |
| TCH10116H10A00 (01) | 1 160 | 1 170 | 10 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 163.67 | 28.4 |
| TCH10116H20A00 (01) | 1 160 | 1 170 | 20 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 169.76 | 28.4 |
| TCH10126H10A00 (01) | 1 260 | 1 270 | 10 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 175.91 | 30.4 |
| TCH10126H20A00 (01) | 1 260 | 1 270 | 20 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 182.00 | 30.4 |


TCH10 Short Slider Specifications (Double)

| Reference number | Nominal stroke (mm) | Stroke limit (mm) | Ball screw lead (mm) | Body length (mm) | | | | | No. of mounting holes n | Inertia $\times 10^6$ (kg · m ²) | Mass (kg) |
|---------------------|---------------------|-------------------|----------------------|------------------|----------------|----------------|----------------|----|-------------------------|--|-----------|
| | | | | L ₁ | L ₂ | L ₃ | L ₄ | G | | | |
| TCH10036H10B00 (01) | 360 | 369 | 10 | 673 | 580 | 450 | 400 | 65 | 4 | 79.97 | 15.6 |
| TCH10036H20B00 (01) | 360 | 369 | 20 | 673 | 580 | 450 | 400 | 65 | 4 | 92.14 | 15.6 |
| TCH10046H10B00 (01) | 460 | 469 | 10 | 773 | 680 | 600 | 500 | 40 | 5 | 92.22 | 17.5 |
| TCH10046H20B00 (01) | 460 | 469 | 20 | 773 | 680 | 600 | 500 | 40 | 5 | 104.39 | 17.5 |
| TCH10056H10B00 (01) | 560 | 569 | 10 | 873 | 780 | 750 | 600 | 15 | 6 | 104.52 | 19.4 |
| TCH10056H20B00 (01) | 560 | 569 | 20 | 873 | 780 | 750 | 600 | 15 | 6 | 116.69 | 19.4 |
| TCH10066H10B00 (01) | 660 | 669 | 10 | 973 | 880 | 750 | 700 | 65 | 6 | 116.72 | 21.4 |
| TCH10066H20B00 (01) | 660 | 669 | 20 | 973 | 880 | 750 | 700 | 65 | 6 | 128.89 | 21.4 |
| TCH10076H10B00 (01) | 760 | 769 | 10 | 1 073 | 980 | 900 | 800 | 40 | 7 | 129.02 | 23.4 |
| TCH10076H20B00 (01) | 760 | 769 | 20 | 1 073 | 980 | 900 | 800 | 40 | 7 | 141.19 | 23.4 |
| TCH10086H20B00 (01) | 860 | 869 | 20 | 1 173 | 1 080 | 1 050 | 900 | 15 | 8 | 153.37 | 25.3 |
| TCH10096H20B00 (01) | 960 | 969 | 20 | 1 273 | 1 180 | 1 050 | 1 000 | 65 | 8 | 165.61 | 27.3 |
| TCH10106H20B00 (01) | 1 060 | 1 069 | 20 | 1 373 | 1 280 | 1 200 | 1 100 | 40 | 9 | 177.86 | 29.2 |
| TCH10116H20B00 (01) | 1 160 | 1 169 | 20 | 1 473 | 1 380 | 1 350 | 1 200 | 15 | 10 | 190.10 | 31.2 |

C-2-6 Accessories


C-2-6. 1 Sensor Unit

Reference number TC - SRH - 1



- Coding for model no.
- 0: Proximity switch (3 b-contacts)
 - 1: Proximity switch (3 a-contacts)
 - 2: Proximity switch (1 a-contact, 2 b-contacts)
 - 3: Photo sensor (3 sensors)

◆ Proximity switch

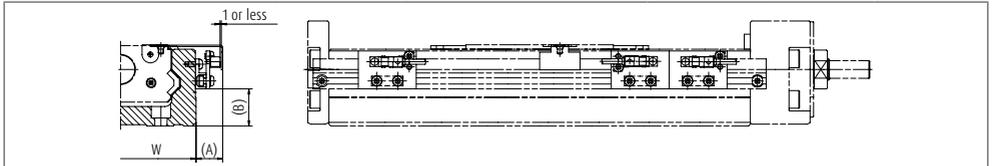

| Model no. | | Reference number | | | Dimensions | | |
|-----------|------------------------------|------------------|-------------|-------------|-----------------------|--------|-------------------|
| | | | | | A (mm) | B (mm) | Body width W (mm) |
| TCH06 | | TC-SRH06-10 | TC-SRH06-11 | TC-SRH06-12 | 17 | 10 | 60 |
| TCH09 | | TC-SRH09-10 | TC-SRH09-11 | TC-SRH09-12 | 16 | 21 | 86 |
| TCH10 | | TC-SRH10-10 | TC-SRH10-11 | TC-SRH10-12 | 16 | 25 | 100 |
| Quantity | Proximity switch (a-contact) | — | 3 | 1 | E2S-W13 (OMRON Corp.) | | |
| Quantity | Proximity switch (b-contact) | 3 | — | 2 | E2S-W13 (OMRON Corp.) | | |



◆ Photo sensor



| Model no. | Reference number | Dimensions | | | Note |
|-----------|------------------|------------|--------|-------------------|---|
| | | C (mm) | D (mm) | Body width W (mm) | |
| TCH06 | TC-SRH06-13 | 24 | 2 | 60 | EE-SX674 (OMRON Corp.) 3 sets (EE-1001 connector included) |
| TCH09 | TC-SRH09-13 | 24 | 12 | 86 | |
| TCH10 | TC-SRH10-13 | 24 | 16 | 100 | |

(1) Sensor Rail

Reference number TC - SRL -

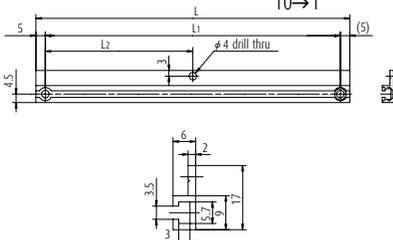


| Model no. | Body rail length | Dimensions | | |
|-----------|------------------|------------|----------------|----------------|
| | | L | L ₁ | L ₂ |
| TCH06 | 150 | 168 | 158 | 79 |
| TCH06 | 200 | 218 | 208 | 104 |
| TCH06 | 300 | 318 | 308 | 154 |
| TCH06 | 400 | 418 | 408 | 204 |
| TCH06 | 500 | 518 | 508 | 254 |
| TCH06 | 600 | 618 | 608 | 304 |
| TCH09 | 240 | 258 | 248 | 124 |
| TCH09 | 340 | 358 | 348 | 174 |
| TCH09 | 440 | 458 | 448 | 224 |
| TCH09 | 540 | 558 | 548 | 274 |
| TCH09 | 640 | 658 | 648 | 324 |
| TCH09 | 740 | 758 | 748 | 374 |
| TCH09 | 840 | 858 | 848 | 424 |
| TCH09 | 958 | 958 | 948 | 474 |
| TCH10 | 280 | 298 | 288 | 144 |
| TCH10 | 380 | 398 | 388 | 194 |
| TCH10 | 480 | 498 | 488 | 244 |
| TCH10 | 580 | 598 | 588 | 294 |
| TCH10 | 680 | 698 | 688 | 344 |
| TCH10 | 780 | 798 | 788 | 394 |
| TCH10 | 880 | 898 | 888 | 444 |
| TCH10 | 980 | 998 | 988 | 494 |
| TCH10 | 1 080 | 1 098 | 1 088 | 544 |
| TCH10 | 1 180 | 1 198 | 1 188 | 594 |
| TCH10 | 1 280 | 1 298 | 1 288 | 644 |
| TCH10 | 1 380 | 1 398 | 1 388 | 694 |

C-2-6. 2 Cover Unit

◆ Cover Unit


TC-HV06XXXXK00

TC-HV06XXXXD00

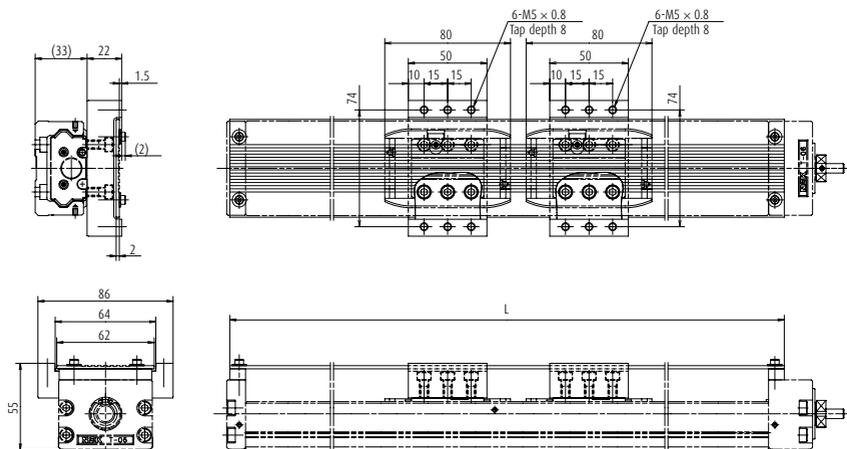

TC-HV06XXXA00


TC-HV06XXXB00

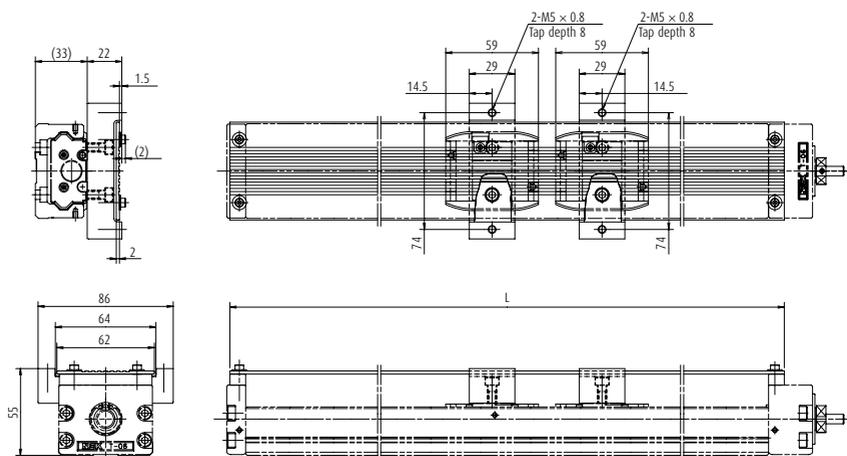


TCH06

| Body rail length | Dimensions L | Slider specifications | | | |
|------------------|--------------|-----------------------|---------------|---------------|---------------|
| | | Standard | | Short | |
| | | Single | Double | Single | Double |
| 150 | 170 | TC-HV06005K00 | — | TC-HV06007A00 | — |
| 200 | 220 | TC-HV06010K00 | — | TC-HV06012A00 | — |
| 300 | 320 | TC-HV06020K00 | TC-HV06013D00 | TC-HV06022A00 | TC-HV06017B00 |
| 400 | 420 | TC-HV06030K00 | TC-HV06023D00 | TC-HV06032A00 | TC-HV06027B00 |
| 500 | 520 | TC-HV06040K00 | TC-HV06033D00 | TC-HV06042A00 | TC-HV06037B00 |
| 600 | 620 | TC-HV06050K00 | TC-HV06043D00 | TC-HV06052A00 | TC-HV06047B00 |

TC-HV09XXXK00
TC-HV09XXXD00

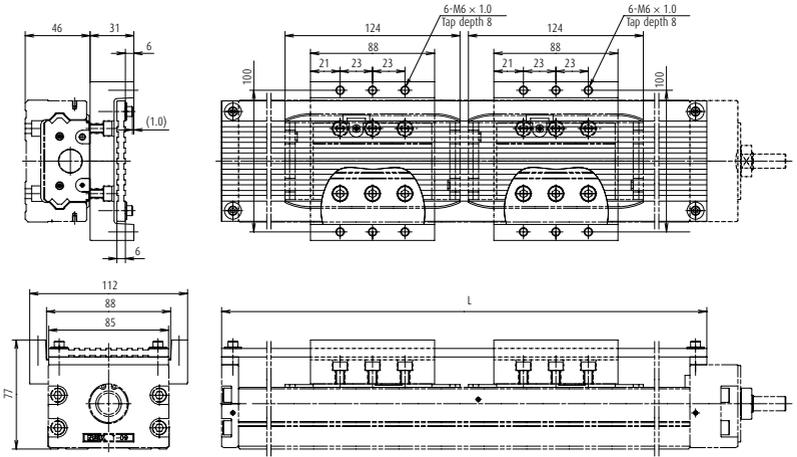

TC-HV09XXXA00
TC-HV09XXXB00

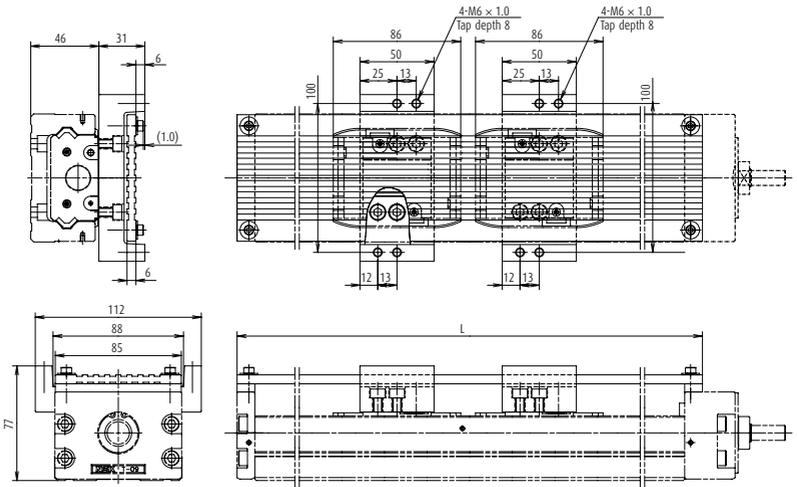


TCH09


| Body rail length | Dimensions L | Slider specifications | | | |
|------------------|--------------|-----------------------|---------------|---------------|---------------|
| | | Standard | | Short | |
| | | Single | Double | Single | Double |
| 240 | 264 | TC-HV09010K00 | — | TC-HV09014A00 | — |
| 340 | 364 | TC-HV09020K00 | — | TC-HV09024A00 | — |
| 440 | 464 | TC-HV09030K00 | TC-HV09017D00 | TC-HV09034A00 | TC-HV09025B00 |
| 540 | 564 | TC-HV09040K00 | TC-HV09027D00 | TC-HV09044A00 | TC-HV09035B00 |
| 640 | 664 | TC-HV09050K00 | TC-HV09037D00 | TC-HV09054A00 | TC-HV09045B00 |
| 740 | 764 | TC-HV09060K00 | TC-HV09047D00 | TC-HV09064A00 | TC-HV09055B00 |
| 840 | 864 | TC-HV09070K00 | — | TC-HV09074A00 | — |
| 940 | 964 | TC-HV09080K00 | TC-HV09067D00 | TC-HV09084A00 | TC-HV09075B00 |

Accessories

TC-HV10XXXK00
TC-HV10XXXD00

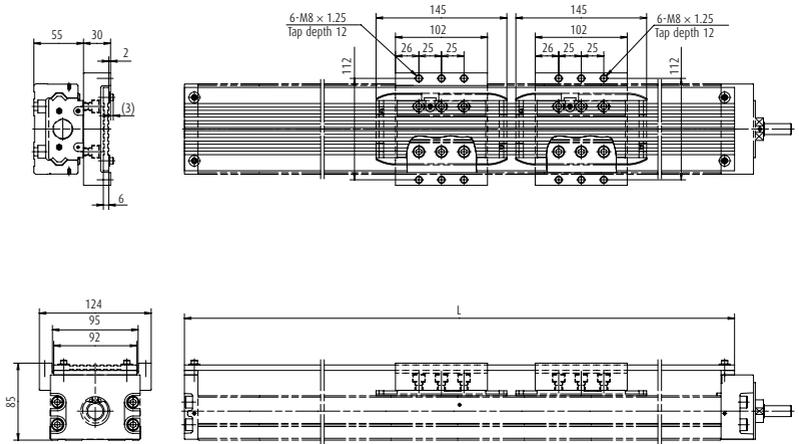

TC-HV10XXXA00
TC-HV10XXXB00

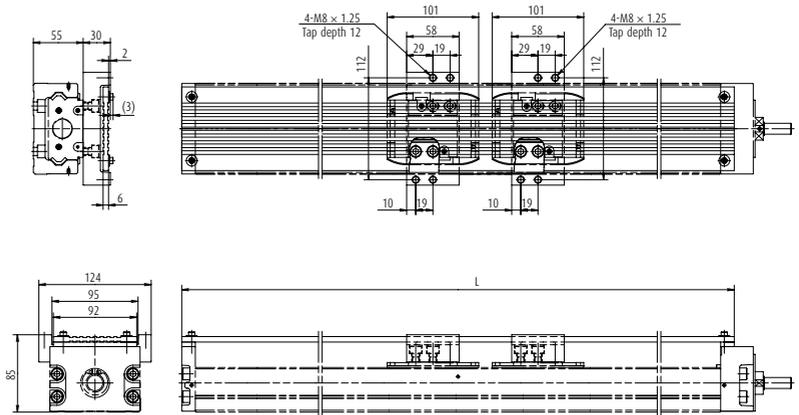

TCH10


| Body rail length | Dimensions L | Slider specifications | | | |
|------------------|--------------|-----------------------|---------------|---------------|---------------|
| | | Standard | | Short | |
| | | Single | Double | Single | Double |
| 280 | 310 | TC-HV10010K00 | — | TC-HV10016A00 | — |
| 380 | 410 | TC-HV10020K00 | — | TC-HV10026A00 | — |
| 480 | 510 | TC-HV10030K00 | — | TC-HV10036A00 | — |
| 580 | 610 | TC-HV10040K00 | TC-HV10027D00 | TC-HV10046A00 | TC-HV10036B00 |
| 680 | 710 | TC-HV10050K00 | TC-HV10037D00 | TC-HV10056A00 | TC-HV10046B00 |
| 780 | 810 | TC-HV10060K00 | TC-HV10047D00 | TC-HV10066A00 | TC-HV10056B00 |
| 880 | 910 | TC-HV10070K00 | TC-HV10057D00 | TC-HV10076A00 | TC-HV10066B00 |
| 980 | 1 010 | TC-HV10080K00 | TC-HV10067D00 | TC-HV10086A00 | TC-HV10076B00 |
| 1 080 | 1 110 | TC-HV10090K00 | TC-HV10077D00 | TC-HV10096A00 | TC-HV10086B00 |
| 1 180 | 1 210 | TC-HV10100K00 | TC-HV10087D00 | TC-HV10106A00 | TC-HV10096B00 |
| 1 280 | 1 310 | TC-HV10110K00 | TC-HV10097D00 | TC-HV10116A00 | TC-HV10106B00 |
| 1 380 | 1 410 | TC-HV10120K00 | TC-HV10107D00 | TC-HV10126A00 | TC-HV10116B00 |

C-2-6. 3 Motor Bracket

◆ Motor bracket

> Reference number


TC-BKH06-145-00

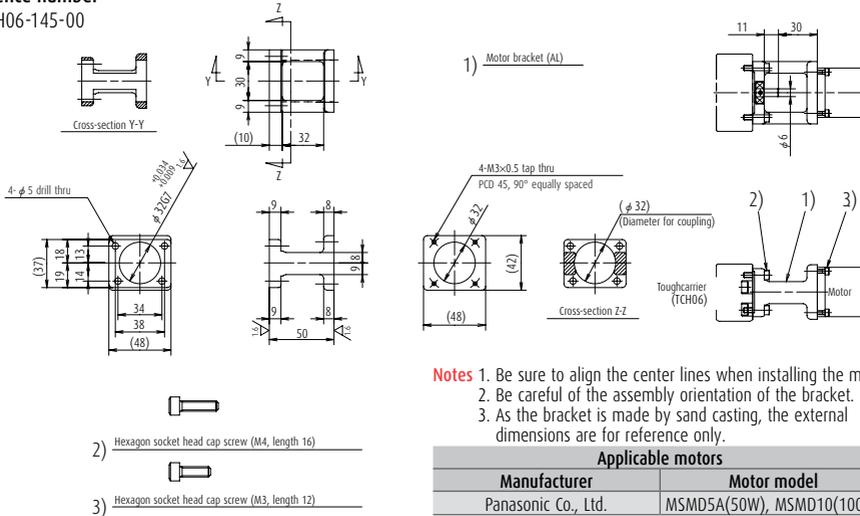

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

> Reference number


TC-BKH06-146-00

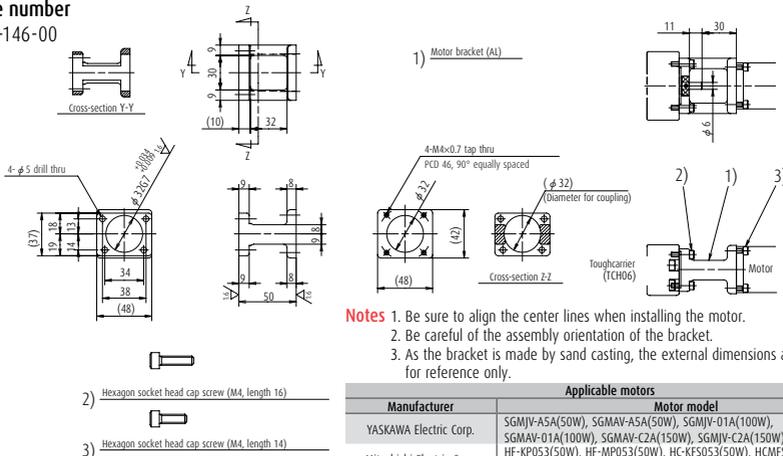

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.




> Reference number

TC-BKH06-148-00

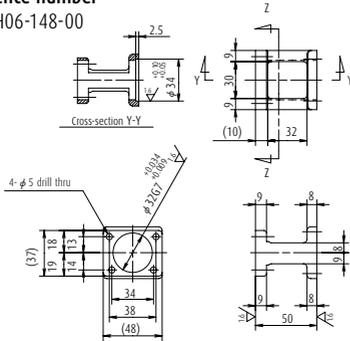

- 2) Hexagon socket head cap screw (M4, length 16)
- 3) Hexagon socket head cap screw (M3, length 12)

1) Motor bracket (AL)




- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

| Manufacturer | Motor model |
|-----------------------|---------------------------------|
| Panasonic Co., Ltd. | MAMA01(100W) |
| SANYO DENKI Co., Ltd. | P50B04006(60W), P50B04010(100W) |




> Reference number

TC-BKH06-160-00

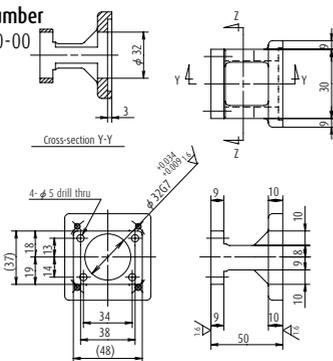

- 2) Hexagon socket head cap screw (M4, length 16)
- 3) Hexagon socket head cap screw (M4, length 14)

1) Motor bracket (AL)









- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.


Applicable motors

| Manufacturer | Motor model |
|-----------------------|--|
| SANYO DENKI Co., Ltd. | P50B05005(50W), P50B05010(100W), P50B05020(200W) |

> Reference number
TC-BKH06-250-00



1) Motor bracket (AL)




- 2)  Hexagon socket head cap screw (M4, length 16)
- 3)  Hexagon socket head cap screw (M4, length 14)

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

| Applicable motors | |
|--------------------------|--|
| Manufacturer | Motor model |
| SANYO DENKI Co., Ltd. | PBM603XXX, PBM604XXX, 103F78XX |
| ORIENTAL MOTOR Co., Ltd. | AS66, ASC66, UPK56X, PK56X, CSK56X, CFK56X, UFK56X |


> Reference number

TC-BKH09-145-00

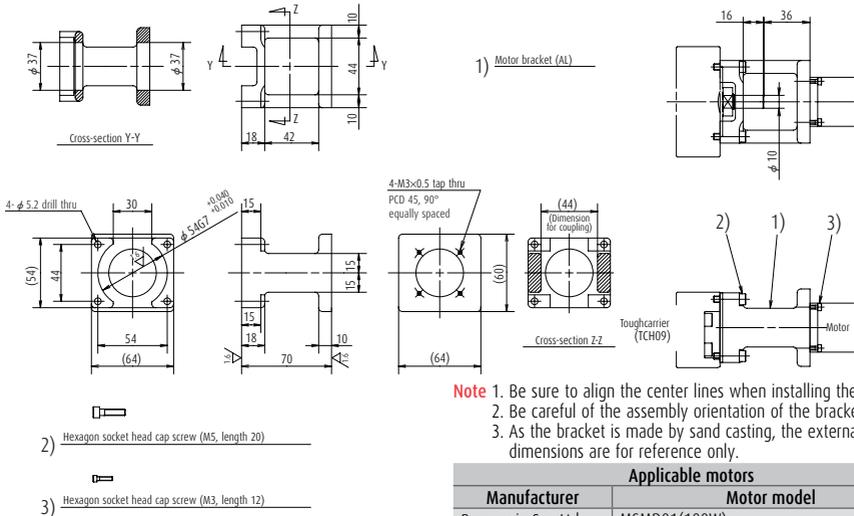


> Reference number

TC-BKH09-146-00

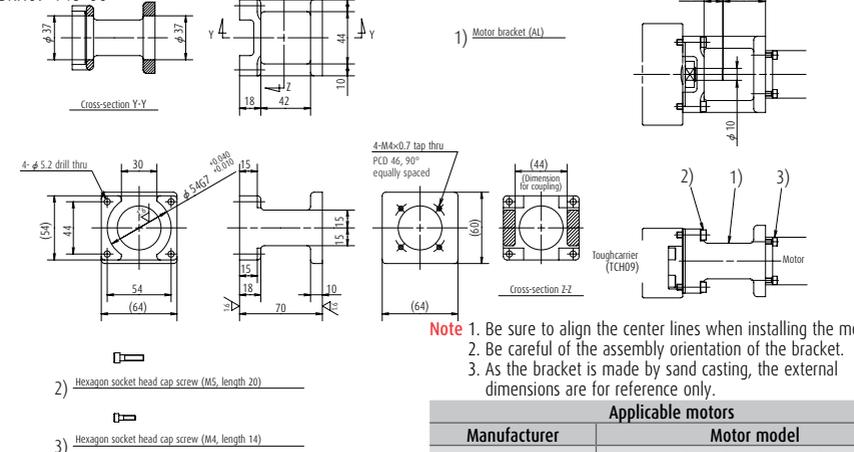

> Reference number

TC-BKH09-160-00

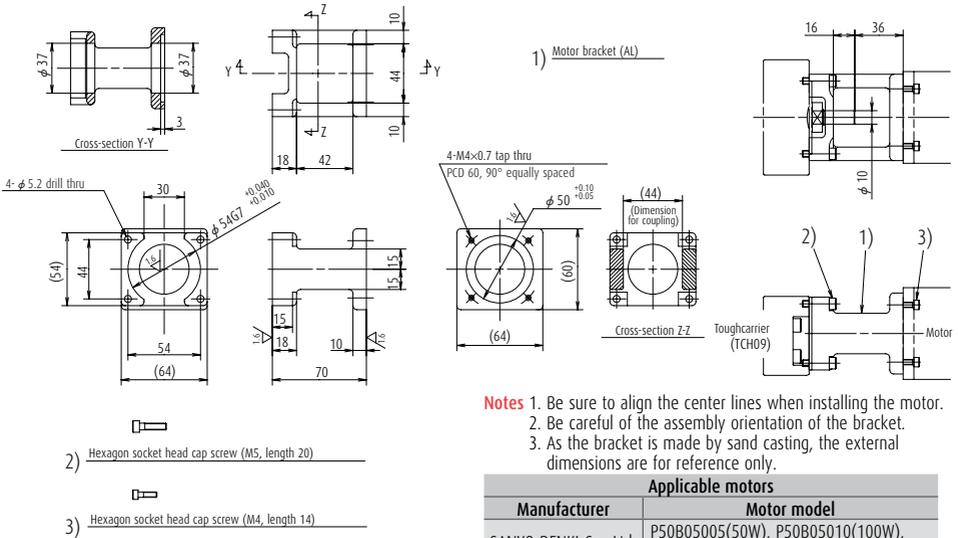


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

| Applicable motors | |
|-----------------------|--|
| Manufacturer | Motor model |
| SANYO DENKI Co., Ltd. | P50B05005(50W), P50B05010(100W), P50B05020(200W) |

> Reference number


TC-BKH09-170-00

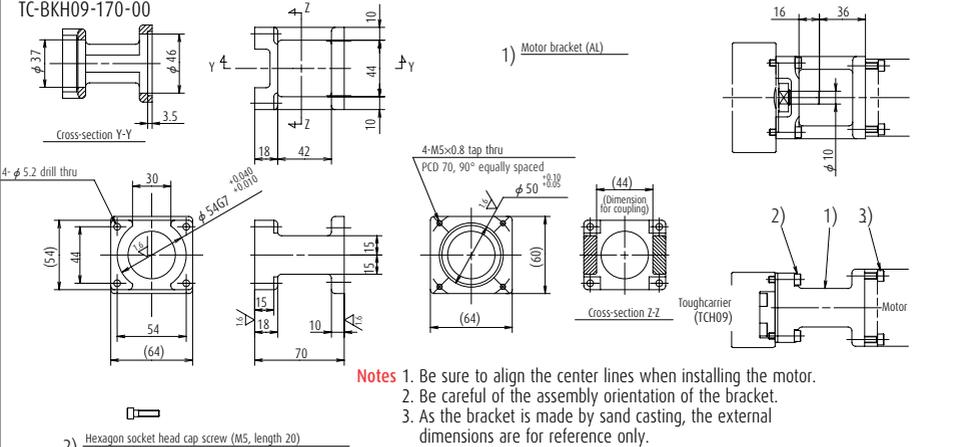

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

| Applicable motors | |
|---------------------------|--|
| Manufacturer | Motor model |
| YASKAWA Electric Corp. | SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W) |
| Mitsubishi Electric Corp. | HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| SANYO DENKI Co., Ltd. | P50B06020(200W), P30B06040(400W), R2AA06010(100W), R2AA06020(200W), R2A06040(400W) |

> Reference number
TC-BKH09-170-01

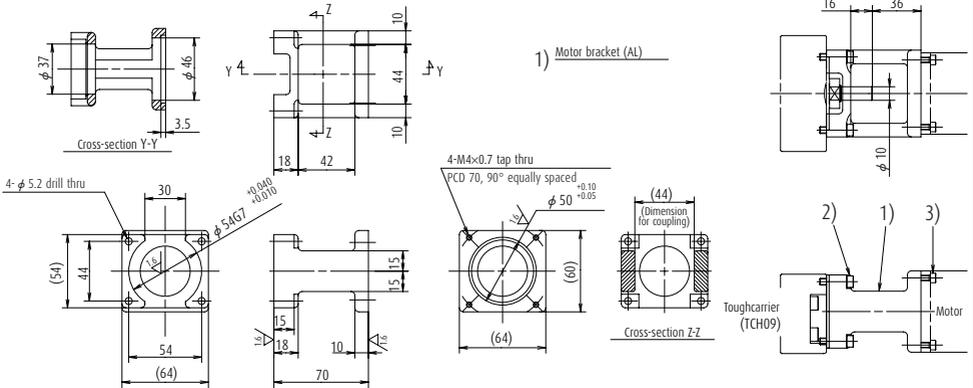


- 2) Hexagon socket head cap screw (M5, length 20)
- 3) Hexagon socket head cap screw (M4, length 14)

Notes

1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

| Applicable motors | |
|---------------------|--|
| Manufacturer | Motor model |
| Panasonic Co., Ltd. | MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W) |

> Reference number
TC-BKH09-190-00

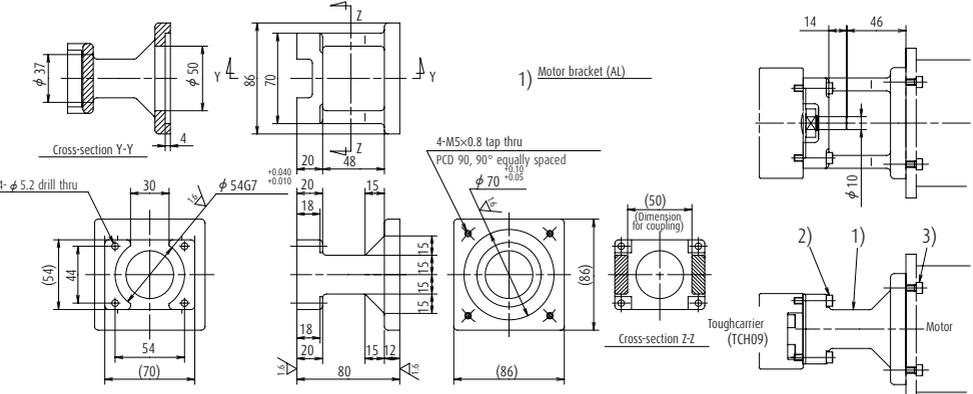

- 2) Hexagon socket head cap screw (M5, length 25)
- 3) Hexagon socket head cap screw (M5, length 16)


Notes

1. Be sure to align the center lines when installing the motor.
2. Be careful of the assembly orientation of the bracket.
3. As the bracket is made by sand casting, the external dimensions are for reference only.

| Applicable motors | |
|-----------------------|---|
| Manufacturer | Motor model |
| SANYO DENKI Co., Ltd. | P50B07020(200W), P50B07030(300W), P50B07040(400W) |

> Reference number

TC-BKH10-170-00

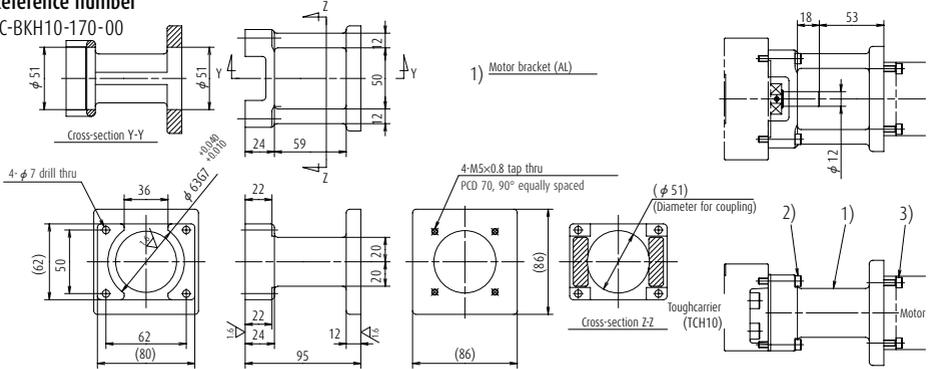

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M5, length 20)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

| Manufacturer | Motor model |
|---------------------------|--|
| YASKAWA Electric Corp. | SGMJV-02A(200W), SGMJV-02A(200W), SGMJV-04A(400W), SGMJV-04A(400W) |
| Mitsubishi Electric Corp. | HF-KP23(200W), HF-MP23(200W), HF-KP43(400W), HF-MP43(400W), HC-KFS23(200W), HC-MFS23(200W), HC-KFS43(400W), HC-MFS43(400W) |
| OMRON Corp. | R88M-W20(200W), R88M-W40(400W) |
| SANYO DENKI Co., Ltd. | P30B06020(200W), P30B06040(400W), R2AA06020(200W), R2A06040(400W) |

> Reference number

TC-BKH10-170-01

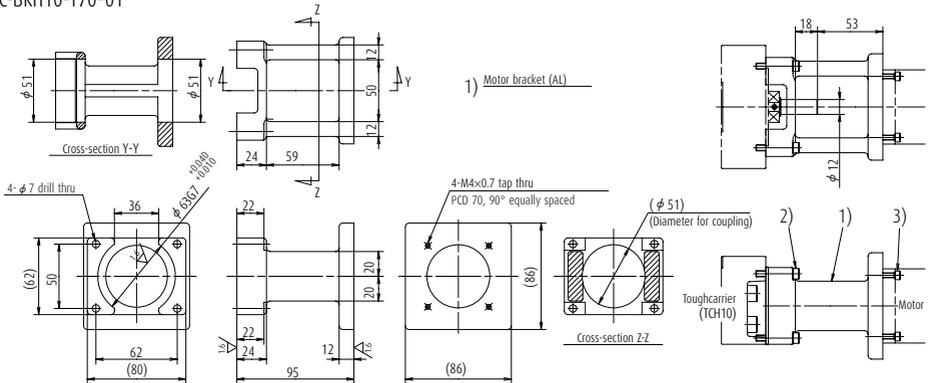

- 2) Hexagon socket head cap screw (M6, length 30)
- 3) Hexagon socket head cap screw (M4, length 16)


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

| Manufacturer | Motor model |
|---------------------|--|
| Panasonic Co., Ltd. | MSMD02(200W), MAMA02(200W), MSMD04(400W), MAMA04(400W) |

> Reference number

TC-BKH10-190-00

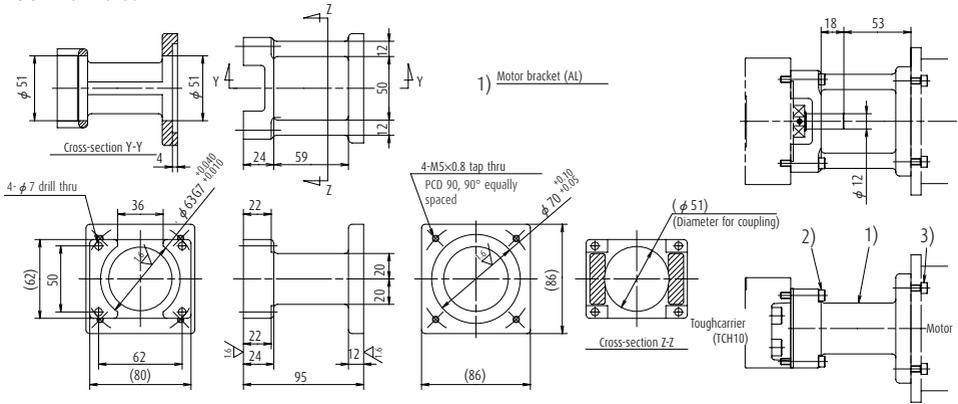


- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

| Manufacturer | Motor model |
|-----------------------|---|
| Panasonic Co., Ltd. | MSMD08(750W), MAMA08(750W) |
| SANYO DENKI Co., Ltd. | P50B07020(200W), P50B07030(300W), P50B07040(400W) |

> Reference number

TC-BKH10-270-00

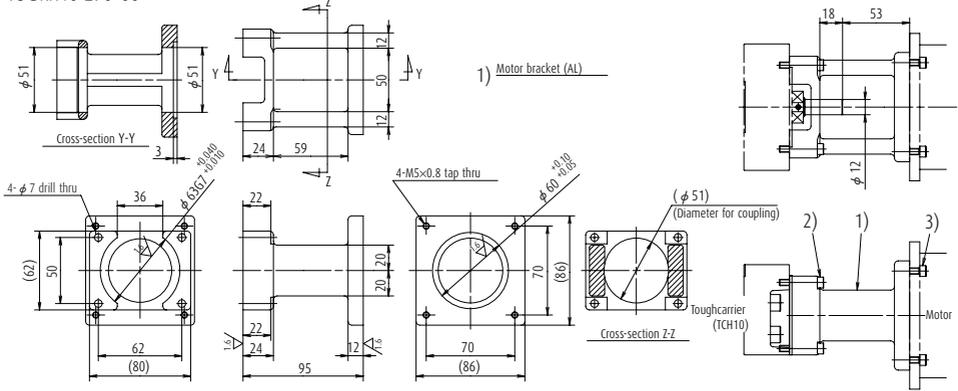

- Notes**
1. Be sure to align the center lines when installing the motor.
 2. Be careful of the assembly orientation of the bracket.
 3. As the bracket is made by sand casting, the external dimensions are for reference only.

Applicable motors

| Manufacturer | Motor model |
|--------------------------|---|
| SANYO DENKI Co., Ltd. | 103FB5XX |
| ORIENTAL MOTOR Co., Ltd. | AS98, UPK59X, PK59X, CSK59X, CFK59X, UFK59X |

C-2-7 Motor Bracket Compatibility Table

| Model No. | Reference number | Motor manufacturer | Stepping motor model No. | Wattage of AC servo motor | | | | | | | | | |
|--------------------------|---------------------------|--|--|---------------------------|--|------------------------|--|------------------------|-----------|--|------------------------|------------------|--|
| | | | | 30W | 50W | 60W | 100W | 150W | 200W | 300W | 400W | 750W | |
| TCH06 | TC-BKH06-146-00 | Panasonic Co., Ltd. | | | MSMD5A | | MSMD10 | | | | | | |
| | | YASKAWA Electric Corp. | | | SGMJV-ASA SGMAV-ASA | | SGMJV-01A SGMAV-01A | SGMJV-C2A SGMAV-C2A | | | | | |
| | | Mitsubishi Electric Corp. | | | HF-KP053 HF-MP053 HC-KFS053 HC-MFS053 | | HF-KP13 HF-MP13 HC-KFS13 HC-MFS13 | | | | | | |
| | | OMRON Corp. | | R88M-W03 | R88M-W05 | | R88M-W10 | | | | | | |
| | SANYO DENKI Co., Ltd. | | P30B04003 | P30B04005 R2AA04005 | | P30B04010 R2AA04010 | | | | | | | |
| | Panasonic Co., Ltd. | | | | | | MAMA01 | | | | | | |
| | SANYO DENKI Co., Ltd. | | | | | P50B04006 | P50B04010 | | | | | | |
| | SANYO DENKI Co., Ltd. | | | P50B05005 | | | P50B05010 | | P50B05020 | | | | |
| | SANYO DENKI Co., Ltd. | | PBM603XXX PBM604XXX 103F78XX | | | | | | | | | | |
| | ORIENTAL MOTOR Co., Ltd. | | AS66 ASC66 UPKS6X PKS6X CSKS6X CFKS6X UFKS6X | | | | | | | | | | |
| TCH09 | TC-BKH09-145-00 | Panasonic Co., Ltd. | | | | | MSMD01 | | | | | | |
| | | YASKAWA Electric Corp. | | | | | SGMJV-01A SGMAV-01A | SGMJV-C2A SGMAV-C2A | | | | | |
| | | Mitsubishi Electric Corp. | | | | | HF-KP13 HF-MP13 HC-KFS13 HC-MFS13 | | | | | | |
| | | SANYO DENKI Co., Ltd. | | | P30B04005 | | P30B04010 R2AA04010 | | | | | | |
| | SANYO DENKI Co., Ltd. | | | P50B05005 | | P50B05010 | | | | | | | |
| | YASKAWA Electric Corp. | | | | | | SGMJV-02A SGMAV-02A | | | SGMJV-04A SGMAV-04A | | | |
| | Mitsubishi Electric Corp. | | | | | | HF-KP23 HF-MP23 HC-KFS23 HC-MFS23 | | | HF-KP43 HF-MP43 HC-KFS43 HC-MFS43 | | | |
| | OMRON Corp. | | | | | | R88M-W20 | | | R88M-W40 | | | |
| | SANYO DENKI Co., Ltd. | | | | | R2AA06010 | P30B06020 R2AA06020 | | | P30B06040 R2AA06040 | | | |
| | Panasonic Co., Ltd. | | | | | | | MSMD02 MAMA02 | | MSMD04 MAMA04 | | | |
| SANYO DENKI Co., Ltd. | | | | | | P50B07020 | | P50B07030 | | P50B07040 | | | |
| SANYO DENKI Co., Ltd. | | PBM603XXX PBM604XXX 103F78XX | | | | | | | | | | | |
| ORIENTAL MOTOR Co., Ltd. | | AS66 ASC66 UPKS6X PKS6X CSKS6X CFKS6X UFKS6X | | | | | | | | | | | |
| ORIENTAL MOTOR Co., Ltd. | | AS98 UPKS9X PKS9X CSKS9X CFKS9X UFKS9X | | | | | | | | | | | |
| SANYO DENKI Co., Ltd. | | 103F85XX | | | | | | | | | | | |
| TCH10 | TC-BKH10-170-00 | YASKAWA Electric Corp. | | | | | | SGMJV-02A SGMAV-02A | | | SGMJV-04A SGMAV-04A | | |
| | | Mitsubishi Electric Corp. | | | | | HF-KP23 HF-MP23 HC-KFS23 HC-MFS23 | | | HF-KP43 HF-MP43 HC-KFS43 HC-MFS43 | | | |
| | | OMRON Corp. | | | | | | R88M-W20 | | | R88M-W40 | | |
| | | SANYO DENKI Co., Ltd. | | | | | | P30B06020 R2AA06020 | | | MSMD04 MAMA04 | | |
| | Panasonic Co., Ltd. | | | | | | | MSMD02 MAMA02 | | MSMD04 MAMA04 | | | |
| | Panasonic Co., Ltd. | | | | | | | | | | | MSMD08 MSMD08 | |
| | SANYO DENKI Co., Ltd. | | | | | | | P50B07020 | | P50B07030 | | P50B07040 | |
| | SANYO DENKI Co., Ltd. | | | 103FB5XX | | | | | | | | | |
| | ORIENTAL MOTOR Co., Ltd. | | AS98 UPKS9X PKS9X CSKS9X CFKS9X UFKS9X | | | | | | | | | | |

C-2-8 Sensor Rail and Top Cover Unit Combination Table

| Model No. | Reference number | Rail length (L ₂) | Sensor rail reference number | Cover unit reference number |
|----------------|------------------|-------------------------------|------------------------------|-----------------------------|
| TCH06 | TCH06005H05K00 | 150 | TC-SRL6-0150 | TC-HV06005K00 |
| | TCH06005H10K00 | | | |
| | TCH06005H20K00 | | | |
| | TCH06007H05A00 | | | |
| | TCH06007H10A00 | 200 | TC-SRL6-0200 | TC-HV06010K00 |
| | TCH06010H05K00 | | | |
| | TCH06010H10K00 | | | |
| | TCH06010H20K00 | | | |
| | TCH06012H05A00 | 300 | TC-SRL6-0300 | TC-HV06012A00 |
| | TCH06012H10A00 | | | |
| | TCH06020H05K00 | | | |
| | TCH06020H10K00 | | | |
| | TCH06020H20K00 | | | |
| | TCH06013H05D00 | | | |
| | TCH06013H10D00 | | | |
| | TCH06022H05A00 | | | |
| | TCH06022H10A00 | | | |
| | TCH06017H05B00 | | | |
| | TCH06017H10B00 | | | |
| | TCH06030H05K00 | | | |
| | TCH06030H10K00 | | | |
| | TCH06030H20K00 | | | |
| | TCH06023H05D00 | | | |
| | TCH06023H10D00 | | | |
| | TCH06032H05A00 | | | |
| | TCH06032H10A00 | | | |
| | TCH06027H05B00 | 500 | TC-SRL6-0500 | TC-HV06013D00 |
| | TCH06027H10B00 | | | |
| | TCH06040H05K00 | | | |
| | TCH06040H10K00 | | | |
| | TCH06040H20K00 | | | |
| | TCH06033H05D00 | | | |
| | TCH06033H10D00 | | | |
| | TCH06042H05A00 | | | |
| | TCH06042H10A00 | | | |
| | TCH06037H05B00 | | | |
| | TCH06037H10B00 | | | |
| | TCH06050H05K00 | | | |
| | TCH06050H10K00 | | | |
| | TCH06050H20K00 | | | |
| | TCH06043H10D00 | | | |
| | TCH06043H20D00 | | | |
| TCH06052H05A00 | | | | |
| TCH06052H10A00 | | | | |
| TCH06047H10B00 | TC-HV06017B00 | | | |
| | TC-HV06030K00 | | | |
| | TC-HV06023D00 | | | |
| | TC-HV06032A00 | | | |
| | TC-HV06027B00 | | | |
| | TC-HV06040K00 | | | |
| | TC-HV06033D00 | | | |
| | TC-HV06042A00 | | | |
| | TC-HV06037B00 | | | |
| | TC-HV06050K00 | | | |
| | TC-HV06043D00 | | | |
| | TC-HV06052A00 | | | |
| | TC-HV06047B00 | | | |

- > Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- > Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

| Model No. | Reference number | Rail length (L ₂) | Sensor rail reference number | Cover unit reference number | | | |
|---------------|------------------|-------------------------------|------------------------------|-----------------------------|--------------|---------------|---------------|
| TCH09 | TCH0910H05K00 | 240 | TC-SRL9-0240 | TC-HV09010K00 | | | |
| | TCH0910H10K00 | | | | | | |
| | TCH0910H20K00 | | | | | | |
| | TCH0914H05A00 | | | | | | |
| | TCH0914H10A00 | | | | | | |
| | TCH0914H20A00 | 340 | TC-SRL9-0340 | TC-HV09014A00 | | | |
| | TCH0920H05K00 | | | | | | |
| | TCH0920H10K00 | | | | | | |
| | TCH0920H20K00 | | | | | | |
| | TCH0924H05A00 | | | | | | |
| | TCH0924H10A00 | 440 | TC-SRL9-0440 | TC-HV09024A00 | | | |
| | TCH0924H20A00 | | | | | | |
| | TCH0930H05K00 | | | | | | |
| | TCH0930H10K00 | | | | | | |
| | TCH0930H20K00 | | | | | | |
| | TCH0917H05D00 | | | | | | |
| | TCH0917H10D00 | | | | | | |
| | TCH0934H05A00 | | | | | | |
| | TCH0934H10A00 | | | | | | |
| | TCH0934H20A00 | | | | | | |
| | TCH0925H05B00 | | | | | | |
| | TCH0925H10B00 | | | | | | |
| | TCH0940H05K00 | | | | 540 | TC-SRL9-0540 | TC-HV09025B00 |
| | TCH0940H10K00 | | | | | | |
| | TCH0940H20K00 | | | | | | |
| | TCH0927H05D00 | | | | | | |
| | TCH0927H10D00 | | | | | | |
| | TCH0944H05A00 | | | | | | |
| | TCH0944H10A00 | | | | | | |
| | TCH0944H20A00 | | | | | | |
| | TCH0935H05B00 | | | | | | |
| | TCH0935H10B00 | | | | | | |
| | TCH0950H05K00 | 640 | TC-SRL9-0640 | TC-HV09040K00 | | | |
| | TCH0950H10K00 | | | | | | |
| | TCH0950H20K00 | | | | | | |
| | TCH0937H05D00 | | | | | | |
| | TCH0937H10D00 | | | | | | |
| | TCH0954H05A00 | | | | | | |
| | TCH0954H10A00 | | | | | | |
| | TCH0954H20A00 | | | | | | |
| | TCH0945H05B00 | | | | | | |
| | TCH0945H10B00 | | | | | | |
| | TCH0960H05K00 | | | | 740 | TC-SRL9-0740 | TC-HV09050K00 |
| | TCH0960H10K00 | | | | | | |
| | TCH0960H20K00 | | | | | | |
| | TCH0947H10D00 | | | | | | |
| | TCH0947H20D00 | | | | | | |
| | TCH0964H05A00 | | | | | | |
| | TCH0964H10A00 | | | | | | |
| | TCH0964H20A00 | | | | | | |
| TCH0955H10B00 | | | | | | | |
| TCH0955H20B00 | | | | | | | |
| TCH0970H05K00 | 840 | TC-SRL9-0840 | TC-HV09060K00 | | | | |
| TCH0970H10K00 | | | | | | | |
| TCH0970H20K00 | | | | | | | |
| TCH0974H05A00 | | | | | | | |
| TCH0974H10A00 | | | | | | | |
| TCH0974H20A00 | | | | | | | |
| TCH0980H05K00 | | | | 940 | TC-SRL9-0940 | TC-HV09074A00 | |
| TCH0980H10K00 | | | | | | | |
| TCH0980H20K00 | | | | | | | |
| TCH0967H10D00 | | | | | | | |
| TCH0967H20D00 | | | | | | | |
| TCH0984H05A00 | | | | | | | |
| TCH0984H10A00 | | | | | | | |
| TCH0984H20A00 | | | | | | | |
| TCH0975H10B00 | | | | | | | |
| TCH0975H20B00 | | | | | | | |
| | | | TC-HV09080K00 | | | | |
| | | | TC-HV09067D00 | | | | |
| | | | TC-HV09084A00 | | | | |
| | | | TC-HV09075B00 | | | | |

- Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

| Model No. | Reference number | Rail length (L ₂) | Sensor rail reference number | Cover unit reference number |
|----------------|------------------|-------------------------------|------------------------------|-----------------------------|
| TCH10 | TCH10010H10K00 | 280 | TC-SRL1-0280 | TC-HV10010K00 |
| | TCH10010H20K00 | | | TC-HV10016A00 |
| | TCH10016H10A00 | | | TC-HV10020K00 |
| | TCH10016H20A00 | | | TC-HV10026A00 |
| | TCH10020H10K00 | 380 | TC-SRL1-0380 | TC-HV10030K00 |
| | TCH10020H20K00 | | | TC-HV10036A00 |
| | TCH10026H10A00 | | | TC-HV10040K00 |
| | TCH10026H20A00 | | | TC-HV10027D00 |
| | TCH10030H10K00 | 480 | TC-SRL1-0480 | TC-HV10046A00 |
| | TCH10030H20K00 | | | TC-HV10036B00 |
| | TCH10036H10A00 | | | TC-HV10050K00 |
| | TCH10036H20A00 | | | TC-HV10037D00 |
| | TCH10040H10K00 | 580 | TC-SRL1-0580 | TC-HV10056A00 |
| | TCH10040H20K00 | | | TC-HV10046B00 |
| | TCH10027H10D00 | | | TC-HV10060K00 |
| | TCH10027H20D00 | | | TC-HV10047D00 |
| | TCH10046H10A00 | 680 | TC-SRL1-0680 | TC-HV10066A00 |
| | TCH10046H20A00 | | | TC-HV10066B00 |
| | TCH10036H10B00 | | | TC-HV10060K00 |
| | TCH10036H20B00 | | | TC-HV10066A00 |
| | TCH10050H10K00 | 780 | TC-SRL1-0780 | TC-HV10066B00 |
| | TCH10050H20K00 | | | TC-HV10056B00 |
| | TCH10037H10D00 | | | TC-HV10070K00 |
| | TCH10037H20D00 | | | TC-HV10057D00 |
| | TCH10056H10A00 | 880 | TC-SRL1-0880 | TC-HV10076A00 |
| | TCH10056H20A00 | | | TC-HV10066B00 |
| | TCH10060H10B00 | | | TC-HV10080K00 |
| | TCH10060H20B00 | | | TC-HV10067D00 |
| | TCH10047H10D00 | 980 | TC-SRL1-0980 | TC-HV10086A00 |
| | TCH10047H20D00 | | | TC-HV10076B00 |
| | TCH10066H10A00 | | | TC-HV10090K00 |
| | TCH10066H20A00 | | | TC-HV10077D00 |
| | TCH10056H10B00 | 1 080 | TC-SRL1-1080 | TC-HV10096A00 |
| | TCH10056H20B00 | | | TC-HV10086B00 |
| | TCH10070H10K00 | | | TC-HV10100K00 |
| | TCH10070H20K00 | | | TC-HV10087D00 |
| | TCH10057H10D00 | 1 180 | TC-SRL1-1180 | TC-HV10106A00 |
| | TCH10057H20D00 | | | TC-HV10096B00 |
| | TCH10076H10A00 | | | TC-HV10110K00 |
| | TCH10076H20A00 | | | TC-HV10097D00 |
| | TCH10066H10B00 | 1 280 | TC-SRL1-1280 | TC-HV10116A00 |
| | TCH10066H20B00 | | | TC-HV10106B00 |
| | TCH10080H10K00 | | | TC-HV10120K00 |
| | TCH10080H20K00 | | | TC-HV10107D00 |
| | TCH10067H10D00 | 1 380 | TC-SRL1-1380 | TC-HV10126A00 |
| | TCH10067H20D00 | | | TC-HV10116B00 |
| | TCH10086H10A00 | | | TC-HV10126A00 |
| | TCH10086H20A00 | | | TC-HV10116B00 |
| TCH10076H10B00 | | | | |
| TCH10076H20B00 | | | | |
| TCH10090H10K00 | | | | |
| TCH10090H20K00 | | | | |
| TCH10077H20D00 | | | | |
| TCH10096H10A00 | | | | |
| TCH10096H20A00 | | | | |
| TCH10086H20B00 | | | | |
| TCH10100H10K00 | | | | |
| TCH10100H20K00 | | | | |
| TCH10087H20D00 | | | | |
| TCH10106H10A00 | | | | |
| TCH10106H20A00 | | | | |
| TCH10096H20B00 | | | | |
| TCH10110H10K00 | | | | |
| TCH10110H20K00 | | | | |
| TCH10097H20D00 | | | | |
| TCH10116H10A00 | | | | |
| TCH10116H20A00 | | | | |
| TCH10106H20B00 | | | | |
| TCH10120H10K00 | | | | |
| TCH10120H20K00 | | | | |
| TCH10107H20D00 | | | | |
| TCH10126H10A00 | | | | |
| TCH10126H20A00 | | | | |
| TCH10116H20B00 | | | | |

- › Sensor rail reference numbers are determined according to the rail length. Select a sensor rail appropriate for your requirements.
- › Shapes and numbers of spacer plates for cover unit are selected according to slider specifications.

C-2-9 Toughcarrier High-Thrust Series (Special product)

◆ Specifications

The life of the feeding system is improved by use of higher load capacity ball screw part and support bearings for standard Toughcarrier.

| | | TCH06 | | TCH09 | | TCH10 | |
|------------------|----------------------------------|--------|--------|--------|--------|---------|---------|
| Ball screw | Shaft diameter (mm) | 12 | 12 | 20 | 20 | 25 | 25 |
| Ball screw | Lead (mm) | 10 | 20 | 10 | 20 | 20 | 25 |
| Ball screw | Basic dynamic load rating Ca (N) | 3 760 | 2 970 | 11 500 | 8 790 | 9 760 | 9 760 |
| Ball screw | Basic static load rating Coa (N) | 6 310 | 4 240 | 25 700 | 18 500 | 23 600 | 23 600 |
| Linear guide | Basic dynamic load rating C (N) | 20 900 | 20 900 | 44 900 | 44 900 | 62 400 | 62 400 |
| Linear guide | Basic static load rating Co (N) | 45 000 | 45 000 | 96 900 | 96 900 | 132 000 | 132 000 |
| Support bearings | Basic dynamic load rating (N) | 5 900 | 5 900 | 18 800 | 18 800 | 21 900 | 21 900 |
| Support bearings | Load limit (N) | 3 500 | 3 500 | 11 500 | 11 500 | 26 600 | 26 600 |

1) Only compatible with standard slider.

2) Applicable strokes are as follows.

TCH06: Stroke 500 mm

TCH09: Stroke 800 mm

TCH10: Stroke 1 200 mm

3) High and precision grades are available for accuracy

◆ Features

- 1) Mounting dimensions are the same as Monocarrier MCH Series and standard Toughcarrier. (Interchangeable)
- 2) Permissible rotational speed is faster than standard Toughcarrier due to different ball recirculation system.

C-3 Technical Materials

C-3 Technical Materials

| | Page |
|---|------|
| 1. Sensor Specification..... | C135 |
| 1.1 Proximity Switch | C135 |
| 1.2 Photo Sensor | C136 |
| 2. Characteristics and Evaluation Method..... | C137 |
| 2.1 Positioning Accuracy..... | C137 |
| 2.2 Repeatability | C137 |
| 2.3 Running Parallelism | C137 |
| 3. Special Specifications..... | C138 |
| 4. Maintenance..... | C139 |
| 4.1 Maintenance Method..... | C139 |
| 4.2 NSK K1 Lubricant Unit..... | C139 |
| 5. NSK Clean Grease LG2 Specification..... | C140 |

C-3-1 Sensor Specification

C-3-1. 1 Proximity Switch


Use of OMRON E2S-W13 and E2S-W14

| Item | E2S-W13 type | E2S-W14 type |
|--|---|---|
| Setting surface | Front face | Front face |
| Sensing distance | 1.6 mm ±15% | 1.6 mm ±15% |
| Setting distance | 0 to 1.2 mm | 0 to 1.2 mm |
| Differential travel | 10% max. of sensing distance | 10% max. of sensing distance |
| Detectable object type | Ferrous metal | Ferrous metal |
| Standard sensing object | Iron, 12 × 12 × 1 mm | Iron, 12 × 12 × 1 mm |
| Response frequency | 1 kHz min. | 1 kHz min. |
| Power supply voltage (operating voltage range) | 12 to 24 VDC; ripple (p-p), 10% max (10 to 30 VDC) | 12 to 24 VDC; ripple (p-p), 10% max (10 to 30 VDC) |
| Current consumption | 13 mA max. at 24 VDC with no load | 13 mA max. at 24 VDC with no load |
| Control output (Switching Capacity) | NPN open collector output, 50 mA max. (30 VDC max.) | NPN open collector output, 50 mA max. (30 VDC max.) |
| Control output (Residual voltage) | 1.0 V max. with a load current of 50 mA and a cable length of 1 m | 1.0 V max. with a load current of 50 mA and a cable length of 1 m |
| Indicator | Operation indicator (orange) | Operation indicator (orange) |
| Operating status (with sensing object approaching) | NO (Normally open contact) | NC (Normally close contact) |
| Wire lead length | 1 000 mm | 1 000 mm |

Notes 1) Do not make a wrong connection. 2) Please contact NSK for PNP output type.

| Movement mode | Output type | Type | Time chart | Output circuit |
|---------------|-------------|--------------|------------|----------------|
| NO | NPN | E2S-W13 type | | |
| | | E2S-W14 type | | |

E2S-W13 (Normally open contact)
 E2S-W14 (Normally close contact)
 The external appearances are the same.

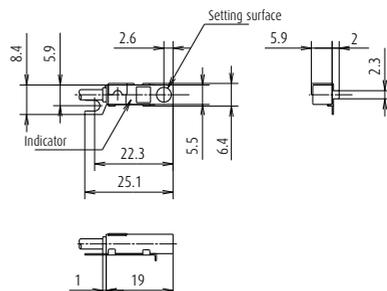

C-3-1. 1 Proximity Switch

Use of OMRON EE-SX674

| Item | E2S-W13 type |
|--------------------------------------|--|
| Slot width | 5 mm |
| Standard reference object | Opaque, 2 × 0.8 mm |
| Differential distance | 0.025 mm |
| Light source | GaAs infrared LED with peak wavelength of 940 nm |
| Indicator (without detecting object) | ON GaP red LED (peak emission wavelength, 690 nm) |
| Supply voltage | 5 to 24 VDC ±10%; ripple (p-p), 10% max. |
| Current consumption | 35 mA max. |
| Control output | NPN open collector output models, 5 to 24 VDC, 100 mA load current |
| Response frequency | 1 kHz max. (3 kHz typ.) |
| Ambient illumination | Fluorescent light, 1 000 lx max. |
| Ambient temperature | -25°C to 55°C (-13°F to 131°F) (for operating); -30°C to 80°C (-22°F to 176°F) (for storing) |
| Ambient humidity | 5 to 85% RH (for operating); 5 to 95% RH (for storing) |
| Connecting method | EE-1001/1006 Connectors, soldering terminals |


Notes 1) Do not make a wrong connection. 2) Please contact NSK for PNP output type.

| Type | Movement mode | Time chart | Connection terminal | Output circuit |
|---------------|---------------|------------|--|----------------|
| EE-SX674 type | Light-ON | | When terminals L and ⊕ are short circuited | |
| | Dark-ON | | When terminals L and ⊕ are open circuited | |

EE-SX674 (Sensor)

EE-1001 (Connector)

A connector is mounted to the sensor in the right figure.



C-3-2 Characteristics and Evaluation Method

C-3-2. 1 Positioning Accuracy

Perform successive positioning from the reference position in a specific direction. Measure the difference between the actual and desired travel distances for each point from the reference position. Repeat this measurement seven times to determine the average value. Measure such average value over the entire travel distance at the intervals specified for each model and take the maximum difference of the average values determined at respective positions as the measured value.

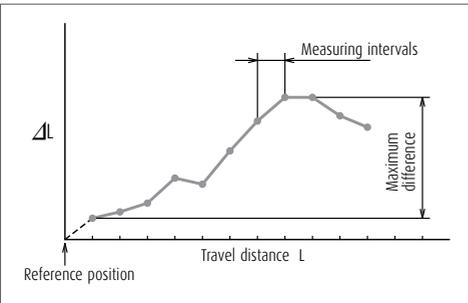


Fig. 1

C-3-2. 3 Running Parallelism (Vertical direction)

We specify the parallelism of slider to the datum bottom surface of rail. An indicator is moved in the axial slider making its stylus slightly touching on the rail bottom surface. The slider is moved in the axial direction for the checking. We define the total indicator reading as the running parallelism. During the checking, the rail is not fixed to the table base. Please be aware that, in general application, the rail is fixed to the machine base, and thus the wobbly rolling error will be added to the running parallelism.

C-3-2. 2 Repeatability

Repeat positioning at any point seven times from the same direction to measure the stopping position and determine one half of the maximum difference of readings. Repeat this measurement over the entire travel distance at the intervals specified for each model. Take the maximum difference of the determined values as the measured value. Express one half of the maximum difference with a plus-or-minus (\pm) sign.

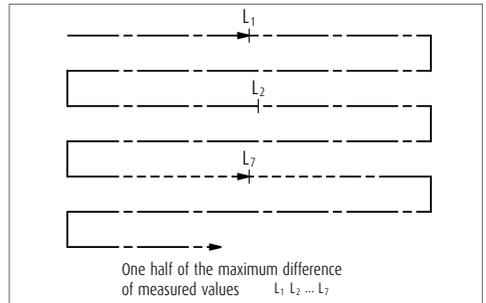


Fig. 2

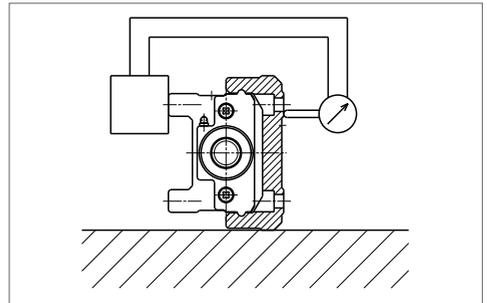


Fig. 3 Setting of indicator

C-3-3 Special Specifications

Please consult NSK if your requirement is not in the standard products.

(1) Surface Treatment

- › Fluoride low temperature chrome plating

Note: Ball screw parts (including low temperature chrome plating.)

(2) Special Machining (Processing)

- i) Shaft end processing
 - › Key way processing
 - › One flat or two flats processing
- ii) Pin hole processing
 - › Slider
 - › Rail

Note: Due to interference with the internal construction, the position of pin hole is limited. Please consult with NSK about the pin position.

(3) Motor Bracket and Intermediate Plate for Motor Mounting

- › We provide motor mounting brackets and intermediate plates that are not listed in the catalog.
- › We assemble motor upon request if the motor is provided in advance.

Note: Motion check of the motor is unavailable.

(4) Reversed Motor Mount

The reversed motor mount is available. Please consult NSK.

- Notes:** 1) We do not check motor running condition.
2) Please refer to the bottom of page C87 to C89 for the configuration of reversed motor mounting of the MCH series.

(5) Right and Left Turn Thread

Right and left turn ball screw is available. Please consult with NSK for available leads.

(6) Ball-Screw-Less Specification (Only Linear Guide Part)

A ball-screw-less rail part with the same cross section of standard Monocarriers is available for a driven linear guide. It will lessen a height adjustment work compared with a construction with two standard Monocarriers.

Note: Height grinding adjustment of the two axes assembly is not available.

C-3-4 Maintenance

C-3-4.1 Maintenance Method

1. For standard Monocarrier, we pack grease in the slider, linear guides and ball screw.
2. Monocarriers are equipped with NSK K1 Lubrication Unit as a standard feature, therefore, you may use it for 5 years or 10 000 km depending on your application, whichever comes first, without maintenance. However, replenishment of preceded grease may extend its life substantially.
3. The NSK K1 Lubrication Unit is ideal in environments where oily dust exists. However, the life may be shorter than described in Clause 2 above. In such a case, it requires increasing the frequency of replenishment.
4. A Nozzle for the NSK grease pump for MCH Monocarriers is available as an option.

NSK reference number: NSK HGP NZ8

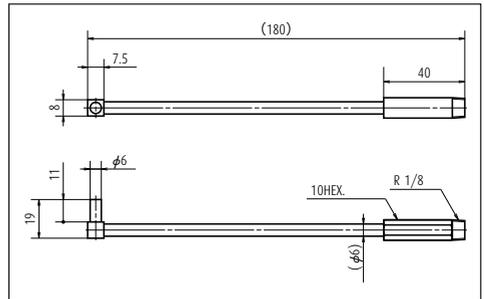


Fig. 4 NSK HGP NZ8

Precautions for handling

1. Please consult with NSK when the motor is coupled to the ball screw using a pulley because there is a restriction on allowable load to the end of ball screw shaft.
2. To extend high performance of NSK K1 lubrication unit, please observe the following.

- | | |
|----------------------|---|
| 1. Temperature range | Ambient temperature: 50°C Max. instantaneous temperature: 80°C |
| 2. Use of chemicals | Never leave a Monocarrier in close proximity of grease removing organic solvents such as hexane or thinner. Never immerse it in an antirust solvent that contains kerosene. |

Note: Other oils, such as water-based and oil based cutting oil, and grease do not cause any problems.

C-3-4. 2 NSK K1 Lubricant Unit

NSK K1 lubrication unit exhibits outstanding features, confirmed by abundant experimental data, along with proven performance of linear guides and ball screws that are equipped with NSK K1.

(1) High-Speed Durability Test of Linear Guides without Lubricant

Results of high-speed durability testing of a linear guide without lubricant are shown in **Fig. 5** While the linear guide cannot be operated without lubricant for even short periods without damage, the installation of the NSK K1 permits the linear guide to run over 25 000 km without any problem.

| | |
|--------------|------------------------------------|
| | Test piece: LH30AN (Preload Z1) |
| Conditions | Speed: 3.3 m/s Stroke: 1 800 mm |
| No lubricant | All grease removed |
| NSK K1 | All grease removed + NSK K1 |

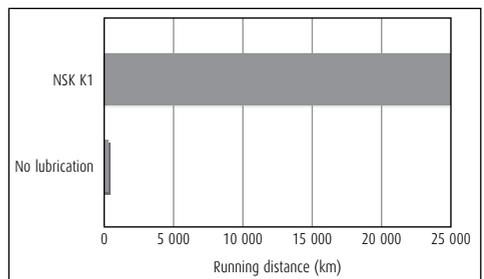


Fig. 5 Results of high-speed durability test of linear guides without lubricant

(2) High-Speed Durability Test of Ball Screws without Lubricant

Results of high-speed durability testing of ball screw without lubrication are shown in Fig. 6. While the ball screw cannot be operated without a lubricant at 8.5 km without damage, the installation of the NSK K1 permits the ball screw to run over 21 000 km without any problem.

| | |
|--------------|---|
| | Test piece: BS2020 (Ball screw) |
| | Shaft diameter: 20 mm |
| Conditions | Lead: 20 mm |
| | Load: none |
| | Speed: 1.3 m/s (4 000 min ⁻¹) |
| | Stroke: 600 mm |
| No lubricant | All grease removed |
| NSK K1 | All grease removed + NSK K1 |

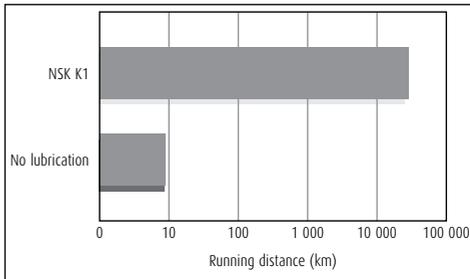


Fig. 6 Results of high-speed durability test of ball screws without lubricant

> NSK K1 Lubrication Units for food processing and medical devices are available.

For safety equipment of food processing and medical care, NSK provides the Monocarrier equipped with special NSK K1 Lubrication Unit that is made of materials approved by the FDA.

Dimensions are the same as the standard NSK K1 Lubrication Unit, and special handling care is not required.

C-3-5 NSK Clean Grease LG2 Specification

> Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean rooms. Compared to the fluoride grease which are commonly used in clean rooms, LG2 has several advantages such as: higher in lubrication function, longer lubrication life, more stable torque (resistant to wear), and higher rust prevention. In dust generation, LG2 is more than equal to fluoride grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general grease.

> Applications

LG2 is lubrication grease for rolling contact machine components such as linear guides and ball screws for processing equipment for semiconductors and LCD which require highly clean environment at normal pressure in normal temperatures. It cannot be used in a vacuum environment.

> Nature

| | |
|------------------------------|---|
| Thickener | Lithium soap base |
| Base oil | Mineral oil + Synthetic hydrocarbon oil |
| Consistency | 199 |
| Dropping point | 201°C |
| Volume of evaporation | 1.40% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.8% (100°C, 24 hr) |
| Base oil kinematic Viscosity | 32 mm ² /s (40°C) |

Other

D BLOCK

Other

| | |
|--|-----|
| 1. Special Environments | D1 |
| 1.1 Specifications for Special Environments | D1 |
| 1.2 Lubrication and Materials | D3 |
| 1.3 Rust Prevention and Surface Treatment | D5 |
| 1.4 Measures Against Special Environments | D7 |
| 1.5 Table to Cope with Special Environments | D11 |
| 1.6 Precautions for Handling | D12 |
| 2. Lubrication | D13 |
| 2.1 Grease Lubrication | D13 |
| 2.2 Oil Lubrication | D24 |
| 3. RoHS Compliant | D24 |

1 Special Environments

1.1 Specifications for Special Environments

1. Linear guide

Table 1.1 Linear guide specifications

| Environment | Condition | NSK linear guide specifications | | | | Technical Explanation Page No. |
|----------------------|---|---------------------------------|-----------------------------|------------------------------|---|-----------------------------------|
| | | Rail, slide | Steel balls/rollers | Ball recirculation component | Lubrication/surface treatment | |
| Clean | Atmosphere, normal temperature | Standard material | Standard material | Standard material | LG2, LGU Grease NSK K1 lubrication unit | D8 D10 |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | LG2, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating | D8 D10 D5 |
| | Atmosphere-Vacuum, normal temperature | | | | Fluoride grease | |
| | Atmosphere-Vacuum up to 200°C | | | | | |
| Vacuum | Atmosphere-Vacuum, normal temperature | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Fluoride grease | |
| | Atmosphere-Vacuum up to 200°C | | | | | |
| | Atmosphere-Vacuum up to 300°C | | | | Molybdenum disulfide | |
| | High vacuum up to 500°C | | | | Special silver film | D7 |
| Corrosion resistance | Vapor, steam | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | |
| | | Standard material | Standard material | Standard material | | D5 |
| | Acid, alkali | | | | Fluoride low temperature chrome plating | D5 D5 |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Fluoride low temperature chrome LG2, LGU Grease plating | D5 D8 |
| | Acid, alkali, clean | | | | Fluoride low temperature chrome Fluoride grease plating | D5 |
| | Strong acid, strong alkali | | | | | |
| Organic solvent | | | | Fluoride grease | | |
| High temperature | Atmosphere up to 150°C | Standard material | Standard material | Austenitic stainless steel | ET-100K Grease | |
| | Atmosphere up to 200°C | | | | Fluoride grease | |
| | Atmosphere up to 200°C, Corrosion resistant | Martensitic stainless steel | Martensitic stainless steel | | Fluoride grease | |
| Low temperature | -273°C and higher | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Solid lubricant | |
| Radiation resistance | Atmosphere | Standard material | Standard material | Standard material | Radiation resistant grease | |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | |
| Foreign matters | Fine particles, wooden chips | Standard material | Standard material | Standard material | NSK K1 lubrication unit | D10 |
| | | | Martensitic stainless steel | Austenitic stainless steel | | D10 |
| | Water, under water | Martensitic stainless steel | Standard material | Standard material | | D10 |
| | | | Martensitic stainless steel | Austenitic stainless steel | | D10 |

2. Ball screw

Table 1.2 Ball screw specifications

| Environment | Condition | NSK linear guide specifications | | | | Technical Explanation Page No. |
|----------------------|--|---|-----------------------------|------------------------------|---|-----------------------------------|
| | | Rail, slide | Steel balls/rollers | Ball recirculation component | Lubrication/surface treatment | |
| Clean | Atmosphere, normal temperature | Standard material | Standard material | Standard material | LG2, LGU Grease NSK K1 lubrication unit | D8 D10 |
| | Atmosphere-Vacuum, normal temperature | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | LG2, LGU Grease NSK K1 lubrication unit Fluoride low temperature chrome plating | D8 D10 D5 |
| | Atmosphere-Vacuum up to 200°C | | | | Fluoride grease | |
| | Atmosphere-Vacuum up to 200°C, Corrosion resistant | Ceramic | Ceramic | Ceramic | Fluoride grease | |
| Vacuum | Atmosphere-Vacuum, normal temperature | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Fluoride grease | |
| | Atmosphere-Vacuum up to 200°C | | | | | |
| | Atmosphere-Vacuum up to 300°C | | | | Molybdenum disulfide | |
| | High vacuum up to 500°C | | | | Special silver film | D7 |
| Corrosion resistance | Acid, alkali, clean | Standard material | Standard material | Austenitic stainless steel | Fluoride low temperature chrome plating | D5 |
| | | Martensitic stainless steel | Martensitic stainless steel | | | D5 |
| | Precipitation hardening stainless steel | Precipitation hardening stainless steel | Fluoride grease | | | |
| | Strong acid, strong alkali, clean, nonmagnetic | Ceramic | Ceramic | | Fluoride grease | |
| Nonmagnetic | Atmosphere-Vacuum, clean | Special austenitic stainless steel | Ceramic | Austenitic stainless steel | Fluoride grease | |
| | Atmosphere-Vacuum, up to 200°C, clean | Ceramic | | | Fluoroplastic | |
| High temperature | Atmosphere up to 200°C | Standard material | Standard material | Austenitic stainless steel | Fluoride grease | |
| | | Martensitic stainless steel | Martensitic stainless steel | | Fluoride low temperature chrome plating | D5 |
| | Atmosphere up to 500°C, corrosion resistance | Ceramic | Ceramic | | Fluoride grease | |
| Low temperature | -273°C and higher | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | Solid lubricant | |
| Radiation resistance | Atmosphere | Standard material | Standard material | Standard material | Radiation resistant grease | |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | |
| Foreign matters | Fine particles, wooden chips | Standard material | Standard material | Standard material | NSK K1 lubrication unit | D10 |
| | | Martensitic stainless steel | Martensitic stainless steel | Austenitic stainless steel | | D10 |
| | Water, under water | | | | | D10 |

1.2 Lubrication and Materials

1. Lubrication

Grease can be used for high rotation and magnetic field. However, grease evaporates or solidifies in special environment such as vacuum, high temperature, and low temperature.

Solid lubricant is used when it is difficult to use grease. Functions of solid lubricant differ greatly by condition where it is used. It is important to select the most suitable solid lubrication for the environment.

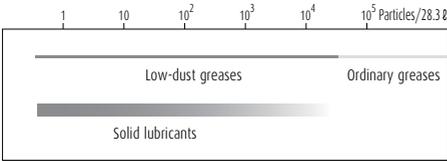


Fig. 2.1 Lubrication in clean environment

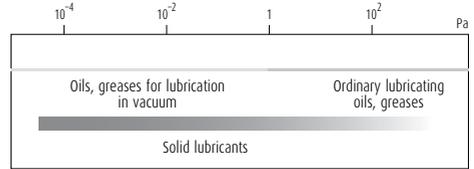


Fig. 2.2 Lubrication in vacuum

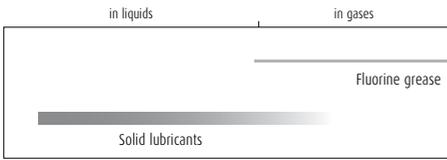


Fig. 2.3 Lubrication in corrosive environment

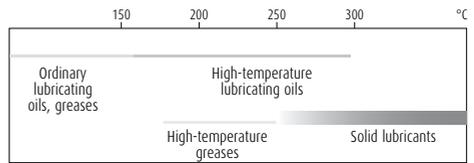


Fig. 2.4 Lubrication in high temperature

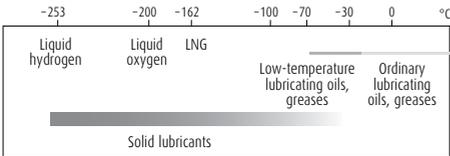


Fig. 2.5 Lubrication in low temperature

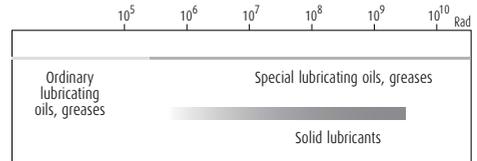


Fig. 2.6 Lubrication in radioactive environment

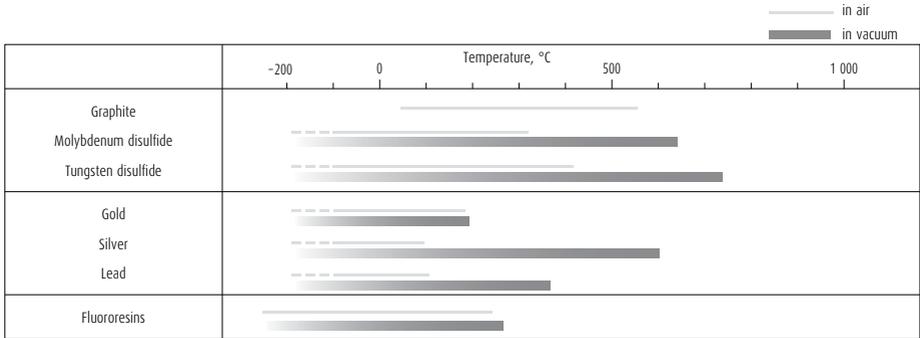


Fig. 2.7 Temperature range for using solid lubricants

2. Materials

Iron type metals are used in vacuum, high temperature, and high speed environments as the basic material. We generally use nonmagnetic stainless steel for nonmagnetic materials.

Table 2.1 Characteristics of metal materials

| Application | Type of steel | Linear expansivity $\times 10^{-6}/^{\circ}\text{C}$ | Young's modulus GPa | Hardness ^{a)} HB |
|---|--|---|------------------------|------------------------------|
| For clean environment, vacuum environment, corrosion resistance, low temperature, high temperature, radioactive resistance | Martensitic stainless steel SUS440C | 10.1 | 200 | 580 |
| | Austenitic stainless steel SUS304 | 16.3 | 193 | 150 |
| | Precipitation hardening stainless steel SUS630 | 10.8 | 200 | 277 - 363 |
| Nonmagnetic | Nonmagnetic stainless steel | 17.0 | 195 | 420 |

^{a)} Hardness of steel is usually indicated by Rockwell C Scale. For comparison, these figures are expressed by Brinell number.

1.3 Rust Prevention and Surface Treatment

1. Fluoride low temperature chrome plating

The use environment of NSK linear guides ball screws, and monocarriers is expanding from general industrial machines, semiconductor and liquid crystal manufacturing systems to aerospace equipment. Among all measures to cope with environment, rust prevention is the most challenging. Such environment includes:

- > Moisture for washing machines and other equipment
- > Chemicals used in the wet processing of semiconductor and liquid crystal display manufacturing equipment.

NSK has developed electrolytic rust prevention black film treatment (black chrome plating) which is added by fluoro resin impregnating treatment. (Hereinafter referred as "Fluoride low temperature chrome plating".) This surface treatment methods has proved its superiority as the rust prevention of linear guides and ball screws which are used in the above equipment.

> Humidity chamber test

> What is "Fluoride low temperature chrome plating?"

This is a type of black chrome plating which forms a black film (1 to 2 μm in thickness) on the metal surface. Fluoroplastic coating is added to the film to increase corrosion resistance.

- > Accuracy control is easily manageable due to low temperature treatment and to the absence of hydrogen embrittlement.
- > Product accuracy is less affected due to the thin film which has high corrosion resistance.
- > This method is superior to other surface treatments in durability on the rolling surface.
- > Inexpensive compared with products with other surface treatment and stainless steel products.

Do not use organic solvent because it adversely affects antirust property of the plating.

Table 3.1 Results of the humidity test

| Test sample | | Fluoride low temperature chrome plating (recommended) | Hard chrome plating (reference) | Electroless nickel plating (reference) | Equivalent to SUS440C material | Standard steel |
|------------------------------|--|---|---------------------------------|--|--------------------------------|----------------|
| | | Characteristic | | | | |
| Rusting | Top | (Ground) B | (Ground) B | (Ground) A | (Ground) C | (Ground) D |
| | Side | (Ground) A | (Ground) A | (Ground) A | (Ground) C | (Ground) E |
| | Bottom | (Ground) A | (Ground) A | (Ground) A | (Ground) C | (Ground) E |
| | End | (Machined) A | (Machined) C | (Machined) A | (Machined) C | (Machined) E |
| | Chamfer/grinding recess | (Drawn) A | (Drawn) D | (Drawn) A | (Drawn) C | (Drawn) E |
| Corrosion-resistant property | <Test conditions> > Testing chamber: High temperature, highly moist chamber (made by DABAI ESPEC) > Temperature: 70°C > Relative humidity: 95% > Testing time: 96 h Time to "ramp-up" and "ramp-down" condition of the temperature and the humidity conditions Ramp-up: 5h Ramp-down: 2h | | | | | |
| | | | | | | |
| Film thickness | | 5 μm | 0.5 - 7 μm | 10 μm | — | — |

Rusting






A: No rust
C: Spotty rust

B: Not rusted, but slightly discolored
D: slightly rusted
E: Completely rusted

› Chemical corrosion resistance test

Table 3.2 Results of the corrosion resistance test

Test conditions Rail base material: Equivalent to SUS440C
Chemical density: 1 mol/ℓ

| Fluoride low temperature chrome plating | Hard chrome plating | Hard chrome plating | None surface treatment |
|---|---|---|--|
|  | Immersed in solution for 24 hrs Nitric acid |  |  |
|  | Immersed in solution for 24 hrs Nitric acid |  |  |
|  | Exposed to vapor for 72 hrs Hydrochloric acid type washing solution HCl: H ₂ O ₂ : H ₂ O = 1 : 1 : 8 |  | |
| ○ | Hydrochloric acid (immersed) | ○ | ▲ |
| ○ | Sulfuric acid (immersed) | ○ | X |
| ○ | Ammonia or sodium hydroxide | ○ | △ |

○: Normal △: Partial surface damage ▲: Overall surface damage X: Corroded

› Surface treatment durability test

Peeling resistance of surface treatment

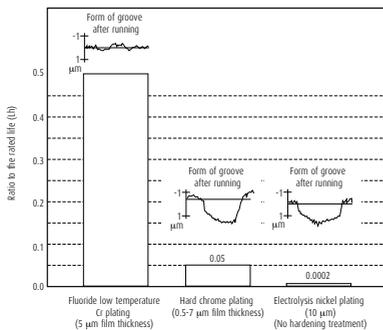


Fig. 3.1 Results of durability test

› Total evaluation

Table 3.3 Evaluation

| | Available length | Rust prevention ability | Quality stability | Durability | Cost |
|---|------------------|-------------------------|-------------------|------------|------|
| Fluoride low temperature chrome plating | ◎ (4 m) | ◎ | ○ | ◎ | ◎ |
| Hard chrome plating | △ (2 m) | ○ | X | △ | △ |
| Electroless nickel plating | ◎ (4 m) | ◎ | △ | X | △ |
| Material equivalent to SUS440C | ○ (3.5 m) | ○ | ◎ | ◎ | △ |

◎: Excellent ○: Suitable in use
△: Not so good for use X: Problem in use

1.4 Measures Against Special Environments

1. In vacuum

> Silver-film plated ball screw

Ball screws that are plated by soft metal (special silver film) as a solid lubricant are developed the application for vacuum environment such as semiconductor manufacturing equipment and surface modification systems.

> Durability test in high vacuum

Test equipment and conditions

Table 4.1 shows ball screw specifications. Fig. 4.1 is a schematic of the testing system in vacuum chamber.

Table 4.2 shows testing conditions.

Table 4.1 Ball screw specifications

| | | |
|---|------------------|----------------------|
| Shaft diameter | | 12 mm |
| Lead | | 4 mm |
| Steel ball diameter | | 2.381 mm |
| Numbers of circuit of balls | | 2.5 turns, 1 circuit |
| Axis load (preload) | | 29.4 N |
| Maximum surface pressure (preload volume) | | about 690 MPa |
| Material | Shaft | SUS630 |
| | Nut | SUS440C |
| | Ball return tube | SUS304 |
| | Steel balls | SUS440C |
| Solid lubricant | | Special silver film |

Table 4.2 Testing conditions

| | |
|-------------------------|--|
| Rotational speed | 300 min ⁻¹ |
| Vacuum chamber pressure | $1.3 \times 10^{-5} - 1.3 \times 10^{-6}$ Pa |
| Stroke | 160 mm |

Evaluation method

It is understood that the rolling bearing with solid lubrication reaches end of life when the lubrication film deteriorates, resulting in sudden rise of friction torque. In this test, ball screw rotation torque was constantly measured to study durability and operation. Results were then evaluated.

Test results

Fig. 4.2 shows two distinctive examples obtained in the torque characteristic test.

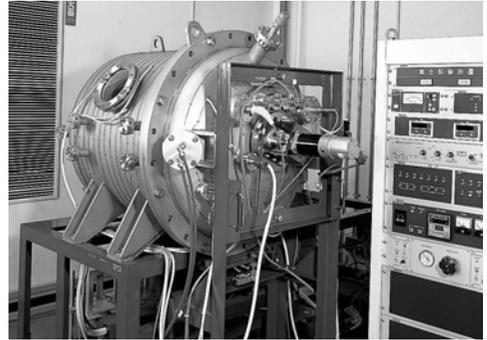


Photo 4.1 Vacuum testing system

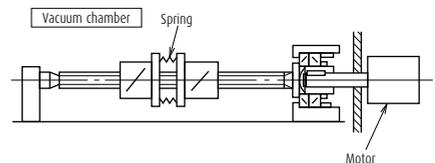


Fig. 4.1 Schematic of the testing system

Test results of the ball screw (a)

The torque tendency was stable until about 1×10^7 rev. Then the torque characteristics slightly deteriorated. At about 1.35×10^7 rev, the torque suddenly rose. At this point, it was determined that the ball screw reached the end of its life.

Test results of the ball screw (b)

Torque value is a little higher in the test (a). The value is also little unstable. The torque momentarily soared several times during the test (some 10 N·cm). It is thought this is attributable to the repeated peeling/sticking of the surface film made of soft metal (silver, etc.).

When the torque finally soared at 1.13×10^7 rev, it was determined that the ball screw reached the end of its life.

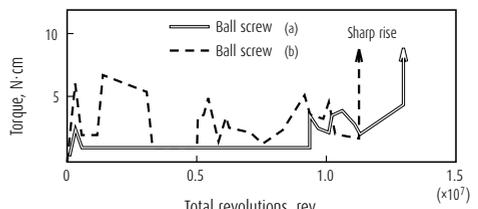


Fig. 4.2 Torque variation

Table 4.3 Ball screw durability

| | Classification | Ball screw (a) | Ball screw (b) |
|------|-------------------------------|----------------------|----------------------|
| Life | Total revolutions (rev.) | 1.35×10 ⁷ | 1.13×10 ⁷ |
| | Total traveling distance (km) | 54.0 | 45.2 |
| | Total traveling hours* (h) | 750 | 628 |

* Total traveling hours when operated constantly at 300 min⁻¹

Conclusion

Table 4.3 explains results of the two ball screw durability tests. From these results and other findings, it is estimated that a life of more than 1×10⁷ rev. is possible with a load of about 29.4 N. Torque may soar momentarily before the ball screw reaches its final life due to peeling/sticking of the surface film made of soft metal like silver. For this reason, it is recommendable to select a drive motor with extra torque capacity.

2. Clean environment

› **NSK Clean Grease LG2 and LGU**

NSK Clean Grease LG2 is used in clean room for NSK linear guides, ball screws, Monocarriers, XY Modules, Megatorque motors, XY tables, etc. with low-dust emitting specifications. For its low dust emission and high durability, LG2 earns trust and high reputation of semiconductor equipment manufacturers. LG2 is superior in many areas to fluorine greases which are commonly used in clean room.

Features

- › Remarkably low dust emission
- › Long life -- More than ten times longer than fluoride greases, and equivalent to ordinary greases.
- › Excellent rust prevention -- Significantly higher capacity than fluorine greases.
- › Low and stable torque -- 20% or less than that of fluorine greases

Table 4.4 Nature of Clean Grease LG2 and LGU

| Name | Thickener | Base oil | Base oil kinematic viscosity mm ² /s (40°C) | Consistency | Dropping point °C |
|------------------|--------------|---|--|-------------|-------------------|
| Clean Grease LG2 | Lithium soap | Synthetic hydrocarbon oil + mineral oil | 32 | 199 | 201 |
| Clean Grease LGU | Diurea | Synthetic hydrocarbon oil | 95.8 | 201 | 260 |

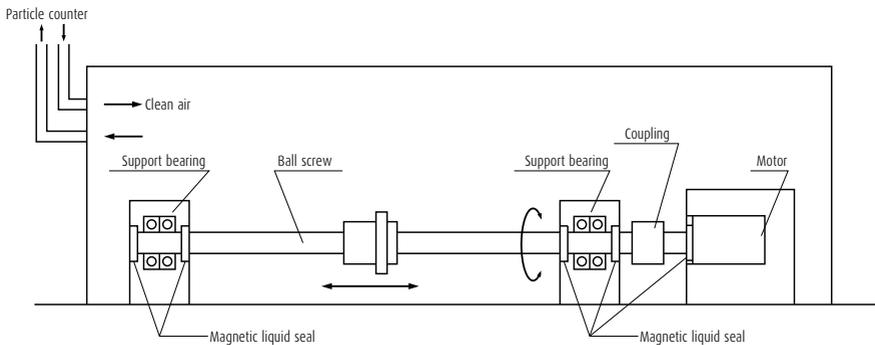


Fig. 4.3 Setting to measure dust generated by ball screw

> **Feature 1: Remarkably low dust emission**

Compared with fluoride greases, dust emission by LG2 is low and stable for long period of time.

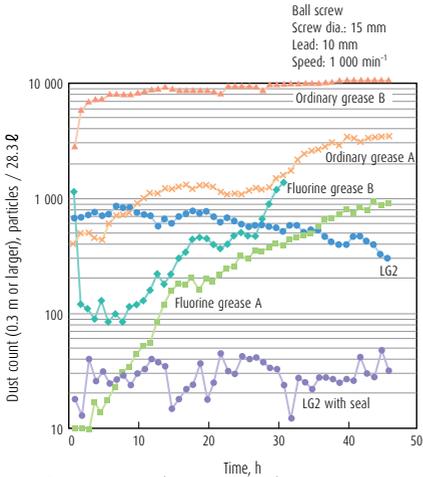


Fig. 4.4 Comparison in dust emission characteristics

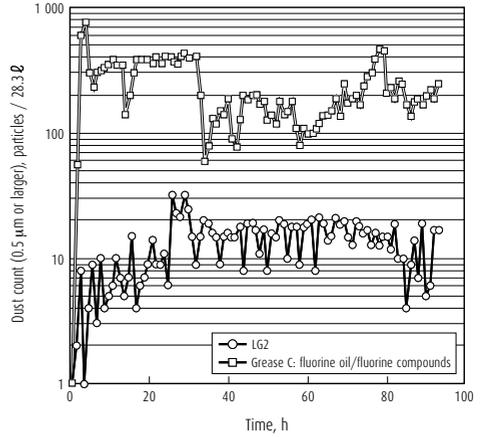


Fig. 4.5 Dust emission from linear guide (Linear guide: LU09)

> **Feature 2: Long life**

Life is ten times or longer than fluorine greases, and equivalent to ordinary greases. This stretches maintenance intervals.


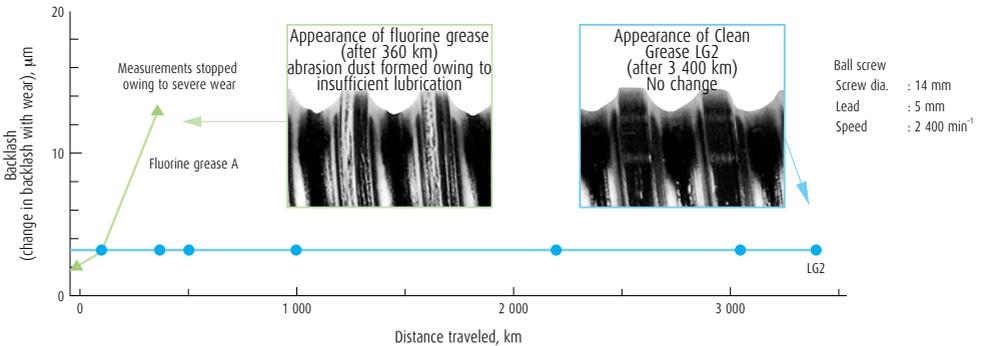


Fig. 4.6 Results of ball screw durability test

› **Feature 3: Excellent rust prevention capacity**

The rust prevention capacity is significantly higher than fluoride type greases. Handling and preparation for operation are easy.

Ball screw rust prevention test (test conditions: 96 hr at humidity 95%, temperature 70°C)

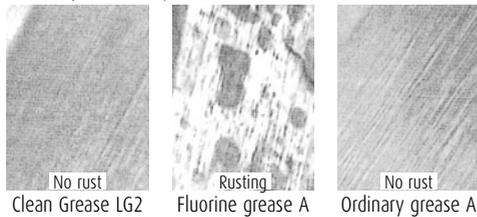

› **Feature 4: Stable torque**

Torque is 20% or lower than fluorine greases.

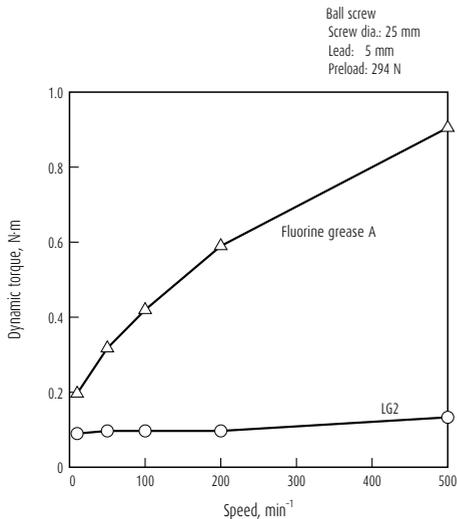


Fig. 4.7 Comparison of torque characteristics

Table 4.5 Rust prevention test on bearing

| Type | Rusting after 7 days |
|----------------------|----------------------|
| NSK Clean Grease LG2 | No rust |
| Fluorine grease B | Rusted |

Test conditions :19 mg is sealed in ball bearing 695
:Temp. 90°C, Humidity 60%
Evaluation :Studied by microscope

› **Total evaluation**

Table 4.6 Evaluation

| Characteristic | LG2 | Fluorine grease | General grease |
|-------------------------|-----|-----------------|----------------|
| Dust generation | ○ | ○ - △ | △ - X |
| Torque | ○ | X | ○ - △ |
| Durability | ○ | △ - X | ○ |
| Rust prevention ability | ○ | △ - X | ○ |

○: Suitable △: Not very suitable X: Problem in use

3. Environment with foreign matters

› **NSK K1 lubrication unit (linear guide and ball screw)**

Molded oil is made of a lubrication oil and polyolefin which has affinity with the lubrication oil. More than 70% of the mass is lubrication oil.

Molded oil which is formed into NSK K1 lubrication unit effectively seals linear guides, continually supplying lubrication oil. NSK K1 lubrication unit has made it possible to use linear guides in water or powder dust.

NSK K1 lubrication unit for ball screws is also available. For monocarriers, NSK K1 is equipped as a standard feature.

Features

- › **Extend maintenance-free intervals**
- › **No contamination of surrounding environment**
- › **Prolong life of the products exposed to water**

Refer to pages A38, B569 and C139 for details of NSK K1 lubrication unit.

1.5 Table to Cope With Special Environments

1. Linear guides.

| Series | Model No. | Special environment which linear guide can tolerate | | | | | |
|--------|-----------|---|--------|-----------|------------|----------|--------------------|
| | | Clean | Vacuum | Corrosion | High temp. | Hygienic | High dust proofing |
| NH | NH15 | ○ | | ○ | | ○ | |
| | NH20 | ○ | ○ | ○ | ○ | ○ | |
| | NH25 | ○ | ○ | ○ | ○ | ○ | |
| | NH30 | ○ | ○ | ○ | ○ | ○ | |
| | NH35 | ○ | | ○ | ○ | ○ | |
| | NH45 | ○ | | ○ | ○ | | |
| | NH55 | ○ | | ○ | | | |
| | NH65 | ○ | | ○ | | | |
| VH | VH15 | ○ | | ○ | | | ○ |
| | VH20 | ○ | | ○ | | | ○ |
| | VH25 | ○ | | ○ | | | ○ |
| | VH30 | ○ | | ○ | | | ○ |
| | VH35 | ○ | | ○ | | | ○ |
| | VH45 | ○ | | ○ | | | ○ |
| TS | TS15 | ○ | | ○ | | | |
| | TS20 | ○ | | ○ | | | |
| | TS25 | ○ | | ○ | | | |
| | TS30 | ○ | | ○ | | | |
| | TS35 | ○ | | ○ | | | |
| NS | NS15 | ○ | ○ | ○ | ○ | ○ | |
| | NS20 | ○ | ○ | ○ | ○ | ○ | |
| | NS25 | ○ | ○ | ○ | ○ | ○ | |
| | NS30 | ○ | ○ | ○ | ○* | ○ | |
| | NS35 | ○ | | ○ | | ○ | |
| | LW | LW17 | ○ | | | ○* | ○ |
| LW21 | | ○ | | ○ | ○* | ○ | |
| LW27 | | ○ | | ○ | ○ | ○ | |
| LW35 | | ○ | | ○ | | ○ | |
| LW50 | | ○ | | ○ | | | |
| PU | PU05 | ○ | | ○ | | | |
| | PU07 | ○ | | ○ | | | |
| | PU09 | ○ | | ○ | | ○ | |
| | PU12 | ○ | | ○ | | ○ | |
| | PU15 | ○ | | ○ | | ○ | |
| LU | LU05 | ○ | | ○ | | | |
| | LU07 | ○ | | ○ | | | |
| | LU09_L | ○ | ○ | ○ | ○ | ○ | |
| | LU09_R | ○ | | ○ | | ○ | |
| | LU12_L | ○ | ○ | ○ | ○ | ○ | |
| | LU12_R | ○ | | ○ | | ○ | |
| LU15 | ○ | ○ | ○ | ○* | ○ | | |

| Series | Model No. | Special environment which linear guide can tolerate | | | | | |
|--------------|-----------|---|--------|-----------|------------|----------|--------------------|
| | | Clean | Vacuum | Corrosion | High temp. | Hygienic | High dust proofing |
| PE | PE05 | ○ | | ○ | | | |
| | PE07 | ○ | | ○ | | | |
| | PE09 | ○ | | ○ | | ○ | |
| | PE12 | ○ | | ○ | | ○ | |
| | PE15 | ○ | | ○ | | ○ | |
| LE | LE05 | ○ | | ○ | | | |
| | LE07 | ○ | ○ | ○ | ○* | | |
| | LE09_L | ○ | ○ | ○ | ○* | ○ | |
| | LE09_R | ○ | | ○ | | ○ | |
| | LE12_L | ○ | ○ | ○ | ○ | ○ | |
| Miniature LH | LE12_R | ○ | | ○ | | ○ | |
| | LE15_L | ○ | ○ | ○ | ○ | ○ | |
| | LE15AR | ○ | | ○ | | ○ | |
| | LH08 | ○ | | ○ | | | |
| | LH10 | ○ | | ○ | | | |
| RA | LH12 | ○ | ○ | ○ | ○* | ○ | |
| | RA15 | ○ | | ○ | | | |
| | RA20 | ○ | | ○ | | | |
| | RA25 | ○ | | ○ | | | |
| | RA30 | ○ | | ○ | | | |
| | RA35 | ○ | | ○ | | | |
| LA | RA45 | ○ | | ○ | | | |
| | RA55 | ○ | | ○ | | | |
| | RA65 | ○ | | ○ | | | |
| | LA25 | ○ | | ○ | | | |
| | LA30 | ○ | | ○ | | | |
| | LA35 | ○ | | ○ | | | |
| HA | LA45 | ○ | | ○ | | | |
| | LA55 | ○ | | ○ | | | |
| | LA65 | ○ | | ○ | | | |
| | HA25 | ○ | | ○ | | | |
| | HA30 | ○ | | ○ | | | |
| HS | HA35 | ○ | | ○ | | | |
| | HA45 | ○ | | ○ | | | |
| | HA55 | ○ | | ○ | | | |
| | HS15 | ○ | | ○ | | | |
| | HS20 | ○ | | ○ | | | |
| HS | HS25 | ○ | | ○ | | | |
| | HS30 | ○ | | ○ | | | |
| | HS35 | ○ | | ○ | | | |

*) Dust-proof parts are not applicable to high-temperature environmental use.

2. Ball screws

| Series | Special environment | | | | |
|--|---------------------|--------|-----------------|------------|-----------------|
| | Clean | Vacuum | Rust prevention | High temp. | Foreign matters |
| KA Series | ○ | ○ | ○ | | |
| For Contaminated environments VSS Type | | | | | ○ |
| Made-to-order ball screw | ○* | ○* | ○* | ○* | ○* |

*Available in the made-to-order ball screw.
Please consult NSK.

3. Monocarriers

Please consult with NSK for special environmental use.

1.6 Precautions for Handling

Please observe the following precautions to maintain high functions of ball screws and linear motion guide bearings in special environment over a long period.

- › Products are washed to remove oil, and wrapped in a way to protect them from moisture. Use the product as soon as possible after opening the package.
- › After opening, store the ball slide (random-matching type linear guide) and ball nut (R series ball screw) in a clean, air-tight container such as desiccater with desiccating agent (e.g. silica gel). Do not apply rust preventive oil or paper or product that vaporizes rust preventive agent.
- › Wear plastic gloves and handle product in clean place.

2. Lubrication

There are two types of lubricating method -- grease and oil -- for ball screws, linear guides and monocarriers.

Use a lubricant agent and method most suitable to condition requirements and purpose to optimize functions of ball screws, linear guides and monocarriers.

In general, lubricants with low base oil kinematic viscosity are used for high-speed operation, in which thermal expansion has a large impact, and in low temperatures.

Lubrication with high base oil kinematic viscosity is used for oscillating operations, low speeds and high temperatures.

The following are lubrication methods using grease and oil.

2.1 Grease Lubrication

Grease lubrication is widely used because it does not require a special oil supply system or piping. Grease lubricants made by NSK are:

- › Various types of grease in bellows tubes that can be instantly attached to a grease pump;
- › NSK Grease Unit that consists of a hand grease pump and various nozzles. They are compact and easy to use.

1. NSK grease lubricants

Table 1.1 shows the marketed general grease widely used for linear guides, ball screws, and monocarrier for specific uses, conditions and purposes.

Table 1.1 Grease lubricant for linear guides, ball screws and monocarriers

| Type | Thickener | Base oil | Base oil kinematic viscosity mm ² /s (40°C) | Range of use temperature (°C) | Purpose |
|------|---------------------|---|--|-------------------------------|--|
| AS2 | Lithium type | Mineral oil | 130 | -10 - 110 | For general use at high load |
| PS2 | Lithium type | Synthetic oil + synthetic hydrocarbon oil | 15.9 | -50 - 110 | For low temperature and high frequency operation |
| LR3 | Lithium type | Synthetic oil | 30 | -30 - 130 | For high speed, medium load |
| LG2 | Lithium type | Mineral oil + synthetic hydrocarbon oil | 32 | -20 - 70 | For clean environment |
| LGU | Diurea | Synthetic hydrocarbon oil | 95.8 | -30 - 120 | For clean environment |
| NF2 | Urea composite type | Synthetic hydrocarbon oil | 26 | -40 - 100 | For fretting resistance |

(1) NSK Grease AS2

› Features

It is an environmentally friendly and widely used grease for high load application. It is mineral oil based grease containing lithium thickener and several additives. It is superb in load resistance as well as stability in oxidization. It not only maintains good lubrication over a long period of time, but also demonstrates superb capability in retaining water. Even containing a large amount of water, it does not lose grease when it is softened.

› Application

It is a standard grease for general NSK linear guides, ball screws and monocarriers. It is prevalently used in many applications because of its high base oil viscosity, high load resistance, and stability in oxidization.

(2) NSK Grease LR3

› Features

It contains a special synthetic oil for high temperature and stability, and a carefully selected anti-oxidation agent. This grease dramatically increases lubrication life under high temperature conditions. It is used for high speed, medium load. Lubrication life exceeded 2 000 hours in the endurance test at 150°C. Its rust prevention capacity in severe conditions such as water and moist environments is further strengthened.

› Application

It is a standard grease for ball screws PSS type (shaft dia. 15 mm or over), FSS type, FA type (except shaft dia. 10 mm with lead of 4mm and shaft dia. 12 mm with lead of 5 mm) and VFA type. It is ideal for operation with medium load, at high speed such as positioning in high tact material handling equipment.

(3) NSK Grease PS2

› Features

The major base oil component is synthetic oil with mineral oil. It is an excellent lubrication especially for low temperature operation. It is for high speed and light load.

› Application

It is a standard grease for NSK miniature linear guides and ball screws. It is especially superb for low temperature operation, but also functions well in normal temperatures, making it ideal for small equipment with light load.

› Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Lithium soap base |
| Base oil | Mineral oil |
| Consistency | 275 |
| Dropping point | 181°C |
| Volume of evaporation | 0.24% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 2.8% (100°C, 24 hr) |
| Base oil kinematic viscosity | 130 mm ² /s (40°C) |

› Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Lithium soap base |
| Base oil | Synthetic oil |
| Consistency | 228 |
| Dropping point | 208°C |
| Volume of evaporation | 0.58% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 1.9% (100°C, 24 hr) |
| Base oil kinematic viscosity | 30 mm ² /s (40°C) |

› Nature

| | |
|------------------------------|---|
| Thickener | Lithium soap base |
| Base oil | Synthetic oil + Synthetic hydrocarbon oil |
| Consistency | 275 |
| Dropping point | 190°C |
| Volume of evaporation | 0.60% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 3.6% (100°C, 24 hr) |
| Base oil kinematic viscosity | 15.9 mm ² /s (40°C) |

(4) NSK Grease LG2

> Features

This grease was developed by NSK to be exclusively used for linear guides and ball screws in clean room. Compared to the fluorine grease which are commonly used in clean room, LG2 has several advantages such as:

- > Higher in lubrication function
- > Longer lubrication life
- > More stable torque (resistant to wear)
- > Higher rust prevention.

In dust generation, LG2 is more than equal to fluorine grease in keeping dust volume low. Since the base oil is not a special oil but a mineral oil, LG2 can be handled in the same manner as general greases.

> Application

LG2 is a lubrication grease for rolling element products such as linear guides and ball screws for semiconductor and liquid crystal display (LCD) processing equipment which require a highly clean environment. Because LG2 is exclusively for a clean environment at normal temperatures, however, it cannot be used in a vacuum environment.

Refer to "Special environment" in page D8 for detailed data on superb characteristics of NSK Grease LG2.

> Nature

| | |
|------------------------------|---|
| Thickener | Lithium soap base |
| Base oil | Mineral oil + Synthetic hydrocarbon oil |
| Consistency | 199 |
| Dropping point | 201°C |
| Volume of evaporation | 1.40% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.8% (100°C, 24 hr) |
| Base oil kinematic viscosity | 32 mm ² /s (40°C) |

(5) NSK Grease LGU

> Features

This is a proprietary urea base grease of NSK featuring low dust emission exclusively for ball screws and linear guides which are used in clean rooms.

In comparison with fluorine base grease, which has been used commonly in clean rooms, LGU has better lubricating property, longer duration of lubricant, better torque variation, much better anti-rust property, and equivalent or better dust emission. In addition, this grease can be handled in the same way as the other common grease because high-grade synthetic oil is used as the base oil.

LGU grease contains much less metallic elements compared to LG2 grease. It can be used in high temperature environment.

> Application

This is exclusive lubrication grease for ball screws and linear guides that are installed in equipment that requires cleanliness, as same as LG2 grease, and it can be used in high temperature range of -30 to 120°C. This cannot be used in vacuum.

> Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Diurea |
| Base oil | Synthetic hydrocarbon oil |
| Consistency | 201 |
| Dropping point | 260°C |
| Volume of evaporation | 0.09% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.6% (100°C, 24 hr) |
| Base oil kinematic viscosity | 95.8 mm ² /s (40°C) |

(6) NSK Grease NF2

> Features

It uses high-grade synthetic oil as the base oil and urea base organic compound as the thickener. It has remarkable anti-fretting corrosion property. It can be used in wide temperature range, from low to high, and has superior lubrication life.

> Application

This grease is suitable for ball screws and linear guides of which application include oscillating operations. Allowable temperature range is -40 to 100°C.

> Nature

| | |
|------------------------------|---------------------------------------|
| Thickener | Diurea |
| Base oil | Synthetic hydrocarbon oil |
| Consistency | 288 |
| Dropping point | 260°C |
| Volume of evaporation | 0.22% (99°C, 22 hr) |
| Copper plate corrosion test | Satisfactory (Method B, 100°C, 24 hr) |
| Oil separation | 0.5% (100°C, 24 hr) |
| Base oil kinematic viscosity | 26 mm ² /s (40°C) |

> Precautions for handling

- > Wash the linear guides and ball screws to remove oil prior to applying Clean Grease LG2 or LGU, so the grease functions are fully utilized.
- > Clean grease is exclusively used for clean environments at normal temperatures.

Note) Refer to NSK Grease Unit Catalog (CAT.No.3317) for details of NSK Grease.

2. Before use of NSK Precision Products

Wipe off the rust preventive oil before use for the products that the oil is applied.

If grease is not applied, apply grease, and move a ball slide or ball nut a few strokes so the grease permeates into the ball slide and inside the nut. (Move the ball slide or the ball nut 5 to 10 times with full stroke.)

Then wipe off the excess grease.

3. How to replenish grease and volume of grease to be replenished

Use grease fitting if exclusive grease supply component is not used. Supply required amount through grease fitting by a grease pump.

Wipe off old grease and accumulated dust before supplying new grease. If grease fitting is not used, apply grease directly to the rail or to the ball groove of the screw shaft. Move a ball slide or ball nut a few strokes so the grease permeates into the ball slide and inside the nut.

Once grease is replenished, another supply is not required for a long time. But under some operational conditions, it is necessary to periodically replenish grease. The following are replenishing methods.

* When replenishing using a grease pump:

Use a grease pump and fill the inside of ball slide, ball nut and monocarrier slider with grease. Supply grease until it comes out from the ball slide, ball nut or monocarrier slider area. Move ball slide, ball nut or monocarrier slider by hand while filling them with grease, so the grease permeates all areas. Do not operate the machine immediately after replenishing. Always try the system a few times to spread the grease throughout the system and to remove excess grease. Trial operations are necessary because the resistance to sliding force and screw torque greatly increases immediately after replenishment (full-pack state) and may cause problems. The agitating resistance of grease is accountable for this phenomenon. Wipe off excess grease that accumulates at end of rail and screw shaft after trial runs so the grease does not move to other areas.

* When there is an exclusive grease supply system and the volume from the spout can be controlled, the criterion is:

- > All at once, replenish the amount that fills about 50% of the internal space of the ball slide or the internal space of the ball nut. This method eliminates waste of grease and is efficient.

Tables 1.2, 1.3 and 1.4 show internal spaces of ball slide, ball nut and monocarrier slider for reference.

Table 1.2 Inside space of the slide of linear guide

NH Series

Unit: cm³

| Model No. | Series | NH | |
|-----------|--------|----------------|----------------------|
| | | High-load type | Ultra-high-load type |
| 15 | | 3 | 4 |
| 20 | | 6 | 8 |
| 25 | | 9 | 13 |
| 30 | | 13 | 20 |
| 35 | | 22 | 30 |
| 45 | | 47 | 59 |
| 55 | | 80 | 100 |
| 65 | | 139 | 186 |

LW Series

Unit: cm³

| Model No. | Series | LW |
|-----------|--------|----|
| 17 | | 3 |
| 21 | | 3 |
| 27 | | 7 |
| 35 | | 24 |
| 50 | | 52 |

VH Series

Unit: cm³

| Model No. | Series | VH | |
|-----------|--------|----------------|----------------------|
| | | High-load type | Super-high-load type |
| 15 | | 3 | 4 |
| 20 | | 6 | 8 |
| 25 | | 9 | 13 |
| 30 | | 13 | 20 |
| 35 | | 22 | 30 |
| 45 | | 47 | 59 |
| 55 | | 80 | 100 |

PU, LU Series

Unit: cm³

| Model No. | Series | PU | | LU | |
|-----------|--------|---------------|----------------|---------------|----------------|
| | | Standard type | High-load type | Standard type | High-load type |
| 05 | | 0.1 | - | 0.1 | - |
| 07 | | 0.1 | - | 0.1 | - |
| 09 | | 0.2 | 0.3 | 0.2 | 0.3 |
| 12 | | 0.3 | 0.4 | 0.3 | 0.4 |
| 15 | | 0.8 | 1.1 | 0.8 | 1.1 |

TS Series

Unit: cm³

| Model No. | Series | TS |
|-----------|--------|----|
| 15 | | 2 |
| 20 | | 3 |
| 25 | | 6 |
| 30 | | 9 |
| 35 | | 15 |

PE, LE Series

Unit: cm³

| Model No. | Series | PE | | LE | | |
|-----------|--------|---------------|----------------|------------------|---------------|----------------|
| | | Standard type | High-load type | Medium-load type | Standard type | High-load type |
| 05 | | 0.1 | - | 0.1 | 0.1 | - |
| 07 | | 0.2 | - | 0.1 | 0.2 | 0.3 |
| 09 | | 0.4 | 0.5 | 0.2 | 0.4 | 0.5 |
| 12 | | 0.5 | 0.7 | 0.3 | 0.5 | 0.7 |
| 15 | | 1.2 | 1.6 | 0.8 | 1.2 | 1.6 |

NS Series

Unit: cm³

| Model No. | Series | NS | |
|-----------|--------|------------------|----------------|
| | | Medium-load type | High-load type |
| 15 | | 2 | 3 |
| 20 | | 3 | 4 |
| 25 | | 5 | 8 |
| 30 | | 8 | 12 |
| 35 | | 12 | 19 |

Miniature LH Series

Unit: cm³

| Model No. | Series | LH |
|-----------|--------|-----|
| 08 | | 0.2 |
| 10 | | 0.4 |
| 12 | | 1.2 |

RA Series

Unit: cm³

| Model No. | Series | RA | |
|-----------|--------|----------------|----------------------|
| | | High-load type | Super-high-load type |
| 15 | | 1 | 1.5 |
| 20 | | 2 | 2.5 |
| 25 | | 3 | 3.5 |
| 30 | | 5 | 6 |
| 35 | | 6 | 8 |
| 45 | | 10 | 13 |
| 55 | | 15 | 20 |
| 65 | | 33 | 42 |

LA Series

Unit: cm³

| Model No. | Series | LA | |
|-----------|--------|----------------|----------------------|
| | | High-load type | Super-high-load type |
| 25 | | 8 | 12 |
| 30 | | 14 | 18 |
| 35 | | 21 | 29 |
| 45 | | 38 | 48 |
| 55 | | 68 | 86 |
| 65 | | 130 | 177 |

HA, HS Series

Unit: cm³

| Model No. | Series | HA | HS |
|-----------|--------|-----|----|
| 15 | | - | 5 |
| 20 | | - | 9 |
| 25 | | 16 | 16 |
| 30 | | 27 | 25 |
| 35 | | 42 | 40 |
| 45 | | 67 | - |
| 55 | | 122 | - |

Table 1.3 Inside space of ball nut
Return tube type (single nut)

| Unit: cm ³ | | Unit: cm ³ | |
|-----------------------|--------------|-----------------------|--------------|
| Nut model | Inside space | Nut model | Inside space |
| 1004 - 2.5 | 0.8 | 2525 - 1.5 | 7.5 |
| 1205 - 2.5 | 1.2 | 2805 - 5 | 6 |
| 1210 - 2.5 | 1.4 | 3205 - 5 | 7 |
| 1405 - 2.5 | 2.2 | 3206 - 5 | 9.5 |
| 1510 - 2.5 | 2.3 | 3210 - 5 | 22 |
| 1605 - 2.5 | 2.6 | 3225 - 2.5 | 17 |
| 1616 - 1.5 | 2.1 | 3232 - 1.5 | 15 |
| 2004 - 5 | 2.7 | 3610 - 5 | 32 |
| 2005 - 5 | 4.3 | 4005 - 10 | 14 |
| 2010 - 2.5 | 4.7 | 4010 - 5 | 30 |
| 2020 - 1.5 | 4.2 | 4012 - 5 | 34 |
| 2504 - 5 | 3.2 | 4510 - 5 | 34 |
| 2505 - 5 | 5 | 5010 - 5 | 37 |
| 2506 - 5 | 7 | 5010 - 10 | 59 |
| 2510 - 3 | 9.5 | | |
| 2520 - 2.5 | 12 | | |

Deflector (bridge) type
(single nut)

| Unit: cm ³ | |
|-----------------------|--------------|
| Nut model | Inside space |
| 2505 - 6 | 6.5 |
| 2510 - 4 | 10 |
| 3205 - 8 | 9.5 |
| 3210 - 6 | 28 |
| 4010 - 8 | 42 |
| 5010 - 8 | 52 |

End cap type

| Unit: cm ³ | |
|-----------------------|--------------|
| Nut model | Inside space |
| 1520 - 1.5 | 1.9 |
| 2040 - 1 | 2.8 |
| 2550 - 1 | 4.2 |

Note: Nut model: shaft diameter, lead, total number of turns of balls. Please consult NSK for other specifications.
Refer to B110 to B146 for Compact FA Series.

Table 1.4 Inside space of the monocarrier
MCM Series

| Unit: cm ³ | | |
|-----------------------|-----------|--------------|
| Model No. | Lead (mm) | Inside space |
| MCM02 | 1 | 0.3 |
| | 2 | 0.3 |
| MCM03 | 1 | 1 |
| | 2 | 0.9 |
| | 10 | 1.8 |
| MCM05 | 12 | 1.7 |
| | 5 | 4.2 |
| | 10 | 4 |
| | 20 | 2.1 |
| 30 | 2.0 | |

| Unit: cm ³ | | |
|-----------------------|-----------|--------------|
| Model No. | Lead (mm) | Inside space |
| MCM06 | 5 | 8.3 |
| | 10 | 6.5 |
| | 20 | 5.5 |
| MCM08 | 5 | 11.6 |
| | 10 | 9.8 |
| | 20 | 8.7 |
| | 30 | 4.3 |
| MCM10 | 10 | 19.4 |
| | 20 | 17.4 |
| | 30 | 8.8 |

MCH Series

| Unit: cm ³ | | |
|-----------------------|-----------|--------------|
| Model No. | Lead (mm) | Inside space |
| MCH06 | 5 | 2.8 |
| | 10 | 2.7 |
| MCH09 | 10 | 2.7 |
| | 20 | 2.7 |
| MCH10 | 5 | 5.8 |
| | 10 | 5.8 |
| | 20 | 5.6 |
| | 10 | 10.9 |
| 20 | 10.1 | |

4. Intervals of checks and replenishments

Although the grease is of high quality, it gradually deteriorates and its lubrication function diminishes. Also, the grease in the ball slide and ball nut is gradually removed by stroke movement.

In some environments, the grease becomes dirty, and foreign objects may enter. Grease should be replenished depending on frequency of use. The following is a guide of grease replenishment intervals for linear guides and ball screws.

Table 1.5 Intervals of checks and replenishments for grease lubrication

| Intervals of checks | Items to check | Intervals of replenishments |
|---------------------|---|--|
| 3-6 months | Dirt, foreign matters such as cutting chips | Usually once per year. Every 3 000 km for material handling system that travels more than 3 000 km per year. Replenish if checking results warrant it necessary. |

- Notes:**
- As a general rule, do not mix greases of different brands.
 - Grease viscosity varies by temperature. Viscosity is particular high in winter due to low temperatures. Pay attention to increases in linear guide and monocarrier sliding resistance and ball screw and monocarrier torque in such conditions.
 - When the ambient temperature is low, or in winter, if it is difficult to pump out the grease from the container, wait until the grease is softened.
 - In locations where coolant is dispersed or scattered, emulsification of lubricants and rinsing with water may significantly deteriorate the integrity of the lubricant and efficiency of the grease. Protect the grease unit from coolant by shielding it with a cover, etc.

5. NSK Grease Unit

Supply grease to NSK linear guides and ball screws by manual type hand grease pump. Install grease in bellows tube to the pump. Several types of grease (80 g) are available.



Grease in bellows tube



(1) Composition of NSK Grease Unit

Components and grease types are shown below.

| | Name | (Tube color) | Reference number |
|--|-----------------------------|--------------|------------------|
| NSK Grease Unit | | | |
| NSK Grease (80 g in a bellows tube) | NSK Grease AS2 | (Brown) | NSK GRS AS2 |
| | NSK Grease PS2 | (Orange) | NSK GRS PS2 |
| | NSK Grease LR3 | (Green) | NSK GRS LR3 |
| | NSK Grease LG2 | (Blue) | NSK GRS LG2 |
| | NSK Grease LGU | (Yellow) | NSK GRS LGU |
| | NSK Grease NF2 | (Gray) | NSK GRS NF2 |
| NSK Hand Grease Pump Unit | | | |
| NSK Hand Grease Pump (Straight nozzle NSK HGP NZ1 -- One nozzle is provided with hand pump.) | | | NSK HGP |
| Grease nozzle (used with hand grease pump) | NSK straight nozzle | | NSK HGP NZ1 |
| | NSK chuck nozzle | | NSK HGP NZ2 |
| | NSK drive fitting nozzle | | NSK HGP NZ3 |
| | NSK point nozzle | | NSK HGP NZ4 |
| | NSK flexible nozzle | | NSK HGP NZ5 |
| | NSK flexible extension pipe | | NSK HGP NZ6 |
| | NSK straight extension pipe | | NSK HGP NZ7 |
| | NSK nozzle for MCH | | NSK HGP NZ8 |

(2) NSK Greases (80 g in bellows tube)

Refer to pages D14 and D15 for their natures and details.

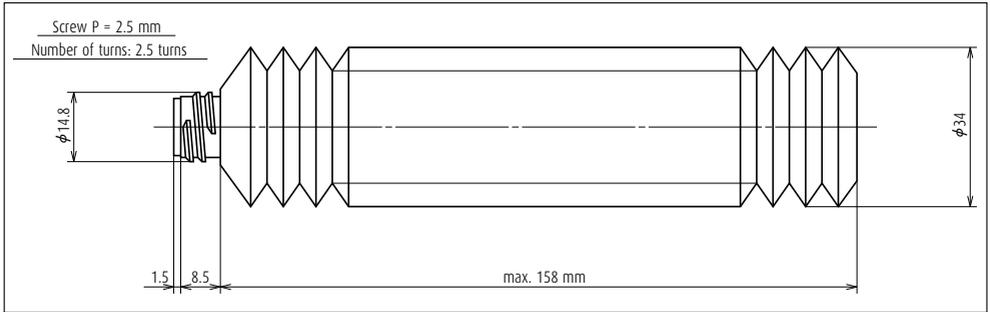


Fig. 1.1 Bellows tube

(3) NSK Manual Grease Pump Unit

a) NSK Hand Grease Pump
(Reference number: NSK HGP)

> Features

- Light-weight
- Inserting by high pressure
- No leaking
- Easy to change grease
- Remaining grease
- Several nozzles

> Specifications

- Discharge pressure: 15 Mpa
- Spout volume: 0.35 cc/shot
- Mass of main body: Without nozzle 240 g, Provided nozzle 90 g
- Grease tube outer diameter: ϕ 38.1
- Accessory: Several nozzles for a unique application can be attached

Can be operated by one hand, yet there is no worry to make a mistake.


Insert at 15 Mpa.

Does not leak when held upside down.

Simply attach grease in bellows tube.

Can be confirmed through slit on tube.

Six types of nozzles to choose from.

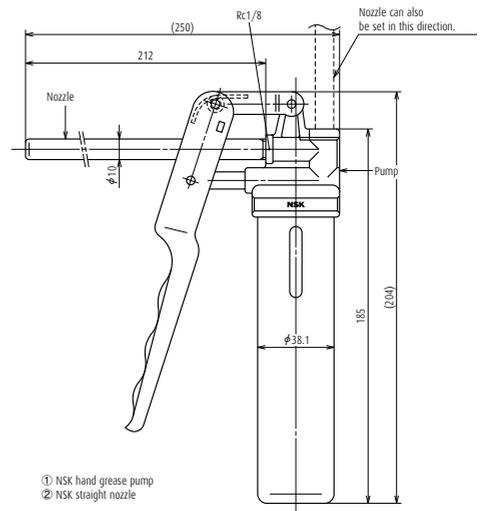

① NSK hand grease pump
② NSK straight nozzle

Fig. 1.2 NSK Hand Grease Pump with NSK straight nozzle

*Air is contained in the unopened bellows tube. Try the system tens of times when to use the hand grease pump. The tube will be use after deflated from the tube.

b) Nozzles

Table 1.6 Nozzles that can be attached to NSK Hand Grease Pump

| Name | Designation code | Use | Dimensions |
|-----------------------------|------------------|--|------------|
| NSK straight nozzle | NSK HGP NZ1 | Can be used with grease fitting A, B, and C under JIS B1575 standard. | |
| NSK chuck nozzle | NSK HGP NZ2 | Same as above. However, there is no need to press the hand pump because the grease fitting and the nozzle come to contact due to the chucking mechanism at the tip. | |
| NSK fitting nozzle | NSK HGP NZ3 | Dedicated for the - φ 3 drive-in grease fitting. | |
| NSK point nozzle | NSK HGP NZ4 | Used for linear guides and ball screws which do not have grease fitting. Supplies grease directly to the ball grooves, or through the opening of ball slide or ball slide to inside. | |
| NSK flexible nozzle | NSK HGP NZ5 | The tip of the flexible nozzle is chuck nozzle. The straight nozzle is not available for use. | |
| NSK flexible extension pipe | NSK HGP NZ6 | Flexible extension pipe connects the grease pump and the nozzle | |
| NSK straight extension pipe | NSK HGP NZ7 | Straight extension pipe connects the grease pump and the nozzle. | |
| NSK nozzle for MCH | NSK HGP NZ8 | For MCH Series grease replenishment | |

Table 1.7 Grease fittings used for NSK linear guide

| Series | Model number | Tap hole for grease fitting | Standard grease fitting | Straight nozzle NZ1 | Chuck nozzles NZ2 | Drive-in nipple nozzle NZ3 | Point nozzle NZ4 | Flexible nozzle NZ5 |
|--------------|----------------------|-----------------------------|-------------------------|---------------------|-------------------|----------------------------|------------------|---------------------|
| NH | NH15 | φ 3 | Drive-in type | | | ○ | | |
| NH | NH20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| NH | NH45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| VH | VH15 | φ 3 | Drive-in type | | | ○ | | |
| VH | VH20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| VH | VH45, 55 | Rc1/8 | B type | ○ | ○ | | | ○ |
| TS | TS15 | φ 3 | Drive-in type | | | ○ | | |
| TS | TS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| NS | NS15 | φ 3 | Drive-in type | | | ○ | | |
| NS | NS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| LW | LW17 | φ 3 | Drive-in type | | | ○ | | |
| LW | LW21, 27, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| LW | LW50 | Rc1/8 | B type | ○ | ○ | | | ○ |
| PU | PU05, 07, 09, 12 | - | - | | | | ○ | |
| PU | PU15 | φ 3 | Drive-in type | | | ○ | | |
| LU | LU05, 07, 09, 12, 15 | - | - | | | | ○ | |
| PE | PE05, 07, 09, 12 | - | - | | | | ○ | |
| PE | PE15 | φ 3 | Drive-in type | | | ○ | | |
| LE | LE05, 07, 09, 12, 15 | - | - | | | | ○ | |
| Miniature LH | LH08, 10 | - | - | | | | ○ | |
| Miniature LH | LH12 | φ 3 | Drive-in type | | | ○ | | |
| RA | RA15, 20 | φ 3 | Drive-in type | | | ○ | | |
| RA | RA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| RA | RA45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| LA | LA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| LA | LA45, 55, 65 | Rc1/8 | B type | ○ | ○ | | | ○ |
| HA | HA25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |
| HA | HA45, 55 | Rc1/8 | B type | ○ | ○ | | | ○ |
| HS | HS15 | φ 3 | Drive-in type | | | ○ | | |
| HS | HS20, 25, 30, 35* | M6×0.75 | B type | ○ | ○ | | | ○ |

*) If using a chuck nozzle, avoid interference with table and rail.

Note: 1) For PU, PE, LU, and LE Series, apply grease directly to ball groove, etc. using point nozzle.

2) A long threaded grease fitting is required for NSK linear guides because of dust-proof parts. Please refer to the sections pertaining to the lubrication and dust-proof parts of each series.

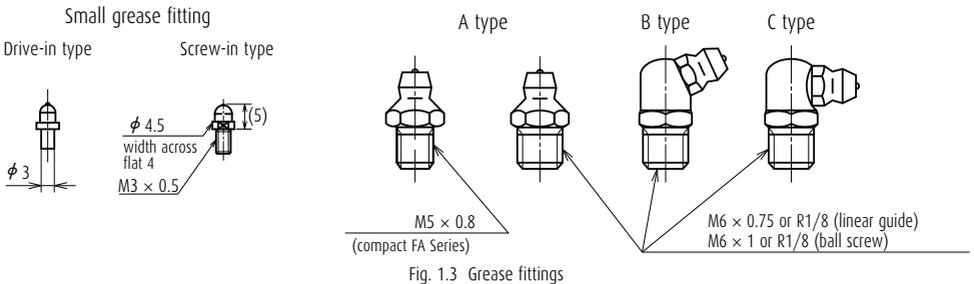


Fig. 1.3 Grease fittings

Table 1.8 Applicable grease nozzle for ball screws

| Series Tap hole for grease fitting | | | Model no. | | Standard grease fitting | Straight nozzle NZ1 | Chuck nozzles NZ2 | Drive-in fitting nozzle NZ3 | Point nozzle NZ4 | Flexible nozzle NZ5 |
|------------------------------------|----------------------|-----------------------|--|--------|-------------------------|---------------------|-------------------|-----------------------------|------------------|---------------------|
| Finished shaft end | Compact FA | High-accuracy, clean | USS | M5×0.8 | A type | ○ | ○ | | ○ | ○ |
| | | General | PSS | | A type | ○ ^{*1} | ○ ^{*1} | | ○ | ○ ^{*1} |
| | | Transfer equipment | FSS | | A type | ○ ^{*1} | ○ ^{*1} | | ○ | ○ ^{*1} |
| | Miniature, fine lead | MA | Shaft dia. 12 or less | - | - | | | | ○ | |
| | | | Shaft dia. 16 or over | M6×1 | - | | | | ○ | |
| | Small equipment | FA | | M6×1 | - | ○ ^{*2} | ○ ^{*2} | | ○ | ○ ^{*2} |
| | Machine tools | SA | Shaft dia. 36 or less | M6×1 | - | ○ | ○ | | ○ | Finished shaft end |
| | | | Shaft dia. 40 or over | Rc1/8 | - | ○ | ○ | | ○ | a |
| | Stainless steel | KA | Shaft dia. 12 or less and lead 2 or less | M3×0.5 | - | | | ○ | ○ | |
| | | | except above | M6×1 | - | ○ ^{*2} | ○ ^{*2} | | ○ | ○ ^{*2} |
| | Transfer equipment | VFA | Shaft dia. 12 or less | φ 2.7 | - | | | | ○ | |
| | | | Shaft dia. 15 or over | φ 3.5 | - | | | | ○ | |
| RMA | | | - | - | | | | ○ | | |
| Miniature, fine lead | MS | Shaft dia. 12 or less | - | - | | | | ○ | | |
| | | Shaft dia. 16 or over | M6×1 | - | | | | ○ | | |
| Small equipment | FS | | M6×1 | - | ○ ^{*2} | ○ ^{*2} | | ○ | ○ ^{*2} | |
| Machine tools | SS | Shaft dia. 36 or less | M6×1 | - | ○ | ○ | | ○ | ○ | |
| | | Shaft dia. 40 or over | Rc1/8 | - | ○ | ○ | | ○ | ○ | |
| Blank shaft end | HSS | | M6×1 | - | ○ | ○ | | ○ | ○ | |
| | | RMS | | - | | | | ○ | | |
| | RNFTL | Shaft dia. 12 or less | M3×0.5 | - | | | ○ | ○ | | |
| | | Shaft dia. 14 or over | M6×1 | - | ○ | ○ | | ○ | ○ | |
| | RNFBL | Shaft dia. 12 or less | M3×0.5 | - | | | ○ | ○ | | |
| | | Shaft dia. 14 or over | M6×1 | - | ○ | ○ | | ○ | ○ | |
| | RNCT | | - | - | | | | ○ | | |
| | RNFL | Shaft dia. 12 or less | M3×0.5 | - | | | ○ | ○ | | |
| | | Shaft dia. 15 or over | M6×1 | - | ○ | ○ | | ○ | ○ | |
| RNSTL | | M6×1 | - | ○ | ○ | | ○ | ○ | | |

^{*1} Unavailable for shaft dia. 25 mm ^{*2} If using A type grease fitting, may not install the nozzle.

Notes 1) Normally, grease fitting is not provided to NSK ball screw except Compact FA Series. Ball nut has a tap hole to install a grease fitting. The user should install a grease fitting if necessary. 2) For M3 × 0.5 tap hole, small fitting (screw-in type) is available. Please contact NSK. 3) VFA type cannot install grease fitting. Apply grease directly to inside the nut through oil hole using point nozzle. 4) MA, RMA, MS, RMS, and RNCT types have no tap hole, apply grease directly to the screw shaft and ball grooves using point nozzle.

Table 1.9 Applicable grease nozzles for Monocarriers

| Series | Model no. | Tap hole for grease fitting | Standard grease fitting | Straight nozzle NZ1 | Chuck nozzles NZ2 | Drive-in fitting nozzle NZ3 | Flexible nozzle NZ5 | MCH exclusive fitting nozzle NZ8 |
|--------|-------------------|-----------------------------|-------------------------|---------------------|-------------------|-----------------------------|---------------------|----------------------------------|
| MCM | MCM02 | - | - | | | | | |
| MCM | MCM03, 05, 08, 10 | φ 3 | Drive-in type | | | ○ | | ○ |
| MCM | MCM06 | M6×0.75 | A type | ○ | ○ | | ○ | |
| MCH | MCH06,09,10 | φ 3 | Drive-in type | | | | | ○ |

^{*}) Use of NZ3 is recommended.

2.2 Oil Lubrication

Required amount of new oil is regularly supplied by:

- > Manual or automatic intermittent supply system;
- > Oil mist lubricating system via piping.

Equipment for oil lubrication is more costly than grease lubrication. However, oil mist lubricating system supplies air as well as oil, raising the inner pressure of the ball slide. This prevents foreign matters from entering, and the air cools the system. Use an oil of high atomizing rate such as ISO VG 32 to 68 for the oil mist lubrication system.

ISO VG 68 to 220 are recommended for common intermittent replenishment system. Approximate volume of oil Q for a ball slide of linear guide per hour can be obtained by the following formula.

In case of ball type linear guides except the LA Series

$$Q = n/150 \text{ (cm}^3\text{/hr)}$$

In case of LA Series, RA Series

$$Q \geq n/100 \text{ (cm}^3\text{/hr)}$$

n: Linear guide code

e.g. When NH45 is used,

$$n = 45$$

Therefore,

$$Q = 45/150 = 0.3 \text{ cm}^3\text{/hr}$$

Similarly, approximate oil supply volume Q to ball screw can be obtained by the following formula.

$$Q = d/15 \text{ (cm}^3\text{/hr)}$$

d: Nominal shaft diameter of the ball screw

e.g. When the shaft diameter is 50,

$$d = 50$$

Therefore,

$$Q = 50/15 = 3.3 \text{ cm}^3\text{/hr}$$

For oil lubrication by gravity drip, the oil supply position and installation position of the ball slide or ball nut are crucial. In case of linear guide, unless it is installed to a horizontal position, the oil flows only on the down side, and does not spread to all raceway surface. This may cause insufficient lubrication. For ball screw lubrication as well, oil does not spread if the oil orifice is installed at the bottom, causing insufficient lubrication. Please consult NSK to correct such situations prior to use. NSK has internal design which allows oil lubricant to flow throughout the system. **Table 2.1** shows the criterion of intervals of oil checks and replenishments.

Table 2.1 Intervals of checks and replenishments

| Method | Intervals of checks | Items to check | Replenishment or intervals of changes |
|-------------------------------|------------------------|---------------------------|---|
| Automatic intermittent supply | Weekly | Volume of oil, dirt, etc. | Replenish at each check. Suitable volume for tank capacity. |
| Oil bath | Daily before operation | Oil surface | Make a suitable criterion based on consumption |

Notes 1) As with grease lubrication, do not mix oil lubricant with different types.

2) Some components of the linear guide and ball screw are made of plastic. Avoid using an oil that adversely affects synthetic resin.

3) When using oil mist lubricating system, please confirm an oil supply amount at the each outlet part.

3. RoHS Compliant

1. Linear Guides

- > Linear Guides listed in the catalog except the products for special environments, are compliant with RoHS.
- > Please consult NSK for RoHS of special parts and lubricant provided by customer, and customer-supplied product.

2. Ball Screws

- > Ball screws listed in the catalog except the products for special environments, are compliant with RoHS.


3. Monocarriers

- > Monocarriers listed in the catalog are compliant with RoHS.

4. Ball Screw Support Bearings

- > Ball screw support bearings listed in the catalog are compliant with RoHS.

*For details of country-specific RoHS, contact NSK.



APPENDICES: TABLES

E BLOCK

Appendices: Tables

1. Conversion from International Systems of Units (SI) E1
2. Conversion table between N and kgf.....E3
3. Conversion table between kg and lb.....E4
4. Hardness conversion table.....E5
5. Variations of shaft used in common fitsE7
6. Variations of housing holes in common fitsE9

Appendices: Table

1. Conversion from international system of units (SI)

Comparisons of SI, CGS, and engineering systems of units

| System of units \ Items | Length | Mass | Time | Temperature | Acceleration | Force | Stress | Pressure | Energy | Power |
|-------------------------|--------|-------------------------|------|-------------|------------------|-------|---------------------|---------------------|---------|-----------|
| SI | m | kg | s | K, °C | m/s ² | N | Pa | Pa | J | W |
| CGS system | cm | g | s | °C | Gal | dyn | dyn/cm ² | dyn/cm ² | erg | erg/s |
| Engineering system | m | kgf • s ² /m | s | °C | m/s ² | kgf | kgf/m ² | kgf/m ² | kgf • m | kgf • m/s |

Conversion rates from SI system of units

| Item | SI unit | | Units other than SI units | | Conversion rate from SI unit |
|----------------------------|----------------------------|---------------------|---------------------------------------|---------------------|-------------------------------|
| | Name of unit | Abbreviation | Name of unit | Abbreviation | |
| Angle | Radian | rad | Degree | ° | 180/π |
| | | | Minute | ' | 10 800/π |
| | | | Second | " | 648 000/π |
| Length | Meter | m | Micron | μ | 10 ⁶ |
| | | | Angstrom | Å | 10 ¹⁰ |
| Area | Square meter | m ² | Are | a | 10 ⁻² |
| | | | Hectare | ha | 10 ⁻⁴ |
| Volume | Cubic meter | m ³ | Liter | l, L | 10 ³ |
| | | | Deciliter | dl, dL | 10 ⁴ |
| Time | Second | s | Minute | min | 1/60 |
| | | | Hour | h | 1/3 600 |
| | | | Day | d | 1/86 400 |
| Numbers of vibration | Hertz | Hz | Cycle | s ⁻¹ | 1 |
| Rotational speed | Times per second | s ⁻¹ | Times per minute | rpm | 60 |
| Velocity | Meter per second | m/s | Kilometer per hour | km/h | 3 600/1 000 |
| | | | Knot | kn | 3 600/1 852 |
| Acceleration | Meter per square second | m/s ² | Gal | Gal | 10 ² |
| Acceleration | Meter per square second | m/s ² | G | G | 1/9.806 65 |
| Mass | Kilogram | kg | Ton | t | 10 ⁻³ |
| Force | Newton | N | Weight kilogram | kgf | 1/9.806 65 |
| | | | Weight ton | tf | 1/(9.806 65×10 ³) |
| | | | Dyne | dyn | 10 ⁵ |
| Torque and moment of force | Newton meter | N • m | Weight kilogram meter | kgf • m | 1/9.806 65 |
| Stress | Pascal | Pa | Weight kilogram per square centimeter | kgf/cm ² | 1/(9.806 65×10 ⁴) |
| Stress | (Newtons per square meter) | (N/m ²) | Weight kilogram per square millimeter | kgf/mm ² | 1/(9.806 65×10 ⁶) |

Prefixes for SI units

| Powers of 10 | Prefix | | Powers of 10 | Prefix | |
|--------------|--------|------|--------------|--------|-------|
| | Name | Code | | Name | Code |
| 10^{18} | exa | E | 10^{-1} | deci | d |
| 10^{15} | peta | P | 10^{-2} | centi | c |
| 10^{12} | tera | T | 10^{-3} | milli | m |
| 10^9 | giga | G | 10^{-6} | micro | μ |
| 10^6 | mega | M | 10^{-9} | nano | n |
| 10^3 | kilo | k | 10^{-12} | pico | p |
| 10^2 | hecto | h | 10^{-15} | femto | f |
| 10^1 | deca | da | 10^{-18} | atto | a |

Conversion rates from SI units (continued from previous page)

| Item | SI unit | | Units other than SI units | | Conversion rate from SI unit |
|--|-------------------------------------|---------------------------|----------------------------------|--------------------|---------------------------------|
| | Name of unit | Abbreviation | Name of unit | Abbreviation | |
| Pressure | Pascal (newton per square meter) | Pa (N/m ²) | Weight kilogram per square meter | kgf/m ² | 1/9.806 65 |
| | | | Water column meter | mH ₂ O | 1/(9.806 65×10 ³) |
| | | | Mercurial column millimeter | mmHg | 760/(1.013 25×10 ⁵) |
| | | | Torr | Torr | 760/(1.013 25×10 ⁵) |
| | | | Bar | bar | 10 ⁻⁵ |
| Energy | Joule (newton meter) | J (N · m) | Atmosphere | atm | 1/(1.013 25×10 ⁵) |
| | | | Erg | erg | 10 ⁷ |
| | | | Calorie (international) | cal _{IT} | 1/4.186 8 |
| | | | Weight kilogram meter | kgf · m | 1/9.806 65 |
| | | | Kilowatt hour | kW · h | 1/(3.6×10 ⁶) |
| Electric power, power | Watt (joules per second) | W (J/s) | Metric horsepower/hour | PS · h | ≈3.776 72×10 ⁻⁷ |
| | | | Weight kilogram meter per second | kgf · m/s | 1/9.806 65 |
| | | | Kilo calorie per hour | kcal/h | 1/1.163 |
| | | | Metric horsepower | PS | ≈1/735.498 8 |
| | | | Viscosity, Viscosity index | Pascal second | Pa · s |
| Kinematic viscosity, Kinematic viscosity index | Square meter per second | m ² /s | | | |
| | | | Centistokes | cSt | 10 ⁶ |
| Temperature, Difference in temperature | Kelvin, Celsius degrees | K, °C | Degree | °C | [See Note (1)] |
| Electrical current, magnetomotive force | Ampere | A | Ampere | A | 1 |
| Electrical power, electromotive force | Volt | V | (Watt per ampere) | (W/A) | 1 |
| Magnetic field intensity | Ampere per meter | A/m | Oersted | Oe | 4 π /10 ³ |
| Magnetic flux density | Tesla | T | Gauss | Gs | 10 ⁴ |
| | | | Gamma | γ | 10 ⁹ |
| Electrical resistance | Ohm | Ω | (Volt per ampere) | (V/A) | 1 |

Note (1) Conversion from TK to °C is : $\theta = T - 273.15$. To indicate temperature difference: $\Delta T = \Delta\theta$. ΔT and $\Delta\theta$ indicate temperature differences measured by Kelvin and Celsius respectively.

Remarks: Names and abbreviations of the unit in parentheses indicate the definition of the unit shown above the parentheses or left to the parentheses.

Conversion example 1 N = 1/9.806 65 kgf

Appendices: (conversion table)

2. Conversion table between N and kgf

[How to read the table]

To convert 10 N to kgf, locate 10 in the center column in the first block. Locate a corresponding kgf figure in the right side column. You will find 10 N is 1.0197 kgf. To convert 10 kgf to N, locate a figure in N column to its left. You will find 10 kgf is 98.006 N.

$$1 \text{ N} = 0.1019716 \text{ kgf}$$

$$1 \text{ kgf} = 9.80665 \text{ N}$$

| N | | kgf | N | | kgf | N | | kgf |
|--------|----|--------|--------|----|--------|--------|----|--------|
| 9.8066 | 1 | 0.1020 | 333.43 | 34 | 3.4670 | 657.05 | 67 | 6.8321 |
| 19.613 | 2 | 0.2039 | 343.23 | 35 | 3.5690 | 666.85 | 68 | 6.9341 |
| 29.420 | 3 | 0.3059 | 353.04 | 36 | 3.6710 | 676.66 | 69 | 7.0360 |
| 39.227 | 4 | 0.4079 | 362.85 | 37 | 3.7729 | 686.47 | 70 | 7.1380 |
| 49.033 | 5 | 0.5099 | 372.65 | 38 | 3.8749 | 696.27 | 71 | 7.2400 |
| 58.840 | 6 | 0.6118 | 382.46 | 39 | 3.9769 | 706.08 | 72 | 7.3420 |
| 68.647 | 7 | 0.7138 | 392.27 | 40 | 4.0789 | 715.89 | 73 | 7.4439 |
| 78.453 | 8 | 0.8158 | 402.07 | 41 | 4.1808 | 725.69 | 74 | 7.5459 |
| 88.260 | 9 | 0.9177 | 411.88 | 42 | 4.2828 | 735.50 | 75 | 7.6479 |
| 98.066 | 10 | 1.0197 | 421.69 | 43 | 4.3848 | 745.31 | 76 | 7.7498 |
| 107.87 | 11 | 1.1217 | 431.49 | 44 | 4.4868 | 755.11 | 77 | 7.8518 |
| 117.68 | 12 | 1.2237 | 441.30 | 45 | 4.5887 | 764.92 | 78 | 7.9538 |
| 127.49 | 13 | 1.3256 | 451.11 | 46 | 4.6907 | 774.73 | 79 | 8.0558 |
| 137.29 | 14 | 1.4279 | 460.91 | 47 | 4.7927 | 784.53 | 80 | 8.1577 |
| 147.10 | 15 | 1.5296 | 470.72 | 48 | 4.8946 | 794.34 | 81 | 8.2597 |
| 156.91 | 16 | 1.6315 | 480.53 | 49 | 4.9966 | 804.15 | 82 | 8.3617 |
| 166.71 | 17 | 1.7335 | 490.33 | 50 | 5.0986 | 813.95 | 83 | 8.4636 |
| 176.52 | 18 | 1.8355 | 500.14 | 51 | 5.2006 | 823.76 | 84 | 8.5656 |
| 186.33 | 19 | 1.9375 | 509.95 | 52 | 5.3025 | 833.57 | 85 | 8.6676 |
| 196.13 | 20 | 2.0394 | 519.75 | 53 | 5.4045 | 843.37 | 86 | 8.7696 |
| 205.94 | 21 | 2.1414 | 529.56 | 54 | 5.5065 | 853.18 | 87 | 8.8715 |
| 215.75 | 22 | 2.2434 | 539.37 | 55 | 5.6084 | 862.99 | 88 | 8.9735 |
| 225.55 | 23 | 2.3453 | 549.17 | 56 | 5.7104 | 872.79 | 89 | 9.0755 |
| 235.36 | 24 | 2.4473 | 558.98 | 57 | 5.8124 | 882.60 | 90 | 9.1774 |
| 245.17 | 25 | 2.5493 | 568.79 | 58 | 5.9144 | 892.41 | 91 | 9.2794 |
| 254.97 | 26 | 2.6513 | 578.59 | 59 | 6.0163 | 902.21 | 92 | 9.3814 |
| 264.78 | 27 | 2.7532 | 588.40 | 60 | 6.1183 | 912.02 | 93 | 9.4834 |
| 274.59 | 28 | 2.8552 | 598.21 | 61 | 6.2203 | 921.83 | 94 | 9.5853 |
| 284.39 | 29 | 2.9572 | 608.01 | 62 | 6.3222 | 931.63 | 95 | 9.6873 |
| 294.20 | 30 | 3.0591 | 617.82 | 63 | 6.4242 | 941.44 | 96 | 9.7893 |
| 304.01 | 31 | 3.1611 | 627.63 | 64 | 6.5262 | 951.25 | 97 | 9.8912 |
| 313.81 | 32 | 3.2631 | 637.43 | 65 | 6.6282 | 961.05 | 98 | 9.9932 |
| 323.62 | 33 | 3.3651 | 647.24 | 66 | 6.7301 | 970.86 | 99 | 10.095 |

3. Conversion table between kg and lb

[How to read the table]

To convert 10 kg to lb, locate 10 in the center column in the first block. Locate a corresponding lb figure in right column. You will find 10 kg is 22.046 lb. To convert 10 lb to kg, locate the figure in the kg column to the left. You will find 10 lb is 4.536 kg.

$$1 \text{ kg} = 2.2046226 \text{ lb}$$

$$1 \text{ lb} = 0.45359237 \text{ kg}$$

| kg | | lb |
|--------|----|--------|
| 0.454 | 1 | 2.205 |
| 0.907 | 2 | 4.409 |
| 1.361 | 3 | 6.614 |
| 1.814 | 4 | 8.818 |
| 2.268 | 5 | 11.023 |
| 2.722 | 6 | 13.228 |
| 3.175 | 7 | 15.432 |
| 3.629 | 8 | 17.637 |
| 4.082 | 9 | 19.842 |
| 4.536 | 10 | 22.046 |
| 4.990 | 11 | 24.251 |
| 5.443 | 12 | 26.455 |
| 5.897 | 13 | 28.660 |
| 6.350 | 14 | 30.865 |
| 6.804 | 15 | 33.069 |
| 7.257 | 16 | 35.274 |
| 7.711 | 17 | 37.479 |
| 8.165 | 18 | 39.683 |
| 8.618 | 19 | 41.888 |
| 9.072 | 20 | 44.092 |
| 9.525 | 21 | 46.297 |
| 9.979 | 22 | 48.502 |
| 10.433 | 23 | 50.706 |
| 10.886 | 24 | 52.911 |
| 11.340 | 25 | 55.116 |
| 11.793 | 26 | 57.320 |
| 12.247 | 27 | 59.525 |
| 12.701 | 28 | 61.729 |
| 13.154 | 29 | 63.934 |
| 13.608 | 30 | 66.139 |
| 14.061 | 31 | 68.343 |
| 14.515 | 32 | 70.548 |
| 14.969 | 33 | 72.753 |

| kg | | lb |
|--------|----|--------|
| 15.422 | 34 | 74.957 |
| 15.876 | 35 | 77.162 |
| 16.329 | 36 | 79.366 |
| 16.783 | 37 | 81.571 |
| 17.237 | 38 | 83.776 |
| 17.690 | 39 | 85.980 |
| 18.144 | 40 | 88.185 |
| 18.597 | 41 | 90.390 |
| 19.051 | 42 | 92.594 |
| 19.504 | 43 | 94.799 |
| 19.958 | 44 | 97.003 |
| 20.412 | 45 | 99.208 |
| 20.865 | 46 | 101.41 |
| 21.319 | 47 | 103.62 |
| 21.772 | 48 | 105.82 |
| 22.226 | 49 | 108.03 |
| 22.680 | 50 | 110.23 |
| 23.133 | 51 | 112.44 |
| 23.587 | 52 | 114.64 |
| 24.040 | 53 | 116.84 |
| 24.494 | 54 | 119.05 |
| 24.948 | 55 | 121.25 |
| 25.401 | 56 | 123.46 |
| 25.855 | 57 | 125.66 |
| 26.308 | 58 | 127.87 |
| 26.762 | 59 | 130.07 |
| 27.216 | 60 | 132.28 |
| 27.669 | 61 | 134.48 |
| 28.123 | 62 | 136.69 |
| 28.576 | 63 | 138.89 |
| 29.030 | 64 | 141.10 |
| 29.484 | 65 | 143.30 |
| 29.937 | 66 | 145.51 |

| kg | | lb |
|--------|----|--------|
| 30.391 | 67 | 147.71 |
| 30.844 | 68 | 149.91 |
| 31.298 | 69 | 152.12 |
| 31.751 | 70 | 154.32 |
| 32.205 | 71 | 156.53 |
| 32.659 | 72 | 158.73 |
| 33.112 | 73 | 160.94 |
| 33.566 | 74 | 163.14 |
| 34.019 | 75 | 165.35 |
| 34.473 | 76 | 167.55 |
| 34.927 | 77 | 169.76 |
| 35.380 | 78 | 171.96 |
| 35.834 | 79 | 174.17 |
| 36.287 | 80 | 176.37 |
| 36.741 | 81 | 178.57 |
| 37.195 | 82 | 180.78 |
| 37.648 | 83 | 182.98 |
| 38.102 | 84 | 185.19 |
| 38.555 | 85 | 187.39 |
| 39.009 | 86 | 189.60 |
| 39.463 | 87 | 191.80 |
| 39.916 | 88 | 194.01 |
| 40.370 | 89 | 196.21 |
| 40.823 | 90 | 198.42 |
| 41.277 | 91 | 200.62 |
| 41.730 | 92 | 202.83 |
| 42.184 | 93 | 205.03 |
| 42.638 | 94 | 207.23 |
| 43.091 | 95 | 209.44 |
| 43.545 | 96 | 211.64 |
| 43.998 | 97 | 213.85 |
| 44.452 | 98 | 216.05 |
| 44.906 | 99 | 218.26 |

Appendices: Table

4. Conversion table of hardness

| Rockwell C Scale hardness (1 471 N) | Vickers hardness | Brinell hardness | | Rockwell hardness | | Shore hardness |
|---|---------------------|------------------|--------------------------|---|---|-------------------|
| | | Standard ball | Tungsten carbide ball | A Scale Load 588.4 N brale penetrator | B Scale Load 980.7 N Diameter 1.5888 mm {1/16 in} sphere | |
| 68 | 940 | — | — | 85.6 | — | 97 |
| 67 | 900 | — | — | 85.0 | — | 95 |
| 66 | 865 | — | — | 84.5 | — | 92 |
| 65 | 832 | — | 739 | 83.9 | — | 91 |
| 64 | 800 | — | 722 | 83.4 | — | 88 |
| 63 | 772 | — | 705 | 82.8 | — | 87 |
| 62 | 746 | — | 688 | 82.3 | — | 85 |
| 61 | 720 | — | 670 | 81.8 | — | 83 |
| 60 | 697 | — | 654 | 81.2 | — | 81 |
| 59 | 674 | — | 634 | 80.7 | — | 80 |
| 58 | 653 | — | 615 | 80.1 | — | 78 |
| 57 | 633 | — | 595 | 79.6 | — | 76 |
| 56 | 613 | — | 577 | 79.0 | — | 75 |
| 55 | 595 | — | 560 | 78.5 | — | 74 |
| 54 | 577 | — | 543 | 78.0 | — | 72 |
| 53 | 560 | — | 525 | 77.4 | — | 71 |
| 52 | 544 | 500 | 512 | 76.8 | — | 69 |
| 51 | 528 | 487 | 496 | 76.3 | — | 68 |
| 50 | 513 | 475 | 481 | 75.9 | — | 67 |
| 49 | 498 | 464 | 469 | 75.2 | — | 66 |
| 48 | 484 | 451 | 455 | 74.7 | — | 64 |
| 47 | 471 | 442 | 443 | 74.1 | — | 63 |
| 46 | 458 | 432 | 432 | 73.6 | — | 62 |
| 45 | 446 | 421 | 421 | 73.1 | — | 60 |
| 44 | 434 | 409 | 409 | 72.5 | — | 58 |
| 43 | 423 | 400 | 400 | 72.0 | — | 57 |
| 42 | 412 | 390 | 390 | 71.5 | — | 56 |
| 41 | 402 | 381 | 381 | 70.9 | — | 55 |
| 40 | 392 | 371 | 371 | 70.4 | — | 54 |
| 39 | 382 | 362 | 362 | 69.9 | — | 52 |

| Rockwell C Scale hardness (1 471 N) | Vickers hardness | Brinell hardness | | Rockwell hardness | | Shore hardness |
|---|---------------------|------------------|--------------------------|---|---|-------------------|
| | | Standard ball | Tungsten carbide ball | A Scale Load 588.4 N brale penetrator | B Scale Load 980.7 N Diameter 1.5888 mm {1/16 in} sphere | |
| 38 | 372 | 353 | 353 | 69.4 | — | 51 |
| 37 | 363 | 344 | 344 | 68.9 | — | 50 |
| 36 | 354 | 336 | 336 | 68.4 | (109.0) | 49 |
| 35 | 345 | 327 | 327 | 67.9 | (108.5) | 48 |
| 34 | 336 | 319 | 319 | 67.4 | (108.0) | 47 |
| 33 | 327 | 311 | 311 | 66.8 | (107.5) | 46 |
| 32 | 318 | 301 | 301 | 66.3 | (107.0) | 44 |
| 31 | 310 | 294 | 294 | 65.8 | (106.0) | 43 |
| 30 | 302 | 286 | 286 | 65.3 | (105.5) | 42 |
| 29 | 294 | 279 | 279 | 64.7 | (104.5) | 41 |
| 28 | 286 | 271 | 271 | 64.3 | (104.0) | 41 |
| 27 | 279 | 264 | 264 | 63.8 | (103.0) | 40 |
| 26 | 272 | 258 | 258 | 63.3 | (102.5) | 38 |
| 25 | 266 | 253 | 253 | 62.8 | (101.5) | 38 |
| 24 | 260 | 247 | 247 | 62.4 | (101.0) | 37 |
| 23 | 254 | 243 | 243 | 62.0 | 100.0 | 36 |
| 22 | 248 | 237 | 237 | 61.5 | 99.0 | 35 |
| 21 | 243 | 231 | 231 | 61.0 | 98.5 | 35 |
| 20 | 238 | 226 | 226 | 60.5 | 97.8 | 34 |
| (18) | 230 | 219 | 219 | — | 96.7 | 33 |
| (16) | 222 | 212 | 212 | — | 95.5 | 32 |
| (14) | 213 | 203 | 203 | — | 93.9 | 31 |
| (12) | 204 | 194 | 194 | — | 92.3 | 29 |
| (10) | 196 | 187 | 187 | — | 90.7 | 28 |
| (8) | 188 | 179 | 179 | — | 89.5 | 27 |
| (6) | 180 | 171 | 171 | — | 87.1 | 26 |
| (4) | 173 | 165 | 165 | — | 85.5 | 25 |
| (2) | 166 | 158 | 158 | — | 83.5 | 24 |
| (0) | 160 | 152 | 152 | — | 81.7 | 24 |

Appendices: Table

5. Deviations of shafts used in common fits

| Classification of diameter (mm) | | d6 | e6 | f6 | g5 | g6 | h5 | h6 | h7 | h8 | h9 | h10 | js5 | js6 | |
|---------------------------------|---------|------|------|------|-----|------|-----|-----|------|------|------|------|-----|--------|--------|
| Over | or less | | | | | | | | | | | | | | |
| — | 3 | -20 | -14 | -6 | -2 | -2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 2 | ± 3 |
| | | -26 | -20 | -12 | -6 | -8 | -4 | -6 | -10 | -14 | -25 | -40 | 0 | ± 2 | ± 3 |
| 3 | 6 | -30 | -20 | -10 | -4 | -4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 2.5 | ± 4 |
| | | -38 | -28 | -18 | -9 | -12 | -5 | -8 | -12 | -18 | -30 | -48 | 0 | ± 2.5 | ± 4 |
| 6 | 10 | -40 | -25 | -13 | -5 | -5 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 3 | ± 4.5 |
| | | -49 | -34 | -22 | -11 | -14 | -6 | -9 | -15 | -22 | -36 | -58 | 0 | ± 3 | ± 4.5 |
| 10 | 18 | -50 | -32 | -16 | -6 | -6 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 4 | ± 5.5 |
| | | -61 | -43 | -27 | -14 | -17 | -8 | -11 | -18 | -27 | -43 | -70 | 0 | ± 4 | ± 5.5 |
| 18 | 30 | -65 | -40 | -20 | -7 | -7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 4.5 | ± 6.5 |
| | | -78 | -53 | -33 | -16 | -20 | -9 | -13 | -21 | -33 | -52 | -84 | 0 | ± 4.5 | ± 6.5 |
| 30 | 50 | -80 | -50 | -25 | -9 | -9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 5.5 | ± 8 |
| | | -96 | -66 | -41 | -20 | -25 | -11 | -16 | -25 | -39 | -62 | -100 | 0 | ± 5.5 | ± 8 |
| 50 | 80 | -100 | -60 | -30 | -10 | -10 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 6.5 | ± 9.5 |
| | | -119 | -79 | -49 | -23 | -29 | -13 | -19 | -30 | -46 | -74 | -120 | 0 | ± 6.5 | ± 9.5 |
| 80 | 120 | -120 | -72 | -36 | -12 | -12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 7.5 | ± 11 |
| | | -142 | -94 | -58 | -27 | -34 | -15 | -22 | -35 | -54 | -87 | -140 | 0 | ± 7.5 | ± 11 |
| 120 | 180 | -145 | -85 | -43 | -14 | -14 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 9 | ± 12.5 |
| | | -170 | -110 | -68 | -32 | -39 | -18 | -25 | -40 | -63 | -100 | -160 | 0 | ± 9 | ± 12.5 |
| 180 | 250 | -170 | -100 | -50 | -15 | -15 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 10 | ± 14.5 |
| | | -199 | -129 | -79 | -35 | -44 | -20 | -29 | -46 | -72 | -115 | -185 | 0 | ± 10 | ± 14.5 |
| 250 | 315 | -190 | -110 | -56 | -17 | -17 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 11.5 | ± 16 |
| | | -222 | -142 | -88 | -40 | -49 | -23 | -32 | -52 | -81 | -130 | -210 | 0 | ± 11.5 | ± 16 |
| 315 | 400 | -210 | -125 | -62 | -18 | -18 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 12.5 | ± 18 |
| | | -246 | -161 | -98 | -43 | -54 | -25 | -36 | -57 | -89 | -140 | -230 | 0 | ± 12.5 | ± 18 |
| 400 | 500 | -230 | -135 | -68 | -20 | -20 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | ± 13.5 | ± 20 |
| | | -270 | -175 | -108 | -47 | -60 | -27 | -40 | -63 | -97 | -155 | -250 | 0 | ± 13.5 | ± 20 |
| 500 | 630 | -260 | -145 | -76 | — | -22 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 22 |
| | | -304 | -189 | -120 | — | -66 | — | -44 | -70 | -110 | -175 | -280 | 0 | — | ± 22 |
| 630 | 800 | -290 | -160 | -80 | — | -24 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 25 |
| | | -340 | -210 | -130 | — | -74 | — | -50 | -80 | -125 | -200 | -320 | 0 | — | ± 25 |
| 800 | 1 000 | -320 | -170 | -86 | — | -26 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 28 |
| | | -376 | -226 | -142 | — | -82 | — | -56 | -90 | -140 | -230 | -360 | 0 | — | ± 28 |
| 1 000 | 1 250 | -350 | -195 | -98 | — | -28 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 33 |
| | | -416 | -261 | -164 | — | -94 | — | -66 | -105 | -165 | -260 | -420 | 0 | — | ± 33 |
| 1 250 | 1 600 | -390 | -220 | -110 | — | -30 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 39 |
| | | -468 | -298 | -188 | — | -108 | — | -78 | -125 | -195 | -310 | -500 | 0 | — | ± 39 |
| 1 600 | 2 000 | -430 | -240 | -120 | — | -32 | — | 0 | 0 | 0 | 0 | 0 | 0 | — | ± 46 |
| | | -522 | -332 | -212 | — | -124 | — | -92 | -150 | -230 | -370 | -600 | 0 | — | ± 46 |

Unit: μm

| j5 | j6 | j7 | k5 | k6 | k7 | m5 | m6 | n6 | p6 | r6 | r7 | Classification of diameter (mm) | |
|-----|-----|-----|-----|-----|------|-----|------|------|------|------|------|---------------------------------|---------|
| | | | | | | | | | | | | Over | or less |
| +2 | +4 | +6 | +4 | +6 | +10 | +6 | +8 | +10 | +12 | +16 | +20 | — | 3 |
| -2 | -2 | -4 | 0 | 0 | 0 | +2 | +2 | +4 | +6 | +10 | +10 | — | 3 |
| +3 | +6 | +8 | +6 | +9 | +13 | +9 | +12 | +16 | +20 | +23 | +27 | 3 | 6 |
| -2 | -4 | -4 | +1 | +1 | +1 | +4 | +4 | +8 | +12 | +15 | +15 | 3 | 6 |
| +4 | +7 | +10 | +7 | +10 | +16 | +12 | +15 | +19 | +24 | +28 | +34 | 6 | 10 |
| -2 | -2 | -5 | +1 | +1 | +1 | +6 | +6 | +10 | +15 | +19 | +19 | 6 | 10 |
| +5 | +8 | +12 | +9 | +12 | +19 | +15 | +18 | +23 | +29 | +34 | +41 | 10 | 18 |
| -3 | -3 | -6 | +1 | +1 | +1 | +7 | +7 | +12 | +18 | +23 | +23 | 10 | 18 |
| +5 | +9 | +13 | +11 | +15 | +23 | +17 | +21 | +28 | +35 | +41 | +49 | 18 | 30 |
| -4 | -4 | -8 | +2 | +2 | +2 | +8 | +8 | +15 | +22 | +28 | +28 | 18 | 30 |
| +6 | +11 | +15 | +13 | +18 | +27 | +20 | +25 | +33 | +42 | +50 | +59 | 30 | 50 |
| -5 | -5 | -10 | +2 | +2 | +2 | +9 | +9 | +17 | +26 | +34 | +34 | 30 | 50 |
| +6 | +12 | +18 | +15 | +21 | +32 | +24 | +30 | +39 | +51 | +60 | +71 | 50 | 80 |
| -7 | -7 | -12 | +2 | +2 | +2 | +11 | +11 | +20 | +32 | +41 | +41 | 50 | 80 |
| +6 | +12 | +18 | +15 | +21 | +32 | +24 | +30 | +39 | +51 | +62 | +73 | 65 | 80 |
| -7 | -7 | -12 | +2 | +2 | +2 | +11 | +11 | +20 | +32 | +43 | +43 | 65 | 80 |
| +6 | +13 | +20 | +18 | +25 | +38 | +28 | +35 | +45 | +59 | +73 | +86 | 80 | 100 |
| -9 | -9 | -15 | +3 | +3 | +3 | +13 | +13 | +23 | +37 | +51 | +51 | 80 | 100 |
| +6 | +13 | +20 | +18 | +25 | +38 | +28 | +35 | +45 | +59 | +76 | +89 | 100 | 120 |
| -9 | -9 | -15 | +3 | +3 | +3 | +13 | +13 | +23 | +37 | +54 | +54 | 100 | 120 |
| +7 | +14 | +22 | +21 | +28 | +43 | +33 | +40 | +52 | +68 | +88 | +103 | 120 | 140 |
| -11 | -11 | -18 | +3 | +3 | +3 | +15 | +15 | +27 | +43 | +63 | +63 | 120 | 140 |
| +7 | +14 | +22 | +21 | +28 | +43 | +33 | +40 | +52 | +68 | +90 | +105 | 140 | 160 |
| -11 | -11 | -18 | +3 | +3 | +3 | +15 | +15 | +27 | +43 | +65 | +65 | 140 | 160 |
| +7 | +14 | +22 | +21 | +28 | +43 | +33 | +40 | +52 | +68 | +93 | +108 | 160 | 180 |
| -11 | -11 | -18 | +3 | +3 | +3 | +15 | +15 | +27 | +43 | +68 | +68 | 160 | 180 |
| +7 | +16 | +25 | +24 | +33 | +50 | +37 | +46 | +60 | +79 | +106 | +123 | 180 | 200 |
| -13 | -13 | -21 | +4 | +4 | +4 | +17 | +17 | +31 | +50 | +77 | +77 | 180 | 200 |
| +7 | +16 | +25 | +24 | +33 | +50 | +37 | +46 | +60 | +79 | +109 | +126 | 200 | 225 |
| -13 | -13 | -21 | +4 | +4 | +4 | +17 | +17 | +31 | +50 | +80 | +80 | 200 | 225 |
| +7 | +16 | +25 | +24 | +33 | +50 | +37 | +46 | +60 | +79 | +113 | +130 | 225 | 250 |
| -13 | -13 | -21 | +4 | +4 | +4 | +17 | +17 | +31 | +50 | +84 | +84 | 225 | 250 |
| +7 | +16 | +26 | +27 | +36 | +56 | +43 | +52 | +66 | +88 | +126 | +146 | 250 | 280 |
| -16 | -16 | -26 | +4 | +4 | +4 | +20 | +20 | +34 | +56 | +94 | +94 | 250 | 280 |
| +7 | +16 | +26 | +27 | +36 | +56 | +43 | +52 | +66 | +88 | +130 | +150 | 280 | 315 |
| -16 | -16 | -26 | +4 | +4 | +4 | +20 | +20 | +34 | +56 | +98 | +98 | 280 | 315 |
| +7 | +18 | +29 | +29 | +40 | +61 | +46 | +57 | +73 | +98 | +144 | +165 | 315 | 355 |
| -18 | -18 | -28 | +4 | +4 | +4 | +21 | +21 | +37 | +62 | +108 | +108 | 315 | 355 |
| +7 | +18 | +29 | +29 | +40 | +61 | +46 | +57 | +73 | +98 | +150 | +171 | 355 | 400 |
| -18 | -18 | -28 | +4 | +4 | +4 | +21 | +21 | +37 | +62 | +114 | +114 | 355 | 400 |
| +7 | +20 | +31 | +32 | +45 | +68 | +50 | +63 | +80 | +108 | +166 | +189 | 400 | 450 |
| -20 | -20 | -32 | +5 | +5 | +5 | +23 | +23 | +40 | +68 | +126 | +126 | 400 | 450 |
| +7 | +20 | +31 | +32 | +45 | +68 | +50 | +63 | +80 | +108 | +172 | +195 | 450 | 500 |
| -20 | -20 | -32 | +5 | +5 | +5 | +23 | +23 | +40 | +68 | +132 | +132 | 450 | 500 |
| — | — | — | — | +44 | +70 | — | +70 | +88 | +122 | +194 | +220 | 500 | 560 |
| — | — | — | — | 0 | 0 | — | +26 | +44 | +78 | +150 | +150 | 500 | 560 |
| — | — | — | — | +44 | +70 | — | +70 | +88 | +122 | +199 | +225 | 560 | 630 |
| — | — | — | — | 0 | 0 | — | +26 | +44 | +78 | +155 | +155 | 560 | 630 |
| — | — | — | — | +50 | +80 | — | +80 | +100 | +138 | +225 | +255 | 630 | 710 |
| — | — | — | — | 0 | 0 | — | +30 | +50 | +88 | +175 | +175 | 630 | 710 |
| — | — | — | — | +50 | +80 | — | +80 | +100 | +138 | +235 | +265 | 710 | 800 |
| — | — | — | — | 0 | 0 | — | +30 | +50 | +88 | +185 | +185 | 710 | 800 |
| — | — | — | — | +56 | +90 | — | +90 | +112 | +156 | +266 | +300 | 800 | 900 |
| — | — | — | — | 0 | 0 | — | +34 | +56 | +100 | +210 | +210 | 800 | 900 |
| — | — | — | — | +56 | +90 | — | +90 | +112 | +156 | +276 | +310 | 900 | 1 000 |
| — | — | — | — | 0 | 0 | — | +34 | +56 | +100 | +220 | +220 | 900 | 1 000 |
| — | — | — | — | +66 | +105 | — | +106 | +132 | +186 | +316 | +355 | 1 000 | 1 120 |
| — | — | — | — | 0 | 0 | — | +40 | +66 | +120 | +250 | +250 | 1 000 | 1 120 |
| — | — | — | — | +66 | +105 | — | +106 | +132 | +186 | +326 | +365 | 1 120 | 1 250 |
| — | — | — | — | 0 | 0 | — | +40 | +66 | +120 | +260 | +260 | 1 120 | 1 250 |
| — | — | — | — | +78 | +125 | — | +126 | +156 | +218 | +378 | +425 | 1 250 | 1 400 |
| — | — | — | — | 0 | 0 | — | +48 | +78 | +140 | +300 | +300 | 1 250 | 1 400 |
| — | — | — | — | +78 | +125 | — | +126 | +156 | +218 | +408 | +455 | 1 400 | 1 600 |
| — | — | — | — | 0 | 0 | — | +48 | +78 | +140 | +330 | +330 | 1 400 | 1 600 |
| — | — | — | — | +92 | +150 | — | +150 | +184 | +262 | +462 | +520 | 1 600 | 1 800 |
| — | — | — | — | 0 | 0 | — | +58 | +92 | +170 | +370 | +370 | 1 600 | 1 800 |
| — | — | — | — | +92 | +150 | — | +150 | +184 | +262 | +492 | +550 | 1 800 | 2 000 |
| — | — | — | — | 0 | 0 | — | +58 | +92 | +170 | +400 | +400 | 1 800 | 2 000 |

Appendices: Table

6. Deviations of holes used in common fits

| Classification of diameter (mm) | | E6 | F6 | F7 | G6 | G7 | H6 | H7 | H8 | J6 | J7 | JS6 | JS7 |
|---------------------------------|---------|----------------|----------------|----------------|---------------|---------------|-----------|------------|------------|-------------|--------------|------------------|------------------|
| Over | or less | | | | | | | | | | | | |
| — | 3 | + 20 + 14 | + 12 + 6 | + 16 + 6 | + 8 + 2 | + 12 + 2 | + 6 0 | + 10 0 | + 14 0 | + 2 - 4 | + 4 - 6 | ± 3 ± 3 | ± 5 ± 5 |
| 3 | 6 | + 28 + 20 | + 18 + 10 | + 22 + 10 | + 12 + 4 | + 16 + 4 | + 8 0 | + 12 0 | + 18 0 | + 5 - 3 | ± 6 ± 6 | ± 4 ± 4 | ± 6 ± 6 |
| 6 | 10 | + 34 + 25 | + 22 + 13 | + 28 + 13 | + 14 + 5 | + 20 + 5 | + 9 0 | + 15 0 | + 22 0 | + 5 - 4 | + 8 - 7 | ± 4.5 ± 4.5 | ± 7.5 ± 7.5 |
| 10 | 18 | + 43 + 32 | + 27 + 16 | + 34 + 16 | + 17 + 6 | + 24 + 6 | + 11 0 | + 18 0 | + 27 0 | + 6 - 5 | + 10 - 8 | ± 5.5 ± 5.5 | ± 9 ± 9 |
| 18 | 30 | + 53 + 40 | + 33 + 20 | + 41 + 20 | + 20 + 7 | + 28 + 7 | + 13 0 | + 21 0 | + 33 0 | + 8 - 5 | + 12 - 9 | ± 6.5 ± 6.5 | ± 10.5 ± 10.5 |
| 30 | 50 | + 66 + 50 | + 41 + 25 | + 50 + 25 | + 25 + 9 | + 34 + 9 | + 16 0 | + 25 0 | + 39 0 | + 10 - 6 | + 14 - 11 | ± 8 ± 8 | ± 12.5 ± 12.5 |
| 50 | 80 | + 79 + 60 | + 49 + 30 | + 60 + 30 | + 29 + 10 | + 40 + 10 | + 19 0 | + 30 0 | + 46 0 | + 13 - 6 | + 18 - 12 | ± 9.5 ± 9.5 | ± 15 ± 15 |
| 80 | 120 | + 94 + 72 | + 58 + 36 | + 71 + 36 | + 34 + 12 | + 47 + 12 | + 22 0 | + 35 0 | + 54 0 | + 16 - 6 | + 22 - 13 | ± 11 ± 11 | ± 17.5 ± 17.5 |
| 120 | 180 | + 110 + 85 | + 68 + 43 | + 83 + 43 | + 39 + 14 | + 54 + 14 | + 25 0 | + 40 0 | + 63 0 | + 18 - 7 | + 26 - 14 | ± 12.5 ± 12.5 | ± 20 ± 20 |
| 180 | 250 | + 129 + 100 | + 79 + 50 | + 96 + 50 | + 44 + 15 | + 61 + 15 | + 29 0 | + 46 0 | + 72 0 | + 22 - 7 | + 30 - 16 | ± 14.5 ± 14.5 | ± 23 ± 23 |
| 250 | 315 | + 142 + 110 | + 88 + 56 | + 108 + 56 | + 49 + 17 | + 69 + 17 | + 32 0 | + 52 0 | + 81 0 | + 25 - 7 | + 36 - 16 | ± 16 ± 16 | ± 26 ± 26 |
| 315 | 400 | + 161 + 125 | + 98 + 62 | + 119 + 62 | + 54 + 18 | + 75 + 18 | + 36 0 | + 57 0 | + 89 0 | + 29 - 7 | + 39 - 18 | ± 18 ± 18 | ± 28.5 ± 28.5 |
| 400 | 500 | + 175 + 135 | + 108 + 68 | + 131 + 68 | + 60 + 20 | + 83 + 20 | + 40 0 | + 63 0 | + 97 0 | + 33 - 7 | + 43 - 20 | ± 20 ± 20 | ± 31.5 ± 31.5 |
| 500 | 630 | + 189 + 145 | + 120 + 76 | + 146 + 76 | + 66 + 22 | + 92 + 22 | + 44 0 | + 70 0 | + 110 0 | — — | — — | ± 22 ± 22 | ± 35 ± 35 |
| 630 | 800 | + 210 + 160 | + 130 + 80 | + 160 + 80 | + 74 + 24 | + 104 + 24 | + 50 0 | + 80 0 | + 125 0 | — — | — — | ± 25 ± 25 | ± 40 ± 40 |
| 800 | 1 000 | + 226 + 170 | + 142 + 86 | + 176 + 86 | + 82 + 26 | + 116 + 26 | + 56 0 | + 90 0 | + 140 0 | — — | — — | ± 28 ± 28 | ± 45 ± 45 |
| 1 000 | 1 250 | + 261 + 195 | + 164 + 98 | + 203 + 98 | + 94 + 28 | + 133 + 28 | + 66 0 | + 105 0 | + 165 0 | — — | — — | ± 33 ± 33 | ± 52.5 ± 52.5 |
| 1 250 | 1 600 | + 298 + 220 | + 188 + 110 | + 235 + 110 | + 108 + 30 | + 155 + 30 | + 78 0 | + 125 0 | + 195 0 | — — | — — | ± 39 ± 39 | ± 62.5 ± 62.5 |
| 1 600 | 2 000 | + 332 + 240 | + 212 + 120 | + 270 + 120 | + 124 + 32 | + 182 + 32 | + 92 0 | + 150 0 | + 230 0 | — — | — — | ± 46 ± 46 | ± 75 ± 75 |

Unit: µm

| K5 | K6 | K7 | M5 | M6 | M7 | N5 | N6 | N7 | P6 | P7 | Classification of diameter (mm) | |
|-------------|-------------|--------------|--------------|---------------|---------------|--------------|---------------|---------------|----------------|----------------|---------------------------------|---------|
| | | | | | | | | | | | Over | or less |
| 0 - 4 | 0 - 6 | 0 - 10 | - 2 - 6 | - 2 - 8 | - 2 - 12 | - 4 - 8 | - 4 - 10 | - 4 - 14 | - 6 - 12 | - 6 - 16 | — | 3 |
| 0 - 5 | + 2 - 6 | + 3 - 9 | - 3 - 8 | - 1 - 9 | 0 - 12 | - 7 - 12 | - 5 - 13 | - 4 - 16 | - 9 - 17 | - 8 - 20 | 3 | 6 |
| + 1 - 5 | + 2 - 7 | + 5 - 10 | - 4 - 10 | - 3 - 12 | 0 - 15 | - 8 - 14 | - 7 - 16 | - 4 - 19 | - 12 - 21 | - 9 - 24 | 6 | 10 |
| + 2 - 6 | + 2 - 9 | + 6 - 12 | - 4 - 12 | - 4 - 15 | 0 - 18 | - 9 - 17 | - 9 - 20 | - 5 - 23 | - 15 - 26 | - 11 - 29 | 10 | 18 |
| + 1 - 8 | + 2 - 11 | + 6 - 15 | - 5 - 14 | - 4 - 17 | 0 - 21 | - 12 - 21 | - 11 - 24 | - 7 - 28 | - 18 - 31 | - 14 - 35 | 18 | 30 |
| + 2 - 9 | + 3 - 13 | + 7 - 18 | - 5 - 16 | - 4 - 20 | 0 - 25 | - 13 - 24 | - 12 - 28 | - 8 - 33 | - 21 - 37 | - 17 - 42 | 30 | 50 |
| + 3 - 10 | + 4 - 15 | + 9 - 21 | - 6 - 19 | - 5 - 24 | 0 - 30 | - 15 - 28 | - 14 - 33 | - 9 - 39 | - 26 - 45 | - 21 - 51 | 50 | 80 |
| + 2 - 13 | + 4 - 18 | + 10 - 25 | - 8 - 23 | - 6 - 28 | 0 - 35 | - 18 - 33 | - 16 - 38 | - 10 - 45 | - 30 - 52 | - 24 - 59 | 80 | 120 |
| + 3 - 15 | + 4 - 21 | + 12 - 28 | - 9 - 27 | - 8 - 33 | 0 - 40 | - 21 - 39 | - 20 - 45 | - 12 - 52 | - 36 - 61 | - 28 - 68 | 120 | 180 |
| + 2 - 18 | + 5 - 24 | + 13 - 33 | - 11 - 31 | - 8 - 37 | 0 - 46 | - 25 - 45 | - 22 - 51 | - 14 - 60 | - 41 - 70 | - 33 - 79 | 180 | 250 |
| + 3 - 20 | + 5 - 27 | + 16 - 36 | - 13 - 36 | - 9 - 41 | 0 - 52 | - 27 - 50 | - 25 - 57 | - 14 - 66 | - 47 - 79 | - 36 - 88 | 250 | 315 |
| + 3 - 22 | + 7 - 29 | + 17 - 40 | - 14 - 39 | - 10 - 46 | 0 - 57 | - 30 - 55 | - 26 - 62 | - 16 - 73 | - 51 - 87 | - 41 - 98 | 315 | 400 |
| + 2 - 25 | + 8 - 32 | + 18 - 45 | - 16 - 43 | - 10 - 50 | 0 - 63 | - 33 - 60 | - 27 - 67 | - 17 - 80 | - 55 - 95 | - 45 - 108 | 400 | 500 |
| — — | 0 - 44 | 0 - 70 | — — | - 26 - 70 | - 26 - 96 | — — | - 44 - 88 | - 44 - 114 | - 78 - 122 | - 78 - 148 | 500 | 630 |
| — — | 0 - 50 | 0 - 80 | — — | - 30 - 80 | - 30 - 110 | — — | - 50 - 100 | - 50 - 130 | - 88 - 138 | - 88 - 168 | 630 | 800 |
| — — | 0 - 56 | 0 - 90 | — — | - 34 - 90 | - 34 - 124 | — — | - 56 - 112 | - 56 - 146 | - 100 - 156 | - 100 - 190 | 800 | 1 000 |
| — — | 0 - 66 | 0 - 105 | — — | - 40 - 106 | - 40 - 145 | — — | - 66 - 132 | - 66 - 171 | - 120 - 186 | - 120 - 225 | 1 000 | 1 250 |
| — — | 0 - 78 | 0 - 125 | — — | - 48 - 126 | - 48 - 173 | — — | - 78 - 156 | - 78 - 203 | - 140 - 218 | - 140 - 265 | 1 250 | 1 600 |
| — — | 0 - 92 | 0 - 150 | — — | - 58 - 150 | - 58 - 208 | — — | - 92 - 184 | - 92 - 242 | - 170 - 262 | - 170 - 320 | 1 600 | 2 000 |

NSK Sales Offices – Europe, Middle East and Africa

UK

NSK UK Ltd.
Northern Road, Newark
Nottinghamshire NG24 2JF
Tel. +44 (0) 1636 605123
Fax +44 (0) 1636 643276
info-uk@nsk.com

France & Benelux

NSK France S.A.S.
Quartier de l'Europe
2, rue Georges Guynemer
78283 Guyancourt Cedex
Tel. +33 (0) 1 30573939
Fax +33 (0) 1 30570001
info-fr@nsk.com

Germany, Austria, Switzerland, Nordic

NSK Deutschland GmbH
Harkortstraße 15
40880 Ratingen
Tel. +49 (0) 2102 4810
Fax +49 (0) 2102 4812290
info-de@nsk.com

Italy

NSK Italia S.p.A.
Via Garibaldi, 215
20024 Garbagnate
Milanese (MI)
Tel. +39 02 995 191
Fax +39 02 990 25 778
info-it@nsk.com

Middle East

NSK Bearings Gulf Trading Co.
JAFZA View 19, Floor 24 Office 2/3
Jebel Ali Downtown,
PO Box 262163
Dubai, UAE
Tel. +971 (0) 4 804 8205
Fax +971 (0) 4 884 7227
info-me@nsk.com

Poland & CEE

NSK Polska Sp. z o.o.
Warsaw Branch
Ul. Migdałowa 4/73
02-796 Warszawa
Tel. +48 22 645 15 25
Fax +48 22 645 15 29
info-pl@nsk.com

Russia

NSK Polska Sp. z o.o.
Russian Branch
Office I 703, Bldg 29,
18th Line of Vasilievskiy Ostrov,
Saint-Petersburg, 199178
Tel. +7 812 3325071
Fax +7 812 3325072
info-ru@nsk.com

South Africa

NSK South Africa (Pty) Ltd.
25 Galaxy Avenue
Linbro Business Park
Sandton 2146
Tel. +27 (011) 458 3600
Fax +27 (011) 458 3608
nsk-sa@nsk.com

Spain

NSK Spain, S.A.
C/ Tarragona, 161 Cuerpo Bajo
2ª Planta, 08014 Barcelona
Tel. +34 93 2892763
Fax +34 93 4335776
info-es@nsk.com

Turkey

NSK Rulmanları Orta Doğu Tic. Ltd. Şti
19 Mayıs Mah. Atatürk Cad.
Ulya Engin İş Merkezi No: 68/3 Kat. 6
P.K.: 34736 - Kozyatağı - İstanbul
Tel. +90 216 4777111
Fax +90 216 4777174
turkey@nsk.com

Please also visit our website: www.nskeurope.com | Global NSK: www.nsk.com

